

# A Systematic Study of Small Language Models on Abstract Reasoning Tasks

**Nur A Zarin Nishat**

*Leibniz University of Hanover*

*TIB – Leibniz Information Centre for Science and Technology and University Library*

*nur.nishat@tib.eu*

**Jens Lehmann**

*\*Amazon*

*jlehmann@amazon.com*

**Andrei Aioanei**

*TIB – Leibniz Information Centre for Science and Technology and University Library*

*Andrei.Aioanei@tib.eu*

**Sahar Vahdati**

*Leibniz University of Hanover*

*TIB – Leibniz Information Centre for Science and Technology and University Library*

*sahar.vahdati@tib.eu*

## Abstract

Endpoint accuracy on abstract-reasoning benchmarks does not reveal whether a language model has acquired a transferable rule or fit distribution-specific regularities. We study this distinction in small language models on the ARC-TGI benchmark, which organizes abstract grid transformations into controllable task families and supports resampling, spatial shifts, and cross-benchmark transfer. Across more than 1,000 runs, we profile decoder-only, encoder-decoder, and mixture-of-experts model families under supervised fine-tuning. We examine the efficiency and stability of skill acquisition, robustness beyond the training distribution, interactions with model family and task formulation, and layer-wise attention signatures that accompany behavioral differences. Substantial in-distribution accuracy is attainable, but acquisition is sensitive to optimization and unevenly distributed across task families. Performance deteriorates sharply outside the training distribution, including when the rule is retained but grid scale changes. Greater training-set depth and breadth yield uneven gains, while the effect of additional in-context examples depends on model family. Executable-rule induction also yields correct solutions not observed under direct grid generation. On selected tasks, attention diagnostics show distinct concentration and context-dependence profiles, but do not establish general causal mechanisms. Overall, abstract-reasoning scores are conditional on the model, adaptation regime, evaluation distribution, and response format.

## 1 Introduction

Language models can produce correct answers to difficult tasks, yet endpoint accuracy alone does not establish whether their success reflects transferable rule acquisition. Performance may instead depend on surface regularities, task-specific training, prompt composition, or the required output representation. Controlled perturbations are therefore needed to distinguish acquisition of a transformation from success under one evaluation condition. This question is especially tractable in small language models (SLMs), for which broad experimental sweeps are feasible while the models remain capable of learning nontrivial transformations. The Abstraction and Reasoning Corpus (ARC) Chollet (2019) provides a precise setting for this analysis. Each task presents a few input–output grids that disclose a latent transformation and asks the solver to apply it to a new grid. Exact-match evaluation is unambiguous, and success requires generalization from sparse demonstrations; human studies nevertheless show that the tasks are broadly

---

\*Work done outside of Amazon.

solvable LeGris et al. (2025). However, the original corpus contains unique tasks rather than controlled distributions of related instances. Concept-organized variants improve diagnosis across spatial and semantic abstractions, but remain fixed collections of puzzles Moskvichev et al. (2023). The release of new ARC versions as systems specialize on earlier tasks further underscores the importance of preserving evaluation novelty Chollet et al. (2025). The original corpus is consequently well suited to benchmarking but less suited to separating within-family fitting from transfer under parameter, spatial, or novel-family shifts.

We address this limitation with a controlled study using the ARC-TGI benchmark Lehmann et al. (2026). This benchmark represents a transformation as a task-family generator that can sample variations in color, position, object configuration, and grid size. It supports a hierarchy of evaluation conditions: held-out seen-family episodes resample from training generators; within-family shifts retain the transformation while varying controlled properties; and novel-family or cross-benchmark transfer introduces unseen generators or original ARC evaluation tasks. The experiments reported here instantiate this hierarchy through held-out seen-family episodes, controlled grid-scale shifts, and ARC-AGI cross-benchmark transfer. Generator-disjoint novel-family evaluation remains a capability of the broader protocol but is not analyzed as a separate quantitative endpoint. This hierarchy turns ARC from a single endpoint into an instrument for examining skill acquisition and transfer. We use this instrument to profile three transformer model families—decoder-only (D), encoder–decoder (ED), and mixture-of-experts (MoE)—across more than 1,000 controlled training and evaluation runs. The study is descriptive rather than a causal comparison of transformer architectures: each family is represented by a different pretrained model, and the observed differences therefore combine architectural, pretraining, tokenization, and capacity effects. Our analysis is organized around the following questions:

1. **RQ1:** How efficiently and stably do small language models acquire abstract transformation skills?
2. **RQ2:** How robustly do acquired skills transfer beyond the training distribution?
3. **RQ3:** How do model family and task formulation modulate the capabilities that are expressed?
4. **RQ4:** What attention signatures appear in selected diagnostic cases under spatial shift?

This study makes three contributions. First, it defines a controlled ARC-TGI evaluation protocol that separates acquisition, training experience, distribution shift, and task formulation while profiling differences among model families. Second, it applies this protocol in a large behavioral analysis of optimization sensitivity, learning dynamics, training- and inference-time experience, and transfer. The results show that strong seen-family performance can coexist with narrow task-family coverage and weak robustness to distribution shift. Third, attention-entropy analysis and attention-edge intervention provide complementary selected-task diagnostics, which we interpret as exploratory evidence rather than causal explanations of architectural differences. Together, these contributions characterize when abstract-transformation performance is acquired, retained, and expressed under alternative evaluation conditions.

## 2 Related Work

**ARC-AGI evaluation and solver design.** ARC-AGI tests whether a solver can infer novel visual transformations from limited demonstrations Chollet (2019). Human studies show that the tasks are challenging but broadly solvable, whereas GPT-family performance varies substantially across task types LeGris et al. (2025); Mitchell et al. (2024). Later ARC-AGI versions maintain novelty as systems specialize on earlier benchmarks Chollet et al. (2025); ARC Prize Foundation (2026); broader evaluations and surveys likewise caution against interpreting leaderboard scores without the task distribution and inference procedure Gendron et al. (2024); Vahdati et al. (2026). Consequently, comparisons across ARC systems should identify both task novelty and the amount of solver-side adaptation. Performance also depends on solver design. Object-oriented representations can expose spatial structure hidden by plain-text grids Xu et al. (2024), while test-time training, augmentation, and search add task-specific computation Akyürek et al. (2025); Franzen et al. (2024); Chollet et al. (2024). These methods allocate computation at different stages—input construction, per-task optimization, or inference-time search—so equal endpoint accuracy need not reflect equal transfer. Correct outputs may coexist with inconsistent explanations Lee et al. (2025), and direct-grid transduction and executable-rule induction solve overlapping but distinct task subsets Li et al. (2025). We therefore treat representation, inference budget, and output formulation as experimental variables rather than interchangeable routes to one score.

**ARC benchmark and dataset variants.** ARC-derived resources vary in task organization, response format, and generation mechanism. ConceptARC groups puzzles by spatial and semantic concepts; Mini-ARC uses simplified  $5 \times 5$  grids and supports human interaction traces, and MC-LARC converts open-ended grid generation into multiple-choice

selection Moskvicev et al. (2023); Kim & Phunyaphibarn (2023); Shin et al. (2024). Data-expansion suites make a different trade-off: AugARC applies rotational variants to existing tasks, whereas GIFARC synthesizes analogy-grounded ARC-style tasks from GIFs Bikov et al. (2024); Sim et al. (2025). Procedural suites resample transformation families: ReARC reconstructs generators for the 400 public ARC training tasks; ARC-GEN targets exhaustive mimetic coverage of those families, and ARC-TGI adds episode-level constraints and aligned reasoning and code artifacts Hodel (2024); Moffitt (2025); Lehmann et al. (2026). These resources are complementary but do not yield directly comparable scores: concept grouping, response-format changes, augmentation, synthesis, and procedural resampling alter different aspects of the task distribution. Our study requires repeated family identity and controlled parameters, so it uses ARC-TGI for within-family interventions and reserves original ARC-AGI tasks for cross-benchmark evaluation.

**Controlled generalization and adaptation.** Controlled perturbations reveal failures hidden by aggregate accuracy. GSM-Symbolic changes surface details while preserving mathematical structure Mirzadeh et al. (2025); complexity-controlled puzzles expose sharp failure regimes whose interpretation can depend on token budgets and output constraints Shojaei et al. (2026); Lawsen (2025). Synthetic-data studies separately analyze knowledge, manipulation, reasoning, and planning Allen-Zhu & Li (2023–2025), while grokking shows generalization can emerge after training accuracy saturates Power et al. (2022). These results motivate reporting trajectories across controlled shifts rather than endpoints alone. A useful evaluation should test whether gains persist as nuisance features, complexity, or spatial scale change while the latent transformation is preserved. Training choices are equally consequential: supervised fine-tuning and reinforcement learning can alter capabilities differently Huan et al. (2025); Zhang et al. (2026), and LoRA trades a constrained update space for parameter efficiency Hu et al. (2022), affecting both acquisition and forgetting Biderman et al. (2025). Optimizer choice, update rank, and checkpoint selection can therefore change the apparent model orderings. Our study consequently controls hyperparameter configuration, adaptation method, checkpointing granularity, training data, prompt strategy, and evaluation distribution shift jointly across all three architectures.

**Model-family and contextual factors.** Decoder-only models place demonstrations and targets in one autoregressive stream, whereas encoder–decoder models first construct a bidirectional input representation, as in T5 and LongT5 Raffel et al. (2020); Guo et al. (2022). T5Gemma obtains an encoder–decoder model through continued pretraining of decoder models Zhang et al. (2025); sparse MoE models instead route tokens through subsets of experts Shazeer et al. (2017); Fedus et al. (2021). Because representatives also differ in pretraining, tokenization, context length, and capacity, we report model-family profiles rather than isolated architectural effects. This distinction is especially important for serialized grids, whose token length grows with spatial scale. Matched spatial and prompting conditions help separate this contextual sensitivity from overall endpoint performance. Because attention weights become difficult to interpret after layer-wise mixing and even attention interventions provide imperfect relevance evidence Abnar & Zuidema (2020); Serrano & Smith (2019), we treat entropy and edge knockout as complementary selected-task diagnostics rather than mechanistic explanations.

### 3 Experimental Design

Figure 1 summarizes how the research questions are translated into matched experiments. Each curriculum is analyzed for experiment-specific complexity and converted into task and prompt variants before a common scheduler launches the selected model and adaptation configurations. Distributed training and inference then produce the behavioral results for acquisition, transfer, and formulation, followed by the selected-task internal diagnostics. Each intervention changes a designated axis—optimization, training experience, evaluation distribution, demonstration count, or output formulation—while holding the remaining protocol fixed wherever the comparison permits. We interpret differences within these matched blocks and reserve cross-family comparisons for descriptive profiling because the pretrained representatives are not fully matched. The following subsections describe the controlled distributions, model and formulation choices, and reporting protocol in this order.

#### 3.1 Controlled Task Distributions

Each ARC task contains several input–output demonstration grids and a test input whose output is determined by the same latent transformation. ARC-AGI provides unique tasks and exact-match evaluation, but it does not provide repeated samples from a common transformation family. ARC-TGI supplies this missing experimental control: a generator deterministically implements a transformation while sampling colors, positions, object configurations, lengths, and grid sizes. Operationally, each generator is a Python module: `create_input` samples a valid grid,

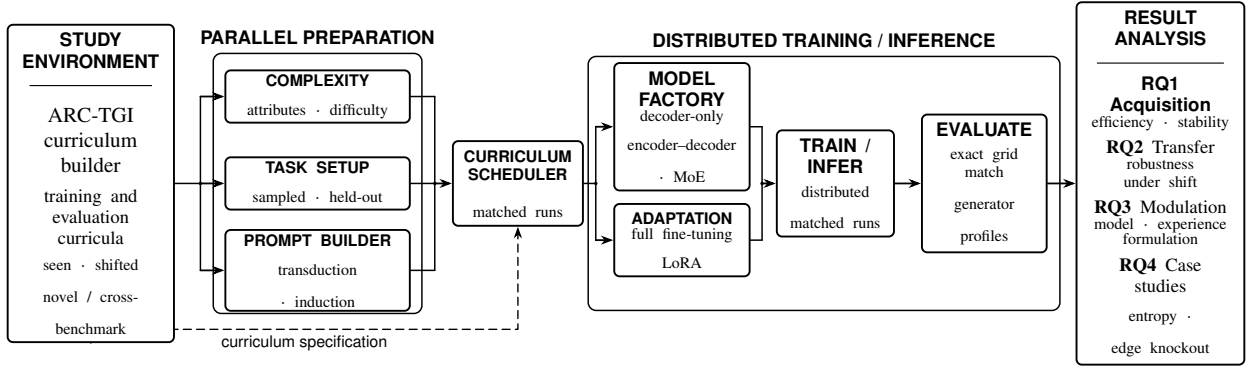


Figure 1: **Controlled study workflow.** The curriculum builder creates parallel complexity, task, and prompt views that converge in a matched scheduler. The scheduler instantiates model-family and adaptation choices, launches distributed training or inference, and routes behavioral and selected-task diagnostic evidence to the four research questions. The dashed path denotes the curriculum constraints applied directly to scheduling.

`transform_input` applies the fixed rule, and `create_grids` assembles demonstrations and a test pair while rejecting invalid or ambiguous episodes. Task-level variables remain fixed within an episode, whereas grid-level variables may vary among demonstrations. This enables resampling surface realizations while retaining the rule; because validity depends on the implementation, claims are scoped to the curated families.

The released inventory contains 461 human-validated generators covering 180 ARC-Mini, 215 ARC-AGI-1 (200 training and 15 evaluation), and 66 ARC-AGI-2 (55 training and 11 evaluation) tasks Lehmann et al. (2026). Each generated episode includes grids, instantiated input, transformation reasoning chains, and partially evaluated Python programs. The same latent task can therefore support direct grid transduction, executable-rule induction, and reasoning-description prompts without changing the underlying transformation. Our curricula use only the ARC-AGI-1 training-family subset that satisfies the study-specific constraints; the exact support for each intervention is reported below.

**Rationale for benchmark selection.** Benchmark selection was guided by four requirements. First, the evaluation must distinguish repeated exposure to an individual task from learning within a transformation family; task-disjoint resamples from a shared generator provide this comparison. Second, a distribution shift must be able to preserve the rule while changing a specified observable property; separate task- and grid-level variables support targeted spatial and surface shifts. The present experiments instantiate this control through grid scale, while other parameter-level shifts remain extensions of the protocol. Third, demonstrations must jointly specify the intended transformation without relying on attributes that appear only at test time. Episode constraints, executable checks of stored outputs, optional shortcut screening, and human refinement provide safeguards for this requirement. Finally, correspondence with source ARC tasks permits a separate cross-benchmark evaluation on the original ARC-AGI set. These controls support the required comparisons, but they do not imply that all generators are equally natural or difficult. We therefore retain generator-level reporting and scope the conclusions to the filtered families.

Figure 2 illustrates a representative family. The rule identifies separated colored horizontal segments and joins them into an aligned vertical stack. Segment count, length, and color vary across grids, whereas joining direction and horizontal alignment remain fixed across the demonstrations and test pair of one episode; these task-level choices can change between generated samples. The samples are therefore not duplicates of the source puzzle: they preserve the transformation family while requiring the episode-specific realization to be inferred from its demonstrations.

**Held-out seen-family evaluation** resamples new episodes from generators used during training. **Within-family shifts** retain the transformation but change controlled properties, including generator parameters or grid scale. **Novel-family evaluation and cross-benchmark transfer** introduce unseen generators or original ARC-AGI tasks. Dataset construction enforces disjoint task identifiers and, where required, disjoint generator sets. Appendix A describes generation, filtering, and leakage controls. Curricula are filtered by token length, grid size, and experiment-specific condition. Each record stores the demonstration grids, test grid, task identifier, and generator identifier. Natural-language grid descriptions and transformation traces are included only when required by the prompt condition. Training and evaluation

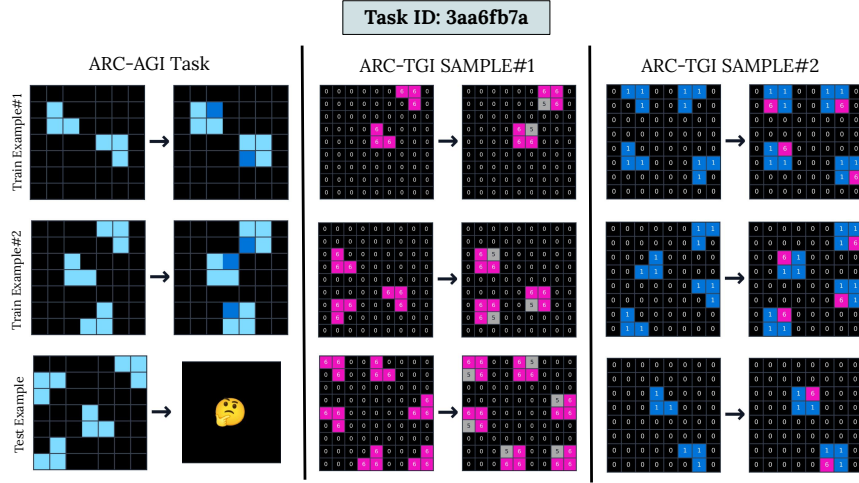


Figure 2: **Representative ARC-TGI transformation family.** Grid-level variables change object configuration, positions, and colors. Task-level variables determine their joining direction and alignment within each generated episode.

always use disjoint task identifiers, including when they share a generator. Novel-family evaluation additionally uses generator-disjoint splits, whereas spatial transfer reuses generators but constrains grid sizes on each side. The reported results use spatial and cross-benchmark transfer; the generator-disjoint split is documented as protocol support rather than as a separate empirical endpoint. Since the original ARC-AGI evaluation set changes both generator source and difficulty, it is a cross-benchmark condition rather than a pure intervention on novelty.

Within-family depth varies the number of training examples per generator over  $n \in \{10, 20, 40, 50, 70, 80, 100\}$  and evaluates every model on a common disjoint set of 30 examples per generator. Training breadth varies the number of generators over  $\{60, 80, 100, 140, 180, 193\}$  with 50 training examples per generator; evaluation uses 30 examples from 50 families shared across all scales. Spatial transfer uses 123 generators shared across directions with 50 training, and 20 evaluation examples per generator under matched or crossed small- and large-grid regimes. Full schedules are reported in Appendices C and D.

### 3.2 Models, Training, and Task Formulations

We study one representative from each of three transformer families. The decoder-only model is Qwen3-1.7B; the encoder-decoder model is T5Gemma-ml-ml-ul2-it with approximately 2B parameters; and the sparse model is Qwen1.5-MoE-A2.7B-Chat, with approximately 14.3B total and 2.7B active parameters. We report comparisons at the *model-family* level because the representatives differ in pretraining, tokenization, context length, and total capacity; the design therefore does not isolate architecture as a causal factor.

Selection required repeated fine-tuning, structured generation, instruction following, and sufficient context for multiple grids. Qwen3 provides a 32,768-token context, whereas the ED model provides 8K; the MoE representative matches the intended scale more closely in active parameters than in total capacity. These differences remain part of the model-family profiles, not controlled architectural effects. All models are trained with supervised fine-tuning. We evaluate both full-parameter updates and parameter-efficient updates through LoRA Hu et al. (2022). The large hyperparameter sweep establishes a suitable operating region for each family before the generalization and experience analyses. Across 624 configurations, the initial sweep varies learning rate, warm-up ratio, weight decay, and epoch. The D and MoE sweeps use learning rates  $\{5 \times 10^{-6}, 10^{-5}, 2 \times 10^{-5}, 2 \times 10^{-4}\}$ , whereas the ED sweep uses  $\{10^{-5}, 5 \times 10^{-5}, 10^{-4}, 2 \times 10^{-4}\}$ . All use warm-up ratios  $\{0.03, 0.05, 0.1\}$ ; weight decay is  $\{0, 0.01, 0.05, 0.1\}$  for the D and MoE models and  $\{0, 0.01, 10^{-4}, 10^{-5}\}$  for the ED model. Checkpoint grids extend to 35 epochs for decoder-only, 30 for ED, and 12 for MoE. LoRA tests  $(r, \alpha) \in \{(16, 32), (32, 64), (64, 128), (128, 256)\}$  with dropout 0.05, keeping  $\alpha/r = 2$ . Configuration selection is performed within each family; the formulation study additionally repeats a smaller warm-up and weight-decay search with epochs fixed at 10 for the D and ED models and five for MoE. The sweep locates

operating regions rather than causal optimizer effects; Appendix B retains run-level timing, memory, and cost-adjusted compute tables, whose  $H200 = 2 \times H100$  conversion is only an accounting convention.

We consider two output formulations. In **transduction**, demonstrations and a test input are mapped directly to the output grid. In **induction**, the model generates a Python function that expresses the inferred transformation and is executed on the test input. Within each formulation, we compare a few-shot prompt with a reasoning-description prompt that supplies natural-language descriptions and transformation traces. This design tests whether formulation changes which capabilities are surfaced rather than assuming that all prompts measure the same behavior.



Figure 3: **RQ1: hyperparameter sensitivity and leading configurations.** Top: reported importance scores for the decoder-only, mixture-of-experts, and encoder-decoder model families. Bottom: the ten highest-accuracy configurations in each sweep. Axes are scaled independently by family, and importance scores are descriptive rather than an additive variance partition. LR, WU, and WD denote learning rate, warm-up ratio, and weight decay.

### 3.3 Evaluation and Reporting

The primary metric is exact grid-match accuracy. We additionally inspect generator-level accuracy to determine whether aggregate improvements extend broadly across families or are driven by a few. Transduction outputs are extracted from structured tags. Induction outputs are parsed as code, executed in a sandboxed environment, and compared with the target grid. Unless explicitly stated, subsequent experiments use the best-performing configurations identified by the tuning study. In that study, every configuration uses the same seed-42 split of the filtered task records: 95% is used for training and the remaining 5% for configuration comparison. We therefore treat the 5% holdout as validation support rather than as an independent final test set. Training does not use a separate evaluation dataset for validation-based checkpoint selection; checkpoint performance is measured after training. Ray coordinates distributed training on the SLURM cluster, while inference uses actors pinned to individual GPUs. The workloads run on H100 and H200 hardware, with the allocation recorded for each configuration.

For MoE, target-module detection distinguishes expert feed-forward targets, which may require dynamic unused-parameter detection, from attention-only targets compatible with static-graph execution. The reported MoE LoRA runs adapt the attention projections. At inference, the decoder-only and MoE models use vLLM, whereas the ED model uses the Hugging Face generation pipeline. The reproducibility protocol requires model and tokenizer revisions, random seeds, package versions, launch commands, dataset manifests, and checkpoint-selection rules. Together, these fields make the data, execution backend, and selected checkpoint auditable for each reported condition.

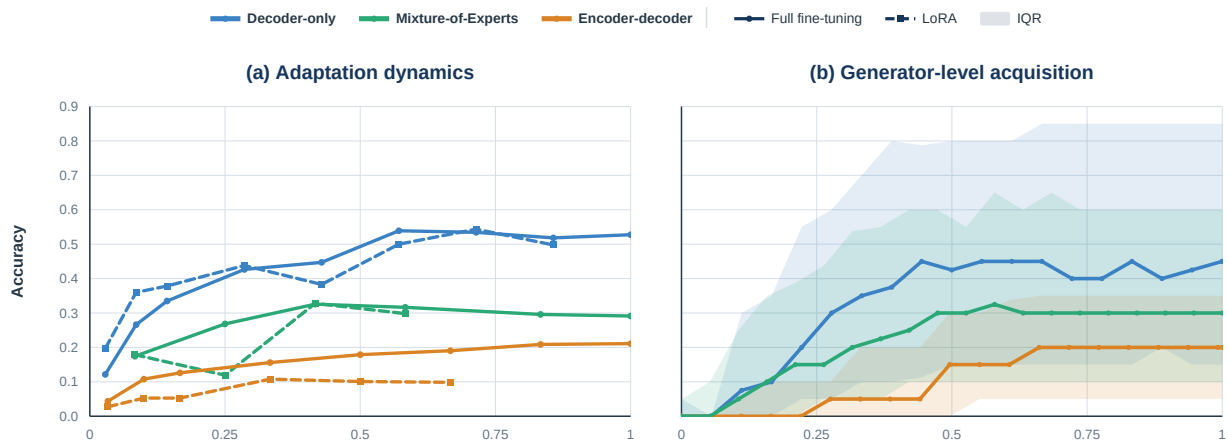


Figure 4: **RQ1: adaptation and acquisition dynamics.** (a) Exact-match accuracy for the selected full fine-tuning and LoRA configurations over model-family-specific normalized training progress. Colors identify model families; solid circles denote full fine-tuning and dashed squares denote LoRA. (b) Median generator-level accuracy with interquartile bands over normalized training progress. Endpoint, rank, and compute details appear in Appendix B; disaggregated generator trajectories appear in Appendix C.

The study comprises more than 1,000 controlled training and evaluation runs, including 624 hyperparameter configurations. This breadth supports behavioral profiling, but it is not a substitute for uncertainty estimates: the main text therefore emphasizes large, repeated patterns across families and avoids claims unsupported by the design. RQ4 adds two selected-task diagnostics after behavioral evaluation: layer-wise attention entropy over the test-input region, computed for each family over its own attention type, and attention-edge knockout, which measures the percentage change in mean per-token target log probability after masking one prompt region’s incoming edges within a five-layer sliding layer window. Because their effect scales differ across families, we compare layer-wise signatures rather than aggregate their magnitudes into a common score.

## 4 Results

Each subsection answers one research question. We first establish the operating conditions and stability of acquisition, then test transfer, examine interactions with task formulation and in-context experience, and finally report exploratory internal diagnostics. The main text presents the comparisons needed for this sequence; full response distributions, epoch-wise tables, per-generator scaling heatmaps, compute accounting, and diagnostic methods appear in the corresponding appendix sections.

### 4.1 Acquisition Efficiency and Stability

This subsection addresses **RQ1**. Optimization is a prerequisite for interpreting all subsequent comparisons. Across 624 configurations, learning rate and training duration are the dominant modulators, whereas warm-up ratio and weight decay have smaller effects over the tested ranges. Figure 3 shows that their relative influence is model-family-specific: learning rate and epoch are both consequential for D, while learning rate dominates the MoE and ED sweeps. The leading configurations reinforce this separation—D favors the largest tested learning rate over longer schedules, MoE peaks in a narrower intermediate-rate region, and ED favors the smallest tested rate. Consequently, transferring one optimization recipe across families would confound subsequent comparisons. Appendix B reports the full marginal response distributions and search grids.

Parameter-efficient adaptation is also family-dependent. Rank-128 LoRA matches full fine-tuning for D (54.4% versus 53.9%), and rank-16 LoRA reaches a comparable endpoint for MoE; under the tested configuration, however, ED loses approximately half of its full fine-tuning accuracy. Figure 4(a) shows that these endpoints arise from different

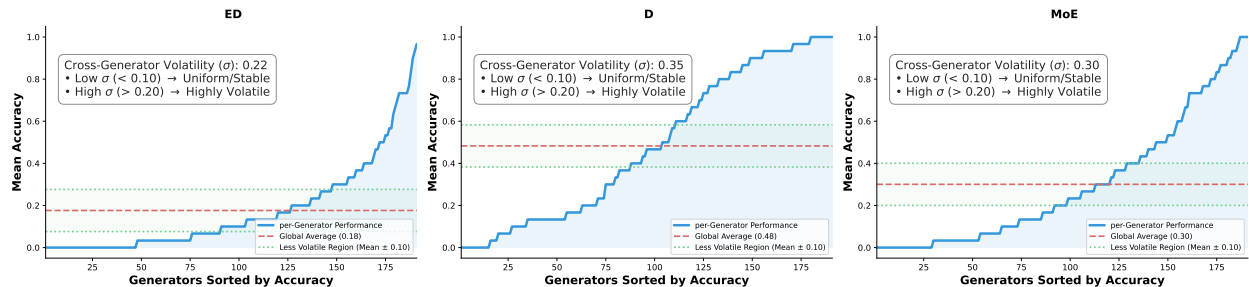


Figure 5: **RQ2: family-level heterogeneity.** Generators are sorted by exact-match accuracy for each model family. The dashed line is global mean accuracy and dotted lines mark mean  $\pm 0.1$ . Low dispersion can reflect consistent success or uniform failure.

trajectories. D follows nearly the same path under both update methods; MoE’s selected LoRA run is less stable early in training, and the ED gap opens early and persists. A single adaptation budget is therefore not a neutral default across model families. Table 1 and Appendix B report the selected endpoints and compute details.

Panel (b) shifts the unit of analysis from aggregate accuracy to median generator-level accuracy. D rises most quickly, reaches about 0.45, and then fluctuates around 0.40–0.45; MoE improves steadily and stabilizes near 0.30; and ED improves later and plateaus near 0.20. The broad interquartile bands show that even these distinct median trajectories conceal substantial variation among generators. Appendix C disaggregates the curves into checkpoint-level generator trajectories and reports the corresponding improved, decreased, and zero-performing counts.

Increasing experience improves aggregate performance, but unevenly. The depth intervention holds 200 transformation families fixed while varying training examples per family from 10 to 100. Its generator-level profiles retain persistent easy and difficult bands, and individual families can improve, plateau, or regress as examples are added (Appendix C, Figure 10). Additional within-family variation therefore does not uniformly expand the learnable task set.

The complementary breadth intervention varies the number of training generators while evaluating the same 50 families. Table 1 reports the endpoints: scaling from 60 to 193 generators raises accuracy from 39.3% to 51.6% for D, from 39.1% to 45.0% for MoE, and from 7.5% to 13.0% for ED. Appendix C reports all intermediate scales and shows that these aggregate gains are driven by only some transformation families.

**Answer to RQ1.** The three model families acquire substantial in-distribution skill, but acquisition is not uniformly efficient or stable across conditions. It depends strongly on optimization and adaptation choices, follows family-specific trajectories, and varies substantially across transformation families. More experience improves aggregate accuracy without reliably eliminating this heterogeneity; endpoint comparisons should therefore be conditioned on both the operating point and the training experience.

## 4.2 Transfer Beyond the Training Distribution

This subsection addresses **RQ2**. The central test is whether improvements on seen task families persist under distribution shift. We evaluate each available training checkpoint on the original ARC-AGI evaluation set. Table 1 (RQ2: Cross-benchmark) contrasts each family’s strongest reported seen-family validation performance with its maximum observed ARC-AGI accuracy. Because ARC-AGI is evaluated across multiple checkpoints, these maxima are post-hoc descriptive summaries of the trajectories rather than estimates from checkpoints selected independently of ARC-AGI. The decoder-only model falls from 54.4% to 3.5%, MoE from 32.8% to 2.75%, and ED from 21.1% to 2.0%. Epoch-wise transfer is also non-monotonic even when seen-family accuracy increases (Appendix D). D’s performance fluctuates between 0.25% and 3.5%; MoE reaches its peak at epochs 1 and 5 but declines between them; ED reaches 2% at epochs 15 and 20 before falling to 0.25% at epoch 25. Continued fitting on seen families therefore does not monotonically improve cross-benchmark transfer. Because ARC-AGI differs from ARC-TGI in both novelty and difficulty, this result is best interpreted as cross-benchmark transfer rather than as a pure estimate of generator novelty.

Spatial scale provides a more controlled shift because the transformation family is retained. After filtering, 123 generators are shared across the two directions. Each training curriculum contains 50 samples per generator restricted



| RQ  | Comparison               | Condition             | D    | MoE  | ED   |
|-----|--------------------------|-----------------------|------|------|------|
| RQ1 | Training breadth         | 60 generators         | 39.3 | 39.1 | 7.5  |
|     |                          | 193 generators        | 51.6 | 45.0 | 13.0 |
|     | Adaptation               | Full fine-tuning      | 53.9 | 32.6 | 21.1 |
|     |                          | LoRA                  | 54.4 | 32.8 | 10.8 |
| RQ2 | Cross-benchmark transfer | Seen-family val. max. | 54.4 | 32.8 | 21.1 |
|     |                          | Observed ARC-AGI peak | 3.5  | 2.75 | 2.00 |
|     | Small-grid training      | Small-grid evaluation | 68.5 | 53.1 | 64.4 |
|     |                          | Large-grid evaluation | 24.3 | 12.7 | 5.9  |
|     | Large-grid training      | Large-grid evaluation | 65   | 42.4 | 33.9 |
|     |                          | Small-grid evaluation | 51.4 | 36.4 | 45   |
| RQ3 | Few-shot formulation     | Transduction          | 44.3 | 33.7 | 0.0  |
|     |                          | Induction             | 52.3 | 59.0 | 16.1 |
|     | In-context examples      | One shot              | 36.7 | 20.1 | 43.6 |
|     |                          | Four shots            | 51.9 | 30.6 | 23.4 |

Table 1: **Behavioral results summary.** Exact-match accuracy (%) under the two conditions stated for each RQ1–RQ3 comparison. Complete trajectories, intermediate scales, formulation variants, and compute accounting appear in the corresponding figures and appendices.

to small ( $\leq 15 \times 15$ ) or large ( $> 16 \times 16$ ) grids, and each evaluation curriculum contains 20 samples per generator from the opposite or matched scale for 118 out of 123 generators. Table 1 (RQ2: spatial-transfer rows) shows a consistent asymmetry that differs by model. For D and MoE, models trained on small grids perform well on small evaluation grids but collapse in the large-grid regime. Training on larger grids transfers better to small grids, although performance still declines. For D, the matched-to-shifted gap is 44.2 points after small-grid training but 13.6 points after large-grid training. The corresponding gaps are 40.4 versus 6 points for MoE. ED follows this pattern in only one direction: its matched-to-shifted gap after small-grid training is 58.5 points, the largest collapse of the three models. The opposite pattern appears when trained on large grids, where it improves by 11.1 points when transferred to smaller grids. ED therefore shows the strongest asymmetry in both directions. Its shorter context and model-specific input representation are plausible contributors, but the comparison cannot separate those factors from the other model-specific differences. Thus, even when the latent transformation is unchanged, token length and spatial realization materially affect transfer.

The aggregate transfer gaps must also be interpreted relative to the coverage of the seen-family reference score. We sample up to 30 disjoint evaluation instances from each of 191 seen generators and aggregate exact-match accuracy by family. Figure 5 sorts generators by accuracy and reports cross-generator dispersion. High performance is concentrated in roughly 50, 25, and 10 generators for D, MoE, and ED, respectively, while many families remain near zero. D has the highest mean accuracy but also the largest reported cross-generator standard deviation ( $\sigma = 0.35$ ); ED has the lowest mean and the smallest dispersion ( $\sigma = 0.22$ ), which is driven partly by uniform failure. Dispersion alone is therefore not a sufficient measure of consistency. The profiles show that a high aggregate reference score need not represent broad transformation-family coverage.

**Answer to RQ2.** Acquired performance transfers poorly as evaluation departs from the training distribution. The degradation appears under cross-benchmark transfer and under a controlled spatial shift that retains the transformation family; its directional asymmetry further reveals sensitivity to the surface realization and length of the serialized task. Seen-family endpoint performance is therefore a weak proxy for transfer. This evidence is consistent with distribution-specific fitting, but it does not establish the absence of abstract reasoning because exact-match behavior alone cannot determine the internal computation.

### 4.3 Effects of Model Family and Task Formulation

This subsection addresses **RQ3**. No model family dominates every condition. Because the best configuration from direct transduction does not transfer reliably across prompts, the formulation study performs a smaller search over

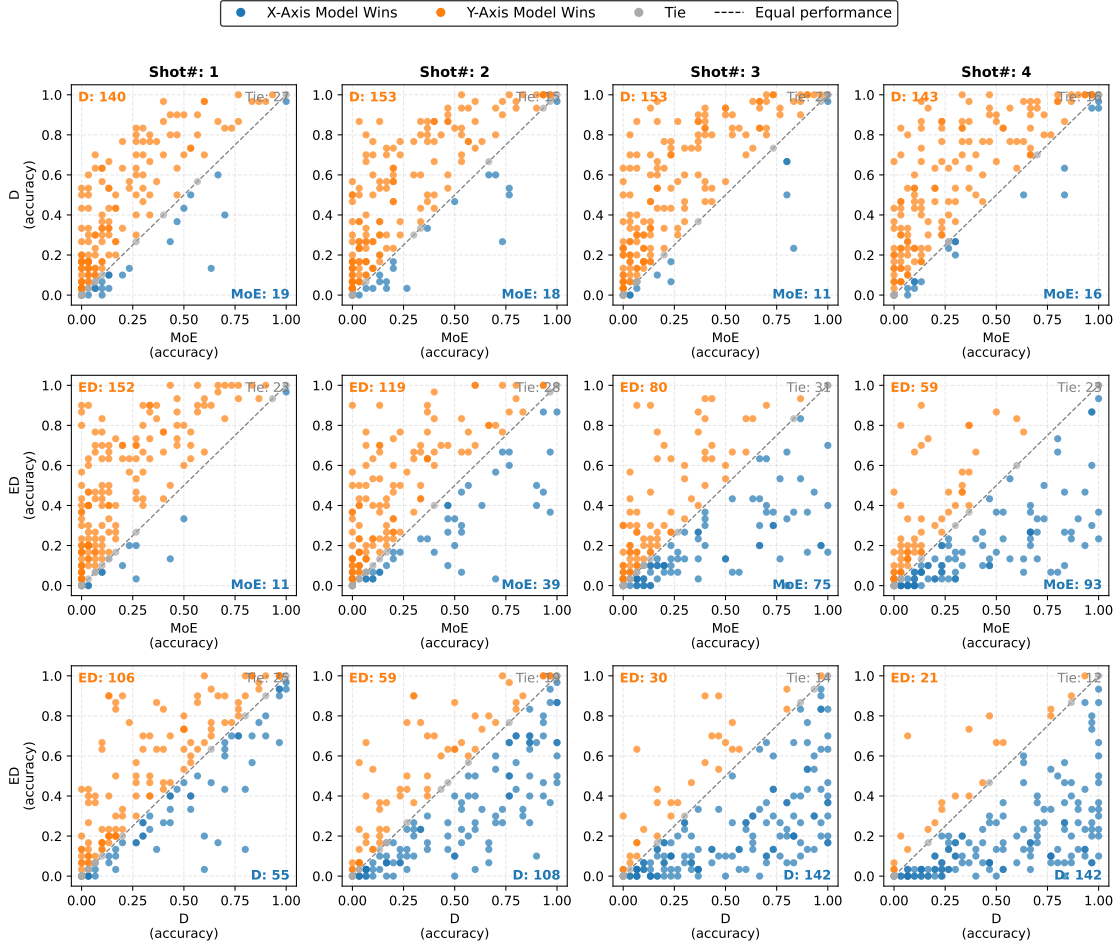


Figure 6: **RQ3: generator-level effects of in-context experience.** Pairwise generator accuracies for one to four demonstrations. Points above or below the diagonal indicate which model family performs better; gray denotes a tie.

warm-up ratio and weight decay while fixing the epoch budget for each family. With direct transduction, D achieves the strongest accuracy, followed by MoE and ED. Induction changes this ordering: few-shot induction raises D and MoE to 52.3% and 59% respectively, substantially narrowing their gap, while ED improves from 0.0% in few-shot transduction to 16.1% in few-shot induction. Providing natural-language reasoning information has little or negative benefit for D and MoE under transduction, while it substantially improves ED from 0.0% to 15.6%. Under induction, however, reasoning reduces accuracy for D and ED and leaves MoE essentially unchanged. The formulation is therefore not a neutral output wrapper; it changes the computational problem and the prior supplied by the output language.

The number of demonstrations produces another family-specific interaction. Task and generator identifiers are held fixed across  $k \in \{1, 2, 3, 4\}$ , yielding approximately 5,800 evaluation instances from 186 generators at each comparison. D and MoE improve from one to four shots (36.7% to 51.9% and 20.1% to 30.6%, respectively), whereas ED declines from 43.6% to 23.4%. This inversion is consistent with an input-length or representation bottleneck for the selected encoder-decoder model, but the present design cannot attribute it solely to encoder-decoder architecture.

Table 1 consolidates these formulation and context-length endpoints with the RQ1 and RQ2 comparisons discussed above; the complete formulation and shot-count results appear in Appendix Table 5.

Aggregate shot accuracy conceals which transformation families drive the reversal. Figure 6 compares the families pairwise. At one shot, ED outperforms D on 106 generators and in aggregate accuracy (43.6% versus 36.7%). By four shots, D outperforms ED on 142 generators, whereas ED leads on only 21; aggregate accuracy likewise favors D (51.9% versus 23.4%). D also increasingly outperforms MoE as demonstrations increase, while MoE outperforms

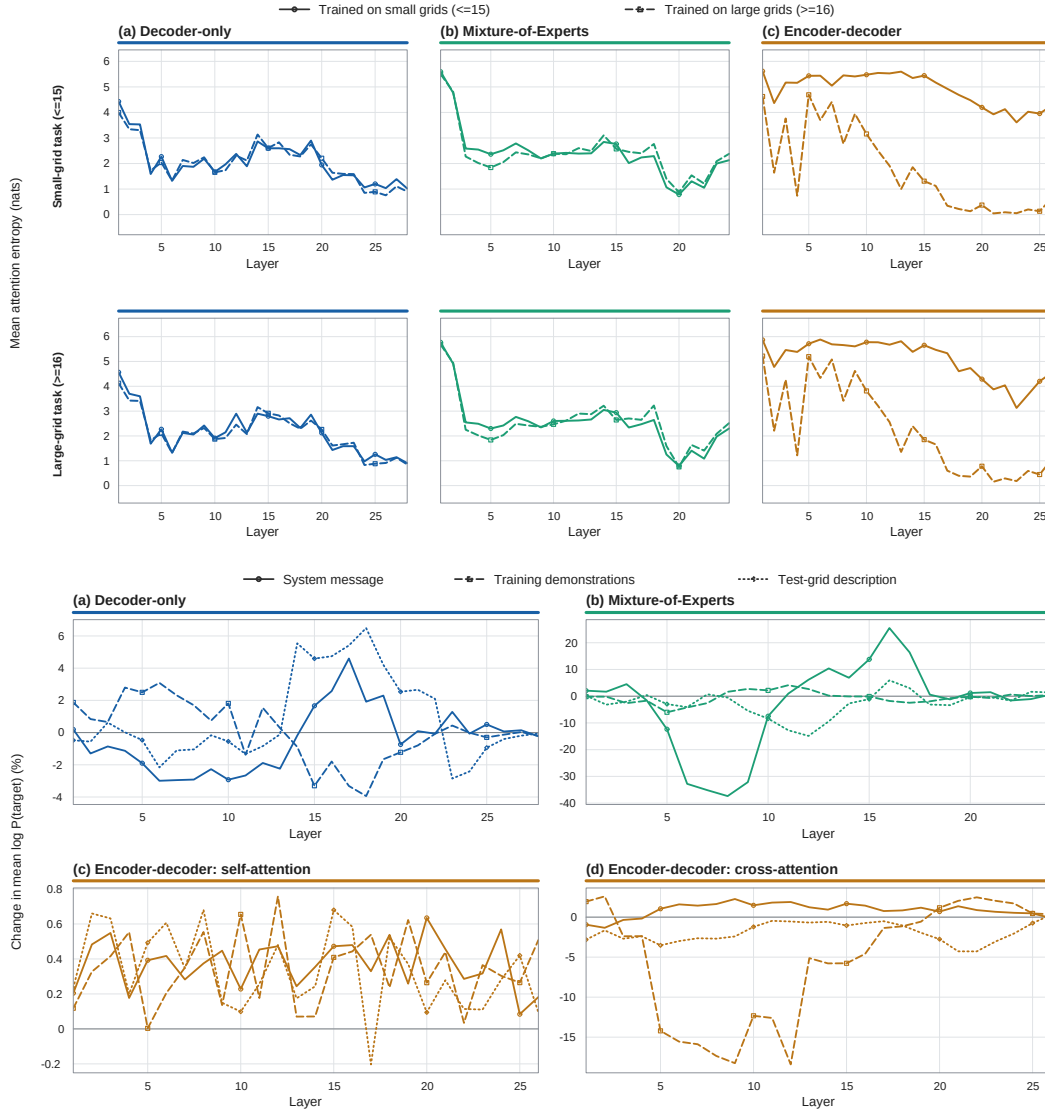


Figure 7: **RQ4: exploratory layer-wise attention diagnostics.** *Top*: mean attention entropy on the selected small-grid task (upper row) and large-grid task (lower row) after small-grid or large-grid training. *Bottom*: the baseline-normalized change in mean per-token target-answer log probability after blocking attention from the system message, demonstrations, or test-grid description. Negative knockout values indicate supportive context. Colors identify D (blue), MoE (green), and ED (orange); knockout panels retain native scales.

ED in the four-shot condition. The result is not a uniform offset between families: prompt length changes the set of transformations on which each model is competitive.

**Answer to RQ3.** Measured performance depends on the model, training configuration, and task formulation rather than on the model alone. D has the strongest direct-transduction performance; MoE often acquires skills quickly, and ED is competitive in the one-shot setting but degrades with additional context. Executable-rule induction reveals correct solutions not observed through direct grid generation, while more demonstrations help the selected decoder-based models and hurt the selected encoder-decoder model. These profiles motivate hypotheses about autoregressive processing, sparse routing, and bidirectional encoding, but they do not support a universal or causal architecture ranking; that test requires multiple matched models per family.

---

## 4.4 Exploratory Internal-Signature Case Studies

This subsection addresses **RQ4**. We use two complementary selected-task diagnostics to examine, in selected cases, whether the behavioral differences under spatial shift are accompanied by distinct layer-wise attention signatures. The analysis is deliberately contrastive: for entropy, we select one small-grid and one large-grid task that models from all three families solve after large-grid training but fail after small-grid training. The knockout analysis uses a common selected prompt across families to compare when each prompt region contributes. The resulting profiles characterize diagnostic cases in which training scale or model family changes the outcome; they are not population-level estimates over ARC tasks.

For the entropy diagnostic, we compute Shannon entropy from the normalized attention distribution, reported as raw per-layer values. The averaging domain differs by family because the diagnostic probes a different attention type in each. For D and MoE, we hook self-attention and average over heads and over query positions in the test-input region. For ED, we hook decoder cross-attention at the first decoder position and average over heads, with the distribution restricted and renormalized over the encoder key positions in the test-input region. Lower entropy denotes more concentrated attention, not better reasoning. Figure 7 (top) compares the two selected tasks after training in either grid regime. D begins between 4 and 4.4 nats and becomes more concentrated in its final layers, with the training conditions remaining nearly indistinguishable. MoE starts near 5.5–6 nats, falls rapidly to 2–3 nats, and exhibits another marked decrease around layer 20. ED remains near 4.6–6.3 nats through much of its cross-attention stack when trained on small-grid tasks, but when trained on large-grid tasks, entropy falls sharply from the middle layers onwards and drops to approximately 1 by the final layers. The two training profiles diverge substantially and are by far the largest separation between the two training regimes of the three families. Entropy thus separates family-specific concentration profiles, but it cannot identify which prompt region contributes to the target.

The attention-edge intervention provides a more direct diagnostic. We partition the prompt into system instructions, demonstrations, and the test-grid description. Within each five-layer window, incoming edges from one region are masked (to the final query position for self-attention, and to all decoder query positions for ED cross-attention); the forward pass is rerun without deleting prompt tokens, and the mean per-token target-answer log probability is compared with the unmodified pass. We report this comparison as a percentage change relative to the magnitude of the unmodified value (Appendix F.2), so each panel is expressed in units of that model’s own baseline confidence. Negative changes indicate that the removed region supported the target; positive changes indicate that it carried a competing signal. Because each panel is normalized to its own baseline, effect magnitudes are not comparable across families; comparisons should focus on sign and layer-wise timing rather than absolute magnitude across families. The selected D case exhibits a two-phase pattern: demonstrations compete with the target early but support it after roughly layer 13. The selected MoE case relies strongly on the system message: suppressing it collapses the target probability around layers 5–9 and shows the opposite behavior between layers 10–18, while the model relies on demonstrations in the initial and late layers. ED self-attention is noisier, whereas its decoder cross-attention shows sustained support from demonstrations through approximately layers 3–17. Taken together, the diagnostics separate concentration from dependence: ED’s diffuse entropy profile, for example, coexists with a clear cross-attention dependence on demonstrations. Appendix F provides the complete diagnostic definitions and scope.

**Answer to RQ4.** In the selected diagnostic cases, the model families exhibit distinct internal signatures in both attention concentration and prompt-region dependence. D and MoE become more concentrated with depth but rely on demonstrations over different layer ranges, whereas ED retains diffuse attention and exposes a clearer signal in decoder cross-attention than in encoder self-attention. These signatures accompany the behavioral differences, but they neither explain those differences nor support a causal architectural ranking.

## 5 Conclusion

We used controllable ARC task families to distinguish seen-family acquisition from performance under shifted evaluation conditions. Across three small-model families and more than 1,000 controlled runs, in-distribution accuracy could be substantial, yet acquisition was sensitive to optimization, heterogeneous across task families, and only weakly predictive of transfer. Increasing training depth or breadth improved aggregate accuracy unevenly without eliminating persistent difficult families; spatial and cross-benchmark shifts produced sharp degradation; and induction, transduc-

---

tion, and demonstration count surfaced different model-family profiles. Attention diagnostics revealed family-specific internal signatures, although they neither explain the behavioral differences nor support causal architectural rankings.

Taken together, the results support a broader standard of evidence in abstract-reasoning research. A single score collapses several scientifically distinct questions: what was acquired, how efficiently and stably it was acquired, which task families support it, how far it transfers, and which formulation makes it observable. Resampleable task-family distributions make these questions experimentally separable. We therefore encourage future ARC studies to pair endpoint accuracy with learning trajectories, family-level coverage, matched distribution shifts, and formulation sensitivity, while using internal diagnostics to generate hypotheses rather than support general mechanistic claims. Under this view, ARC provides a controlled testbed for studying the conditions under which measured performance appears, persists, and fails. Small models are especially useful in this setting: their limitations make broad controlled interventions feasible and expose structure that a single frontier-model result can conceal. The goal is not merely to solve more instances drawn from a familiar distribution, but to acquire transformations quickly, preserve them across nuisance and spatial changes, and express them reliably under alternative interfaces. This study does not establish the absence of abstract reasoning; it shows how to demand more precise evidence for it. Progress toward general abstract reasoning should therefore be assessed not only by success rate, but also by acquisition efficiency, task-family coverage, stability under controlled shifts, and evidence that an acquired transformation survives those shifts.

## Limitations

The study has five primary limitations. First, one pretrained model represents each architectural family; pretraining data, tokenizer, context length, parameter count, alignment, and inference backend are therefore confounded with architecture. Second, the sweep prioritizes broad experimental coverage but does not estimate variability across training seeds. Its 5% holdout supports configuration selection rather than an independent final test, and the reported ARC-AGI maxima are post-hoc summaries across evaluated checkpoints. Third, cross-benchmark transfer to ARC-AGI changes both task-family novelty and difficulty, so it is not a pure OOD intervention. Fourth, exact grid match measures behavioral success but cannot determine whether the internal computation constitutes reasoning; executable code also supplies a strong formal-language prior. Finally, the mechanistic diagnostics cover selected tasks and yield effects on different scales across model families. They are exploratory and should not be read as general causal explanations.

These limitations restrict the conclusions to the selected small-model families, training regimes, and textual ARC representation. They also motivate matched-family comparisons, repeated-seed estimates for headline results, controlled novel-generator splits, and object-structured representations in future work.

## Broader Impact Statement

This work studies evaluation methodology and small-model behavior rather than a deployed system. Its positive impact is to encourage more cautious interpretation of reasoning benchmarks and more compute-efficient controlled studies. Potential negative impacts include overgeneralizing results from selected models or treating behavioral failures as definitive claims about intelligence. We mitigate these risks by stating the model-family confounds, separating behavioral evidence from mechanistic interpretation, and reporting the limits of cross-benchmark transfer. The experimental campaign also consumed substantial GPU resources; the compute tables support transparent accounting and motivate reuse of released artifacts where possible.

## References

- Samira Abnar and Willem Zuidema. Quantifying attention flow in transformers. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 4190–4197, Online, 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.385. URL <https://aclanthology.org/2020.acl-main.385/>.
- Ekin Akyürek, Mehul Damani, Adam Zweiger, Linlu Qiu, Han Guo, Jyothish Pari, Yoon Kim, and Jacob Andreas. The surprising effectiveness of test-time training for few-shot learning. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pp. 942–963. PMLR, 2025. URL <https://proceedings.mlr.press/v267/akyurek25a.html>.

- 
- Zeyuan Allen-Zhu and Yuanzhi Li. Physics of language models (series): Parts 1–4. <https://physics.allen-zhu.com/>, 2023–2025. Accessed: 2026-05-23.
- ARC Prize Foundation. ARC-AGI-3: A new challenge for frontier agentic intelligence. *arXiv preprint arXiv:2603.24621*, 2026. doi: 10.48550/arXiv.2603.24621. URL <https://arxiv.org/abs/2603.24621>.
- Dan Biderman, Jose Gonzalez Ortiz, Jacob Portes, Mansheej Paul, Philip Greengard, Connor Jennings, Daniel King, Sam Havens, Vitaliy Chiley, Jonathan Frankle, Cody Blakeney, and John P. Cunningham. LoRA learns less and forgets less. In *Proceedings of the Thirteenth International Conference on Learning Representations*, 2025. URL <https://iclr.cc/virtual/2025/poster/31465>.
- Kiril Bikov, Mikel Bober-Irizar, and Soumya Banerjee. AugARC: Augmented abstraction and reasoning benchmark for large language models. OpenReview, 2024. URL <https://openreview.net/forum?id=kRFwzuv0ze>.
- François Chollet. On the measure of intelligence. *arXiv preprint arXiv:1911.01547*, 2019. doi: 10.48550/arXiv.1911.01547. URL <https://arxiv.org/abs/1911.01547>.
- François Chollet, Mike Knoop, Gregory Kamradt, and Bryan Landers. ARC prize 2024: Technical report. Technical report, December 2024. URL <https://arxiv.org/abs/2412.04604>.
- François Chollet, Mike Knoop, Gregory Kamradt, Bryan Landers, and Henry Pinkard. ARC-AGI-2: A new challenge for frontier AI reasoning systems. *arXiv preprint arXiv:2505.11831*, 2025. doi: 10.48550/arXiv.2505.11831. URL <https://arxiv.org/abs/2505.11831>.
- William Fedus, Barret Zoph, and Noam Shazeer. Switch transformers: Scaling to trillion parameter models with simple and efficient sparsity. *CoRR*, abs/2101.03961, 2021. URL <https://arxiv.org/abs/2101.03961>.
- Daniel Franzen, Jan Disselhoff, and David Hartmann. The LLM ARCHitect: Solving the ARC challenge is a matter of perspective. 2024. URL [https://github.com/da-fr/arc-prize-2024/blob/main/the\\_architects.pdf](https://github.com/da-fr/arc-prize-2024/blob/main/the_architects.pdf). 1st Place, ARC Prize 2024. Achieved 53.5% on private eval.
- Gaël Gendron, Qiming Bao, Michael Witbrock, and Gillian Dobbie. Large language models are not strong abstract reasoners. In *Proceedings of the International Joint Conference on Artificial Intelligence (IJCAI)*, pp. 6270–6278, 2024. URL <https://arxiv.org/abs/2305.19555>.
- Mandy Guo, Joshua Ainslie, David C. Uthus, Santiago Ontañón, Jianmo Ni, Yun-Hsuan Sung, and Yinfei Yang. Long5: Efficient text-to-text transformer for long sequences. In Marine Carpuat, Marie-Catherine de Marneffe, and Iván Vladimir Meza Ruíz (eds.), *Findings of the Association for Computational Linguistics: NAACL 2022, Seattle, WA, United States, July 10-15, 2022*, Findings of ACL, pp. 724–736. Association for Computational Linguistics, 2022. doi: 10.18653/v1/2022.FINDINGS-NAACL.55. URL <https://doi.org/10.18653/v1/2022.findings-naacl.55>.
- Michael Hodel. Addressing the abstraction and reasoning corpus via procedural example generation. *arXiv preprint arXiv:2404.07353*, 2024. doi: 10.48550/arXiv.2404.07353. URL <https://arxiv.org/abs/2404.07353>.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. In *The Tenth International Conference on Learning Representations, ICLR 2022, Virtual Event, April 25-29, 2022*. OpenReview.net, 2022. URL <https://openreview.net/forum?id=nZeVKeeFYf9>.
- Maggie Huan, Yuetai Li, Tuney Zheng, Xiaoyu Xu, Seungone Kim, Minxin Du, Radha Poovendran, Graham Neubig, and Xiang Yue. Does math reasoning improve general LLM capabilities? understanding transferability of LLM reasoning. *CoRR*, abs/2507.00432, 2025. doi: 10.48550/ARXIV.2507.00432. URL <https://doi.org/10.48550/arXiv.2507.00432>.
- Subin Kim and Prin Phunayaphibarn. Playgrounds for abstraction and reasoning: Mini-ARC and O2ARC interface. In *Proceedings of the International Conference on Computational Creativity*, 2023. URL <https://github.com/KSB21ST/MINI-ARC>.

- 
- Alex Lawsén. Comment on The Illusion of Thinking: Understanding the strengths and limitations of reasoning models via the lens of problem complexity. *arXiv preprint arXiv:2506.09250*, 2025. doi: 10.48550/arXiv.2506.09250. URL <https://arxiv.org/abs/2506.09250>.
- Seungpil Lee, Woorchang Sim, Donghyeon Shin, Wongyu Seo, Jiwon Park, Seokki Lee, Sanha Hwang, Sejin Kim, and Sundong Kim. Reasoning abilities of large language models: In-depth analysis on the abstraction and reasoning corpus. *ACM Transactions on Intelligent Systems and Technology*, 16(6):1–52, 2025.
- Solim LeGris, Wai Keen Vong, Brenden M. Lake, and Todd M. Gureckis. A comprehensive behavioral dataset for the abstraction and reasoning corpus. *Scientific Data*, 12(1):1380, 2025. doi: 10.1038/s41597-025-05687-1. URL <https://doi.org/10.1038/s41597-025-05687-1>.
- Jens Lehmann, Syeda Khushbakht, Nikoo Salehfard, Nur A Zarin Nishat, Dhananjay Bhandiwad, Andrei Aioanei, and Sahar Vahdati. ARC-TGI: Human-validated task generators with reasoning chain templates for ARC-AGI. *arXiv preprint arXiv:2603.05099*, 2026.
- Wen-Ding Li, Keya Hu, Carter Larsen, Yuqing Wu, Simon Alford, Caleb Woo, Spencer Dunn, Hao Tang, Wei-Long Zheng, Yewen Pu, et al. Combining induction and transduction for abstract reasoning. In *International Conference on Learning Representations*, volume 2025, pp. 20981–21024, 2025.
- Iman Mirzadeh, Keivan Alizadeh-Vahid, Hooman Shahrokhi, Oncel Tuzel, Samy Bengio, and Mehrdad Farajtabar. Gsm-symbolic: Understanding the limitations of mathematical reasoning in large language models. In *International Conference on Learning Representations*, volume 2025, pp. 94743–94765, 2025.
- Melanie Mitchell, Alessandro B. Palmarini, and Arseny Moskvichev. Comparing humans, GPT-4, and GPT-4V on abstraction and reasoning tasks. In *Proceedings of the LLM-CP Workshop at the 38th AAAI Conference on Artificial Intelligence*, 2024. URL <https://openreview.net/forum?id=3rGT50kzpC>.
- Michael D. Moffitt. ARC-GEN: A mimetic procedural benchmark generator for the abstraction and reasoning corpus. *arXiv preprint arXiv:2511.00162*, 2025. doi: 10.48550/arXiv.2511.00162. URL <https://arxiv.org/abs/2511.00162>.
- Arseny Moskvichev, Victor Vikram Odouard, and Melanie Mitchell. The ConceptARC benchmark: Evaluating understanding and generalization in the ARC domain. *Transactions on Machine Learning Research*, 2023. URL <https://arxiv.org/abs/2305.07141>.
- Alethea Power, Yuri Burda, Harri Edwards, Igor Babuschkin, and Vedant Misra. Grokking: Generalization beyond overfitting on small algorithmic datasets. *CoRR*, abs/2201.02177, 2022. URL <https://arxiv.org/abs/2201.02177>.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21:140:1–140:67, 2020. URL <https://jmlr.org/papers/v21/20-074.html>.
- Sofia Serrano and Noah A. Smith. Is attention interpretable? In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 2931–2951, Florence, Italy, 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1282. URL <https://aclanthology.org/P19-1282/>.
- Noam Shazeer, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc V. Le, Geoffrey E. Hinton, and Jeff Dean. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net, 2017. URL <https://openreview.net/forum?id=BlckMDqlg>.
- Donghyeon Shin, Seungpil Lee, Klea Lena Kovacec, and Sundong Kim. From generation to selection: Findings of converting analogical problem-solving into multiple-choice questions. In *Findings of the Association for Computational Linguistics: EMNLP 2024*, 2024. URL <https://aclanthology.org/2024.findings-emnlp.392/>.
- Parshin Shojaei, Iman Mirzadeh, Maxwell Horton, Samy Bengio, Mehrdad Farajtabar, et al. The illusion of thinking: Understanding the strengths and limitations of reasoning models via the lens of problem complexity. *Advances in Neural Information Processing Systems*, 38:108018–108059, 2026.

- 
- Woochang Sim, Hyunseok Ryu, Kyungmin Choi, Sungwon Han, and Sundong Kim. GIFARC: Synthetic dataset for leveraging human-intuitive analogies to elevate AI reasoning. *arXiv preprint arXiv:2505.20672*, 2025. doi: 10.48550/arXiv.2505.20672. URL <https://arxiv.org/abs/2505.20672>.
- Sahar Vahdati, Andrei Aioanei, Haridhra Suresh, and Jens Lehmann. The ARC of progress towards AGI: A living survey of abstraction and reasoning. *arXiv preprint arXiv:2603.13372*, 2026. doi: 10.48550/arXiv.2603.13372. URL <https://arxiv.org/abs/2603.13372>. Submitted to ACM Computing Surveys.
- Yudong Xu, Wenhao Li, Pashootan Vaezipoor, Scott Sanner, and Elias B. Khalil. LLMs and the abstraction and reasoning corpus: Successes, failures, and the importance of object-based representations. *Transactions on Machine Learning Research*, 2024. ISSN 2835-8856. URL <https://openreview.net/forum?id=E8m8oySvPJ>.
- Biao Zhang, Fedor Moiseev, Joshua Ainslie, Paul Suganthan, Min Ma, Surya Bhupatiraju, Federico Lebrón, Orhan Firat, Armand Joulin, and Zhe Dong. Encoder-decoder gemma: Improving the quality-efficiency trade-off via adaptation. *CoRR*, abs/2504.06225, 2025. doi: 10.48550/ARXIV.2504.06225. URL <https://doi.org/10.48550/arXiv.2504.06225>.
- Renfei Zhang, Manasa Kaniselman, Rylan Schaeffer, and Niloofar Miresghallah. Reinforcement learning improves traversal of parametric knowledge in LLMs. *arXiv preprint arXiv:2511.05933*, 2026. doi: 10.48550/arXiv.2511.05933. URL <https://arxiv.org/abs/2511.05933>.

## A Data Construction and Study Infrastructure

The appendix follows the evidence flow of the main paper. We first document the data and execution controls, then provide the extended RQ1 acquisition analyses, the RQ2 transfer analyses, the RQ3 formulation study, and finally the RQ4 exploratory internal-signature diagnostics. Within each block, the experimental setup precedes the detailed results, followed by the interpretation and limits of the comparison. This organization preserves the distinction used in the main text between behavioral outcomes, transfer under distribution shift, and selected-task internal diagnostics.

### A.1 ARC-TGI Generator Pipeline

An ARC-TGI generator is a Python module implementing a transformation family. The `create_input` stage samples grids with variation in color, position, size, and object configuration. The `transform_input` stage deterministically applies the latent rule. The `create_grids` stage assembles demonstrations and a test pair while rejecting samples that violate task constraints or leave the transformation ambiguous. Task-level variables remain fixed within an episode but vary across episodes; grid-level variables can vary among demonstrations from the same episode. Repeated calls therefore yield distinct instances with a shared transformation.

This structure enables resampling and controlled interventions that are unavailable in a fixed corpus. It also introduces a validity requirement: a generator must faithfully encode the intended ARC rule without permitting unintended shortcuts. Generator quality and the relationship between generated families and original ARC tasks are therefore part of the scope of the results.

The generator is consequently both the unit of data construction and a unit of analysis. Episode-level exact match measures success on a sampled realization; generator-level aggregation measures how broadly that success extends across transformation families. We report both because a high aggregate score can be driven by repeated success on a limited set of generators.

### A.2 Curriculum Construction and Splits

The curriculum builder filters tasks according to experiment-specific criteria including token length, grid size, demonstration size, sample size, unique generators, and number of test examples per sample. Each record contains demonstration grids, a test grid, a task identifier, a generator identifier, and, where required by the prompt condition, a natural-language grid description and transformation trace. Training and evaluation records use disjoint task identifiers. Seen-family evaluation resamples from generators used in training; when used, novel-family evaluation relies on



---

generator-disjoint splits. Spatial-transfer experiments additionally constrain the grid dimensions on each side of the split.

Seen-family resampling draws new episodes from a training generator under its original sampling regime, whereas a within-family shift retains the generator but changes a controlled parameter such as grid scale. The original ARC-AGI evaluation set is treated separately as cross-benchmark transfer because it changes both generator source and task difficulty; it is not a pure intervention on novelty alone.

These splits support progressively stronger tests. Seen-family resampling asks whether performance extends to new realizations of a trained transformation. The spatial intervention asks whether it survives a controlled change in grid scale. Cross-benchmark evaluation asks whether the selected checkpoint remains useful on original ARC-AGI tasks, but does not isolate the source of any decline.

### A.3 Model-Selection Considerations

The experimental volume required models that could be repeatedly fine-tuned on available H100 and H200 hardware. Selection also required instruction following, structured generation, and sufficient context for multiple grid demonstrations. The final representatives involve trade-offs rather than a perfectly matched comparison. Qwen3-1.7B provides a dense decoder-only baseline with a 32,768-token context. Qwen1.5-MoE-A2.7B-Chat provides sparse expert routing with approximately 14.3B total and 2.7B active parameters. T5Gemma-ml-ml-ul2-it provides an approximately 2B encoder-decoder representative with an 8K-token context. The MoE model therefore matches the intended active-compute scale more closely than the total-capacity scale, and the ED context is shorter than the initial 10K target. These deviations are reported explicitly rather than treated as controlled architectural differences.

### A.4 Training and Inference Infrastructure

Training uses supervised fine-tuning with full-parameter or LoRA updates. Ray coordinates distributed execution on a SLURM cluster. NCCL timeout and error-handling variables are set to prevent silent distributed hangs. For MoE, target-module detection distinguishes expert feed-forward targets, which may require dynamic unused-parameter detection, from attention-only targets compatible with a static-graph path. The reported MoE LoRA runs target attention projections.

Inference uses Ray actors pinned to individual GPUs. vLLM is used for D and MoE when supported; ED uses the Hugging Face generation pipeline. Transduction answers are extracted from structured output tags. Induction answers are extracted as Python, executed in a sandbox, and evaluated by exact grid match. The reproducibility record includes model revisions, tokenizer revisions, random seeds, package versions, launch commands, dataset manifests, and checkpoint-selection rules.

Backend differences are recorded because they affect execution and resource accounting, but no architectural conclusion is based on throughput or memory alone. Behavioral comparisons use the same exact-match criterion after output extraction or code execution, and compute measures are reported as properties of the realized configurations rather than hardware-independent efficiency claims.

## B RQ1: Optimization and Adaptation

This section expands the operating-point analysis used before all acquisition and transfer comparisons. It proceeds from the full hyperparameter response to the compute and parameter-efficiency trade-offs of full fine-tuning and LoRA. The purpose is not to declare a universally best optimizer setting, but to show why each family requires its own empirically supported operating region before the subsequent interventions can be discussed.

### B.1 Hyperparameter Search

The initial sweep varies learning rate, warm-up ratio, weight decay, and epoch. Later stages fix the empirically dominant learning-rate region and refine the remaining factors. The evaluated grids are:

| Family | Update | Epoch | Acc.<br>(%) | Time<br>(sec) | GPU    | VRAM<br>(GB) | Min/epoch | Adj. GPU h | Acc./h |
|--------|--------|-------|-------------|---------------|--------|--------------|-----------|------------|--------|
| D      | Full   | 20    | 53.90       | 63303         | 4 H100 | 94           | 52.75     | 70.34      | 0.766  |
|        | LoRA   | 25    | 54.36       | 80191         | 4 H100 | 94           | 53.46     | 89.10      | 0.611  |
| MoE    | Full   | 5     | 32.57       | 111511        | 1 H200 | 141          | 371.70    | 61.95      | 0.526  |
|        | LoRA   | 5     | 32.89       | 95580         | 1 H200 | 141          | 318.60    | 53.10      | 0.618  |
| ED     | Full   | 30    | 21.12       | 25365         | 4 H100 | 94           | 14.09     | 28.18      | 0.749  |
|        | LoRA   | 10    | 10.81       | 16324         | 4 H100 | 94           | 27.21     | 18.14      | 0.595  |

Table 2: **RQ1: unified adaptation and compute summary.** Selected full fine-tuning and LoRA endpoints for each model family. Accuracy is exact grid match; time and peak VRAM describe the realized run. Adjusted GPU hours use the stated H200 =  $2 \times$  H100 accounting convention. Acc./h is reported accuracy divided by adjusted GPU hours and is descriptive rather than a hardware-independent efficiency measure.

1. D: learning rate  $\{5 \times 10^{-6}, 10^{-5}, 2 \times 10^{-5}, 2 \times 10^{-4}\}$ ; warm-up ratio  $\{0.03, 0.05, 0.1\}$ ; weight decay  $\{0, 0.01, 0.05, 0.1\}$ ; epochs  $\{1, 3, 5, 10, 15, 20, 25, 30, 35\}$ .
2. MoE: learning rate  $\{5 \times 10^{-6}, 10^{-5}, 2 \times 10^{-5}, 2 \times 10^{-4}\}$ ; warm-up ratio  $\{0.03, 0.05, 0.1\}$ ; weight decay  $\{0, 0.01, 0.05, 0.1\}$ ; epochs  $\{1, 3, 5, 7, 10, 12\}$ .
3. ED: learning rate  $\{10^{-5}, 5 \times 10^{-5}, 10^{-4}, 2 \times 10^{-4}\}$ ; warm-up ratio  $\{0.03, 0.05, 0.1\}$ ; weight decay  $\{0, 0.01, 10^{-4}, 10^{-5}\}$ ; epochs  $\{1, 3, 5, 10, 15, 20, 25, 30\}$ .

Figure 3 summarizes factor importance and the leading configurations in the main text. Hyperparameter importance was quantified as the main-effect share of accuracy variance,  $\eta_A^2 = SS_A/SS_T$ , where  $SS_A = \sum_{a \in \mathcal{L}_A} n_a (\bar{y}_a - \bar{y})^2$  and  $SS_T = \sum_{i=1}^N (y_i - \bar{y})^2$ , expressed as a percentage

$$VE_A = 100 \times \frac{SS_A}{SS_T} \in [0, 100] \%, \quad (1)$$

with  $y_i$  the accuracy of run  $i$ ,  $\bar{y}$  the grand mean, and  $\bar{y}_a, n_a$  the mean and number of runs at level  $a$  of hyperparameter  $A$ . For a fully crossed design, the importance scores of all hyperparameters sum to  $\sum_A VE_A \leq 100\%$ ; any unexplained variance comes from interactions between hyperparameters. Figure 8 exposes the underlying response distributions. D improves over the early epoch settings and benefits from the largest tested learning rate, although most configurations remain below the best operating region. MoE is dominated by learning rate: accuracy rises sharply at  $2 \times 10^{-5}$ , while its warm-up and weight-decay marginals remain comparatively flat. ED shows the opposite learning-rate direction, with its strongest distribution at  $10^{-5}$  and near-zero performance at larger rates. Across families, the comparatively small shifts associated with warm-up and weight decay support fixing these factors after the initial search. Because each marginal averages over the other sampled factors, these plots diagnose response shape rather than identify causal effects.

## B.2 Adaptation and Compute Accounting

After locating an operating region for each family, we compare the selected full-fine-tuning and LoRA runs in Table 2. Placing both methods in one table makes the relevant trade-off explicit: endpoint accuracy must be read together with schedule length and realized resource use. Adjusted GPU hours use the approximate conversion H200 =  $2 \times$  H100 for accounting only; the conversion is not a hardware-equivalence claim.

We evaluate  $(r, \alpha) \in \{(16, 32), (32, 64), (64, 128), (128, 256)\}$  with dropout 0.05. Holding  $\alpha/r = 2$  keeps update scaling comparable while rank varies; Figure 4(a) reports the resulting learning curves. The selected LoRA run closely matches the full-fine-tuning endpoint for D and slightly exceeds it for MoE, whereas ED retains roughly half of its full-fine-tuning accuracy. Compute follows a different pattern: LoRA reduces adjusted GPU hours for MoE and ED but increases them for D because its selected schedule is longer. Thus, parameter-efficient adaptation is competitive for D and MoE in accuracy and beneficial for MoE and ED in adjusted compute, but it is not uniformly preferable on both criteria.

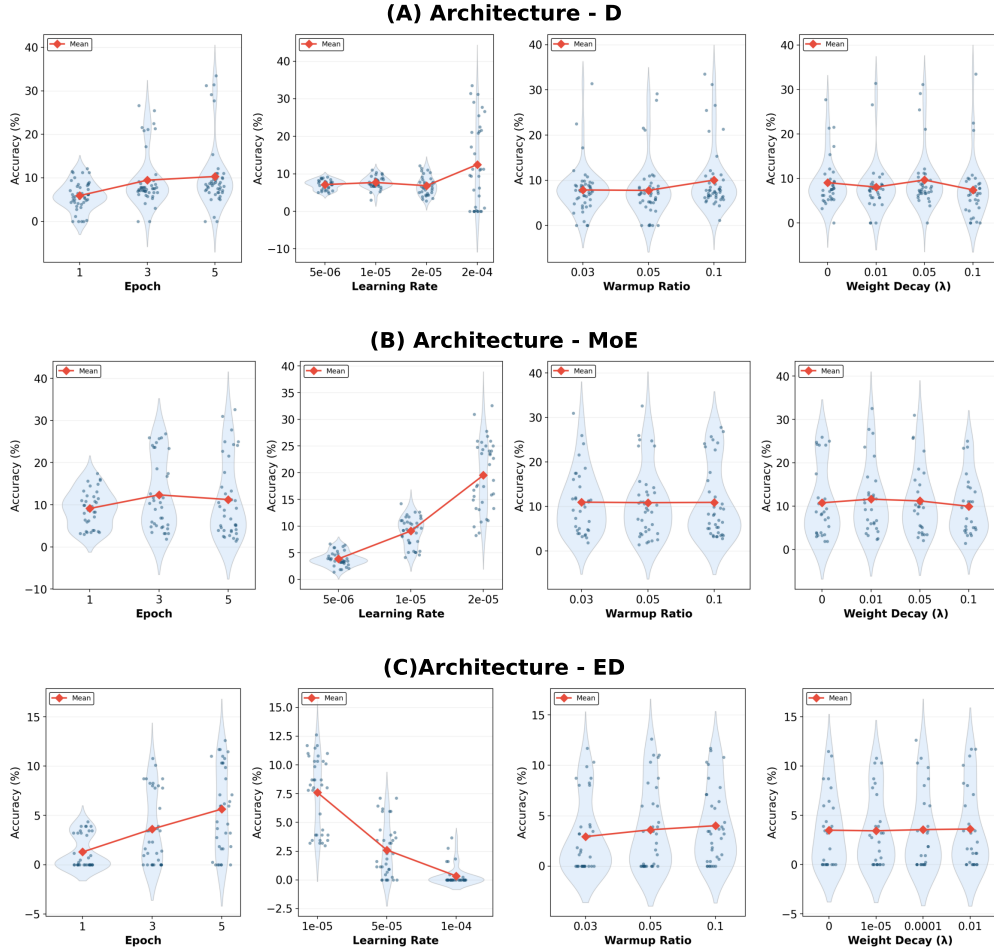


Figure 8: **RQ1: hyperparameter response distributions.** Exact-match accuracy across the tested epoch, learning-rate, warm-up, and weight-decay values for D (top), MoE (middle), and ED (bottom). Points are individual sweep configurations, violins summarize their marginal distributions, and red lines connect marginal means. Each panel marginalizes over the other hyperparameters and should therefore be read as a diagnostic response profile, not an isolated treatment effect.

## C RQ1: Extended Acquisition and Experience Analyses

This section moves from training time to training data: checkpoint trajectories characterize stability, within-family depth tests repeated variation of a fixed rule set, and breadth tests exposure to additional transformation families. The three analyses use different units of progress—updates, samples per generator, and number of generators—but share the same question: whether aggregate gains represent stable and broadly distributed acquisition.

### C.1 Checkpoint-Level Learning Dynamics

For D and ED, 20 checkpoints are sampled uniformly over 10 epochs; for MoE, 20 checkpoints are sampled over five epochs. Early stopping is disabled. Each checkpoint is evaluated on held-out seen-family data with 20 examples per generator. For generator-level performance statistics, we calculate  $\Delta$  as the difference between the final and initial accuracy,

$$\Delta = A_{\text{final}} - A_{\text{initial}}.$$

Generators with  $\Delta > 0$  are categorized as improved, whereas those with  $\Delta < 0$  are categorized as decreased. Zero-performing generators are those whose accuracy remains zero across all sampled checkpoints.



Figure 9: **RQ1: generator-level checkpoint dynamics.** Held-out exact-match trajectories for D (blue), MoE (green), and ED (orange) across 20 checkpoints. The six largest improvements are marked with solid circles, and three representative declines or zero-change cases with dashed diamonds; remaining generator trajectories are gray. Counts below each panel summarize improved, decreased, and zero-performing families between the sampled endpoints.

Figure 9 resolves the aggregate curves in Figure 4(b) into generator-level trajectories. D exhibits rapid early acquisition but substantial heterogeneity across families; 164 families improve, one decreases, and 11 remain at zero performance. MoE similarly shows rapid acquisition, with 161 improving families, no decreasing cases, and 19 zero-performing families, whereas ED improves more gradually and retains the largest zero-performing set (20 families), despite 151 families improving. Abrupt transitions from failure to high accuracy further show that the aggregate curves do not represent smooth progress on a typical generator. Since uniformly sampled checkpoints do not necessarily include the trainer-selected optimum, this analysis characterizes acquisition stability rather than replacing endpoint selection.

## C.2 Experience Depth and Breadth

Within-family depth is varied over  $n \in \{10, 20, 40, 50, 70, 80, 100\}$  training samples per generator. The same 200 generator identities are used across training scales, and evaluation uses a fixed, disjoint support of 30 examples for each of 191 retained generators. This design isolates repeated experience with the same transformation families. Figure 10 shows that D and MoE contain more high-accuracy families than ED, but all three profiles retain strong vertical structure: generators that are easy or difficult at small sample counts often remain so. Non-monotonic cells additionally show that more examples can coincide with either acquisition or forgetting. Depth therefore changes individual families without producing a uniform expansion of the learnable set.

Training breadth is varied over generator sets of size  $\{60, 80, 100, 140, 180, 193\}$  with 50 training examples per generator and 20 evaluation examples per generator. The evaluation support is fixed to 50 generators shared across all scales, so changes cannot be attributed to a different test composition. Figure 11 shows that the average improvement in Table 3 is not uniform: D improves on 19 shared families while one previously strong family declines; MoE improves on 8, retains 12, and declines on two; and ED improves on seven but otherwise remains close to its low baseline. The intermediate columns also contain reversals, indicating that breadth improves the aggregate endpoint without producing monotonic progress for every transformation family.

Depth and breadth therefore produce the same high-level result through different interventions. Additional within-family samples can change individual generators without removing persistent easy and difficult groups, while broader curricula improve the shared evaluation average through gains on only part of the support. Together with the checkpoint trajectories, these results explain why RQ1 is stated in terms of both acquisition efficiency and stability.

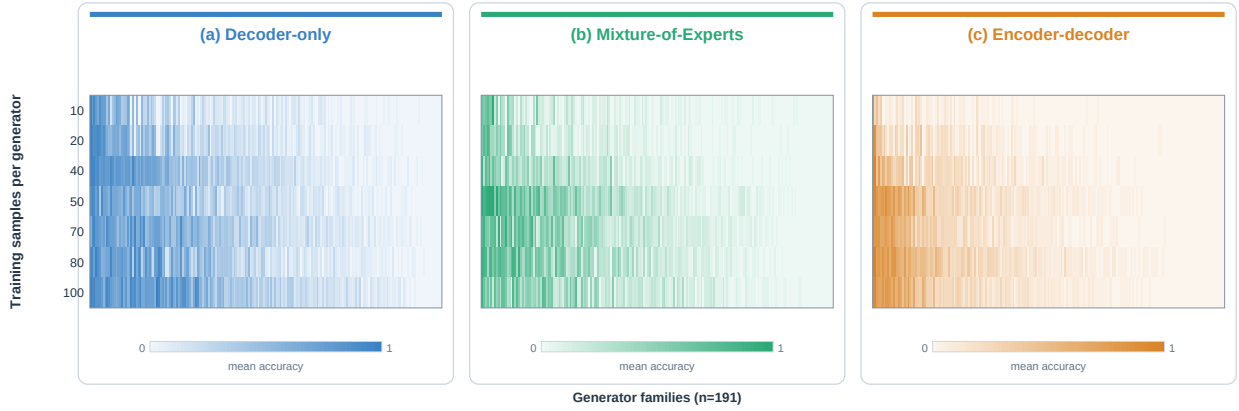


Figure 10: **RQ1: experience depth.** Generator-level exact-match accuracy across 191 fixed transformation families as training examples per family increase from 10 to 100. Panels correspond to D (blue), MoE (green), and ED (orange). Columns are generators, rows are sample counts, and intensity encodes accuracy on a shared 0–1 scale. Persistent vertical structure shows that generator identity remains influential as within-family experience increases.

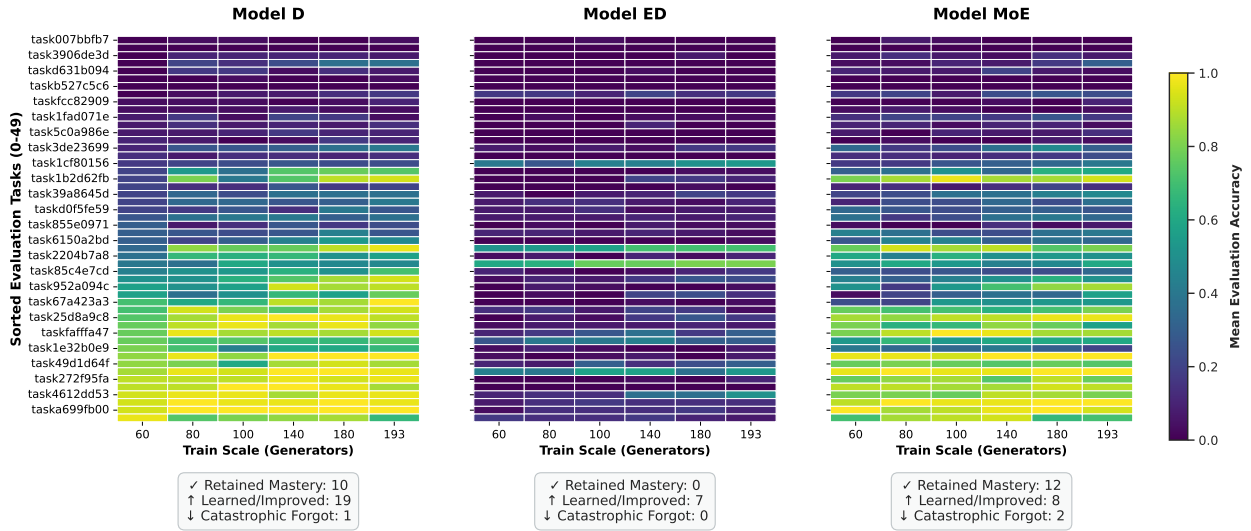


Figure 11: **RQ1: experience breadth.** Generator-level exact-match accuracy on 50 fixed evaluation families as the training curriculum expands from 60 to 193 generators. From left to right, panels show D, MoE, and ED. Columns are curriculum sizes and rows are shared evaluation generators, sorted independently by each model’s 60-generator baseline. Color encodes accuracy on a common 0–1 scale; annotations summarize retained, improved, and markedly decreased endpoint cases.

## D RQ2: Extended Transfer Analyses

This section separates two transfer tests from one coverage analysis. Cross-benchmark evaluation measures performance on original ARC-AGI tasks but changes several aspects of the distribution simultaneously. Spatial-scale transfer retains generator identity and changes the grid regime. The final analysis returns to held-out instances of seen families to determine how broadly the reference performance is distributed; it is not itself an additional transfer condition. Table 4 presents the complete numerical results for the two transfer tests.

| Generators | D    | MoE  | ED   |
|------------|------|------|------|
| 60         | 39.3 | 39.1 | 7.5  |
| 80         | 44.8 | 39.2 | 8.7  |
| 100        | 43.8 | 41.5 | 9.7  |
| 140        | 49.3 | 43.2 | 12.7 |
| 180        | 51.0 | 45.1 | 12.2 |
| 193        | 51.6 | 45.0 | 13.0 |

Table 3: **RQ1: aggregate experience-breadth results.** Exact-match accuracy (%) on the same 50 evaluation families as the training curriculum expands from 60 to 193 generators. These averages summarize the same conditions shown at generator level in Figure 11.

### D.1 Cross-Benchmark Transfer over Training

Table 4(a) reports exact-match accuracy on the original ARC-AGI evaluation set for every available checkpoint. The trajectories fluctuate and often peak before the final seen-family optimum, so checkpoint selection based only on held-out seen-family data can miss the strongest cross-benchmark result. The reported maxima are identified after inspecting these trajectories and are therefore descriptive rather than independently selected test estimates.

D reaches its cross-benchmark maximum at epoch 25, MoE at epochs 1 and 5, and ED at epochs 15 and 20. Later seen-family checkpoints do not preserve these maxima: every family exhibits a decline followed by at most partial recovery. The trajectory therefore reinforces the main-text conclusion that checkpoint quality on seen generators is not a monotonic proxy for transfer. Since the target benchmark also changes task difficulty and generator source, these values remain evidence of cross-benchmark transfer rather than a clean novelty effect.

### D.2 Spatial-Scale Transfer

The spatial intervention retains 123 generator families and changes only the allowed grid-size regime. Each training curriculum contains 50 examples per generator, and each evaluation curriculum contains 20 disjoint examples for each of 118 generators. Table 4(b) presents the complete matched and crossed matrix underlying the RQ2 spatial rows of Table 1. Unlike the cross-benchmark evaluation, this comparison retains the transformation families and changes a specified property of their realization.

Matched-scale evaluation is strongest for every family with one exception. The small-to-large penalty is 44.2 points for D, 40.4 for MoE, and 58.5 for ED; the corresponding large-to-small penalties are smaller at 13.6 and 6 for D and MoE, respectively. However, ED demonstrates opposite behavior, increasing large-to-small performance by 11.1 points. This directional asymmetry shows that exposure to longer serialized grids transfers better to shorter grids than the reverse for the D and MoE models. Context length and representation are plausible contributors, particularly for ED, but the model-family comparison does not isolate either mechanism causally.

### D.3 Seen-Family Coverage and Heterogeneity

For each of 191 generators, we sample up to 30 evaluation instances disjoint from training and aggregate exact-match accuracy by family. Figure 5 shows a steep profile: D exceeds 80% on approximately 50 generators, MoE on approximately 25, and ED on approximately 10. D combines the highest mean with the widest dispersion, whereas ED’s lower dispersion partly reflects widespread failure. Thus, the aggregate reference accuracy does not imply broad coverage of seen transformations. We report this as *family-level heterogeneity*: cross-generator dispersion measures neither consistency across a rule’s parameter settings nor transfer to an unseen family.

## E RQ3: Task Formulation and In-Context Experience

This section separates two sources of expressed capability: the requested output representation and the amount of task evidence supplied in the prompt. The few-shot condition supplies demonstration pairs and asks for either an output grid or Python code. The reasoning-description condition additionally supplies natural-language descriptions and

(a) Cross-benchmark checkpoints

| Epoch | D    | MoE  | ED   |
|-------|------|------|------|
| 0     | 0.5  | 0.25 | 0.25 |
| 1     | 2.0  | 2.75 | 1.0  |
| 3     | 3.0  | 1.25 | 1.75 |
| 5     | 0.5  | 2.75 | 1.25 |
| 7     | –    | 1.50 | –    |
| 10    | 0.25 | –    | 1.50 |
| 15    | 2.0  | –    | 2.0  |
| 20    | 1.0  | –    | 2.0  |
| 25    | 3.50 | –    | 0.25 |
| 30    | 2.50 | –    | 1.25 |

(b) Spatial-scale transfer matrix

| Family | Training grids      | Small eval. | Large eval. |
|--------|---------------------|-------------|-------------|
| D      | Small ( $\leq 15$ ) | 68.5        | 24.3        |
|        | Large ( $\geq 16$ ) | 51.4        | 65          |
| MoE    | Small ( $\leq 15$ ) | 53.1        | 12.7        |
|        | Large ( $\geq 16$ ) | 36.4        | 42.4        |
| ED     | Small ( $\leq 15$ ) | 64.4        | 5.9         |
|        | Large ( $\geq 16$ ) | 45          | 33.9        |

Table 4: **RQ2: unified transfer results.** Exact-match accuracy (%). Left: original ARC-AGI evaluation at each available checkpoint; dashes denote unmeasured checkpoints. Right: matched and crossed grid-scale evaluation with generator identity shared across conditions. The left panel is a cross-benchmark comparison, whereas the right panel isolates a spatial shift within the filtered ARC-TGI families.

transformation traces. Because the best configuration from the original transduction sweep did not transfer reliably across formulations, the formulation study performs a smaller search over warm-up ratio and weight decay, with epochs fixed at 10 for D and ED and five for MoE. Full-parameter fine-tuning is used to limit the remaining search space.

For the demonstration-count intervention, task and generator identifiers are held constant across  $k \in \{1, 2, 3, 4\}$ . The evaluation contains approximately 5,800 examples from 186 generators. Figure 6 provides the generator-level pairwise comparisons underlying the aggregate values in Table 5.

| Intervention | Condition               | D    | MoE  | ED   |
|--------------|-------------------------|------|------|------|
| Formulation  | Transduction: few-shot  | 44.3 | 33.7 | 0.0  |
|              | Transduction: reasoning | 42.7 | 32.6 | 15.6 |
|              | Induction: few-shot     | 52.3 | 59.0 | 16.1 |
|              | Induction: reasoning    | 42.4 | 59.2 | 12.6 |
| Context      | One shot                | 36.7 | 20.1 | 43.6 |
|              | Two shots               | 45.8 | 26.5 | 37.9 |
|              | Three shots             | 49.5 | 28.3 | 27   |
|              | Four shots              | 51.9 | 30.6 | 23.4 |

Table 5: **RQ3: formulation and in-context experience.** Exact-match accuracy (%) under direct grid transduction and executable-rule induction with few-shot or reasoning-description prompts, followed by accuracy on fixed task and generator support as demonstrations increase from one to four.

The formulation results separate output representation from added natural language. Induction improves few-shot performance across all three model representatives, raising D from 44.3% to 52.3%, MoE from 33.7% to 59.0%, and rescuing ED from 0.0% to 16.1%. Reasoning descriptions have mixed effects: under transduction they slightly reduce D and MoE but raise ED to 15.6%, whereas under induction they reduce D and ED while leaving MoE essentially unchanged. Thus, reasoning descriptions do not act as a uniform source of supervision across model representatives or output formulations. The demonstration-count intervention yields a second interaction: D and MoE improve monotonically from one to four examples, while ED declines from 43.6% to 23.4%. Figure 6 shows that this reversal is distributed across transformation families rather than produced by a single outlier.

The two interventions should not be collapsed into a single prompt effect. Changing from transduction to induction changes the target representation and introduces an executable-language prior, whereas increasing shot count changes the amount and length of task evidence. Their family-specific interactions show that the evaluation interface can alter both the measured endpoint and the set of transformations on which a model succeeds. They do not establish that one formulation is intrinsically easier across models or task distributions.

---

## F RQ4: Exploratory Internal-Signature Case Studies

This section provides the definitions and scope of the two diagnostics applied to selected cases and reported together in Figure 7. They provide hypotheses about where model-family profiles diverge, but neither is used as primary evidence for the behavioral conclusions.

### F.1 Attention Entropy

For selected small- and large-grid tasks, we compute Shannon entropy from the attention distribution over key positions, separately for every layer, head, and retained query position. The retained positions and normalization domains differ by attention type, as illustrated in Figure 7. Entropy is reported in nats as raw per-layer values; no smoothing is applied. The two variants therefore have different maximum-entropy ceilings (the logarithm of the prompt length for self-attention in D and MoE versus the logarithm of the test-region length for cross-attention in ED). Lower values indicate a more concentrated distribution, but do not identify the attended content or imply better task performance.

The selected D and MoE cases show decreasing entropy with depth, with only modest differences between small- and large-grid training. By contrast, the selected ED cases show the clearest separation between training regimes from the middle layers onward. These profiles are consistent with different attention-concentration behavior, but the small task sample and family-level confounds preclude general architectural conclusions.

### F.2 Attention-Edge Knockout

We partition the prompt into system instructions, demonstrations, and the test-grid description. For each prompt region and five-layer window, we mask incoming attention edges from that region to the final query position (self-attention) or to all decoder query positions (ED cross-attention), without removing prompt tokens. Let  $\bar{\ell}_0$  denote the mean per-token target-answer log probability of the unmodified pass, averaged over the  $A$  answer tokens under teacher forcing, and let  $\bar{\ell}_m$  denote the same quantity after masking. The reported effect is the relative change:

$$\Delta\% = \frac{\bar{\ell}_m - \bar{\ell}_0}{|\bar{\ell}_0|} \times 100. \quad (2)$$

Because the denominator is positive,  $\Delta\%$  preserves the sign of the underlying log-probability change. Negative values therefore mean that removing the region lowers target probability and the region was supportive in that diagnostic pass; positive values mean that masking removes a competing signal. The bottom half of Figure 7 reports these effects on the selected tasks using per-family baseline-normalized scales. The normalization in Equation 2 rescales each family by  $|\bar{\ell}_0|$ , which differs across models: an identical absolute change in log probability yields a larger  $\Delta\%$  for a model whose unmodified prediction is more confident. Reported magnitudes are therefore interpretable within a panel but not across panels.

The selected decoder-only case exhibits a layer-dependent sign change in the contribution of demonstrations. The selected MoE case shows a strong dependence on system message over an intermediate layer range. Encoder self-attention interventions are noisier, while decoder cross-attention provides a more interpretable signal. These observations motivate larger causal studies but are not used as primary evidence in the main paper.

The diagnostics are complementary rather than interchangeable. Entropy measures how dispersed attention is but does not identify which prompt region supports the answer. Edge knockout tests the contribution of a specified region, but its effect depends on the selected prompt and layer window. Their joint value is to separate concentration from context dependence on diagnostic cases; establishing a general mechanism would require a larger task sample, repeated interventions, and matched representatives within each model family.