

HYCOSEQ: CONTEXTUAL HYPERBOLIC REPRESENTATION LEARNING FOR GENOMIC SEQUENCES

Chenhao Zeng Zhibin Pu Shufei Ge*

Institute of Mathematical Sciences, ShanghaiTech University, Shanghai, China

ABSTRACT

Hyperbolic geometry provides a natural inductive bias for genomic representation learning, but existing hyperbolic genomic models primarily use Lorentz convolutions to learn local sequence representations, while their residual pathways do not directly aggregate full Lorentz representations. We propose HyCoSeq, a contextual hyperbolic representation learning framework for genomic sequences. HyCoSeq incorporates weighted Lorentzian residual aggregation into multi-curvature Lorentz encoding, allowing full Lorentz representations to participate directly in geometry-consistent local aggregation. It further introduces a bidirectional long short-term memory network that integrates information from both sequence directions to learn contextual relationships among local representations at different positions within a genomic sequence, thereby extending local hyperbolic convolutional encoding to sequence-level contextualized representations. Extensive experiments across diverse genomic tasks show that HyCoSeq outperforms existing hyperbolic baselines and, without large-scale genomic pretraining, achieves competitive performance against substantially larger pretrained DNA language models. Code is available at [Hycoseq](https://github.com/HycoSeq).

Index Terms— Hyperbolic geometry, Lorentz model, deep learning, genomic sequence classification

1. INTRODUCTION

Genomic sequence classification is a key task in genomics, playing an important role in predicting protein-binding specificities, chromatin accessibility, histone marks, and the functional effects of noncoding variants [1, 2, 3]. Deep neural networks learn informative representations directly from raw DNA sequences. Diverse deep learning architectures have further advanced genomic sequence modeling across analysis tasks [4, 5, 6]. Despite these advances, most existing approaches still learn genomic representations in Euclidean spaces, with comparatively limited attention to representation geometry.

Recent work suggests that shared ancestry and divergence may induce latent hierarchical structure among genomic sequences [7]. Hyperbolic spaces provide a natural inductive bias for such hierarchies: negative curvature induces exponential volume growth, enabling low-distortion embeddings of branching structures [8, 9, 10]. Hyperbolic neural networks extend core neural network operations beyond Euclidean geometry, enabling representations to be learned on hyperbolic manifolds [11]. Building on the fully hyperbolic convolutional neural network (CNN) [12], Khan et al. introduced Hyperbolic Genome Embeddings (HGE) for genomic sequence representation learning [7]. Its favorable performance across diverse genomic tasks not only provides empirical support for the use of hy-

perbolic geometry in genomic representation learning but also highlights its potential for genomic sequence modeling.

Despite its demonstrated effectiveness, HGE still exhibits limitations in residual feature aggregation and sequence-level context modeling. The residual connection in HGE follows the design of the fully hyperbolic convolutional framework, reconstructing the time-like component after aggregating the spacelike components to satisfy the Lorentz manifold constraint [12, 7]. However, the full Lorentz representations do not directly participate in residual aggregation, and this residual formulation has been noted to lack a clear geometric interpretation within hyperbolic geometry [13]. At the sequence level, the Lorentz convolutional blocks primarily encode local genomic patterns within finite receptive fields. For many regulatory tasks, predictive signals depend not only on individual motifs but also on their spatial arrangement, inter-motif spacing, and flanking sequence context [14, 15]. Accordingly, bidirectional sequence modeling can complement local convolutional encoding by integrating contextual information from both sequence directions [4, 16].

Motivated by these observations, we propose HyCoSeq, a contextual hyperbolic representation learning framework that jointly addresses geometry-consistent aggregation within local Lorentz encoding and bidirectional sequence-level context modeling. HyCoSeq first learns local hyperbolic representations through multi-curvature Lorentz convolution. Within each block, HyCoSeq adopts the weighted residual formulation of Lorentzian Residual Neural Networks (LResNet) [13], allowing full Lorentz representations to participate directly in residual aggregation. A bidirectional long short-term memory (BiLSTM) network [17, 18] then operates on the spacelike coordinates of these local representations to model contextual dependencies across sequence positions using information from both sequence directions. The resulting contextual features are projected back onto the Lorentz manifold and processed by the Lorentz classification head. Our contributions are as follows:

- (1) We propose HyCoSeq, a contextual hyperbolic representation learning framework that couples geometry-consistent local Lorentz encoding with bidirectional sequence-level context modeling for genomic sequence classification.
- (2) We integrate a weighted Lorentzian residual connection into multi-curvature Lorentz convolution for genomic sequence modeling, enabling direct aggregation of full Lorentz representations.
- (3) We conduct extensive experiments across diverse genomic sequence classification tasks, demonstrating the competitive performance of HyCoSeq and the effectiveness of the proposed framework.

2. PRELIMINARIES

Our framework is formulated in the Lorentz model of hyperbolic geometry, where a d -dimensional hyperbolic space with constant curvature $K < 0$ is represented by the upper sheet of a two-sheeted hyperboloid embedded in the $(d + 1)$ -dimensional Minkowski space

*Corresponding author, E-mail: geshf@shanghaitech.edu.cn.

$\mathbb{R}^{d+1}$. A point $\mathbf{x} = [x_{\text{time}}, \mathbf{x}_{\text{space}}] \in \mathbb{R}^{d+1}$ consists of a timelike component $x_{\text{time}} \in \mathbb{R}$ and a spacelike component $\mathbf{x}_{\text{space}} \in \mathbb{R}^d$. For $\mathbf{x}, \mathbf{y} \in \mathbb{R}^{d+1}$, their Lorentzian inner product is $\langle \mathbf{x}, \mathbf{y} \rangle_{\mathcal{L}} = -x_{\text{time}}y_{\text{time}} + \langle \mathbf{x}_{\text{space}}, \mathbf{y}_{\text{space}} \rangle$. The corresponding Lorentz manifold is defined as

$$\mathbb{L}_K^d = \left\{ \mathbf{x} \in \mathbb{R}^{d+1} \mid \langle \mathbf{x}, \mathbf{x} \rangle_{\mathcal{L}} = \frac{1}{K}, x_{\text{time}} > 0 \right\}. \quad (1)$$

Accordingly, the timelike component is determined by the spacelike component as $x_{\text{time}} = \sqrt{\|\mathbf{x}_{\text{space}}\|_2^2 - 1/K}$.

Exponential and logarithmic maps. For $\mathbf{x} \in \mathbb{L}_K^d$, its tangent space is $T_{\mathbf{x}}\mathbb{L}_K^d = \{\mathbf{v} \in \mathbb{R}^{d+1} \mid \langle \mathbf{x}, \mathbf{v} \rangle_{\mathcal{L}} = 0\}$, with $\|\mathbf{v}\|_{\mathcal{L}} = \sqrt{\langle \mathbf{v}, \mathbf{v} \rangle_{\mathcal{L}}}$. For $\mathbf{v} \in T_{\mathbf{x}}\mathbb{L}_K^d$, the exponential map is defined as

$$\exp_{\mathbf{x}}^K(\mathbf{v}) = \cosh\left(\sqrt{-K}\|\mathbf{v}\|_{\mathcal{L}}\right) \mathbf{x} + \frac{\sinh\left(\sqrt{-K}\|\mathbf{v}\|_{\mathcal{L}}\right)}{\sqrt{-K}\|\mathbf{v}\|_{\mathcal{L}}} \mathbf{v}. \quad (2)$$

Conversely, for $\mathbf{y} \in \mathbb{L}_K^d$, the logarithmic map from the manifold to the tangent space at $\mathbf{x}$ is

$$\log_{\mathbf{x}}^K(\mathbf{y}) = \frac{\text{arcosh}(K\langle \mathbf{x}, \mathbf{y} \rangle_{\mathcal{L}})}{\sqrt{(K\langle \mathbf{x}, \mathbf{y} \rangle_{\mathcal{L}})^2 - 1}} (\mathbf{y} - K\langle \mathbf{x}, \mathbf{y} \rangle_{\mathcal{L}} \mathbf{x}). \quad (3)$$

The origin of $\mathbb{L}_K^d$ is $\mathbf{o}_K = [\sqrt{-1/K}, \mathbf{0}]$.

3. METHODOLOGY

As illustrated in Fig. 1, a nucleotide-level one-hot-encoded genomic sequence is first projected position-wise onto an initial Lorentz manifold and subsequently processed by M Lorentz convolutional blocks associated with learnable curvatures $K_1, \dots, K_M$. Within the residual blocks, weighted Lorentzian residual aggregation directly combines the full Lorentz representations of the shortcut and convolutionally transformed branches. The spacelike coordinates of the resulting local hyperbolic representations are subsequently processed by a BiLSTM. The BiLSTM outputs are first linearly transformed to the required spacelike dimensionality and then projected onto the target Lorentz manifold. Finally, the contextualized Lorentz sequence is flattened and passed through a Lorentz fully connected transformation, followed by Lorentz activation and Lorentz multinomial logistic regression (MLR) for classification.

3.1. Multi-Curvature Lorentz Encoding

Multi-curvature Lorentz convolution. Let $\mathbf{S} = [\mathbf{s}_1, \dots, \mathbf{s}_N]^T \in \{0, 1\}^{N \times 4}$ denote the nucleotide-level one-hot encoding of a genomic sequence of length N , where $\mathbf{s}_n \in \{0, 1\}^4$ is the one-hot vector at position n . For a Euclidean feature vector $\mathbf{u} \in \mathbb{R}^q$, its projection onto a Lorentz manifold of curvature $K < 0$ is defined as

$$\phi_K(\mathbf{u}) = \left[\sqrt{\|\mathbf{u}\|_2^2 - \frac{1}{K}}, \mathbf{u} \right] \in \mathbb{L}_K^q. \quad (4)$$

Applying ϕ_{K_1} position-wise gives the initial Lorentz sequence $\mathbf{X}^{(0)} = (\phi_{K_1}(\mathbf{s}_n))_{n=1}^N \in (\mathbb{L}_{K_1}^4)^N$. The projected sequence is subsequently processed by M Lorentz convolutional blocks associated with learnable curvatures $K_m < 0$, $m = 1, \dots, M$. The output of the m -th block is denoted by $\mathbf{X}^{(m)} = (\mathbf{x}_n^{(m)})_{n=1}^N \in (\mathbb{L}_{K_m}^d)^N$. Here, d denotes the dimensionality of the spacelike coordinates, which remains fixed across the Lorentz convolutional blocks. The

Lorentz convolution, normalization, and activation operators follow the fully hyperbolic CNN formulation [12], while the multi-curvature design follows HGE [7].

Weighted Lorentzian residual aggregation. The residual operation in the fully hyperbolic CNN first aggregates the spacelike components of its input and transformed output and then reconstructs the corresponding timelike component [12]. Although the resulting representation satisfies the Lorentz manifold constraint, the full Lorentz representations do not participate directly in residual aggregation. To directly aggregate the full Lorentz representations, let $\mathbf{x} \in \mathbb{L}_K^d$ be the residual-block input and let $f(\mathbf{x}) \in \mathbb{L}_K^d$ be the corresponding transformed output. Following LResNet [13], the weighted Lorentzian residual connection is defined as

$$\mathbf{x} \oplus_{\mathcal{L}} f(\mathbf{x}) = w_1 \mathbf{x} + w_2 f(\mathbf{x}). \quad (5)$$

Let $\mathbf{a} = \beta_1 \mathbf{x} + \beta_2 f(\mathbf{x})$ and $w_i = \beta_i / (\sqrt{-K} \sqrt{-\langle \mathbf{a}, \mathbf{a} \rangle_{\mathcal{L}}})$ for $i \in \{1, 2\}$, where $\beta_1, \beta_2 > 0$ are the unnormalized branch coefficients. The shared normalization factor maps the weighted combination onto $\mathbb{L}_K^d$, thereby preserving the Lorentz manifold constraint. Since w_1 and w_2 share the same normalization factor, their ratio satisfies $w_2/w_1 = \beta_2/\beta_1$. Consequently, the residual output is invariant to any common positive rescaling of β_1 and β_2 and depends on these coefficients only through the ratio β_2/β_1 , equivalently w_2/w_1 . We therefore fix $\beta_1 = 1$ and parameterize $\beta_2 = \text{softplus}(\theta) + \epsilon$, where $\epsilon > 0$ ensures strict positivity and θ is learned independently for each residual block. Under this parameterization, $\beta_2 = w_2/w_1$ directly controls the relative weighting of the transformed output with respect to the block input, allowing each residual block to learn a block-specific balance between the two representations.

Inter-manifold mapping. In the multi-curvature architecture, successive convolutional blocks operate on Lorentz manifolds with different learnable curvatures. A representation $\mathbf{x} \in \mathbb{L}_{K_i}^d$ is mapped from $\mathbb{L}_{K_i}^d$ to $\mathbb{L}_{K_j}^d$ through

$$\text{LM}_{K_i \rightarrow K_j}(\mathbf{x}) = \exp_{\mathbf{o}_{K_j}}^{K_j} \left(\log_{\mathbf{o}_{K_i}}^{K_i}(\mathbf{x}) \right) \in \mathbb{L}_{K_j}^d, \quad (6)$$

where $\mathbf{o}_{K_i}$ and $\mathbf{o}_{K_j}$ denote the origins of the source and target Lorentz manifolds, respectively.

3.2. Bidirectional Sequence-Level Context Modeling

Before bidirectional context modeling, the final convolutional output is mapped position-wise to $\mathbb{L}_{K_{M+1}}^d$ using Eq. (6), yielding $\tilde{\mathbf{X}}^{(M)} = \text{LM}_{K_M \rightarrow K_{M+1}}(\mathbf{X}^{(M)}) \in (\mathbb{L}_{K_{M+1}}^d)^N$. We denote its n -th representation by $\tilde{\mathbf{x}}_n^{(M)}$. Its spacelike-coordinate matrix is $\tilde{\mathbf{X}}_{\text{space}}^{(M)} = [\tilde{\mathbf{x}}_{1,\text{space}}^{(M)}, \dots, \tilde{\mathbf{x}}_{N,\text{space}}^{(M)}]^T \in \mathbb{R}^{N \times d}$. For a given curvature K_{M+1} , these spacelike coordinates uniquely determine the corresponding points on the upper sheet through the Lorentz manifold constraint. We therefore perform bidirectional sequence-level context modeling on this coordinate representation to incorporate contextual information into the local hyperbolic representations.

We employ a single-layer BiLSTM with hidden size h in each direction to obtain bidirectional contextual representations:

$$\mathbf{H} = \text{BiLSTM} \left(\tilde{\mathbf{X}}_{\text{space}}^{(M)} \right) \in \mathbb{R}^{N \times 2h}. \quad (7)$$

The n -th row of $\mathbf{H}$ is given by $\mathbf{h}_n = [\vec{\mathbf{h}}_n; \overleftarrow{\mathbf{h}}_n] \in \mathbb{R}^{2h}$, where $\vec{\mathbf{h}}_n$ and $\overleftarrow{\mathbf{h}}_n$ summarize information propagated from preceding and following sequence positions, respectively. The resulting bidirectional contextual representations are linearly transformed as

$$\mathbf{Z} = \mathbf{H}\mathbf{W}_p + \mathbf{b}_p \in \mathbb{R}^{N \times d}, \quad (8)$$

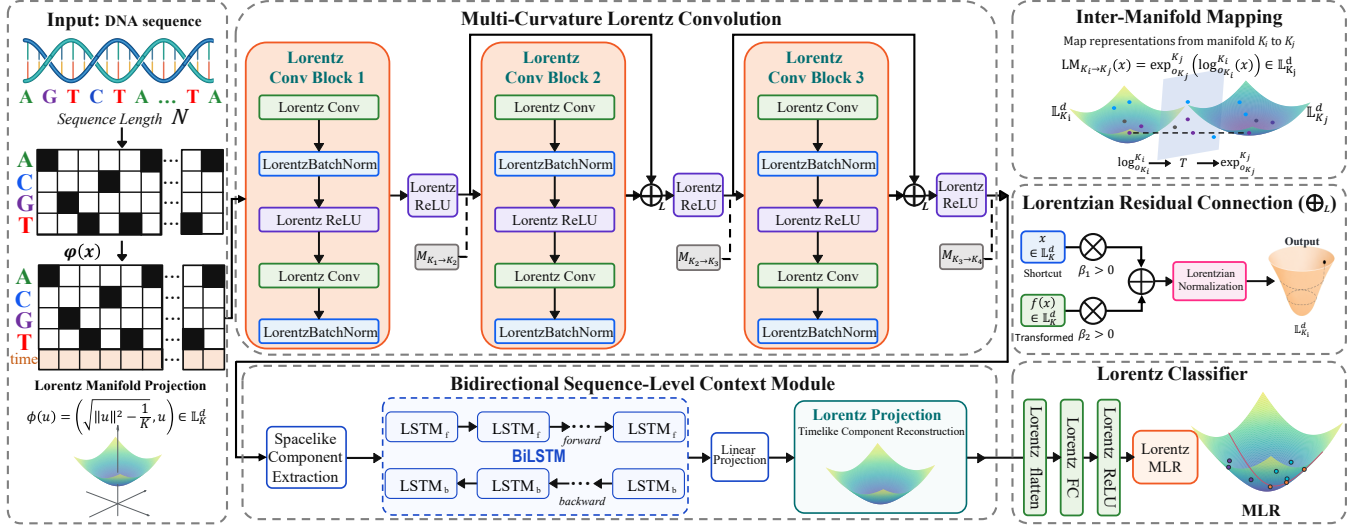


Fig. 1. Overview of the HyCoSeq framework.

where $\mathbf{W}_p \in \mathbb{R}^{2h \times d}$ and $\mathbf{b}_p \in \mathbb{R}^d$ are learnable parameters. This transformation maps the $2h$ -dimensional bidirectional contextual feature at each position to a d -dimensional vector, matching the dimensionality of the spacelike component in the original Lorentz representation. This alignment allows the contextual features to be projected position-wise back onto the Lorentz manifold while preserving the input dimensionality required by the original classification head.

Let $\mathbf{z}_n \in \mathbb{R}^d$ denote the n -th row of $\mathbf{Z}$. The contextual representations are projected position-wise back onto the final Lorentz manifold using $\phi_{K_{M+1}}$ defined in Eq. (4):

$$\mathbf{X}_{\text{ctx}} = (\phi_{K_{M+1}}(\mathbf{z}_n))_{n=1}^N \in \left(\mathbb{L}_{K_{M+1}}^d\right)^N. \quad (9)$$

The contextualized Lorentz representations are subsequently processed by Lorentz flattening, a Lorentz fully connected transformation, and Lorentz activation before classification with Lorentz MLR [12]. All model parameters are optimized end-to-end using the cross-entropy objective.

4. EXPERIMENTS

4.1. Experimental Setup

Datasets. We evaluate HyCoSeq on three genomic benchmarks: the Transposable Elements Benchmark (TEB) [7], the Genome Understanding Evaluation (GUE) [22], and Genomic Benchmarks (GB) [23]. TEB covers multi-species classification of retrotransposons, DNA transposons, and pseudogenes. GUE and GB cover diverse regulatory and sequence classification tasks, including transcription-factor binding, epigenetic marks, promoters, splice sites, enhancers, and open chromatin regions. We use Matthews correlation coefficient (MCC) for all datasets.

Implementation details. For a fair comparison, we follow the same data preprocessing and splits as HGE [7], and use the same three-block Lorentz convolutional backbone to encode local genomic patterns. We use RiemannianAdam [24, 25] and train our models for 100 epochs with a batch size of 100 and a backbone

weight decay of 0.1. The learning rates are set to 10^{-4} , 10^{-4} , and 10^{-5} for TEB, GUE, and GB, respectively, with a manifold learning rate of 2×10^{-2} . All learnable Lorentz curvatures are initialized to $K = -1$. For weighted Lorentzian residual aggregation, β_1 is fixed to 1, while β_2 is learnable and initialized to 1. The BiLSTM consists of a single layer with a hidden size of 16 per direction. Experiments were conducted on NVIDIA A100 GPUs with 40 GB of memory.

4.2. Results and Discussion

Table 1 presents the ablation results across the seven TEB tasks. Applying either weighted Lorentzian residual aggregation or bidirectional sequence-level context modeling individually improves upon HGE (HCNN-M) across all tasks, indicating that each design contributes to the performance gains. HyCoSeq combines both designs, achieves the highest mean MCC on every task, and improves the overall average MCC over HGE by 5.53 percentage points. These results support the complementary roles of the two designs: the former allows full Lorentz representations to participate directly in residual aggregation within the convolutional blocks, whereas the latter supplements local encoding by integrating contextual information from both sequence directions.

We further compare HyCoSeq and the HGE baselines with a range of pretrained DNA language models on 17 representative GUE datasets, including DNABERT [21], HyenaDNA [20], Caduceus-Ph [19], Nucleotide Transformer [6], and DNABERT-2 [22], to assess whether HyCoSeq remains competitive against substantially larger pretrained models. Table 2 reports the classification performance and number of trainable parameters for each model configuration. Following the reporting protocol of HGE [7], the best classification performance is reported for HyCoSeq and the HGE baselines. For HyenaDNA and Caduceus-Ph, we report benchmark evaluations of these two models, whereas the results for the remaining pretrained models follow those reported by Zhou et al. [22]. Unlike these pretrained models, HyCoSeq does not rely on large-scale genomic pretraining and is trained end-to-end on each downstream dataset. HyCoSeq has approximately 4.6M trainable parameters, only 0.16% more than HCNN-M. In contrast, the pre-

Table 1. Ablation results on the seven TEB tasks, averaged over five random seeds and reported as MCC (% , mean $\pm$ standard deviation). *Lorentz Res.* denotes weighted Lorentzian residual aggregation, while *Processed* and *Unprocessed* denote the two pseudogene tasks. The best and second-best mean scores in each task column are highlighted in light green and light yellow, respectively.

Model	Lorentz Res.	BiLSTM	LTR Copia	LINEs	SINEs	CMC-EnSpm	hAT-Ac	Processed	Unprocessed
Euclidean CNN	<i>n/a</i>		54.73 $\pm$ 1.45	70.63 $\pm$ 1.24	85.15 $\pm$ 1.64	72.18 $\pm$ 0.32	87.45 $\pm$ 0.90	60.66 $\pm$ 0.82	51.94 $\pm$ 2.69
HGE (HCNN-M)	–	–	68.05 $\pm$ 2.80	77.10 $\pm$ 2.92	81.85 $\pm$ 2.95	80.65 $\pm$ 1.30	91.04 $\pm$ 1.58	65.41 $\pm$ 5.54	58.36 $\pm$ 1.80
Residual variant	✓	–	71.92 $\pm$ 1.23	81.04 $\pm$ 2.27	91.84 $\pm$ 1.12	83.61 $\pm$ 1.16	91.08 $\pm$ 0.53	70.27 $\pm$ 2.84	61.14 $\pm$ 2.15
Context variant	–	✓	70.36 $\pm$ 1.79	81.06 $\pm$ 1.90	91.81 $\pm$ 0.93	83.98 $\pm$ 0.51	92.48 $\pm$ 0.77	69.18 $\pm$ 0.85	58.64 $\pm$ 0.49
HyCoSeq	✓	✓	72.88 $\pm$ 0.92	83.54 $\pm$ 0.52	93.33 $\pm$ 1.12	84.45 $\pm$ 0.92	93.73 $\pm$ 0.36	70.65 $\pm$ 0.79	62.62 $\pm$ 0.97

Table 2. Comparison of HyCoSeq with pretrained DNA language models and HGE baselines on 17 representative GUE datasets. Columns 2–18 report MCC (%) on the 17 datasets. The last three columns report trainable parameter counts in millions (M), average rank across the 17 datasets (lower is better), and the number of dataset-level best results, respectively. The best and second-best dataset scores are highlighted in light green and light yellow, respectively.

Model	H3K4me1	H3K4me2	H3K4me3	H3K79me3	H3K9ac	H4ac	P-TATA	hTF1	hTF2	hTF3	hTF4	CP-TATA	mTF1	mTF2	mTF3	mTF4	Splice	Param (M)	Avg. Rank	Wins
Caduceus-Ph [19]	37.76	28.16	24.40	60.31	52.70	40.90	66.07	72.10	58.92	54.85	69.45	72.94	80.31	75.89	73.47	47.98	81.59	7.7	7.00	0
HyenaDNA [20]	35.83	25.81	23.15	54.09	50.84	38.44	5.34	67.86	46.85	41.78	61.23	72.87	80.50	65.34	54.20	19.17	72.67	28.2	10.65	0
DNABERT-6mer [21]	41.44	32.27	27.81	61.17	51.22	37.43	61.56	70.14	61.03	51.89	70.97	76.06	78.94	71.44	44.89	42.48	84.07	89	7.24	0
NT-500M-human [6]	37.15	30.87	24.06	58.35	45.81	33.74	78.07	66.75	53.58	42.95	60.81	71.34	75.04	61.67	29.17	29.27	79.71	500	10.94	0
NT-500M-1000g [6]	40.45	31.05	26.16	59.33	49.29	36.79	78.23	70.17	52.73	45.24	62.82	73.52	75.49	64.70	33.07	34.01	80.97	500	9.24	0
NT-2.5B-1000g [6]	43.10	30.28	30.87	61.20	52.36	41.46	75.80	68.30	58.70	49.08	67.59	69.66	80.02	70.14	42.25	43.40	85.78	2500	7.65	0
NT-2.5B-multi [6]	55.30	36.49	40.34	64.70	56.01	49.13	79.43	70.28	58.72	51.65	69.34	72.97	83.76	71.52	69.44	47.07	89.35	2500	4.71	2
DNABERT-2 [22]	50.52	31.13	36.27	67.39	55.63	50.43	71.59	76.06	66.52	58.54	77.43	74.17	84.77	79.32	66.47	52.66	84.99	117	3.59	5
DNABERT-2-PT [22]	53.00	39.89	41.20	65.46	57.07	50.35	68.79	71.87	62.96	55.35	74.94	76.18	86.28	81.28	73.49	50.80	85.93	117	3.06	3
HCNN-S [7]	41.86	43.88	50.58	64.62	54.09	52.94	82.70	69.39	73.80	44.08	68.43	81.34	79.26	77.86	73.51	41.27	81.96	4.6	4.82	1
HCNN-M [7]	39.78	31.27	33.59	63.35	52.25	51.86	79.80	68.48	71.40	43.66	70.01	82.07	77.41	77.51	69.73	43.62	82.23	4.6	5.94	1
HyCoSeq	42.98	44.32	50.87	65.11	56.85	51.78	82.89	75.72	75.07	47.69	76.20	78.67	77.87	79.29	77.02	45.46	84.47	4.6	3.18	5

Table 3. Mean model performance (MCC) aggregated by genomic task category on GUE and GB (% , mean $\pm$ standard error). TF and OCR denote transcription factor and open chromatin regions, respectively. The best and second-best results for each task row are highlighted in light green and light yellow, respectively.

Task	Eucl. CNN	HCNN-S	HCNN-M	HyCoSeq
GUE				
Epigenetic Marks	40.76 $\pm$ 4.07	55.31 $\pm$ 2.64	48.18 $\pm$ 2.81	55.82 $\pm$ 3.62
Human TF	52.52 $\pm$ 3.63	61.12 $\pm$ 3.12	61.25 $\pm$ 2.86	64.72 $\pm$ 4.62
Splice Site	78.64 $\pm$ 0.19	80.32 $\pm$ 0.55	80.76 $\pm$ 0.47	84.03 $\pm$ 0.24
Mouse TF	45.79 $\pm$ 4.72	61.93 $\pm$ 5.52	61.52 $\pm$ 5.08	64.92 $\pm$ 6.08
Core Promoter	70.13 $\pm$ 2.06	70.12 $\pm$ 3.48	70.99 $\pm$ 2.39	71.26 $\pm$ 3.87
Promoter	85.80 $\pm$ 1.75	85.73 $\pm$ 1.37	85.66 $\pm$ 1.82	85.93 $\pm$ 2.46
GB				
Demo	82.52 $\pm$ 2.79	86.34 $\pm$ 2.83	86.48 $\pm$ 2.83	87.57 $\pm$ 3.45
Enhancers	39.41 $\pm$ 9.00	34.18 $\pm$ 7.46	28.77 $\pm$ 2.83	48.47 $\pm$ 11.00
Regulatory	77.36 $\pm$ 4.73	86.74 $\pm$ 1.35	85.05 $\pm$ 2.34	89.26 $\pm$ 1.34
OCR	39.92 $\pm$ 0.38	56.22 $\pm$ 0.13	55.36 $\pm$ 1.23	56.68 $\pm$ 0.25

trained models have parameters ranging from 7.7M to 2.5B. Despite these substantial differences in model scale and training paradigm, HyCoSeq achieves the best performance on multiple GUE datasets and an average rank of 3.18, ranking second overall behind only DNABERT-2-PT, which has an average rank of 3.06 and uses about 25.4 times as many parameters as HyCoSeq. It also outperforms the hyperbolic HGE baselines on the vast majority of the reported datasets, indicating that the improvements are not confined to a particular biological task type. These results indicate that the performance gains of HyCoSeq are not primarily attributable to increased

model capacity. By integrating geometry-consistent residual aggregation with sequence-level contextualization, HyCoSeq remains competitive with substantially larger pretrained genomic models while retaining a compact hyperbolic architecture.

Table 3 further evaluates HyCoSeq at the task-category level. HyCoSeq achieves the highest mean MCC across all reported task groups on both GUE and GB, spanning epigenetic-mark prediction, transcription-factor binding prediction, splice-site prediction, promoter detection, and the classification of enhancers, regulatory elements, and open chromatin regions. Although the magnitude of the gains varies across task groups, HyCoSeq maintains an overall performance advantage. Together with the preceding comparisons, these findings indicate that the benefits of the proposed representation-learning framework are not confined to a particular benchmark or task category, supporting its consistent effectiveness across diverse genomic classification settings.

5. CONCLUSION

We presented HyCoSeq, a contextual hyperbolic representation learning framework for genomic sequence classification. By combining multi-curvature Lorentz encoding, geometry-consistent residual aggregation, and bidirectional sequence-level contextualization, HyCoSeq enhances local hyperbolic representation learning and sequence-level contextual modeling. Experiments across diverse genomic classification settings show that HyCoSeq outperforms existing hyperbolic baselines and remains competitive with substantially larger pretrained DNA language models using fewer parameters. These results demonstrate the effectiveness of HyCoSeq and highlight the potential of hyperbolic representation learning for genomic sequence modeling.

6. ACKNOWLEDGMENTS

This work was supported by the National Natural Science Foundation of China (12401383) and the startup fund of ShanghaiTech University. The authors thank ShanghaiTech University for providing access to its HPC platform.

7. REFERENCES

- [1] Babak Alipanahi, Andrew Delong, Matthew T Weirauch, and Brendan J Frey, “Predicting the sequence specificities of DNA- and RNA-binding proteins by deep learning,” *Nature Biotechnology*, vol. 33, no. 8, pp. 831–838, 2015.
- [2] Jian Zhou and Olga G Troyanskaya, “Predicting effects of noncoding variants with deep learning-based sequence model,” *Nature Methods*, vol. 12, no. 10, pp. 931–934, 2015.
- [3] David R Kelley, Jasper Snoek, and John L Rinn, “Basset: learning the regulatory code of the accessible genome with deep convolutional neural networks,” *Genome Research*, vol. 26, no. 7, pp. 990–999, 2016.
- [4] Daniel Quang and Xiaohui Xie, “Danq: a hybrid convolutional and recurrent deep neural network for quantifying the function of dna sequences,” *Nucleic Acids Research*, vol. 44, no. 11, pp. e107, 2016.
- [5] Žiga Avsec, Vikram Agarwal, Daniel Visentin, Joseph R Ledsam, Agnieszka Grabska-Barwinska, Kyle R Taylor, Yannis Assael, John Jumper, Pushmeet Kohli, and David R Kelley, “Effective gene expression prediction from sequence by integrating long-range interactions,” *Nature Methods*, vol. 18, no. 10, pp. 1196–1203, 2021.
- [6] Hugo Dalla-Torre, Liam Gonzalez, Javier Mendoza-Revilla, Nicolas Lopez Carranza, Adam Henryk Grzywaczewski, Francesco Oteri, Christian Dallago, Evan Trop, Bernardo P. de Almeida, Hassan Sirelkhatim, et al., “Nucleotide Transformer: building and evaluating robust foundation models for human genomics,” *Nature Methods*, vol. 22, no. 2, pp. 287–297, 2025.
- [7] Raiyan Khan, Philippe Chlenski, and Itsik Pe’er, “Hyperbolic genome embeddings,” in *International Conference on Learning Representations*, 2025, vol. 2025, pp. 73425–73454.
- [8] Maximillian Nickel and Douwe Kiela, “Poincaré embeddings for learning hierarchical representations,” *Advances in neural information processing systems*, vol. 30, 2017.
- [9] Maximillian Nickel and Douwe Kiela, “Learning continuous hierarchies in the lorentz model of hyperbolic geometry,” in *International conference on machine learning*. PMLR, 2018, pp. 3779–3788.
- [10] Frederic Sala, Chris De Sa, Albert Gu, and Christopher Ré, “Representation tradeoffs for hyperbolic embeddings,” in *International conference on machine learning*. PMLR, 2018, pp. 4460–4469.
- [11] Octavian Ganea, Gary Bécigneul, and Thomas Hofmann, “Hyperbolic neural networks,” *Advances in neural information processing systems*, vol. 31, 2018.
- [12] Ahmad Bdeir, Kristian Schwethelm, and Niels Landwehr, “Fully hyperbolic convolutional neural networks for computer vision,” in *International Conference on Learning Representations*, 2024, vol. 2024, pp. 47687–47711.
- [13] Neil He, Menglin Yang, and Rex Ying, “Lorentzian residual neural networks,” in *Proceedings of the 31st ACM SIGKDD Conference on Knowledge Discovery and Data Mining V. 1*, 2025, pp. 436–447.
- [14] Žiga Avsec, Melanie Weilert, Avanti Shrikumar, Sabrina Krueger, Amr Alexandari, Khyati Dalal, Robin Fropf, Charles McAnany, Julien Gagneur, Anshul Kundaje, et al., “Base-resolution models of transcription-factor binding reveal soft motif syntax,” *Nature genetics*, vol. 53, no. 3, pp. 354–366, 2021.
- [15] Bernardo P de Almeida, Franziska Reiter, Michaela Pagani, and Alexander Stark, “DeepSTARR predicts enhancer activity from DNA sequence and enables the de novo design of synthetic enhancers,” *Nature Genetics*, vol. 54, no. 5, pp. 613–624, 2022.
- [16] Rentao Luo, Jiawei Liu, Lixin Guan, and Mengshan Li, “HybProm: An attention-assisted hybrid CNN-BiLSTM model for the interpretable prediction of DNA promoter,” *Methods*, vol. 235, pp. 71–80, 2025.
- [17] Sepp Hochreiter and Jürgen Schmidhuber, “Long short-term memory,” *Neural Computation*, vol. 9, no. 8, pp. 1735–1780, 1997.
- [18] Mike Schuster and Kuldip K Paliwal, “Bidirectional recurrent neural networks,” *IEEE Transactions on Signal Processing*, vol. 45, no. 11, pp. 2673–2681, 1997.
- [19] Yair Schiff, Chia Hsiang Kao, Aaron Gokaslan, Tri Dao, Albert Gu, and Volodymyr Kuleshov, “Caduceus: Bi-directional equivariant long-range DNA sequence modeling,” in *Proceedings of the 41st International Conference on Machine Learning*. 2024, vol. 235 of *Proceedings of Machine Learning Research*, pp. 43632–43648, PMLR.
- [20] Eric Nguyen, Michael Poli, Marjan Faizi, Armin Thomas, Michael Wornow, Callum Birch-Sykes, Stefano Massaroli, Aman Patel, Clayton Rabideau, Yoshua Bengio, et al., “Hye-nadna: Long-range genomic sequence modeling at single nucleotide resolution,” *Advances in neural information processing systems*, vol. 36, pp. 43177–43201, 2023.
- [21] Yanrong Ji, Zhihan Zhou, Han Liu, and Ramana V Davuluri, “DNABERT: pre-trained bidirectional encoder representations from transformers model for DNA-language in genome,” *Bioinformatics*, vol. 37, no. 15, pp. 2112–2120, 2021.
- [22] Zhihan Zhou, Yanrong Ji, Weijian Li, Pratik Dutta, Ramana Davuluri, and Han Liu, “Dnabert-2: Efficient foundation model and benchmark for multi-species genomes,” in *International Conference on Learning Representations*, 2024, vol. 2024, pp. 41642–41665.
- [23] Katarína Grešová, Vlastimil Martinek, David Čechák, Petr Šimeček, and Panagiotis Alexiou, “Genomic benchmarks: a collection of datasets for genomic sequence classification,” *BMC Genomic Data*, vol. 24, no. 1, pp. 25, 2023.
- [24] Gary Bécigneul and Octavian-Eugen Ganea, “Riemannian adaptive optimization methods,” in *International Conference on Learning Representations*, 2019.
- [25] Max Kochurov, Rasul Karimov, and Serge Kozlukov, “Geoopt: Riemannian optimization in PyTorch,” 2020.