

CryptoL: Towards Scale Dominance and Physics Constraints Mitigation in Financial Multivariate Time Series Forecasting

Yalda Taheri^{1*}, Mohammad Hassan Heydari^{2*}, Armon Rasooli^{3†},
Maryam Amirshahkarami^{2†}, Mohammad Ebrahim Mahdavi^{2†}, Hossein Karshenas²

¹Faculty of Engineering, Azad University

²Faculty of Computer Engineering, University of Isfahan

³Department of Electrical Engineering, Iran University of Science and Technology

y.jaliltaheri@iau.ir, m.heydari@mehr.ui.ac.ir, a.rasouli@ec.iut.ac.ir

maryamamirshahkarami@mehr.ui.ac.ir, mhm.ebrh.mahdavi@gmail.com, h.karshenas@eng.ui.ac.ir

Abstract

Cryptocurrency forecasting presents a distinctive combination of extreme cross-asset scale heterogeneity, non-stationary dynamics, and structural dependencies among Open–High–Low–Close (OHLC) variables. We present CryptoL, a unified framework designed to address these challenges within multivariate time-series forecasting. CryptoL evaluates forecasting error in context-normalized coordinates within the RevIN pipeline, preventing inverse normalization from introducing an additional squared-scale weighting into the MSE objective. We formally characterize this effect through the empirical risk and parameter-gradient geometry, establishing the conditions under which large-scale assets can disproportionately influence shared-model optimization. Beyond loss-space normalization, CryptoL examines channel-independent and channel-dependent normalization for OHLC data, showing that a shared channel-dependent affine transformation preserves candle-order relations that independent channel transformations need not preserve. The framework further incorporates scale-adaptive numerical stabilization to reduce distortions caused by a fixed normalization constant across assets spanning many orders of magnitude, together with a soft feasibility loss that penalizes violations of the defining OHLC inequalities. Experiments across heterogeneous cryptocurrency assets evaluate these components through controlled ablations and demonstrate improvements in forecasting accuracy, training stability, and the frequency of financially valid OHLC predictions relative to the considered baselines. CryptoL therefore provides an integrated approach to scale-balanced optimization, structure-preserving normalization, numerical stabilization, and constraint-aware cryptocurrency forecasting.

Introduction

Multivariate financial forecasting using open–high–low–close (OHLC) data provides a detailed representation of price evolution, but predicting these highly coupled variables jointly is challenging due to abrupt regime changes and strict physical candlestick rules (Das, Goyal,

and Yadav 2026; Serdar et al. 2021; Simtharakao 2022; Wang, Huang, and Wang 2021). This task is especially demanding in cryptocurrency markets, which exhibit extreme non-stationarity and cross-asset scale heterogeneity (Simtharakao 2022; Kim et al. 2021; Bertheliet et al. 2026). Models must learn simultaneously from assets ranging from fractions of a cent to tens of thousands of dollars, making joint optimization difficult when using standard forecasting backbones that struggle with temporal distribution shifts and scale differences (Kim et al. 2021; Liu et al. 2023; Ye et al. 2024; Bertheliet et al. 2026; Feng, Huang, and Krompass 2024).

While Reversible Instance Normalization (RevIN) is commonly used to mitigate distribution shifts, its implementation details have significant structural and numerical consequences for OHLC data (Kim et al. 2021; Simtharakao 2022; Tepelyan 2025). Channel-independent standardization can disrupt the relative ordering of candlestick channels, whereas channel-dependent normalization preserves these essential relationships. Additionally, standard RevIN evaluates forecasting errors in the original physical scale, which implicitly prioritizes high-value assets during shared model optimization (Kim et al. 2021; Bertheliet et al. 2026; Liu et al. 2023; Ye et al. 2024; Feng, Huang, and Krompass 2024). Training directly in normalized target space which is referred to as Two-Phase RevIN (TP-RevIN), removes this scale-dependent weighting, while scale-adaptive stabilization prevents fixed normalization constants from distorting low-valued series (Bertheliet et al. 2026; Feng, Huang, and Krompass 2024).

Even with proper normalization, models can still produce financially inadmissible predictions that violate core candlestick inequalities (Wang, Huang, and Wang 2021; Simtharakao 2022). Previous approaches addressed this structural consistency through specialized architectures or transformations, but these are often difficult to integrate with modern time-series foundation models. To address these limitations, we present CRYPTO L, a unified framework that combines structure-aware normalization, scale-balanced optimization via TP-RevIN, and an auxiliary physics-informed

*These authors contributed equally.

†These authors contributed equally.

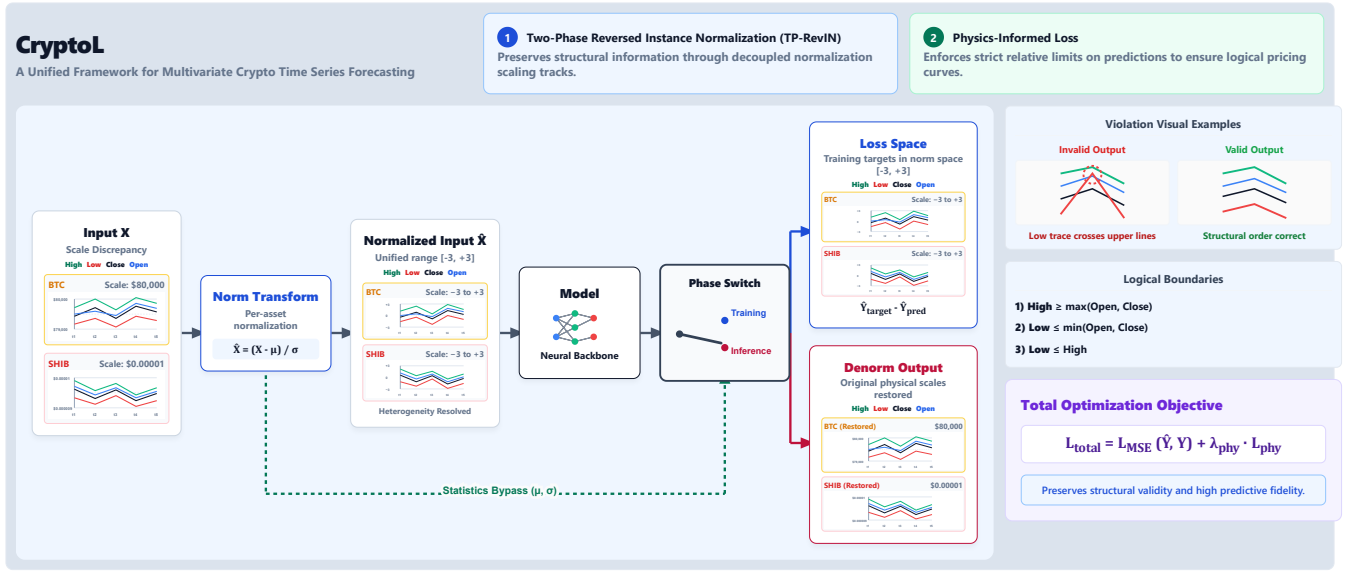


Figure 1: CryptoL framework

loss. This integrated approach discourages invalid candlestick structures while maintaining numerical stability and forecasting accuracy across diverse asset scales.

The contributions of this work are summarized as follows:

- We systematically analyze channel-independent and channel-dependent RevIN for multivariate OHLC forecasting, demonstrate their different effects on candlestick structure, and investigate fixed and scale-adaptive epsilon formulations for stable normalization across assets with extreme numerical ranges.
- We provide a theoretical and extensive empirical analysis of TP-RevIN, equivalently normalized-space MSE training, showing how the location of the training objective affects scale-induced optimization imbalance in heterogeneous cryptocurrency forecasting.
- We introduce an auxiliary physics-informed loss that penalizes violations of the intrinsic OHLC ordering constraints and compare the resulting framework with unconstrained forecasting, conventional RevIN variants, and alternative normalization approaches.

Related Work

Multivariate financial forecasting aims to model temporal, cross-variable, and cross-asset dependencies jointly (Simtharakao 2022; Das, Goyal, and Yadav 2026; Serdar et al. 2021; Tepelyan 2025). Classical approaches have used state-space models, Kalman filtering, and dynamic conditional correlation models, while recent methods employ recurrent networks, autoencoders, Transformers, and MLP-based architectures. StockMixer models indicator, temporal, and stock-level interactions, whereas foundation-model studies have shown that related multivariate inputs can improve financial forecasting (Fan and Shen 2024). DPP instead learns

representations directly from decomposed candlestick charts to predict future price movements (Hung and Chen 2021).

OHLC forecasting introduces additional structural requirements because valid candlesticks must satisfy fixed relationships among the open, high, low, and close prices (Simtharakao 2022; Tepelyan 2025; Wang, Huang, and Wang 2021). Existing studies have addressed these constraints through invertible transformations that guarantee valid reconstructed outputs (Wang, Huang, and Wang 2021), as well as hybrid autoencoder and multitask architectures designed to model channel dependencies (Chakraborty, Ghosh, and Ghosh 2022). Other work has incorporated the timestamps of OHLC events to enrich the bar representation (Das, Goyal, and Yadav 2026; Serdar et al. 2021; Simtharakao 2022; Fiszeder, Fałdziński, and Molnár 2023). These studies indicate that OHLC forecasting is not a standard multivariate regression problem, since predictions must preserve the internal structure of each candlestick.

Normalization methods have been widely studied for handling non-stationarity and distribution shift in time-series forecasting. RevIN removes instance-specific statistics before forecasting and restores them afterward (Kim et al. 2021). SAN extends this principle through local temporal-slice normalization (Liu et al. 2023), while FAN uses dominant frequency components to address both trend and seasonal non-stationarity (Ye et al. 2024). However, most normalization studies focus on temporal distribution changes and give less attention to how the normalization axis affects structured multivariate outputs such as OHLC channels.

Recent work has further distinguished representation normalization from the coordinate system in which the training loss is evaluated. GTT trains on targets normalized using input-context statistics, thereby learning directly in a unified curve-shape space (Feng, Huang, and Krompass 2024). A comparative study of normalization in foundation

models showed that MSE and MAE remain scale sensitive when predictions are denormalized before loss calculation (Ahmed et al. 2026). Another recent analysis of RevIN compared conventional and normalized backpropagation through normalized MSE and reported benefits for heterogeneous-scale data (Bertheliet et al. 2026). Building on these directions, our work jointly studies OHLC-aware normalization, normalized-space optimization, adaptive numerical stabilization, and auxiliary enforcement of candlestick validity.

Methodology

Preliminaries and Problem Definition

Let

$$\mathcal{D} = \{(\mathbf{X}_n, \mathbf{Y}_n)\}_{n=1}^N, \quad (1)$$

$$\mathbf{X}_n \in \mathbb{R}^{L \times 4}, \quad \mathbf{Y}_n \in \mathbb{R}^{H \times 4},$$

denote a collection of cryptocurrency forecasting samples, where $\mathbf{X}_n$ is an observed context window of length L and $\mathbf{Y}_n$ is the corresponding forecast horizon of length H . The four channels are ordered as

$$\mathbf{X}_{n,t,:} = (O_{n,t}, H_{n,t}, L_{n,t}, C_{n,t}), \quad (2)$$

representing the open, high, low, and close prices, respectively. A valid OHLC observation belongs to the feasible set

$$\Omega_{\text{OHLC}} = \{(O, H, L, C) \in \mathbb{R}^4 : H \geq \max(O, C), \quad (3)$$

$$L \leq \min(O, C)\}.$$

Given a forecasting model f_{θ} , the objective is to estimate

$$\hat{\mathbf{Y}}_n = f_{\theta}(\mathbf{X}_n) \quad (4)$$

across cryptocurrencies whose numerical scales may differ by several orders of magnitude, while maintaining stable optimization and reducing violations of the constraints in Equation (3). All normalization statistics are computed exclusively from the observed context $\mathbf{X}_n$ and are reused to normalize the associated target and restore the prediction to its original physical scale.

Channel-wise and Dynamic-Epsilon Normalization

We investigate two choices for the axes over which RevIN statistics are computed. In *channel-independent* (CI) normalization, each OHLC channel is normalized using its own context statistics. For channel $c \in \{O, H, L, C\}$, these statistics are

$$\mu_{n,c}^{\text{CI}} = \frac{1}{L} \sum_{t=1}^L X_{n,t,c}, \quad (5)$$

$$v_{n,c}^{\text{CI}} = \frac{1}{L} \sum_{t=1}^L (X_{n,t,c} - \mu_{n,c}^{\text{CI}})^2,$$

with effective scale

$$s_{n,c}^{\text{CI}} = \sqrt{v_{n,c}^{\text{CI}} + \epsilon_{n,c}}. \quad (6)$$

The context and target are then transformed as

$$\tilde{X}_{n,t,c}^{\text{CI}} = \frac{X_{n,t,c} - \mu_{n,c}^{\text{CI}}}{s_{n,c}^{\text{CI}}}, \quad (7)$$

$$\tilde{Y}_{n,\tau,c}^{\text{CI}} = \frac{Y_{n,\tau,c} - \mu_{n,c}^{\text{CI}}}{s_{n,c}^{\text{CI}}}.$$

CI normalization standardizes open, high, low, and close separately. Because the four channels undergo different affine transformations, their original ordering is not mathematically guaranteed to remain unchanged in normalized space.

In *channel-dependent* (CD) normalization, one shared mean and variance are computed jointly over the temporal and channel dimensions:

$$\mu_n^{\text{CD}} = \frac{1}{4L} \sum_{t=1}^L \sum_{c=1}^4 X_{n,t,c}, \quad (8)$$

$$v_n^{\text{CD}} = \frac{1}{4L} \sum_{t=1}^L \sum_{c=1}^4 (X_{n,t,c} - \mu_n^{\text{CD}})^2.$$

The corresponding effective scale is

$$s_n^{\text{CD}} = \sqrt{v_n^{\text{CD}} + \epsilon_n}, \quad (9)$$

and the same transformation is applied to all OHLC channels:

$$\tilde{X}_{n,t,c}^{\text{CD}} = \frac{X_{n,t,c} - \mu_n^{\text{CD}}}{s_n^{\text{CD}}}, \quad (10)$$

$$\tilde{Y}_{n,\tau,c}^{\text{CD}} = \frac{Y_{n,\tau,c} - \mu_n^{\text{CD}}}{s_n^{\text{CD}}}.$$

Unlike CI, CD applies one common affine transformation to the complete OHLC sample and therefore retains the relative organization of the candlestick channels. Further mathematical proofs and analysis of order preservation under CD and CI normalization are provided in Appendix B.

We additionally examine fixed and dynamic formulations of the stabilizing term used in Equations (6) and (9). The fixed formulation is

$$\epsilon^{\text{fix}} = 10^{-5}, \quad (11)$$

whereas the dynamic formulation adapts the stabilizer to the magnitude of the context mean:

$$\epsilon^{\text{dyn}} = 10^{-5} (\mu^2 + 10^{-12}). \quad (12)$$

For CI normalization, μ denotes the corresponding channelwise mean; for CD normalization, it denotes the shared sample-level mean. Dynamic epsilon is designed to prevent a fixed numerical constant from having a disproportionately large effect on cryptocurrencies with very small quoted values. Additional mathematical analysis of the fixed and dynamic epsilon formulations is provided in Appendix B.

Two-Phase RevIN and Scale-Balanced Optimization

Let the normalization statistics selected in the previous subsection be denoted by $\mu_n \in \mathbb{R}^4$ and $\mathbf{S}_n \in \mathbb{R}^{4 \times 4}$, where $\mathbf{S}_n$

Time Frame	Horizon	Norm Technique	Time-MoE			Timer-XL			Timer		
			MSE	MAE	PHY	MSE	MAE	PHY	MSE	MAE	PHY
5m	5	w/o RevIN	5.7e+8	6325.3	1.312	5.2e+8	6571.64	5.536	6.15e+8	6548.55	15.154
		CI RevIN	9890.9	19.03	0.0040	4387.64	11.66	0.012	4722.96	12.37	0.439
		CD RevIN	9868.58	18.93	0.0076	4485.7	11.81	0.0050	5013.64	12.70	1.71
		Two-Phase CI RevIN	6610.0	15.25	0.001	4584.75	12.34	0.0005	4510.90	12.14	0.278
		Two-Phase CD RevIN	7480.2	16.31	0.00049	4811.0	12.72	0.0004	4632.05	12.30	1.09
	15	w/o RevIN	5.7e+8	6328.50	1.827	5.5e+8	6572.12	5.532	6.15e+8	6548.99	9.523
		CI RevIN	2.20e+4	28.63	0.0046	1.05e+4	18.54	0.0159	1.06e+4	18.69	0.915
		CD RevIN	2.23e+4	28.62	0.0025	1.07e+4	18.71	0.0061	1.19e+4	19.73	6.285
		Two-Phase CI RevIN	1.53e+4	23.55	0.012	1.02e+4	18.39	0.0003	9949.94	18.09	0.390
		Two-Phase CD RevIN	1.95e+4	26.83	0.0010	1.01e+4	18.32	0.0002	1.04e+4	18.54	4.36
30m	5	w/o RevIN	7.73e+8	8438.67	1.271	7.66e+8	8367.45	0.501	7.71e+8	8408.11	5.717
		CI RevIN	6.47e+4	54.60	0.0685	3.35e+4	37.58	0.063	3.22e+4	36.13	1.012
		CD RevIN	6.33e+4	54.20	0.0307	3.38e+4	37.97	0.081	3.24e+4	36.39	3.957
		Two-Phase CI RevIN	4.67e+4	45.45	0.011	3.11e+4	36.04	0.003	3.03e+4	34.93	0.678
		Two-Phase CD RevIN	5.41e+4	49.12	0.0076	3.11e+4	36.26	0.00074	1.4e+4	18.54	4.365
	15	w/o RevIN	7.73e+8	8442.13	1.553	7.68e+8	8383.54	0.606	7.71e+8	8412.84	5.542
		CI RevIN	1.56e+5	86.77	0.0701	8.29e+4	59.11	0.228	7.66e+4	57.00	3.238
		CD RevIN	1.55e+5	87.05	0.0443	8.49e+4	60.007	0.163	8.51e+4	59.75	20.67
		Two-Phase CI RevIN	1.14e+5	72.48	0.12	7.34e+4	55.10	0.026	6.99e+4	53.38	1.123
		Two-Phase CD RevIN	1.37e+5	80.14	0.0078	7.24e+4	54.71	0.00052	7.36e+4	55.11	15.002

Table 1: Comparison of Different RevIN techniques. Lower numbers indicate lower errors and better performances. All of the experiments in this table are done using training with MSE only. Best metrics in each category are colored with **Red** and Second best metrics are colored with **Blue**.

Model	Horizon	FAN			SAN			TP-RevIN		
		MAE	MAPE	PHY	MAE	MAPE	PHY	MAE	MAPE	PHY
Time-MoE	5	284.19	1.63e+4	181.12	34.99	1.45e+4	0.32	68.70	1.31	0.068
	15	285.92	1.92e+3	187.11	55.89	1.52e+3	0.15	108.05	2.07	0.91
	30	286.15	2.6e+4	183.43	83.23	5.21e+3	0.50	131.45	2.52	2.68
Timer-XL	5	113.85	1.67e+4	12.68	36.03	2.40e+4	0.84	50.93	0.95	0.01
	15	123.66	8.0e+4	11.03	56.75	4.84e+3	1.46	80.36	1.49	0.016
	30	125.46	2.6e+5	11.04	81.05	9.58e+3	1.29	106.21	1.97	0.0097

Table 2: Comparison of Models with FAN, SAN, and TP-RevIN Normalization Techniques. Experiments are done under 1h time frame. For TP-RevIN, here we use dynamic epsilon.

is a positive diagonal channel-scale matrix. Under CD normalization, $\mathbf{S}_n = s_n \mathbf{I}_4$; under CI normalization, its diagonal entries contain the channelwise scales. After normalizing the observed context and target, we write

$$\tilde{\mathbf{X}}_n = (\mathbf{X}_n - \mathbf{1}_L \mu_n^\top) \mathbf{S}_n^{-1}, \quad \mathbf{Z}_n = (\mathbf{Y}_n - \mathbf{1}_H \mu_n^\top) \mathbf{S}_n^{-1}, \quad (13)$$

where the statistics are computed exclusively from $\mathbf{X}_n$. The forecasting backbone produces a normalized prediction

$$\hat{\mathbf{Z}}_n = f_\theta(\tilde{\mathbf{X}}_n), \quad (14)$$

and the corresponding physical-scale prediction is recovered as

$$\hat{\mathbf{Y}}_n = \mathbf{1}_H \mu_n^\top + \hat{\mathbf{Z}}_n \mathbf{S}_n. \quad (15)$$

Conventional RevIN-based training commonly restores the prediction through Equation (15) before evaluating MSE.

We refer to this objective as original-space RevIN training:

$$\mathcal{L}_R(\theta) = \frac{1}{2N} \sum_{n=1}^N \left\| \hat{\mathbf{Y}}_n - \mathbf{Y}_n \right\|_F^2. \quad (16)$$

In contrast, *Two-Phase RevIN* (TP-RevIN) separates the normalized training phase from the physical-scale inference phase. During training, the objective is evaluated directly between the normalized prediction and normalized target:

$$\mathcal{L}_{TP}(\theta) = \frac{1}{2N} \sum_{n=1}^N \left\| \hat{\mathbf{Z}}_n - \mathbf{Z}_n \right\|_F^2. \quad (17)$$

Inverse normalization is therefore required for inference and reporting, but it does not participate in the training objective.

Scale-induced reweighting in original-space RevIN. Let $\text{rvec}(\cdot)$ stack the rows of an $H \times 4$ matrix, and define

$$\mathbf{D}_n = \mathbf{I}_H \otimes \mathbf{S}_n \in \mathbb{R}^{4H \times 4H}. \quad (18)$$

Define the vectorized normalized residual and its parameter Jacobian as

$$\mathbf{e}_n(\boldsymbol{\theta}) = \text{rvec}(\hat{\mathbf{Z}}_n - \mathbf{Z}_n), \quad \mathbf{J}_n(\boldsymbol{\theta}) = \frac{\partial \text{rvec}(\hat{\mathbf{Z}}_n)}{\partial \boldsymbol{\theta}} \in \mathbb{R}^{4H \times p} \quad (19)$$

Proposition 1. Assume that $\boldsymbol{\mu}_n$ and $\mathbf{D}_n$ are computed from the observed context and are independent of $\boldsymbol{\theta}$. Then original-space RevIN MSE satisfies

$$\mathcal{L}_R(\boldsymbol{\theta}) = \frac{1}{2N} \sum_{n=1}^N \mathbf{e}_n^\top \mathbf{D}_n^2 \mathbf{e}_n, \quad (20)$$

whereas TP-RevIN satisfies Equation (17). Their parameter gradients are

$$\nabla_{\boldsymbol{\theta}} \mathcal{L}_R = \frac{1}{N} \sum_{n=1}^N \mathbf{J}_n^\top \mathbf{D}_n^2 \mathbf{e}_n, \quad (21)$$

and

$$\nabla_{\boldsymbol{\theta}} \mathcal{L}_{\text{TP}} = \frac{1}{N} \sum_{n=1}^N \mathbf{J}_n^\top \mathbf{e}_n. \quad (22)$$

Consequently, original-space RevIN introduces an explicit scale-dependent weighting into both the empirical objective and the shared parameter update, while TP-RevIN removes this weighting.

Proof. From Equations (13) and (15),

$$\begin{aligned} \text{rvec}(\hat{\mathbf{Y}}_n - \mathbf{Y}_n) &= \mathbf{D}_n \text{rvec}(\hat{\mathbf{Z}}_n - \mathbf{Z}_n) \\ &= \mathbf{D}_n \mathbf{e}_n. \end{aligned} \quad (23)$$

Therefore,

$$\|\hat{\mathbf{Y}}_n - \mathbf{Y}_n\|_F^2 = \mathbf{e}_n^\top \mathbf{D}_n^\top \mathbf{D}_n \mathbf{e}_n. \quad (24)$$

Because $\mathbf{D}_n$ is diagonal and positive, $\mathbf{D}_n^\top \mathbf{D}_n = \mathbf{D}_n^2$, which proves Equation (20).

Differentiating the per-sample term in Equation (20) and treating $\mathbf{D}_n$ as constant with respect to $\boldsymbol{\theta}$ gives

$$\nabla_{\boldsymbol{\theta}} \left(\frac{1}{2} \mathbf{e}_n^\top \mathbf{D}_n^2 \mathbf{e}_n \right) = \mathbf{J}_n^\top \mathbf{D}_n^2 \mathbf{e}_n. \quad (25)$$

Summing over all samples yields Equation (21). Similarly, differentiating the TP-RevIN term $\frac{1}{2} \mathbf{e}_n^\top \mathbf{e}_n$ gives $\mathbf{J}_n^\top \mathbf{e}_n$, establishing Equation (22). $\square$

For CD normalization, where $\mathbf{D}_n = s_n \mathbf{I}_{4H}$, Proposition 1 reduces to

$$\mathcal{L}_R = \frac{1}{2N} \sum_{n=1}^N s_n^2 \|\mathbf{e}_n\|_2^2, \quad (26)$$

and

$$\nabla_{\boldsymbol{\theta}} \mathcal{L}_R = \frac{1}{N} \sum_{n=1}^N s_n^2 \mathbf{J}_n^\top \mathbf{e}_n. \quad (27)$$

Thus two samples with comparable normalized residuals and comparable model sensitivity contribute to the original-space update in proportion to the squares of their context scales. This is the precise sense in which scale dominance arises in RevIN-based MSE training. Large numerical scale alone does not determine the complete gradient, since the contribution also depends on $\mathbf{J}_n^\top \mathbf{e}_n$; however, the factor s_n^2 is an unavoidable multiplicative component of the objective whenever the loss is evaluated after inverse normalization.

The same result can be expressed at the asset level. Let π_a denote the sampling probability of asset a , and define its normalized forecasting risk as

$$R_a(\boldsymbol{\theta}) = \frac{1}{2} \mathbb{E} \left[\|\mathbf{e}(\boldsymbol{\theta})\|_2^2 \mid a \right]. \quad (28)$$

If asset a has approximately constant context scale s_a , then original-space RevIN minimizes

$$R_R(\boldsymbol{\theta}) = \sum_a \pi_a s_a^2 R_a(\boldsymbol{\theta}), \quad (29)$$

whereas TP-RevIN minimizes

$$R_{\text{TP}}(\boldsymbol{\theta}) = \sum_a \pi_a R_a(\boldsymbol{\theta}). \quad (30)$$

Up to a positive global constant, Equation (29) is equivalent to replacing the declared asset distribution π_a with

$$q_a = \frac{\pi_a s_a^2}{\sum_b \pi_b s_b^2}. \quad (31)$$

Original-space RevIN therefore changes the effective optimization priority toward assets with larger context scales. TP-RevIN preserves the declared sampling weights and removes this implicit scale-dependent redistribution.

This distinction is particularly important for cryptocurrency panels, where assets can span many orders of magnitude. Under comparable normalized forecasting errors and model sensitivities, a high-scale asset can dominate the aggregate parameter update even when low-scale assets are sampled equally often. TP-RevIN does not make all assets equally difficult or guarantee equal gradient norms; differences in forecastability, residual structure, sampling frequency, and model sensitivity remain. It specifically removes the multiplicative weighting introduced solely by the RevIN scale and thereby yields a training objective that is neutral to positive affine changes in the numerical units of each asset. Further proofs based on Jacobian and Hessian analyses are provided in Appendix B.

Normalized-Space OHLC Constraint Loss

Under TP-RevIN, both the forecasting objective and the auxiliary OHLC constraint loss are evaluated in normalized coordinates. Let $\hat{\mathbf{Z}}_n$ denote the normalized prediction, with components $\hat{O}_{n,\tau}$, $\hat{H}_{n,\tau}$, $\hat{L}_{n,\tau}$, and $\hat{C}_{n,\tau}$ at forecast step τ . Defining $[x]_+ = \max(0, x)$, the normalized-space constraint

Model	Coin	RevIN		TP-RevIN	
		Fixed Epsilon	Dynamic Epsilon	Fixed Epsilon	Dynamic Epsilon
Time-MoE	BTC	1.15 / 2.38	1.16 / 2.38	1.12 / 2.23	1.16 / 2.27
	ETH	1.94 / 4.20	1.96 / 4.16	1.85 / 3.58	1.94 / 3.59
	SHIB	17362.6 / 12894.9	1.89 / 4.12	67.24 / 73.13	1.87 / 3.51
	DOGE	2.19 / 4.71	2.21 / 4.68	2.07 / 4.26	2.18 / 4.17
	ADA	2.47 / 5.61	2.48 / 5.61	2.37 / 4.93	2.47 / 4.95
Timer-XL	BTC	0.93 / 1.85	0.94 / 1.83	0.93 / 1.72	0.91 / 1.73
	ETH	1.61 / 3.19	1.65 / 3.26	1.67 / 2.81	1.61 / 2.88
	SHIB	181.5 / 3003.3	1.48 / 3.20	71.2 / 146.3	1.40 / 2.74
	DOGE	1.72 / 3.74	1.71 / 3.69	1.73 / 3.31	1.67 / 3.25
	ADA	1.85 / 4.06	1.86 / 4.13	1.82 / 3.69	1.81 / 3.81
Timer	BTC	0.88 / 1.77	0.88 / 1.80	0.85 / 1.68	0.85 / 1.65
	ETH	1.44 / 3.02	1.45 / 3.00	1.40 / 2.70	1.39 / 2.65
	SHIB	471.4 / 5346.9	1.45 / 2.97	179.0 / 355.4	1.38 / 2.72
	DOGE	1.63 / 3.48	1.64 / 3.42	1.58 / 3.20	1.56 / 3.12
	ADA	1.89 / 4.13	1.90 / 3.94	1.87 / 3.74	1.86 / 3.80

Table 3: Comparison of Fixed vs. Dynamic Epsilon Normalization (Values report Horizon 5 / 30 for MAPE).

loss is

$$\begin{aligned}
\mathcal{L}_{\text{phy}} = \frac{1}{NH} \sum_{n=1}^N \sum_{\tau=1}^H & \left([\hat{O}_{n,\tau} - \hat{H}_{n,\tau}]_+ + [\hat{C}_{n,\tau} - \hat{H}_{n,\tau}]_+ \right. \\
& + [\hat{L}_{n,\tau} - \hat{O}_{n,\tau}]_+ + [\hat{L}_{n,\tau} - \hat{C}_{n,\tau}]_+ \\
& \left. + [\hat{L}_{n,\tau} - \hat{H}_{n,\tau}]_+ \right). \tag{32}
\end{aligned}$$

The complete TP-RevIN training objective is therefore

$$\mathcal{L}_{\text{total}} = \lambda_{\text{MSE}} \mathcal{L}_{\text{TP}} + \lambda_{\text{phy}} \mathcal{L}_{\text{phy}}, \tag{33}$$

where both terms are computed before inverse normalization. This design prevents the auxiliary loss from reintroducing the scale-dependent weighting removed by TP-RevIN. Additional mathematical results concerning normalized-space OHLC constraints are provided in Appendix B.

CryptoL Framework

CryptoL combines dynamic-epsilon normalization, TP-RevIN, and the normalized-space OHLC constraint loss within a unified multivariate cryptocurrency forecasting framework. The input context and target are first transformed using either CI or CD statistics together with the dynamic epsilon in Equation (12). The forecasting backbone predicts the future sequence in normalized coordinates, where both the MSE objective and the auxiliary constraint loss are evaluated according to Equation (33). Inverse normalization is applied only after optimization to recover predictions in their original price units.

The selection between CI and CD remains configurable because the two schemes provide different practical trade-offs. CD preserves OHLC ordering under normalization,

whereas CI can provide stronger channelwise forecasting accuracy. Accordingly, both CI and CD variants of CryptoL achieve low physical-consistency errors when combined with the constraint loss, allowing the normalization axis to be selected according to the dataset, backbone, and target evaluation criterion.

Experiments

Dataset

We construct a large-scale cryptocurrency forecasting dataset containing approximately 15.5 million historical OHLC observations from 16 assets. The data were collected through the Binance API at multiple temporal resolutions, enabling evaluation across different forecasting time frames and horizons. The selected assets exhibit extreme scale heterogeneity, with quoted values ranging from approximately 10^{-7} for low-valued assets such as PEPE to above 10^5 for high-valued assets such as BTC. This broad dynamic range provides a suitable setting for evaluating normalization behavior, cross-asset learning, and the scale-balancing properties of TP-RevIN. Complete dataset details, including temporal coverage, row counts, and asset-specific volatility distributions, are provided in Appendix C.

Training Configuration

We evaluate CryptoL using three decoder-only time-series forecasting backbones: Timer (Liu et al. 2024), Timer-XL (Liu et al. 2025), and Time-MoE (Shi et al. 2025). All models are optimized using AdamW with a linearly scheduled learning rate initialized at 10^{-5} . Each model is trained for

Model	Time Frame	Horizon	RevIN (CI)		TP-RevIN (CI)		TP-RevIN (CD)		Unconstrained Space	
			MAE	PHY	MAE	PHY	MAE	PHY	MAE	PHY
Time-MoE	30m	5	47.08	0.047	45.90	1.0e-6	49.82	1.6e-3	459.66	0.0
		15	78.63	2.20	72.64	5.0e-7	80.99	1.5e-3	452.61	0.0
		30	100.07	6.08	91.81	3.6e-5	101.23	7.9e-4	517.42	0.0
	1h	5	68.28	0.161	66.91	1.0e-6	69.25	2.7e-3	723.18	0.0
		15	112.06	1.14	109.06	8.0e-6	117.69	7.8e-3	764.56	0.0
		30	117.92	6.14	130.28	4.3e-5	141.20	8.9e-3	768.84	0.0
Timer-XL	30m	5	34.26	5.4e-2	34.77	2.0e-6	37.09	2.9e-5	3307.53	0.0
		15	55.07	2.4e-1	54.04	1.9e-3	55.71	2.0e-6	1285.78	0.0
		30	73.50	1.6e-1	71.19	6.9e-4	106.98	2.0e-4	1520.53	0.0
	1h	5	52.15	8.7e-2	52.10	1.0e-7	54.91	7.4e-5	1492.80	0.0
		15	85.10	4.4e-1	82.53	9.6e-5	84.85	4.5e-4	801.78	0.0
		30	110.69	3.1e-1	105.5	5.0e-7	106.98	2.0e-4	1247.36	0.0

Table 4: Analysis of training models using auxiliary physics loss on different methods

one epoch using 90% of the available data, while the remaining 10% is reserved for evaluation. All reported forecasting metrics are computed after restoring predictions to the original physical space, ensuring a consistent and fair comparison among normalization and training configurations.

Each experiment is conducted separately for a specific time frame and forecast horizon. Within each configuration, however, the model is trained jointly on all 16 assets rather than independently for each cryptocurrency. This protocol evaluates whether a shared forecasting backbone can learn transferable temporal and cross-asset patterns despite substantial differences in asset scale, volatility, and market behavior.

Hardware and Software Environment

All experiments are conducted on eight TPU v5e accelerators, each providing 16 GB of accelerator memory, for a total distributed memory capacity of 128 GB. The implementation is developed using JAX (Bradbury et al. 2018) and Flax (Heek et al. 2024).¹ Both model parameters and intermediate activations are represented in FP32 throughout training.

To distribute the training workload, we employ fully sharded data-parallel training across all eight TPUs. The model parameters, optimizer states, and input data are sharded over the complete accelerator mesh, reducing the memory allocated to each device and enabling efficient training of the selected forecasting backbones.

Results and Analysis

We begin by evaluating the predictive performance of different normalization strategies, as summarized in Table 1 and Table 2. Without any RevIN (Kim et al. 2021), the models struggle to converge effectively, resulting in extremely high

MSE values due to the immense scale discrepancies among different cryptocurrency assets. Introducing standard CI and CD RevIN significantly mitigates this problem. However, TP-RevIN (Feng, Huang, and Krompass 2024; Bertheliet et al. 2026) formulations consistently yield further reductions in both MSE and MAE across various forecasting horizons and model backbones. When comparing TP-RevIN to alternative temporal normalization schemes such as FAN (Ye et al. 2024) and SAN (Liu et al. 2023) in Table 2, we observe that both FAN and SAN yield substantially higher MAE and Mean Absolute Percentage Error (MAPE) values. This indicates that while those methods are designed to handle non-stationarity, they struggle to balance the extreme cross-asset scale differences present in joint cryptocurrency panels. In contrast, TP-RevIN preserves representation stability across diverse scales and maintains lower physical violation (PHY) rates.

To evaluate the impact of numerical stabilization across assets of varying price scales, we analyze the fixed versus dynamic epsilon formulations in Table 3. For high-value assets such as Bitcoin (BTC) and Ethereum (ETH), the choice between a fixed and dynamic stabilizer (ϵ) has negligible impact on the forecasting performance. However, for low-value assets like Shiba Inu (SHIB), which has an average price scale on the order of 10^{-5} , the fixed epsilon stabilizer ($\epsilon^{\text{fix}} = 10^{-5}$) introduces severe numerical distortions during normalization. This distortion results in highly elevated MAPE values, such as 17362.6 for Time-MoE under standard RevIN. Utilizing the scale-adaptive dynamic epsilon (ϵ^{dyn}) resolves this numerical instability, reducing the SHIB MAPE to 1.87 / 3.51 under TP-RevIN and stabilizing the optimization process without compromising the predictive accuracy of the high-value assets.

Finally, we analyze the effectiveness of the auxiliary physics-informed constraint loss, as presented in Table 4. The "Unconstrained Space" method (Wang, Huang, and Wang 2021) mathematically guarantees zero physical violations (PHY = 0.0) through its structural design. However, this

¹The experiments use JAX version 0.9.2 and Flax version 0.12.6.

rigid constraint comes at a severe cost to overall predictive accuracy, leading to MAE values that are orders of magnitude higher than those of alternative approaches (for example, an MAE of 3307.53 for Timer-XL on a 30m time-frame at horizon 5, compared to 34.77 for TP-RevIN (CI)). Conversely, the proposed TP-RevIN models trained with the auxiliary physics loss find a more balanced trade-off. They reduce physical candlestick violations to near-zero levels while keeping the MAE highly competitive.

Conclusion

In this work, we presented CryptoL, a framework for multivariate cryptocurrency forecasting that addresses cross-asset scale heterogeneity, numerical instability, and physical candlestick constraint violations. By combining Two-Phase RevIN, dynamic epsilon stabilization, and a normalized-space auxiliary physics loss, the framework balances optimization across highly diverse price scales while encouraging structural validity. Empirical evaluations indicate that this integrated approach offers a practical compromise between forecasting accuracy and physical consistency, providing a stable foundation for training shared models on heterogeneous financial time series.

References

- Ahmed, I.; Krompaß, D.; Feng, C.; and Tresp, V. 2026. A Comparative Study on how Data Normalization Affects Zero-Shot Generalization in Time Series Foundation Models. In *ICASSP 2026-2026 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, 3436–3440. IEEE.
- Berthelie, G.; Nabil, T.; Naour, E. L.; Niamke, R.; Perlaza, S.; and Neglia, G. 2026. On the Role of Reversible Instance Normalization. *arXiv preprint arXiv:2603.11869*.
- Bradbury, J.; Frostig, R.; Hawkins, P.; Johnson, M. J.; Katariya, Y.; Leary, C.; Maclaurin, D.; Necula, G.; Paszke, A.; VanderPlas, J.; Wanderman-Milne, S.; and Zhang, Q. 2018. JAX: composable transformations of Python+NumPy programs.
- Chakraborty, D.; Ghosh, S.; and Ghosh, A. 2022. Autoencoder based hybrid multi-task predictor network for daily open-high-low-close prices prediction of Indian stocks. *arXiv preprint arXiv:2204.13422*.
- Das, S. R.; Goyal, T.; and Yadav, M. 2026. Multivariate Financial Forecasting using the Chronos Time Series Foundation Models. *arXiv preprint arXiv:2605.21504*.
- Fan, J.; and Shen, Y. 2024. StockMixer: a simple yet strong MLP-based architecture for stock price forecasting. In *Proceedings of the AAAI conference on artificial intelligence*, volume 38, 8389–8397.
- Feng, C.; Huang, L.; and Krompass, D. 2024. Only the curve shape matters: Training foundation models for zero-shot multivariate time series forecasting through next curve shape prediction. *arXiv preprint arXiv:2402.07570*.
- Fiszeder, P.; Faldziński, M.; and Molnár, P. 2023. Modeling and forecasting dynamic conditional correlations with opening, high, low, and closing prices. *Journal of Empirical Finance*, 70: 308–321.
- Heek, J.; Levskaya, A.; Oliver, A.; Ritter, M.; Rondepierre, B.; Steiner, A.; and van Zee, M. 2024. Flax: A neural network library and ecosystem for JAX.
- Hung, C.-C.; and Chen, Y.-J. 2021. DPP: Deep predictor for price movement from candlestick charts. *Plos one*, 16(6): e0252404.
- Kim, T.; Kim, J.; Tae, Y.; Park, C.; Choi, J.-H.; and Choo, J. 2021. Reversible instance normalization for accurate time-series forecasting against distribution shift. In *International conference on learning representations*.
- Liu, Y.; Qin, G.; Huang, X.; Wang, J.; and Long, M. 2025. Timer-xl: Long-context transformers for unified time series forecasting. In *International Conference on Learning Representations*, volume 2025, 83982–84006.
- Liu, Y.; Zhang, H.; Li, C.; Huang, X.; Wang, J.; and Long, M. 2024. Timer: Generative pre-trained transformers are large time series models. *arXiv preprint arXiv:2402.02368*.
- Liu, Z.; Cheng, M.; Li, Z.; Huang, Z.; Liu, Q.; Xie, Y.; and Chen, E. 2023. Adaptive normalization for non-stationary time series forecasting: A temporal slice perspective. *Advances in Neural Information Processing Systems*, 36: 14273–14292.
- Serdar, N.; Stelios, B.; McColl, J.; and Lee, D. 2021. Multivariate time-varying parameter modelling for stock markets. *Empirical Economics*, 61(2): 947–972.
- Shi, X.; Wang, S.; Nie, Y.; Li, D.; Ye, Z.; Wen, Q.; and Jin, M. 2025. Time-moe: Billion-scale time series foundation models with mixture of experts. In *International conference on learning representations*, volume 2025, 34635–34667.
- Simtharakao, S. 2022. Bitcoin candlestick price prediction with recurrent neural network.
- Tepelyan, R. 2025. Enhancing OHLC Data with Timing Features: A Machine Learning Evaluation. *arXiv preprint arXiv:2509.16137*.
- Wang, H.; Huang, W.; and Wang, S. 2021. Forecasting open-high-low-close data contained in candlestick chart. *arXiv preprint arXiv:2104.00581*.
- Ye, W.; Deng, S.; Zou, Q.; and Gui, N. 2024. Frequency adaptive normalization for non-stationary time series forecasting. *Advances in Neural Information Processing Systems*, 37: 31350–31379.

A Discussion

Cryptocurrency OHLC forecasting combines several difficulties that are usually studied separately in general-purpose time-series forecasting. First, cryptocurrency assets exhibit extreme numerical heterogeneity: the quoted value of one asset may be below 10^{-7} , while another may exceed 10^5 . A shared forecasting model must therefore learn from series whose numerical scales differ by more than twelve orders of magnitude. Second, OHLC observations are structurally constrained. A valid candlestick must satisfy

$$H \geq \max(O, C), \quad L \leq \min(O, C), \quad (34)$$

and a model may produce an invalid financial object even when its aggregate pointwise forecasting error is small.

Reversible instance normalization reduces temporal distribution shift by transforming each context into normalized coordinates before it is processed by the forecasting backbone. However, normalization is not a single unambiguous operation in multivariate OHLC forecasting. When each channel is normalized independently, the open, high, low, and close channels undergo different affine transformations. Their original cross-channel ordering is therefore not guaranteed to remain valid in normalized coordinates. In contrast, when all four channels share one positive affine transformation, their pairwise order is preserved exactly. This distinction motivates the configurable channel-independent and channel-dependent components of CryptoL.

A second issue concerns the coordinate system in which optimization is performed. Under conventional RevIN-style training, the model predicts in normalized coordinates, but the prediction may be inverse normalized before mean-squared error is evaluated. This operation reintroduces the context scale into the empirical objective. For a sample with scalar context scale s_n , the raw-space residual is s_n times the normalized residual, and its squared loss is therefore weighted by s_n^2 . In a shared multi-asset model, this weighting can alter the aggregate gradient direction and the local curvature of the optimization problem. TP-RevIN avoids this effect by evaluating the forecasting objective directly in normalized target coordinates.

CryptoL additionally evaluates its OHLC consistency penalty in normalized coordinates. Consequently, both the forecasting objective and the auxiliary structural objective are prevented from inheriting raw numerical scale. Under CD normalization, normalized-space OHLC constraints are exactly equivalent to the original-space constraints because all channels share the same positive affine transformation. Under CI normalization, this exact equivalence does not hold; the constraint term should instead be interpreted as a representation-space regularizer, and financial validity must still be evaluated after inverse normalization. Empirically, the auxiliary loss substantially reduces original-space violations under both normalization schemes, allowing the normalization axis to remain a configurable design choice.

The final component is the stabilizing term used in the normalization denominator. A fixed epsilon has an absolute numerical scale and may dominate the empirical variance of extremely low-valued assets while being negligible for high-valued assets. CryptoL therefore studies a dynamic epsilon proportional to the squared context mean. This choice is approximately equivariant under positive changes of numerical units and makes the regularization strength depend primarily on relative rather than absolute scale. The following sections formalize these claims and delimit their assumptions.

B Mathematical Analysis

Let

$$\mathcal{D} = \{(\mathbf{X}_n, \mathbf{Y}_n)\}_{n=1}^N, \quad \mathbf{X}_n \in \mathbb{R}^{L \times 4}, \quad \mathbf{Y}_n \in \mathbb{R}^{H \times 4}, \quad (35)$$

denote a set of OHLC forecasting samples. The four channels are ordered as

$$\mathbf{X}_{n,t,:} = (O_{n,t}, H_{n,t}, L_{n,t}, C_{n,t}). \quad (36)$$

All normalization statistics are assumed to be measurable functions of the observed context $\mathbf{X}_n$ only. They are treated as constants with respect to the forecasting parameters θ .

For the optimization analysis, the forecast horizon and channel dimensions are vectorized into

$$d = 4H, \quad \mathbf{z}_n, \hat{\mathbf{z}}_n \in \mathbb{R}^d. \quad (37)$$

Order Preservation Under CD and CI Normalization

Channel-dependent normalization

Under CD normalization, one shared location and one shared positive scale are computed from the complete context:

$$\mu_n^{\text{CD}} = \frac{1}{4L} \sum_{t=1}^L \sum_{c=1}^4 X_{n,t,c}, \quad (38)$$

$$v_n^{\text{CD}} = \frac{1}{4L} \sum_{t=1}^L \sum_{c=1}^4 (X_{n,t,c} - \mu_n^{\text{CD}})^2, \quad (39)$$

and

$$s_n^{\text{CD}} = \sqrt{v_n^{\text{CD}} + \epsilon_n} > 0. \quad (40)$$

The shared affine transformation is

$$T_n^{\text{CD}}(x) = \frac{x - \mu_n^{\text{CD}}}{s_n^{\text{CD}}}. \quad (41)$$

Theorem B.1 (Order preservation under CD normalization). *Let $x_1, x_2 \in \mathbb{R}$, and let T_n^{CD} be defined by Equation (41) with $s_n^{\text{CD}} > 0$. Then*

$$x_1 \geq x_2 \iff T_n^{\text{CD}}(x_1) \geq T_n^{\text{CD}}(x_2). \quad (42)$$

Consequently, every valid OHLC observation remains valid after CD normalization.

Proof. Subtracting the two transformed values gives

$$T_n^{\text{CD}}(x_1) - T_n^{\text{CD}}(x_2) = \frac{x_1 - x_2}{s_n^{\text{CD}}}. \quad (43)$$

Because $s_n^{\text{CD}} > 0$,

$$\text{sign}(T_n^{\text{CD}}(x_1) - T_n^{\text{CD}}(x_2)) = \text{sign}(x_1 - x_2). \quad (44)$$

Therefore $x_1 - x_2 \geq 0$ if and only if the transformed difference is nonnegative, proving Equation (42).

Applying the result to the OHLC inequalities gives

$$H \geq O \implies \tilde{H}^{\text{CD}} \geq \tilde{O}^{\text{CD}}, \quad (45)$$

$$H \geq C \implies \tilde{H}^{\text{CD}} \geq \tilde{C}^{\text{CD}}, \quad (46)$$

$$L \leq O \implies \tilde{L}^{\text{CD}} \leq \tilde{O}^{\text{CD}}, \quad (47)$$

and

$$L \leq C \implies \tilde{L}^{\text{CD}} \leq \tilde{C}^{\text{CD}}. \quad (48)$$

Hence membership in the OHLC feasible set is preserved. The figure 2 shows how CD and CI perform different on order preservation for OHLC data. $\square$

Corollary B.2 (Equivalence of CD normalized and raw constraints). *For every $s_n^{\text{CD}} > 0$,*

$$\left[\tilde{O}^{\text{CD}} - \tilde{H}^{\text{CD}} \right]_+ = \frac{1}{s_n^{\text{CD}}} [O - H]_+. \quad (49)$$

Analogous identities hold for every pairwise OHLC constraint. Therefore, the zero set of the normalized-space CD physics loss is identical to the zero set of the corresponding raw-space OHLC constraint loss.

Proof. Using the shared affine transformation,

$$\tilde{O}^{\text{CD}} - \tilde{H}^{\text{CD}} = \frac{O - H}{s_n^{\text{CD}}}. \quad (50)$$

For $a > 0$, the positive-part function satisfies

$$[ax]_+ = a[x]_+. \quad (51)$$

Setting $a = 1/s_n^{\text{CD}}$ proves Equation (49). $\square$

Channel-independent normalization

Under CI normalization, each channel $c \in \{O, H, L, C\}$ has its own statistics:

$$\mu_{n,c}^{\text{CI}} = \frac{1}{L} \sum_{t=1}^L X_{n,t,c}, \quad (52)$$

$$v_{n,c}^{\text{CI}} = \frac{1}{L} \sum_{t=1}^L (X_{n,t,c} - \mu_{n,c}^{\text{CI}})^2, \quad (53)$$

and

$$s_{n,c}^{\text{CI}} = \sqrt{v_{n,c}^{\text{CI}} + \epsilon_{n,c}} > 0. \quad (54)$$

The channel-specific transformation is

$$T_{n,c}^{\text{CI}}(x) = \frac{x - \mu_{n,c}^{\text{CI}}}{s_{n,c}^{\text{CI}}}. \quad (55)$$

Proposition B.3 (CI normalization does not guarantee OHLC order). *There exist valid OHLC values satisfying $H > O$ for which*

$$T_{n,H}^{\text{CI}}(H) < T_{n,O}^{\text{CI}}(O). \quad (56)$$

Therefore, validity in original coordinates does not imply validity in CI-normalized coordinates.

Proof. Consider

$$O = 10, \quad H = 11, \quad (57)$$

so that $H > O$. Let the channel statistics be

$$\mu_O = 9, \quad s_O = 0.5, \quad \mu_H = 10.8, \quad s_H = 0.2. \quad (58)$$

The normalized values are

$$\tilde{O}^{\text{CI}} = \frac{10 - 9}{0.5} = 2, \quad (59)$$

and

$$\tilde{H}^{\text{CI}} = \frac{11 - 10.8}{0.2} = 1. \quad (60)$$

Hence

$$H > O \quad \text{but} \quad \tilde{H}^{\text{CI}} < \tilde{O}^{\text{CI}}. \quad (61)$$

The original ordering is therefore not guaranteed. $\square$

Remark B.4. The proposition does not state that CI normalization always destroys OHLC ordering. It states only that no universal implication of the form

$$H \geq O \implies \tilde{H}^{\text{CI}} \geq \tilde{O}^{\text{CI}} \quad (62)$$

can be established without additional restrictions on the channel-specific statistics.

Remark B.5. When the physics loss is evaluated in CI-normalized coordinates, it enforces a representation-space ordering rather than an exactly equivalent raw-space ordering. Original-space OHLC validity must therefore be evaluated after inverse normalization.

Mathematical Analysis of Dynamic Epsilon

Let $x_1, \dots, x_L$ denote one context sequence with empirical mean and variance

$$\mu = \frac{1}{L} \sum_{t=1}^L x_t, \quad (63)$$

$$v = \frac{1}{L} \sum_{t=1}^L (x_t - \mu)^2. \quad (64)$$

The fixed-epsilon normalization is

$$\tilde{x}_t^{\text{fix}} = \frac{x_t - \mu}{\sqrt{v + \epsilon_0}}, \quad \epsilon_0 = 10^{-5}. \quad (65)$$

CryptoL uses

$$\epsilon^{\text{dyn}} = \lambda (\mu^2 + \delta), \quad \lambda = 10^{-5}, \quad \delta = 10^{-12}, \quad (66)$$

and

$$\tilde{x}_t^{\text{dyn}} = \frac{x_t - \mu}{\sqrt{v + \lambda(\mu^2 + \delta)}}. \quad (67)$$

Proposition B.6 (Non-equivariance of fixed epsilon). *Let*

$$x'_t = ax_t, \quad a > 0. \quad (68)$$

Then fixed-epsilon normalization satisfies

$$\tilde{x}_t'^{\text{fix}} = \frac{x_t - \mu}{\sqrt{v + \epsilon_0/a^2}}. \quad (69)$$

Consequently,

$$\tilde{x}_t'^{\text{fix}} \neq \tilde{x}_t^{\text{fix}} \quad (70)$$

in general.

Proof. Under Equation (68),

$$\mu' = a\mu, \quad v' = a^2v. \quad (71)$$

Therefore,

$$\begin{aligned} \tilde{x}_t'^{\text{fix}} &= \frac{ax_t - a\mu}{\sqrt{a^2v + \epsilon_0}} \\ &= \frac{a(x_t - \mu)}{a\sqrt{v + \epsilon_0/a^2}} \\ &= \frac{x_t - \mu}{\sqrt{v + \epsilon_0/a^2}}, \end{aligned} \quad (72)$$

where $a > 0$ was used. The denominator depends on a , proving the claim. $\square$

Theorem B.7 (Approximate scale equivariance of dynamic epsilon). *Under the rescaling in Equation (68), dynamic-epsilon normalization satisfies*

$$\tilde{x}_t'^{\text{dyn}} = \frac{x_t - \mu}{\sqrt{v + \lambda\mu^2 + \lambda\delta/a^2}}. \quad (73)$$

If $\delta = 0$, then

$$\tilde{x}_t'^{\text{dyn}} = \tilde{x}_t^{\text{dyn}} \quad (74)$$

for every $a > 0$. For $\delta > 0$, the transformation is approximately equivariant whenever

$$\delta \ll \mu^2 \quad \text{and} \quad \frac{\delta}{a^2} \ll v + \lambda\mu^2. \quad (75)$$

Proof. Using Equation (71),

$$\begin{aligned} \tilde{x}_t'^{\text{dyn}} &= \frac{a(x_t - \mu)}{\sqrt{a^2v + \lambda(a^2\mu^2 + \delta)}} \\ &= \frac{a(x_t - \mu)}{a\sqrt{v + \lambda\mu^2 + \lambda\delta/a^2}} \\ &= \frac{x_t - \mu}{\sqrt{v + \lambda\mu^2 + \lambda\delta/a^2}}, \end{aligned} \quad (76)$$

which proves Equation (73). If $\delta = 0$, the right-hand side equals Equation (67). For $\delta > 0$, the only scale-dependent difference is the term $\lambda\delta/a^2$, which is negligible under Equation (75). $\square$

Proposition B.8 (Dependence on relative variability). *Assume $\mu \neq 0$, and define the squared coefficient of variation as*

$$\text{CV}^2 = \frac{v}{\mu^2}. \quad (77)$$

Ignoring the negligible δ term, the ratio between the dynamic regularizer and the empirical variance is

$$\frac{\epsilon^{\text{dyn}}}{v} = \frac{\lambda}{\text{CV}^2}. \quad (78)$$

Thus, for assets with comparable relative volatility, the effect of dynamic epsilon is approximately independent of their absolute quoted price.

Proof. From Equation (66), with δ omitted,

$$\frac{\epsilon^{\text{dyn}}}{v} = \frac{\lambda\mu^2}{v} = \frac{\lambda}{v/\mu^2} = \frac{\lambda}{\text{CV}^2}. \quad (79)$$

$\square$

Remark B.9. Dynamic epsilon is not universally preferable. If

$$v \ll \lambda\mu^2, \quad (80)$$

then the regularization term dominates the empirical variance and may compress variations in nearly constant contexts. Its value should therefore be examined empirically across assets and volatility regimes.

Jacobian Analysis of Scale-Dominance Mitigation

Let

$$\tilde{\mathbf{X}}_n = \mathcal{N}_n(\mathbf{X}_n) \quad (81)$$

denote the normalized context, and let the forecasting backbone produce

$$\hat{\mathbf{z}}_n = f_{\theta}(\tilde{\mathbf{X}}_n). \quad (82)$$

The normalized target and normalized residual are

$$\mathbf{z}_n = \mathbf{D}_n^{-1}(\mathbf{y}_n - \boldsymbol{\mu}_n), \quad \mathbf{e}_n(\theta) = \hat{\mathbf{z}}_n - \mathbf{z}_n, \quad (83)$$

where $\mathbf{D}_n \succ 0$ is diagonal. The reconstructed prediction is

$$\hat{\mathbf{y}}_n = \boldsymbol{\mu}_n + \mathbf{D}_n \hat{\mathbf{z}}_n. \quad (84)$$

The normalized prediction Jacobian is

$$\mathbf{J}_n = \frac{\partial \hat{\mathbf{z}}_n}{\partial \theta} \in \mathbb{R}^{d \times p}. \quad (85)$$

Theorem B.10 (Residual-Jacobian scaling under original-space RevIN). *Assume that $\boldsymbol{\mu}_n$ and $\mathbf{D}_n$ are independent of θ . Define the original-space residual*

$$\mathbf{r}_n^{\text{Raw}} = \hat{\mathbf{y}}_n - \mathbf{y}_n. \quad (86)$$

Then

$$\mathbf{r}_n^{\text{Raw}} = \mathbf{D}_n \mathbf{e}_n, \quad (87)$$

and the Jacobian of the original-space residual is

$$\mathbf{J}_n^{\text{Raw}} = \frac{\partial \mathbf{r}_n^{\text{Raw}}}{\partial \theta} = \mathbf{D}_n \mathbf{J}_n. \quad (88)$$

Consequently, the original-space MSE gradient contribution is

$$\mathbf{g}_n^{\text{Raw}} = (\mathbf{J}_n^{\text{Raw}})^{\top} \mathbf{r}_n^{\text{Raw}} = \mathbf{J}_n^{\top} \mathbf{D}_n^2 \mathbf{e}_n. \quad (89)$$

In contrast, the TP-RevIN gradient contribution is

$$\mathbf{g}_n^{\text{TP}} = \mathbf{J}_n^{\top} \mathbf{e}_n. \quad (90)$$

Proof. From Equation (84) and the identity

$$\mathbf{y}_n = \boldsymbol{\mu}_n + \mathbf{D}_n \mathbf{z}_n, \quad (91)$$

we obtain

$$\begin{aligned} \mathbf{r}_n^{\text{Raw}} &= \boldsymbol{\mu}_n + \mathbf{D}_n \hat{\mathbf{z}}_n - \boldsymbol{\mu}_n - \mathbf{D}_n \mathbf{z}_n \\ &= \mathbf{D}_n (\hat{\mathbf{z}}_n - \mathbf{z}_n) \\ &= \mathbf{D}_n \mathbf{e}_n, \end{aligned} \quad (92)$$

proving Equation (87). Since $\mathbf{D}_n$ is independent of θ ,

$$\mathbf{J}_n^{\text{Raw}} = \frac{\partial (\mathbf{D}_n \mathbf{e}_n)}{\partial \theta} = \mathbf{D}_n \frac{\partial \mathbf{e}_n}{\partial \theta} = \mathbf{D}_n \mathbf{J}_n, \quad (93)$$

because the target $\mathbf{z}_n$ is also independent of θ .

For a least-squares objective, the per-sample gradient is the transpose of the residual Jacobian multiplied by the residual:

$$\begin{aligned} \mathbf{g}_n^{\text{Raw}} &= (\mathbf{D}_n \mathbf{J}_n)^{\top} (\mathbf{D}_n \mathbf{e}_n) \\ &= \mathbf{J}_n^{\top} \mathbf{D}_n^{\top} \mathbf{D}_n \mathbf{e}_n \\ &= \mathbf{J}_n^{\top} \mathbf{D}_n^2 \mathbf{e}_n, \end{aligned} \quad (94)$$

where the last equality follows because $\mathbf{D}_n$ is diagonal and positive. The TP-RevIN result follows directly from the normalized residual $\mathbf{e}_n$ and Jacobian $\mathbf{J}_n$. $\square$

Corollary B.11 (Scalar-scale gradient weighting). *Under CD normalization,*

$$\mathbf{D}_n = s_n \mathbf{I}_d, \quad (95)$$

and therefore

$$\mathbf{g}_n^{\text{Raw}} = s_n^2 \mathbf{J}_n^\top \mathbf{e}_n = s_n^2 \mathbf{g}_n^{\text{TP}}. \quad (96)$$

Thus, for equal normalized residual-Jacobian products, original-space RevIN weights the sample contributions in proportion to s_n^2 .

Remark B.12. The relation in Equation (96) does not imply that every high-scale sample necessarily has a larger gradient. The complete gradient also depends on

$$\mathbf{J}_n^\top \mathbf{e}_n. \quad (97)$$

TP-RevIN removes the explicit scale multiplier but does not equalize residuals, Jacobians, gradient directions, sample frequencies, or task difficulty.

Stacked Jacobian geometry

Stack the normalized residuals and Jacobians as

$$\mathbf{e} = \text{col}(\mathbf{e}_1, \dots, \mathbf{e}_N), \quad \mathbf{J} = \text{col}(\mathbf{J}_1, \dots, \mathbf{J}_N). \quad (98)$$

Define

$$\mathbf{S} = \text{diag}(\mathbf{D}_1, \dots, \mathbf{D}_N). \quad (99)$$

Then

$$\mathbf{r}^{\text{Raw}} = \mathbf{S}\mathbf{e}, \quad \mathbf{J}^{\text{Raw}} = \mathbf{S}\mathbf{J}, \quad (100)$$

whereas TP-RevIN uses

$$\mathbf{r}^{\text{TP}} = \mathbf{e}, \quad \mathbf{J}^{\text{TP}} = \mathbf{J}. \quad (101)$$

Theorem B.13 (Conditional Jacobian conditioning result). *Assume CD normalization and an orthogonal decomposition*

$$\mathbb{R}^p = V_1 \oplus \dots \oplus V_A. \quad (102)$$

Suppose the normalized Jacobian of asset a satisfies

$$\mathbf{J}_a^\top \mathbf{J}_a = \mathbf{P}_a, \quad (103)$$

where $\mathbf{P}_a$ is the orthogonal projector onto V_a , and

$$\sum_{a=1}^A \mathbf{P}_a = \mathbf{I}_p. \quad (104)$$

If asset a has scalar scale $s_a > 0$, then

$$\kappa_2(\mathbf{J}^{\text{TP}}) = 1, \quad (105)$$

whereas

$$\kappa_2(\mathbf{J}^{\text{Raw}}) = \frac{s_{\max}}{s_{\min}}. \quad (106)$$

Proof. Under the stated assumptions,

$$(\mathbf{J}^{\text{TP}})^\top \mathbf{J}^{\text{TP}} = \sum_{a=1}^A \mathbf{P}_a = \mathbf{I}_p. \quad (107)$$

All singular values of $\mathbf{J}^{\text{TP}}$ are therefore equal to one.

For original-space RevIN,

$$(\mathbf{J}^{\text{Raw}})^\top \mathbf{J}^{\text{Raw}} = \sum_{a=1}^A s_a^2 \mathbf{P}_a. \quad (108)$$

For any $\mathbf{u} \in V_a$,

$$\left(\sum_{b=1}^A s_b^2 \mathbf{P}_b \right) \mathbf{u} = s_a^2 \mathbf{u}. \quad (109)$$

Thus the singular values of $\mathbf{J}^{\text{Raw}}$ are the values s_a , with multiplicities determined by $\dim(V_a)$. Their ratio is $s_{\max}/s_{\min}$. $\square$

Remark B.14. Theorem B.13 is conditional. TP-RevIN removes the row scaling induced by the RevIN inverse map, but it does not universally guarantee a smaller Jacobian condition number. Intrinsic anisotropy in the normalized Jacobians may remain.

Hessian Analysis of Scale-Dominance Mitigation

For sample n , define the normalized-space MSE

$$\ell_n^{\text{TP}} = \frac{1}{2} \|\mathbf{e}_n\|_2^2. \quad (110)$$

The original-space RevIN MSE is

$$\ell_n^{\text{Raw}} = \frac{1}{2} \mathbf{e}_n^\top \mathbf{W}_n \mathbf{e}_n, \quad \mathbf{W}_n = \mathbf{D}_n^\top \mathbf{D}_n = \mathbf{D}_n^2. \quad (111)$$

Let

$$\hat{z}_{n,k} \quad (112)$$

denote output component k , and define its parameter Hessian as

$$\mathbf{H}_{n,k}^f = \nabla_{\boldsymbol{\theta}}^2 \hat{z}_{n,k}. \quad (113)$$

Theorem B.15 (Exact TP-RevIN and original-space Hessians). *Assume $\mathbf{W}_n$ is independent of $\boldsymbol{\theta}$. Then the exact TP-RevIN Hessian is*

$$\mathbf{H}_n^{\text{TP}} = \mathbf{J}_n^\top \mathbf{J}_n + \sum_{k=1}^d e_{n,k} \mathbf{H}_{n,k}^f. \quad (114)$$

The exact original-space RevIN Hessian is

$$\mathbf{H}_n^{\text{Raw}} = \mathbf{J}_n^\top \mathbf{W}_n \mathbf{J}_n + \sum_{k=1}^d (\mathbf{W}_n \mathbf{e}_n)_k \mathbf{H}_{n,k}^f. \quad (115)$$

Under CD normalization, where

$$\mathbf{W}_n = s_n^2 \mathbf{I}_d, \quad (116)$$

the complete per-sample Hessians satisfy

$$\mathbf{H}_n^{\text{Raw}} = s_n^2 \mathbf{H}_n^{\text{TP}}. \quad (117)$$

Proof. The TP-RevIN gradient is

$$\nabla_{\boldsymbol{\theta}} \ell_n^{\text{TP}} = \mathbf{J}_n^\top \mathbf{e}_n. \quad (118)$$

Differentiating by the product rule gives

$$\nabla_{\boldsymbol{\theta}}^2 \ell_n^{\text{TP}} = \mathbf{J}_n^\top \mathbf{J}_n + \sum_{k=1}^d e_{n,k} \nabla_{\boldsymbol{\theta}}^2 \hat{z}_{n,k}, \quad (119)$$

which proves Equation (114).

For original-space RevIN,

$$\nabla_{\boldsymbol{\theta}} \ell_n^{\text{Raw}} = \mathbf{J}_n^\top \mathbf{W}_n \mathbf{e}_n. \quad (120)$$

Differentiating again gives a term from the derivative of the residual and a term from the derivative of the Jacobian:

$$\nabla_{\boldsymbol{\theta}}^2 \ell_n^{\text{Raw}} = \mathbf{J}_n^\top \mathbf{W}_n \mathbf{J}_n + \sum_{k=1}^d (\mathbf{W}_n \mathbf{e}_n)_k \mathbf{H}_{n,k}^f, \quad (121)$$

proving Equation (115).

If $\mathbf{W}_n = s_n^2 \mathbf{I}_d$, then

$$\begin{aligned} \mathbf{H}_n^{\text{Raw}} &= s_n^2 \mathbf{J}_n^\top \mathbf{J}_n + s_n^2 \sum_{k=1}^d e_{n,k} \mathbf{H}_{n,k}^f \\ &= s_n^2 \mathbf{H}_n^{\text{TP}}, \end{aligned} \quad (122)$$

which proves Equation (117). $\square$

Remark B.16. For CI normalization, $\mathbf{W}_n$ is generally diagonal but not a scalar multiple of the identity. In that case, the exact Hessian is given by Equation (115); it is not generally valid to write $\mathbf{H}_n^{\text{Raw}} = s_n^2 \mathbf{H}_n^{\text{TP}}$ using one scalar s_n .

Gauss–Newton curvature

The Gauss–Newton matrices retain the positive-semidefinite first term of the exact Hessians:

$$\mathbf{G}^{\text{TP}} = \frac{1}{N} \sum_{n=1}^N \mathbf{J}_n^\top \mathbf{J}_n, \quad (123)$$

and

$$\mathbf{G}^{\text{Raw}} = \frac{1}{N} \sum_{n=1}^N \mathbf{J}_n^\top \mathbf{W}_n \mathbf{J}_n. \quad (124)$$

Under scalar CD scales,

$$\mathbf{G}^{\text{Raw}} = \frac{1}{N} \sum_{n=1}^N s_n^2 \mathbf{J}_n^\top \mathbf{J}_n. \quad (125)$$

Theorem B.17 (Loewner and eigenvalue bounds). *Assume scalar scales satisfying*

$$0 < s_{\min} \leq s_n \leq s_{\max} < \infty. \quad (126)$$

Then

$$s_{\min}^2 \mathbf{G}^{\text{TP}} \preceq \mathbf{G}^{\text{Raw}} \preceq s_{\max}^2 \mathbf{G}^{\text{TP}}. \quad (127)$$

On any common parameter subspace on which both matrices are positive definite,

$$\lambda_{\min}(\mathbf{G}^{\text{Raw}}) \geq s_{\min}^2 \lambda_{\min}(\mathbf{G}^{\text{TP}}), \quad (128)$$

$$\lambda_{\max}(\mathbf{G}^{\text{Raw}}) \leq s_{\max}^2 \lambda_{\max}(\mathbf{G}^{\text{TP}}), \quad (129)$$

and

$$\kappa(\mathbf{G}^{\text{Raw}}) \leq \left(\frac{s_{\max}}{s_{\min}} \right)^2 \kappa(\mathbf{G}^{\text{TP}}). \quad (130)$$

Proof. For any $\mathbf{u} \in \mathbb{R}^p$,

$$\mathbf{u}^\top \mathbf{G}^{\text{Raw}} \mathbf{u} = \frac{1}{N} \sum_{n=1}^N s_n^2 \|\mathbf{J}_n \mathbf{u}\|_2^2. \quad (131)$$

Applying Equation (126) termwise gives

$$\begin{aligned} s_{\min}^2 \frac{1}{N} \sum_{n=1}^N \|\mathbf{J}_n \mathbf{u}\|_2^2 &\leq \mathbf{u}^\top \mathbf{G}^{\text{Raw}} \mathbf{u} \\ &\leq s_{\max}^2 \frac{1}{N} \sum_{n=1}^N \|\mathbf{J}_n \mathbf{u}\|_2^2. \end{aligned} \quad (132)$$

The outer expressions are

$$s_{\min}^2 \mathbf{u}^\top \mathbf{G}^{\text{TP}} \mathbf{u} \quad (133)$$

and

$$s_{\max}^2 \mathbf{u}^\top \mathbf{G}^{\text{TP}} \mathbf{u}, \quad (134)$$

which proves the Loewner bounds. The eigenvalue inequalities follow from the Rayleigh quotient, and their ratio gives Equation (130). $\square$

Theorem B.18 (Exact scale-induced conditioning under orthogonal asset subspaces). *Assume the parameter space decomposes into mutually orthogonal subspaces $V_1, \dots, V_A$, and suppose the normalized Gauss–Newton operator for asset a is*

$$\mathbf{G}_a = \lambda_a \mathbf{P}_a, \quad \lambda_a > 0, \quad (135)$$

where $\mathbf{P}_a$ projects onto V_a . Let the asset sampling probabilities be $\pi_a > 0$. Then

$$\mathbf{G}^{\text{TP}} = \bigoplus_{a=1}^A \pi_a \lambda_a \mathbf{I}_{V_a}, \quad (136)$$

and

$$\mathbf{G}^{\text{Raw}} = \bigoplus_{a=1}^A \pi_a s_a^2 \lambda_a \mathbf{I}_{V_a}. \quad (137)$$

Consequently,

$$\kappa(\mathbf{G}^{\text{TP}}) = \frac{\max_a \pi_a \lambda_a}{\min_a \pi_a \lambda_a}, \quad (138)$$

whereas

$$\kappa(\mathbf{G}^{\text{Raw}}) = \frac{\max_a \pi_a s_a^2 \lambda_a}{\min_a \pi_a s_a^2 \lambda_a}. \quad (139)$$

If π_a and λ_a are equal across assets, then

$$\kappa(\mathbf{G}^{\text{Raw}}) = \left(\frac{s_{\max}}{s_{\min}} \right)^2, \quad \kappa(\mathbf{G}^{\text{TP}}) = 1. \quad (140)$$

Proof. Because the subspaces are mutually orthogonal, the aggregate Gauss–Newton matrices are block diagonal. The eigenvalue associated with V_a is $\pi_a \lambda_a$ under TP-RevIN and $\pi_a s_a^2 \lambda_a$ under original-space RevIN. The condition numbers are therefore the ratios of the largest and smallest block eigenvalues, proving Equations (138) and (139). Equal π_a and λ_a reduce these expressions to Equation (140). $\square$

Remark B.19 (Scope of the curvature claim). TP-RevIN removes the explicit scale weighting

$$s_n^2 \mathbf{J}_n^\top \mathbf{J}_n \quad (141)$$

from the Gauss–Newton geometry. It does not universally minimize the condition number of every nonlinear forecasting problem. Scale weighting may occasionally compensate for pre-existing curvature anisotropy. The conclusion is therefore that TP-RevIN removes the component of curvature heterogeneity induced solely by the RevIN context scales.

Example B.20 (Scale weighting may leave conditioning unchanged). Let

$$\mathbf{G}_1 = \mathbf{G}_2 = \mathbf{I}_p. \quad (142)$$

Then

$$\mathbf{G}^{\text{TP}} = 2\mathbf{I}_p, \quad \mathbf{G}^{\text{Raw}} = (s_1^2 + s_2^2)\mathbf{I}_p. \quad (143)$$

Both matrices have condition number one, even when $s_1 \neq s_2$. Thus, scale heterogeneity does not necessarily worsen conditioning when all samples excite identical isotropic parameter directions.

Example B.21 (Scale weighting can compensate for intrinsic curvature). Let

$$\mathbf{G}_1 = \begin{bmatrix} 1 & 0 \\ 0 & 0 \end{bmatrix}, \quad \mathbf{G}_2 = \begin{bmatrix} 0 & 0 \\ 0 & 100 \end{bmatrix}. \quad (144)$$

Then

$$\mathbf{G}^{\text{TP}} = \begin{bmatrix} 1 & 0 \\ 0 & 100 \end{bmatrix}, \quad \kappa(\mathbf{G}^{\text{TP}}) = 100. \quad (145)$$

Choosing

$$s_1^2 = 100, \quad s_2^2 = 1 \quad (146)$$

gives

$$\mathbf{G}^{\text{Raw}} = \begin{bmatrix} 100 & 0 \\ 0 & 100 \end{bmatrix}, \quad \kappa(\mathbf{G}^{\text{Raw}}) = 1. \quad (147)$$

This example confirms that universal conditioning superiority cannot be claimed. TP-RevIN provides scale neutrality, not an unconditional minimum-condition-number guarantee.

C Dataset Details and Volatility Analysis

This section provides a detailed breakdown of the large-scale cryptocurrency forecasting dataset utilized in our empirical evaluations. The dataset consists of historical Open-High-Low-Close (OHLC) observations collected via the Binance API. In total, the dataset contains 15,490,300 data rows spanning 16 heterogeneous assets across 7 distinct temporal resolutions (5-minute, 15-minute, 30-minute, 1-hour, 2-hour, 4-hour, and 1-day intervals), yielding a total of 112 distinct time-series panels.

Table 5: Temporal coverage per cryptocurrency asset in the dataset.

Coin	Start Date	End Date
ADAUSDT	2018-04-17 03:30:00	2025-06-01 03:25:00
BCHUSDT	2019-11-28 03:30:00	2025-06-01 03:25:00
BNBUSDT	2017-11-06 03:30:00	2025-06-01 03:25:00
BTCUSDT	2017-08-17 03:30:00	2025-06-01 03:15:00
DOGEUSDT	2019-07-05 03:30:00	2025-06-01 03:25:00
ETHUSDT	2017-08-17 03:30:00	2025-06-01 03:25:00
LINKUSDT	2019-01-16 03:30:00	2025-06-01 03:25:00
LTCUSDT	2017-12-13 03:30:00	2025-06-01 03:25:00
PEPEUSDT	2023-05-05 03:30:00	2025-06-01 03:25:00
SHIBUSDT	2021-05-10 03:30:00	2025-06-01 03:25:00
SOLUSDT	2020-08-11 03:30:00	2025-06-01 03:25:00
SUIUSDT	2023-05-03 03:30:00	2025-06-01 03:25:00
TONUSDT	2024-08-08 03:30:00	2025-06-01 03:25:00
TRXUSDT	2018-06-11 03:30:00	2025-06-01 03:25:00
XLMUSDT	2018-05-31 03:30:00	2025-06-01 03:25:00
XRPUSDT	2018-05-04 03:30:00	2025-06-01 03:25:00

Dataset Overview and Coverage

The temporal coverage and active periods for each of the 16 selected cryptocurrency assets are detailed in Table 5. The assets cover highly mature coins such as Bitcoin (BTC) and Ethereum (ETH) with histories dating back to 2017, alongside more recently launched tokens such as SUI and TON, which provide evaluation paths for lower-history, high-volatility regimes.

The sample density varies across timeframes. Table 6 outlines the exact number of recorded data rows for each asset across the seven temporal resolutions.

Empirical Volatility Analysis and Optimization Difficulty

To understand the optimization challenges across different settings, we analyze the volatility profiles of the dataset. Volatility is defined here as the absolute percentage change in the close price of a candle relative to the preceding candle:

$$v_t = \frac{|C_t - C_{t-1}|}{C_{t-1}} \times 100\% \quad (148)$$

We evaluate the proportion of candles exceeding specified threshold levels ($> 1\%$, $> 2\%$, $> 3\%$, $> 4\%$, and $> 5\%$).

Table 7 reports the aggregate volatility thresholds across all sixteen assets. As the time frame increases, the likelihood of substantial price changes scales non-linearly. For instance, only 0.99% of candles in the 5-minute resolution experience a price deviation greater than 1%, and a mere 0.01% exceed 5%. Conversely, in the daily (1-day) timeframe, 37.46% of the candles exceed a 1% change, and 11.33% experience fluctuations larger than 5%.

This disparity directly aligns with the empirical observations presented in the main paper. As demonstrated in our experimental results, forecasting backbones experience a reduction in predictive accuracy (higher MAE and MAPE metrics) when operating on larger timeframes. The high density of extreme returns on larger temporal resolutions represents a highly volatile dynamical regime with increased variance in the target distributions, presenting a fundamentally more challenging forecasting objective.

Asset-Specific Volatility Distributions

The following tables report the granular, asset-specific volatility distributions across all experimental resolutions. To accommodate the size of the dataset without compilation issues, the records are divided into two distinct parts: Table 8 covers assets from ADAUSDT to LTCUSDT, and Table 9 covers assets from PEPEUSDT to XRPUSDT.

D Experimental Details

To facilitate full reproducibility, this section details the concrete training configurations, hyperparameters, and optimization protocols employed across the four primary experimental tables of the manuscript.

For the evaluation presented in **Table 1** (comparing models without normalization, standard RevIN, and our proposed TP-RevIN), all backbones are trained strictly using the standard Mean Squared Error (MSE) forecasting objective without the

Table 6: Observed data row counts partitioned by coin and time frame.

Coin	5m	15m	30m	1h	2h	4h	1d
ADAUSDT	748,156	249,388	124,699	62,357	31,188	15,602	2,602
BCHUSDT	578,874	192,960	96,483	48,247	24,130	12,069	2,012
BNBUSDT	794,367	264,795	132,404	66,213	33,118	16,568	2,764
BTCUSDT	647,474	272,542	136,277	68,149	34,086	17,052	2,845
DOGEUSDT	620,750	206,919	103,463	51,737	25,875	12,943	2,158
ETHUSDT	817,609	272,542	134,789	68,149	34,086	17,052	2,845
LINKUSDT	669,530	223,179	111,594	55,803	27,909	13,961	2,328
LTCUSDT	783,714	261,243	130,628	65,325	32,674	16,346	2,727
PEPEUSDT	218,088	72,696	36,348	18,174	9,087	4,544	758
SHIBUSDT	426,878	142,293	71,147	35,574	17,789	8,896	1,483
SOLUSDT	505,085	168,363	84,184	42,095	21,052	10,529	1,755
SUIUSDT	218,736	72,912	36,456	18,228	9,114	4,557	760
TONUSDT	85,416	28,472	14,236	7,118	3,559	1,780	297
TRXUSDT	732,226	244,078	122,044	61,030	30,525	15,271	2,547
XTMUSDT	735,418	245,142	122,576	61,296	30,658	15,337	2,558
XRPUSDT	743,210	247,740	123,875	61,945	30,982	15,499	2,585

Table 7: Aggregate volatility distribution across all assets partitioned by timeframe.

Timeframe	> 1%	> 2%	> 3%	> 4%	> 5%
5m	0.99%	0.15%	0.05%	0.02%	0.01%
15m	3.10%	0.65%	0.22%	0.10%	0.05%
30m	5.89%	1.49%	0.56%	0.26%	0.14%
1h	9.94%	3.07%	1.29%	0.64%	0.35%
2h	15.45%	5.88%	2.73%	1.47%	0.86%
4h	21.75%	10.29%	5.43%	3.16%	1.97%
1d	37.46%	27.27%	20.20%	15.04%	11.33%

Table 8: Granular volatility thresholds for assets ADAUSDT through LTCUSDT across experimental resolutions.

Coin	Timeframe	> 1%	> 2%	> 3%	> 4%	> 5%
ADAUSDT	5m	0.90%	0.11%	0.03%	0.01%	0.01%
ADAUSDT	15m	3.35%	0.60%	0.18%	0.07%	0.03%
ADAUSDT	30m	6.63%	1.56%	0.51%	0.21%	0.10%
ADAUSDT	1h	11.38%	3.40%	1.30%	0.59%	0.30%
ADAUSDT	2h	17.65%	6.67%	3.03%	1.55%	0.85%
ADAUSDT	4h	23.81%	11.88%	6.14%	3.41%	2.02%
ADAUSDT	1d	39.64%	29.10%	21.88%	16.57%	12.61%
BCHUSDT	5m	0.74%	0.10%	0.03%	0.01%	0.01%
BCHUSDT	15m	2.61%	0.50%	0.17%	0.06%	0.03%
BCHUSDT	30m	5.27%	1.20%	0.46%	0.19%	0.10%
BCHUSDT	1h	9.10%	2.68%	1.06%	0.52%	0.27%
BCHUSDT	2h	14.70%	5.22%	2.35%	1.21%	0.70%
BCHUSDT	4h	21.52%	9.56%	4.89%	2.77%	1.64%
BCHUSDT	1d	37.69%	27.00%	19.69%	14.42%	10.89%
BNBUSDT	5m	0.92%	0.18%	0.06%	0.03%	0.01%
BNBUSDT	15m	2.72%	0.62%	0.24%	0.11%	0.06%
BNBUSDT	30m	5.16%	1.34%	0.55%	0.27%	0.16%
BNBUSDT	1h	8.85%	2.72%	1.22%	0.61%	0.36%
BNBUSDT	2h	14.09%	5.25%	2.45%	1.36%	0.82%
BNBUSDT	4h	20.60%	9.31%	4.80%	2.73%	1.73%
BNBUSDT	1d	36.81%	26.28%	19.44%	14.12%	10.46%
BTCUSDT	5m	0.24%	0.03%	0.01%	0.00%	0.00%
BTCUSDT	15m	1.46%	0.25%	0.09%	0.04%	0.02%
BTCUSDT	30m	3.01%	0.66%	0.21%	0.09%	0.04%
BTCUSDT	1h	5.64%	1.48%	0.52%	0.24%	0.12%
BTCUSDT	2h	9.74%	3.23%	1.26%	0.58%	0.31%
BTCUSDT	4h	15.48%	6.19%	2.87%	1.46%	0.74%
BTCUSDT	1d	33.90%	22.15%	15.12%	10.41%	6.93%
DOGEUSDT	5m	1.30%	0.30%	0.12%	0.07%	0.04%
DOGEUSDT	15m	3.53%	0.94%	0.41%	0.23%	0.14%
DOGEUSDT	30m	6.24%	1.89%	0.84%	0.47%	0.30%
DOGEUSDT	1h	10.03%	3.48%	1.69%	0.93%	0.59%
DOGEUSDT	2h	15.30%	6.15%	3.11%	1.87%	1.23%
DOGEUSDT	4h	21.45%	10.33%	5.59%	3.38%	2.29%
DOGEUSDT	1d	34.96%	25.17%	18.96%	14.51%	10.66%
ETHUSDT	5m	0.66%	0.09%	0.03%	0.01%	0.01%
ETHUSDT	15m	2.25%	0.42%	0.12%	0.05%	0.03%
ETHUSDT	30m	4.70%	1.06%	0.35%	0.15%	0.07%
ETHUSDT	1h	8.41%	2.34%	0.89%	0.41%	0.18%
ETHUSDT	2h	13.89%	4.88%	2.12%	1.05%	0.51%
ETHUSDT	4h	20.27%	9.23%	4.53%	2.41%	1.33%
ETHUSDT	1d	37.62%	27.67%	20.50%	14.94%	10.79%
LINKUSDT	5m	1.22%	0.15%	0.04%	0.02%	0.01%
LINKUSDT	15m	4.22%	0.82%	0.23%	0.09%	0.04%
LINKUSDT	30m	8.09%	1.94%	0.67%	0.27%	0.12%
LINKUSDT	1h	13.38%	4.17%	1.64%	0.76%	0.37%
LINKUSDT	2h	20.06%	8.23%	3.64%	1.85%	1.00%
LINKUSDT	4h	26.78%	13.93%	7.54%	4.23%	2.44%
LINKUSDT	1d	42.16%	32.87%	25.91%	19.55%	15.13%
LTCUSDT	5m	0.85%	0.12%	0.04%	0.02%	0.01%
LTCUSDT	15m	2.90%	0.58%	0.18%	0.07%	0.04%
LTCUSDT	30m	5.73%	1.39%	0.48%	0.21%	0.10%
LTCUSDT	1h	9.99%	3.01%	1.15%	0.52%	0.27%
LTCUSDT	2h	15.61%	5.77%	2.56%	1.29%	0.80%
LTCUSDT	4h	22.10%	10.31%	5.26%	2.99%	1.79%
LTCUSDT	1d	38.59%	28.47%	20.80%	14.82%	11.30%

Table 9: Granular volatility thresholds for assets PEPEUSDT through XRPUSDT across experimental resolutions.

Coin	Timeframe	> 1%	> 2%	> 3%	> 4%	> 5%
PEPEUSDT	5m	5.22%	0.52%	0.14%	0.05%	0.03%
PEPEUSDT	15m	9.48%	1.84%	0.63%	0.28%	0.14%
PEPEUSDT	30m	14.31%	3.95%	1.54%	0.72%	0.39%
PEPEUSDT	1h	19.11%	7.02%	3.26%	1.77%	1.11%
PEPEUSDT	2h	25.26%	11.63%	6.28%	3.64%	2.18%
PEPEUSDT	4h	30.97%	17.96%	11.14%	7.07%	4.75%
PEPEUSDT	1d	41.08%	34.35%	29.46%	24.70%	20.87%
SHIBUSDT	5m	1.36%	0.30%	0.11%	0.05%	0.02%
SHIBUSDT	15m	3.75%	0.99%	0.43%	0.22%	0.12%
SHIBUSDT	30m	6.71%	1.97%	0.93%	0.50%	0.29%
SHIBUSDT	1h	10.88%	3.62%	1.70%	1.01%	0.64%
SHIBUSDT	2h	16.34%	6.54%	3.28%	1.98%	1.36%
SHIBUSDT	4h	22.25%	10.87%	5.90%	3.87%	2.70%
SHIBUSDT	1d	37.25%	27.53%	19.16%	14.30%	10.59%
SOLUSDT	5m	1.49%	0.25%	0.07%	0.03%	0.02%
SOLUSDT	15m	4.84%	1.10%	0.40%	0.16%	0.08%
SOLUSDT	30m	8.98%	2.58%	1.04%	0.48%	0.23%
SOLUSDT	1h	14.58%	5.16%	2.25%	1.10%	0.63%
SOLUSDT	2h	21.18%	9.40%	4.77%	2.74%	1.62%
SOLUSDT	4h	28.27%	15.44%	9.10%	5.66%	3.92%
SOLUSDT	1d	40.99%	33.41%	26.97%	21.78%	17.45%
SUIUSDT	5m	1.04%	0.11%	0.02%	0.01%	0.01%
SUIUSDT	15m	4.55%	0.71%	0.18%	0.05%	0.02%
SUIUSDT	30m	9.10%	2.02%	0.63%	0.21%	0.09%
SUIUSDT	1h	15.37%	4.78%	1.91%	0.78%	0.34%
SUIUSDT	2h	21.73%	9.34%	4.15%	2.16%	1.04%
SUIUSDT	4h	27.94%	15.25%	8.65%	4.98%	3.14%
SUIUSDT	1d	38.60%	29.78%	24.37%	20.82%	16.86%
TONUSDT	5m	0.30%	0.05%	0.01%	0.01%	0.00%
TONUSDT	15m	1.43%	0.23%	0.06%	0.03%	0.01%
TONUSDT	30m	3.39%	0.53%	0.18%	0.07%	0.04%
TONUSDT	1h	7.80%	1.25%	0.46%	0.22%	0.08%
TONUSDT	2h	12.87%	3.20%	0.93%	0.48%	0.28%
TONUSDT	4h	20.40%	6.63%	2.53%	1.24%	0.56%
TONUSDT	1d	35.14%	23.99%	16.55%	11.15%	7.43%
TRXUSDT	5m	0.57%	0.08%	0.02%	0.01%	0.00%
TRXUSDT	15m	2.10%	0.40%	0.12%	0.05%	0.02%
TRXUSDT	30m	4.10%	1.01%	0.35%	0.15%	0.09%
TRXUSDT	1h	7.22%	2.06%	0.91%	0.43%	0.22%
TRXUSDT	2h	11.92%	4.24%	1.93%	1.03%	0.60%
TRXUSDT	4h	17.73%	7.60%	3.94%	2.21%	1.32%
TRXUSDT	1d	35.15%	23.64%	16.34%	11.55%	8.25%
XLMUSDT	5m	0.86%	0.14%	0.04%	0.02%	0.01%
XLMUSDT	15m	2.92%	0.60%	0.21%	0.10%	0.05%
XLMUSDT	30m	5.65%	1.38%	0.52%	0.26%	0.13%
XLMUSDT	1h	9.74%	2.89%	1.25%	0.61%	0.35%
XLMUSDT	2h	15.29%	5.49%	2.49%	1.37%	0.81%
XLMUSDT	4h	21.71%	9.71%	4.97%	3.05%	1.87%
XLMUSDT	1d	37.19%	26.44%	19.12%	14.12%	10.29%
XRPUSDT	5m	0.90%	0.15%	0.05%	0.02%	0.01%
XRPUSDT	15m	2.71%	0.64%	0.23%	0.10%	0.06%
XRPUSDT	30m	5.05%	1.38%	0.57%	0.28%	0.16%
XRPUSDT	1h	8.63%	2.73%	1.19%	0.62%	0.37%
XRPUSDT	2h	13.86%	4.95%	2.43%	1.35%	0.79%
XRPUSDT	4h	19.87%	8.76%	4.67%	2.91%	1.93%
XRPUSDT	1d	35.33%	24.96%	17.61%	12.85%	10.26%

auxiliary physics constraint loss ($\lambda_{\text{phy}} = 0$). The input context window is fixed to $L = 480$ steps. A separate, independent experiment is conducted for each timeframe (5m, 30m) and target forecast horizon ($H \in \{5, 15\}$). All configurations utilize a fixed numerical stabilization constant of $\epsilon = 10^{-5}$ in their normalization denominators. The Full results of Table 1 in the main paper are presented in Table 10.

The comparison against alternative temporal normalization baselines in **Table 2** (FAN and SAN) is conducted using the 1h timeframe with a lookback window of $L = 480$. All models in this evaluation are trained using the MSE objective only, without any auxiliary physics-informed losses. To ensure a fair and optimal implementation of each baseline, we adopt their recommended training schedules:

- **FAN:** The forecasting backbone and the frequency adaptive projection module are optimized jointly for 3 epochs per experiment.
- **SAN:** A decoupled, two-stage training strategy is adopted. First, the non-stationary slice projection module is optimized independently for 3 epochs until convergence. This projection module is subsequently frozen, and the main forecasting backbone is trained for 1 epoch.
- **TP-RevIN:** The model is trained for 1 epoch using the scale-adaptive dynamic epsilon formulation ($\epsilon^{\text{dyn}} = 10^{-5}(\mu^2 + 10^{-12})$) to handle cross-asset heterogeneity.

For the numerical stabilization analysis in **Table 3** (comparing fixed versus dynamic epsilon), all configurations are evaluated on the 2h timeframe with an input context length of $L = 480$. The models are trained strictly under the MSE objective to isolate the structural impact of denominator regularization on low-valued assets (e.g., SHIB) versus high-valued assets (e.g., BTC).

For the physical consistency evaluations in **Table 4**, all models are trained with a lookback window of $L = 480$ across different historical sampling intervals (30m and 1h). Under the standard RevIN configuration, the auxiliary candlestick constraint loss is evaluated in the original physical coordinate space, which reintroduces absolute context scales. All of the evaluations are done under original space for fair comparison.

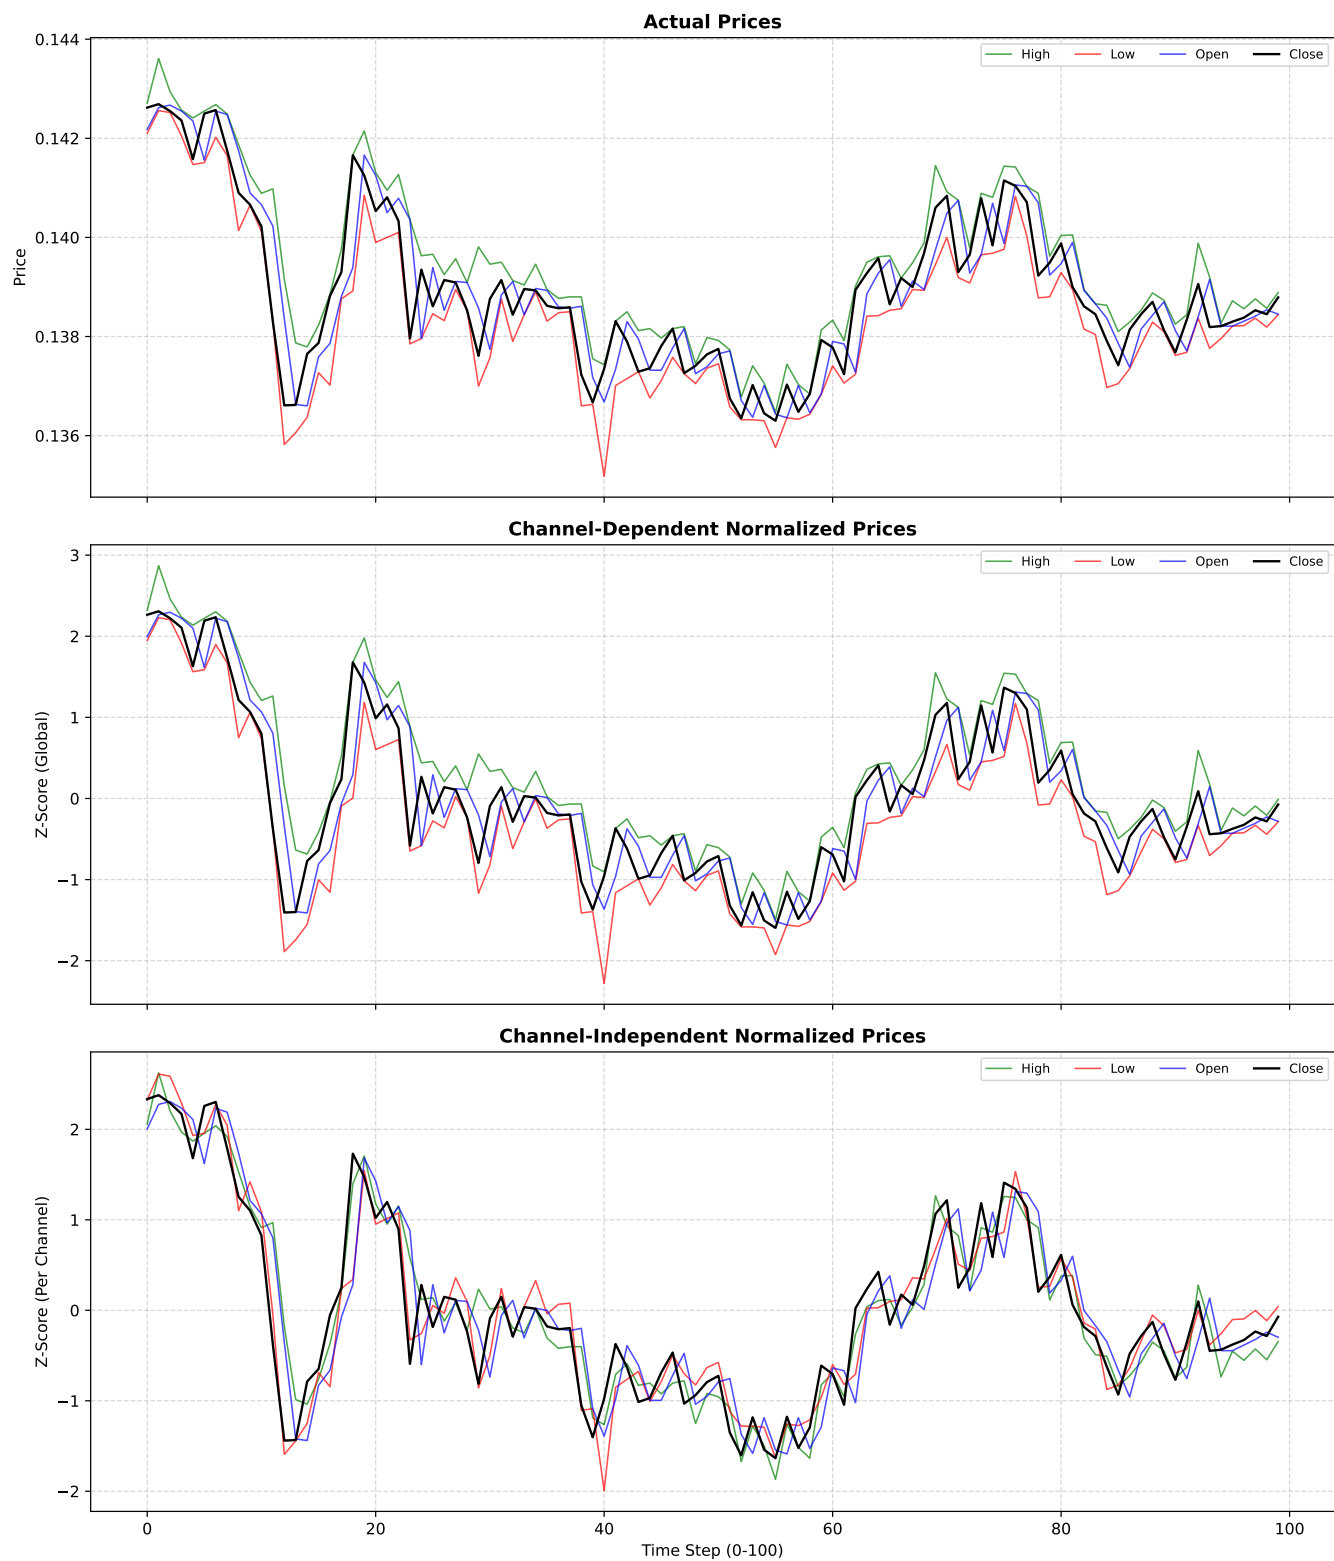


Figure 2: Difference between channel-dependent and channel-independent normalization on OHLC data and how they perform on order preservation.

Time Frame	Horizon	Norm Technique	Time-MoE			Timer-XL			Timer		
			MSE	MAE	PHY	MSE	MAE	PHY	MSE	MAE	PHY
5m	5	w/o RevIN	5.7e+8	6325.3	1.312	5.2e+8	6571.64	5.536	6.15e+8	6548.55	15.154
		CI RevIN	9890.9	19.03	0.0040	4387.64	11.66	0.012	4722.96	12.37	0.439
		CD RevIN	9868.58	18.93	0.0076	4485.7	11.81	0.0050	5013.64	12.70	1.71
		Two-Phase CI RevIN	6610.0	15.25	0.001	4584.75	12.34	0.0005	4510.90	12.14	0.278
		Two-Phase CD RevIN	7480.2	16.31	0.00049	4811.0	12.72	0.0004	4632.05	12.30	1.09
	15	w/o RevIN	5.7e+8	6328.50	1.827	5.5e+8	6572.12	5.532	6.15e+8	6548.99	9.523
		CI RevIN	2.20e+4	28.63	0.0046	1.05e+4	18.54	0.0159	1.06e+4	18.69	0.915
		CD RevIN	2.23e+4	28.62	0.0025	1.07e+4	18.71	0.0061	1.19e+4	19.73	6.285
		Two-Phase CI RevIN	1.53e+4	23.55	0.012	1.02e+4	18.39	0.0003	9949.94	18.09	0.390
		Two-Phase CD RevIN	1.95e+4	26.83	0.0010	1.01e+4	18.32	0.0002	1.04e+4	18.54	4.36
	30	w/o RevIN	5.76e+8	6327.02	2.189	5.9e+8	6748.77	2.32	6.15e+8	6547.06	9.84
		CI RevIN	3.37e+4	34.82	0.0016	1.74e+4	24.07	0.011	1.74e+4	23.94	1.38
		CD RevIN	3.36e+4	34.81	0.0024	1.73e+4	23.95	0.0071	1.99e+4	25.81	12.70
		Two-Phase CI RevIN	2.41e+4	29.36	0.015	1.69e+4	23.70	0.0003	1.60e+4	23.10	0.555
		Two-Phase CD RevIN	3.14e+4	33.64	0.00072	1.65e+4	23.44	0.00003	1.73e+4	23.94	8.90
30m	5	w/o RevIN	7.73e+8	8438.67	1.271	7.66e+8	8367.45	0.501	7.71e+8	8408.11	5.717
		CI RevIN	6.47e+4	54.60	0.0685	3.35e+4	37.58	0.063	3.22e+4	36.13	1.012
		CD RevIN	6.33e+4	54.20	0.0307	3.38e+4	37.97	0.081	3.24e+4	36.39	3.957
		Two-Phase CI RevIN	4.67e+4	45.45	0.011	3.11e+4	36.04	0.003	3.03e+4	34.93	0.678
		Two-Phase CD RevIN	5.41e+4	49.12	0.0076	3.11e+4	36.26	0.00074	1.4e+4	18.54	4.365
	15	w/o RevIN	7.73e+8	8442.13	1.553	7.68e+8	8383.54	0.606	7.71e+8	8412.84	5.542
		CI RevIN	1.56e+5	86.77	0.0701	8.29e+4	59.11	0.228	7.66e+4	57.00	3.238
		CD RevIN	1.55e+5	87.05	0.0443	8.49e+4	60.007	0.163	8.51e+4	59.75	20.67
		Two-Phase CI RevIN	1.14e+5	72.48	0.12	7.34e+4	55.10	0.026	6.99e+4	53.38	1.123
		Two-Phase CD RevIN	1.37e+5	80.14	0.0078	7.24e+4	54.71	0.00052	7.36e+4	55.11	15.002
	30	w/o RevIN	7.74e+8	8449.87	1.643	7.69e+8	8392.46	0.522	7.72e+8	8424.90	6.923
		CI RevIN	2.29e+5	106.78	0.129	1.39e+5	78.05	0.082	1.34e+5	75.79	6.036
		CD RevIN	2.34e+5	107.85	0.214	1.43e+5	78.81	0.153	1.48e+5	80.23	39.168
		Two-Phase CI RevIN	1.79e+5	91.87	0.562	1.21e+5	71.71	0.001	1.16e+5	70.08	1.928
		Two-Phase CD RevIN	2.19e+5	101.75	0.0180	1.22e+5	71.92	0.001	1.26e+5	73.74	34.545
1h	5	w/o RevIN	7.8e+8	8649.4	1.36	7.80e+8	8610.74	0.136	7.82e+8	8643.78	2.214
		CI RevIN	1.27e+5	79.73	0.139	6.84e+4	56.16	0.146	6.46e+4	52.80	1.571
		CD RevIN	1.25e+5	79.68	0.084	6.90e+4	56.82	0.122	6.57e+4	52.94	4.97
		Two-Phase CI RevIN	9.38e+4	65.91	0.02	6.48e+4	54.44	0.008	6.16e+4	51.25	1.275
		Two-Phase CD RevIN	1.08e+5	71.86	0.042	6.16e+4	52.55	0.0032	6.34e+4	51.83	5.247
	15	w/o RevIN	7.85e+8	8680.34	1.532	7.81e+8	8629.43	0.302	7.83e+8	8646.39	1.833
		CI RevIN	3.05e+5	128.34	0.296	1.73e+5	90.42	0.455	1.62e+5	86.06	6.20
		CD RevIN	3.05e+5	127.82	0.234	1.77e+5	90.61	0.520	1.71e+5	88.88	29.87
		Two-Phase CI RevIN	2.31e+5	108.28	0.571	1.48e+5	82.80	0.055	1.39e+5	78.92	2.365
		Two-Phase CD RevIN	2.75e+5	119.51	0.063	1.47e+5	82.38	0.0042	1.48e+5	82.25	23.58
	30	w/o RevIN	7.85e+8	8691.64	1.728	7.82e+8	8647.22	0.290	7.84e+8	8670.49	2.358
		CI RevIN	4.21e+5	151.30	0.509	2.80e+5	116.25	0.299	2.58e+5	110.42	10.22
		CD RevIN	4.32e+5	155.56	0.743	2.79e+5	116.94	0.476	2.95e+5	118.23	57.194
		Two-Phase CI RevIN	3.26e+5	130.22	2.123	2.35e+5	105.72	0.017	-	-	-
		Two-Phase CD RevIN	3.77e+5	141.53	0.109	2.33e+5	105.22	0.0039	2.40e+5	107.54	52.350

Table 10: Comparison of Models with different Normalization Techniques. Lower numbers indicate lower errors and better performances.

Best metrics in each category are colored with Red and Second best metrics are colored with Blue.