

PhysicsBench: A Unified Leaderboard for Generative and Predictive Models in Engineering Design and Simulation

Sang Won Lee^{†a}, Hyogu Jeong^{†a}, Namwoo Kang^{a,b,*}

^a*Narnia Labs, Daejeon, Republic of Korea*

^b*Cho Chun Shik Graduate School of Mobility, KAIST, Daejeon, Republic of Korea*

Abstract

Generative and predictive artificial intelligence models are increasingly used to generate geometry and to predict physical fields and scalar quantities in engineering design and simulation. Yet these models are typically evaluated in isolation, on academic datasets at unconstrained scales, with inconsistent metrics and procedures. We present PhysicsBench, a unified benchmark and leaderboard that evaluates generative and predictive models under one standardized procedure. PhysicsBench spans seven generation and prediction tasks across 1D, 2D, and 3D domains and ranks 66 models on nine datasets, comprising industrial-scale CAD/CFD/FEA simulations and public references, expanded into 28 configurations. One procedure and ranking apply to both families, each ranked within its own tasks. Evaluation spans realistic, limited data scales from S to XL rather than the unlimited training sets common in academic benchmarks. A common metric suite captures geometric fidelity with distributional distances, physical-field and scalar accuracy, and engineering-specific field- and shape-validity. BenchRank debiases correlated metrics and ranks by PageRank over a head-to-head dominance graph, so every reported quality metric is also ranked, with computational cost in a separate efficiency view. Across tasks, an architecture’s large-scale academic standing weakly predicts its small-data ranking. The top model changes with data scale in six of the seven tasks, and no model leads more than one task. PhysicsBench turns “state-of-the-art” from a self-reported claim into an openly published foundation for model selection.

Keywords: Benchmark, Engineering design, Computer-aided engineering, Geometry generation, Surrogate modeling, Neural operators, Small-data regime

1 Introduction

Numerical simulation has long served as a cornerstone of modern engineering design, enabling the prediction of physical behavior across disciplines ranging from structural mechanics to fluid dynamics. High-fidelity methods such as Computational Fluid Dynamics (CFD) and Finite Element Analysis (FEA) provide accurate performance estimates. Their reliance on fine spatial and temporal discretizations, however, renders them computationally expensive, so a single design evaluation frequently demands specialized software, domain expertise, and extensive high-performance computing resources [1]. This cost becomes prohibitive within iterative design and optimization loops, where thousands of candidate geometries must be assessed. To alleviate this burden, data-driven surrogate models based on deep learning have recently emerged as a compelling alternative, learning the mapping from design

*Corresponding author.

[†]These authors contributed equally to this work.

Email address: nwkang@kaist.ac.kr (Namwoo Kang)

geometry to physical response directly from simulation data and thereby delivering near-instantaneous predictions [2, 3]. In particular, advances in geometric deep learning, neural operators, and transformer-based neural solvers have accelerated aerodynamic and structural analyses by several orders of magnitude while retaining engineering-level accuracy [4–6]. Beyond such forward prediction, generative models have opened a complementary, inverse approach to design, synthesizing novel and manufacturable geometries that satisfy prescribed performance targets. Generative Adversarial Networks (GANs), Variational Autoencoders (VAEs), normalizing flows, and diffusion models extend Artificial Intelligence (AI) from the evaluation of designs to their creation [7–10]. Combined, these generative and predictive capabilities are reshaping the engineering design process, expanding the design space that can be explored and enabling real-time, interactive evaluation of complex three-dimensional systems [11, 12].

The rapid progress of AI has been inseparable from the availability of large-scale, publicly ranked benchmarks. In computer vision and natural language processing, standardized datasets and leaderboards such as ImageNet [13, 14], GLUE [15], SuperGLUE [16], and MMLU [17] established common evaluation protocols that enabled fair comparison, ensured reproducibility, and catalyzed successive breakthroughs across competing model families [18]. Motivated by this precedent, the scientific machine learning community has begun to construct analogous benchmarks for physics-based simulation. PDEBench [19] provides standardized datasets and baselines spanning a broad range of time-dependent Partial Differential Equations (PDEs), whereas the Well [20] assembles a 15 TB collection of diverse physical simulations, ranging from fluid dynamics to acoustics and astrophysics, under a single evaluation interface. Within engineering design specifically, large-scale CFD datasets such as AirfRANS [21] for airfoil aerodynamics and DrivAerNet++ [22] for three-dimensional automotive aerodynamics have introduced public leaderboards for surrogate-model evaluation. CarBench [23] has recently established the first comprehensive and reproducible benchmark ranking eleven state-of-the-art architectures on high-fidelity car aerodynamics. Such ranked leaderboards align evaluation practices across the community, quantify genuine algorithmic progress, and lower the barrier to entry for new methods, thereby accelerating the maturation of data-driven engineering.

Despite this progress, several research gaps remain unaddressed. Most existing benchmarks are narrow in scope, targeting a single physical regime or a canonical reference geometry, and many still rely on simplified two-dimensional cases or idealized three-dimensional shapes that omit the geometric complexity of production components [19, 21]. Their coverage is further constrained by a scarcity of high-fidelity, experimentally validated data and by non-standardized train, validation, and test splits, which obscure fair comparison and hinder the assessment of true generalization to unseen designs [24]. Moreover, prevailing benchmarks are calibrated to the large-data conditions of mainstream machine learning, implicitly assuming access to thousands of labelled simulations. High-fidelity CFD and FEA campaigns in industrial practice, by contrast, yield only a limited number of samples per design study, leaving the low-data regime that dominates engineering deployment largely unexamined. Consequently, current leaderboards capture algorithmic capability under idealized settings, yet reveal little about model behavior under the constraints that determine practical utility.

Motivated by these limitations, this work introduces PhysicsBench, which adopts the public leaderboard model but corrects the shortcomings identified above. PhysicsBench brings this methodology to engineering design, where no comparable leaderboard yet exists, evaluating the generation of candidate geometry and the prediction of its physical performance, the two stages conventionally served by design authoring and numerical solvers, under the conditions that govern engineering practice rather than academic convenience. It is a unified benchmark and leaderboard, deployed as the Engineering AI Leaderboard at <https://leaderboard.narnia.ai>, that assesses both generative and predictive models under a single standardized procedure of training, inference, metric computation, and ranking on

industrial engineering datasets. By applying this procedure uniformly, PhysicsBench isolates genuine algorithmic differences from differences in evaluation setup, yielding rankings that reflect a common, independently applied standard rather than self-selected reporting conditions.

PhysicsBench rests on two principles. The first is a single standardized procedure and ranking applied uniformly across all generative and predictive tasks. The second is evaluation across realistic and limited data scales, reported as small (S), medium (M), large (L), and extra large (XL) buckets, rather than the unlimited training sets common in academic benchmarks. The benchmark spans seven tasks across 1D, 2D, and 3D domains, supported by a common metric suite covering geometric fidelity, including distributional distances, physical-field and scalar accuracy, engineering-specific field and shape-validity, and computational cost. Rankings are produced by BenchRank, a debiased graph-based procedure in which each quality metric contributes directly to the ranking, while computational cost is reported separately in an efficiency view. The goal of PhysicsBench is not to identify a single best model but to provide decision support, identifying for each task and data scale the best-performing models on a given dataset.

PhysicsBench makes five contributions.

- **A unified cross-family leaderboard.** Prior engineering-design frameworks such as EngiBench, proposed by Felten et al. [25], provide common APIs, curated datasets, and modular support for generative, surrogate, and optimization methods, establishing a valuable foundation for reproducible comparison on engineering design problems. PhysicsBench extends this direction toward model-output evaluation at industrially relevant scales by ranking both generative and predictive models under a single debiased leaderboard and across a controlled range of data scales. It spans seven generation and prediction tasks across 1D, 2D, and 3D engineering domains, on CAD/CFD/FEA data ranging from industrial-scale simulations to established public references. Each family is ranked within its own tasks and metric suite, and PhysicsBench does not rank generators against predictive models head-to-head.
- **Realistic-scale evaluation.** Every model is swept across controlled data scales from S to XL. This sweep exposes data-efficiency curves, small-data collapse, and best-model crossovers that fixed-scale academic evaluation hides, and it shows that a model’s large-scale academic standing is a weak predictor of its ranking in the small-data regime.
- **BenchRank.** PhysicsBench introduces a debiased, graph-based ranking purpose-built for multi-metric engineering evaluation. BenchRank down-weights correlated metrics, ranks by PageRank over a head-to-head dominance graph, gates non-viable models, and aggregates across datasets by a geometric mean. The procedure is deterministic and reproducible.
- **Ranked engineering-validity metrics.** Beyond pixel and point-averaged error, PhysicsBench ranks *field-validity* for prediction and *shape-validity* for generation. Field-validity covers directional and modal alignment measured by the modal assurance criterion, together with pattern fidelity measured by sign and extremal agreement. Shape-validity covers structural manifold quality measured by the manifold- Δ and uniformity- Δ scores. A model that is metrically close but physically invalid is therefore not rewarded.
- **A reproducible, living platform.** Every published ranking is deterministically regenerable from the committed per-run data, contributors add new models without conflicts, and the leaderboard exposes the underlying per-run scores.

The remainder of this paper is organized as follows. Section 2 reviews generative models, predictive models, and engineering benchmarks. Section 3 describes the PhysicsBench datasets, tasks, pipeline, metrics, and BenchRank. Section 4 presents and discusses the leaderboard results, and Section 5 concludes with limitations and future work.

2 Related Work

2.1 Generative Models for Engineering Design

Deep generative models synthesize candidate engineering designs directly from data. In 2D, Generative Adversarial Networks (GANs), Variational Autoencoders (VAEs), and denoising diffusion models [10] generate engineering images and physical fields discretized on regular grids. In 3D, implicit coordinate networks (DeepSDF [26]), continuous normalizing flows (PointFlow [9]), and point-cloud diffusion models produce shapes as continuous implicit surfaces or discrete point clouds. Regenwetter et al. [11] review these methods for engineering design. Several domain-specific generative-design datasets have been released, including BIKED for bicycles [27], DeepCAD for CAD construction sequences [28], and Ship-D for ship hulls [29]. These datasets target shape or CAD synthesis within a single domain and include no surrogate prediction task.

Generative models are benchmarked on academic shape collections such as ShapeNet [30] using distributional metrics such as the Fréchet Inception Distance (FID), the Chamfer distance, and the coverage (COV) and minimum-matching-distance (MMD) suite of Achlioptas et al. [31]. These metrics measure sample fidelity and diversity. They do not test whether generated geometry lies on a valid, evenly sampled shape manifold. PhysicsBench promotes this structural test to a ranked pair of shape-validity metrics, manifold- Δ and uniformity- Δ . Two gaps remain. Generative models are rarely evaluated on industrial CAD geometry under real data-scarcity and manufacturability constraints, and their behavior at engineering-scale data size is uncharacterized.

2.2 Neural Surrogate and Operator-Learning Models

Neural surrogates replace expensive solvers with learned models that predict physical fields or scalar quantities. Neural operators learn mappings between function spaces and generalize across discretizations, including the Fourier Neural Operator [3], DeepONet [2], and the broader operator-learning frameworks [5]. Geometry-aware operators and transformers extend this to irregular engineering geometry, including the Geometry-Informed Neural Operator [32], Transolver [6], GNOT [33], and universal physics transformers [34] together with their anchored-branched variant for automotive CFD (AB-UPT) [35]. Graph-network simulators [36, 37] and point and graph-based backbones such as PointNet [4] and its successors operate directly on meshes and point clouds. A complementary line imposes physical laws during training, including physics-informed neural networks [38] and the physics-informed neural operator [39], which learn from data while respecting the governing equations. Image-based surrogates regress fields on rasterized geometry using encoder-decoder CNNs such as U-Net [40], feature-pyramid networks [41], and dense-prediction vision transformers [42, 43], and map images to scalar quantities using CNN and vision-transformer backbones [44, 45]. For low-dimensional tabular and time-series quantities of interest, surrogates draw on gradient-boosted trees, deep tabular networks, and in-context foundation models [46–48], together with recurrent and convolutional sequence models [49, 50].

Each model is typically reported on its own datasets with method-specific metrics and training budgets. This precludes cross-method and cross-dataset comparison and leaves the generative and predictive literatures disconnected, despite both serving the same design loop.

2.3 *Benchmarks and Leaderboards in Machine Learning*

Standardized benchmarks with public rankings have driven progress in machine learning, from ImageNet [13, 14] and GLUE/SuperGLUE [15, 16] to MLPerf [51, 52] and HELM [53], with community platforms [54–56] extending the format to thousands of tasks.

Such rankings, however, exhibit well-characterized failure modes. They depend on task selection and aggregation [57], and a high score on a narrow task does not certify general capability [58]. Static benchmarks also saturate as models catch up to their hardest tasks. On GLUE, models passed the non-expert human baseline within a year, prompting SuperGLUE [16], and a survey of 3,765 benchmarks reports rapid saturation [18], motivating dynamic evaluation [59]. Test-set contamination inflates scores through memorization rather than generalization [60]. Optimizing one proxy metric is a known failure mode [61]. Rank diverges from deployment utility when cost is omitted [62], and efficiency is mis-measured when reduced to one indicator [63]. Results are often irreproducible without committed code, data, and configuration [64]. PhysicsBench answers each failure mode directly. BenchRank down-weights correlated metrics and ranks on a metric suite rather than one number. Computational cost is reported in a separate efficiency view. The leaderboard is regenerable from committed per-model results on fixed held-out splits. Rankings are reported per task and per data scale, not as one universal score.

The small-data regime is where engineering operates and where rankings are least stable. High-fidelity CFD/FEA evaluation is the dominant cost of surrogate modeling, therefore the industrial surrogates train on tens to a few hundred simulations [1, 24], and recent design methods operate directly in this data-constrained regime [65]. The best model changes with data scale. On tabular data, gradient-boosted trees lead at larger sizes, while an in-context foundation model wins on the smallest training sets [48, 66, 67]. A leaderboard built only at one specific scale is a poor guide to the regime engineers face. PhysicsBench therefore sweeps controlled S/M/L/XL data scales rather than reporting at a single fixed size.

2.4 *Engineering and Scientific-ML Benchmarks*

Several engineering benchmarks standardize complementary aspects of evaluation. PDEBench [19] and The Well [20] assemble large collections of time-dependent PDE simulations for operator-learning benchmarks. AirfRANS [21] provides RANS airfoil flow, while DrivAerNet++ [22] and DrivAerML [68] provide large-scale automotive-aerodynamics datasets with deep-learning surrogate benchmarks. Concurrent with our work, Elrefaie et al. [23] introduced CarBench, a strong domain-specific benchmark for 3D automotive aerodynamics that enables reproducible comparison of eleven neural surrogates on DrivAerNet++ across accuracy, physical consistency, efficiency, bootstrap uncertainty, and Pareto trade-offs. This depth of evaluation provides an important reference for model assessment within a high-fidelity engineering domain. EngiBench [25] complements this approach by establishing valuable open-source infrastructure for reproducible data-driven engineering design research through a common API, curated cross-domain problems and datasets, and modular support for generative, surrogate, and optimization methods. Building on these complementary foundations, a remaining need is to compare generative and predictive models across a broader range of engineering settings, including 1D, 2D, and 3D generation and prediction, under the limited training data budgets typical of industrial simulation campaigns. PhysicsBench addresses this need through controlled data-scale evaluation on diverse CAD/CFD/FEA tasks using a common multi-metric ranking procedure.

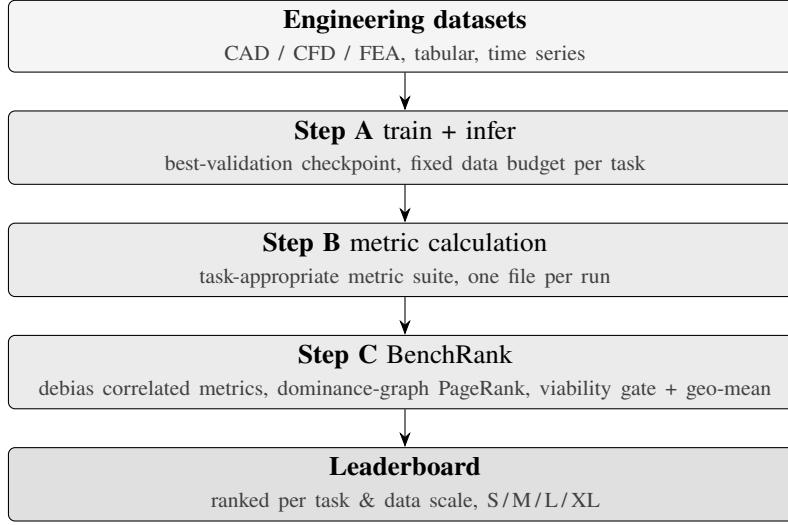


Figure 1: Overview of the PhysicsBench evaluation pipeline. The datasets combine industrial CAD/CFD/FEA simulation sets with established public references.

2.5 Industrial CAE Datasets

PhysicsBench builds on publicly released, simulation-backed engineering datasets, including the jet-engine-bracket structural dataset DeepJEB [69] and the synthetic wheel dataset DeepWheel [70], which extends aforementioned generative wheel design and evaluation [71], the automotive-aerodynamics datasets DrivAerNet++ [22] and DrivAerML [68], the PDE-simulation benchmark PDEBench [19], and standard tabular and time-series references. These datasets supply the real geometries, coupled multi-physics fields, and engineering quantities of interest that separate industrial evaluation from simplified academic data.

3 Benchmark

PhysicsBench evaluates generative and predictive models under a single standardized procedure that fixes the data, training, inference, metric computation, and ranking applied to every model. This section formalizes that procedure and the debiased leaderboard it produces. Figure 1 presents an overview of the PhysicsBench evaluation pipeline.

3.1 Datasets and Task Taxonomy

PhysicsBench draws on engineering CAD/CFD/FEA datasets, both industrial-scale simulation sets and established public references, spanning structural, modal, aerodynamic, porous-flow, acoustic, prognostic, and materials disciplines. Every dataset name follows a four-token convention and decomposes into five orthogonal facets. The first is the input modality dimension. The second is the *output-support manifold* dimension, where a scalar maps to 1d, an image, plane, or surface 2-manifold maps to 2d, and a volume 3-manifold maps to 3d. The third is the engineering scenario, namely the load case, region, or phenomenon that distinguishes siblings. The fourth is the discipline. The fifth is *coupling*, meaning whether one solver run produces the output jointly. We adopt the principle that one engineering problem maps to exactly one dataset and one model-scale checkpoint. A model emits the problem’s coupled multi-dimensional output in a single forward pass, and the leaf quantities, for example pressure

Table 1: Datasets in PhysicsBench, grouped by task. “Identifier” is the four-token name each dataset is published and released under. “In→Out” gives the input-modality and output-support manifold dimensions, and “QoI” lists the coupled quantities of interest as components, with vector quantities contributing one component per axis. Generation tasks have no target field, so their QoI entry is the geometry itself.

Task	Dataset	Identifier	In→Out	QoI (components)	License
1D Scalar Prediction	UCI-Airfoil Self-Noise	airfoil_1d_1d_noise	1d→1d	sound pressure	CC BY 4.0
	NASA-CMAPSS RUL	cmapps_1dt_1d_rul	1dt→1d	remaining useful life	Public Domain
	UCI-Concrete Strength	concrete_1d_1d_strength	1d→1d	compressive strength	CC BY 4.0
2D Image Generation	DeepJEB	deepjeb_2d_2d	2d→2d	geometry	ODC-By v1.0
	DeepWheel	deepwheel_2d_2d	2d→2d	geometry	CC BY-NC 4.0
	DrivAerNet	drivaernet_2d_2d	2d→2d	geometry	CC BY-NC 4.0
2D Scalar Prediction	DeepJEB Structural	deepjeb_2d_1d_structural	2d→1d	displacement, stress	ODC-By v1.0
	DeepWheel Mass	deepwheel_2d_1d_mass	2d→1d	mass	CC BY-NC 4.0
	DeepWheel Modal	deepwheel_2d_1d_modal	2d→1d	natural frequencies	CC BY-NC 4.0
2D Field Prediction	AirFRANS Flow	airfrans_2d_2d_flow	2d→2d	velocity, pressure, turbulence	ODbL 1.0
	DeepJEB Structural	deepjeb_2d_2d_structural	2d→2d	displacement, stress	ODC-By v1.0
	DeepWheel Depth	deepwheel_2d_2d_depth	2d→2d	depth	CC BY-NC 4.0
	PDEBench Darcy Pressure	pdebenchdarcy_2d_2d_pressure	2d→2d	pressure	CC BY 4.0
3D Geometry Generation	DeepJEB	deepjeb_3d_3d	3d→3d	geometry	ODC-By v1.0
	DeepWheel	deepwheel_3d_3d	3d→3d	geometry	CC BY-NC 4.0
	DrivAerNet	drivaernet_3d_3d	3d→3d	geometry	CC BY-NC 4.0
3D Scalar Prediction	DeepJEB Structural	deepjeb_3d_1d_structural	3d→1d	displacement, stress	ODC-By v1.0
	DeepWheel Mass	deepwheel_3d_1d_mass	3d→1d	mass	CC BY-NC 4.0
	DeepWheel Modal	deepwheel_3d_1d_modal	3d→1d	natural frequencies	CC BY-NC 4.0
3D Field Prediction	DeepJEB Diagonal Load	deepjeb_3d_2d_diagonal	3d→2d	displacement, stress	ODC-By v1.0
	DeepJEB Horizontal Load	deepjeb_3d_2d_horizontal	3d→2d	displacement, stress	ODC-By v1.0
	DeepJEB Modal	deepjeb_3d_2d_modal	3d→2d	mode shapes	ODC-By v1.0
	DeepJEB Torsional Load	deepjeb_3d_2d_torsion	3d→2d	displacement, stress	ODC-By v1.0
	DeepJEB Vertical Load	deepjeb_3d_2d_vertical	3d→2d	displacement, stress	ODC-By v1.0
	DrivAerML Surface	drivaerml_3d_2d_surface	3d→2d	pressure, wall shear stress	CC BY-SA 4.0
	DrivAerML Volume	drivaerml_3d_3d_volume	3d→3d	p-coeff, velocity, vorticity	CC BY-SA 4.0
	DrivAerNet Center Plane	drivaernet_3d_2d_centerplane	3d→2d	pressure, velocity	CC BY-NC 4.0
	DrivAerNet Surface	drivaernet_3d_2d_surface	3d→2d	pressure	CC BY-NC 4.0

and velocity for an aerodynamic field or displacement and stress for a structural load case, are stored as *components* of that one result rather than as separate training runs. Components and their vector groupings are defined consistently across the benchmark. Table 1 lists the datasets grouped by the seven tasks, and Figure 2 illustrates representative tasks as input-to-output pairs, spanning generation and prediction across 1D, 2D, and 3D on real engineering data.

3.2 Tasks and Model Families

The task taxonomy operationalizes the generative-AI design-optimization framework of Kang [12], which organizes engineering AI by data dimensionality across 1D, 2D, and 3D and by model role across generation, prediction, and optimization. PhysicsBench realizes the generative and predictive axes as a ranked benchmark. Design optimization searches for new designs rather than scoring model outputs and lies outside the evaluation scope. This yields seven tasks. The 1D domain contributes scalar prediction. The 2D domain contributes image generation, scalar prediction, and field prediction. The 3D domain contributes geometry generation, scalar prediction, and field prediction.

PhysicsBench evaluates 66 publicly ranked models, together with the official AB-UPT described below, on nine source datasets, expanded into the 28 task-specific configurations of Table 1 and each swept over four controlled data scales from S to XL. Coverage is uniform within a task with one exception. In 3D field prediction, four standalone models, GeoFLARE, GeoTransolver, DoMINO, and the official AB-UPT, are evaluated on DrivAerML alone, the automotive-aerodynamics dataset they were built

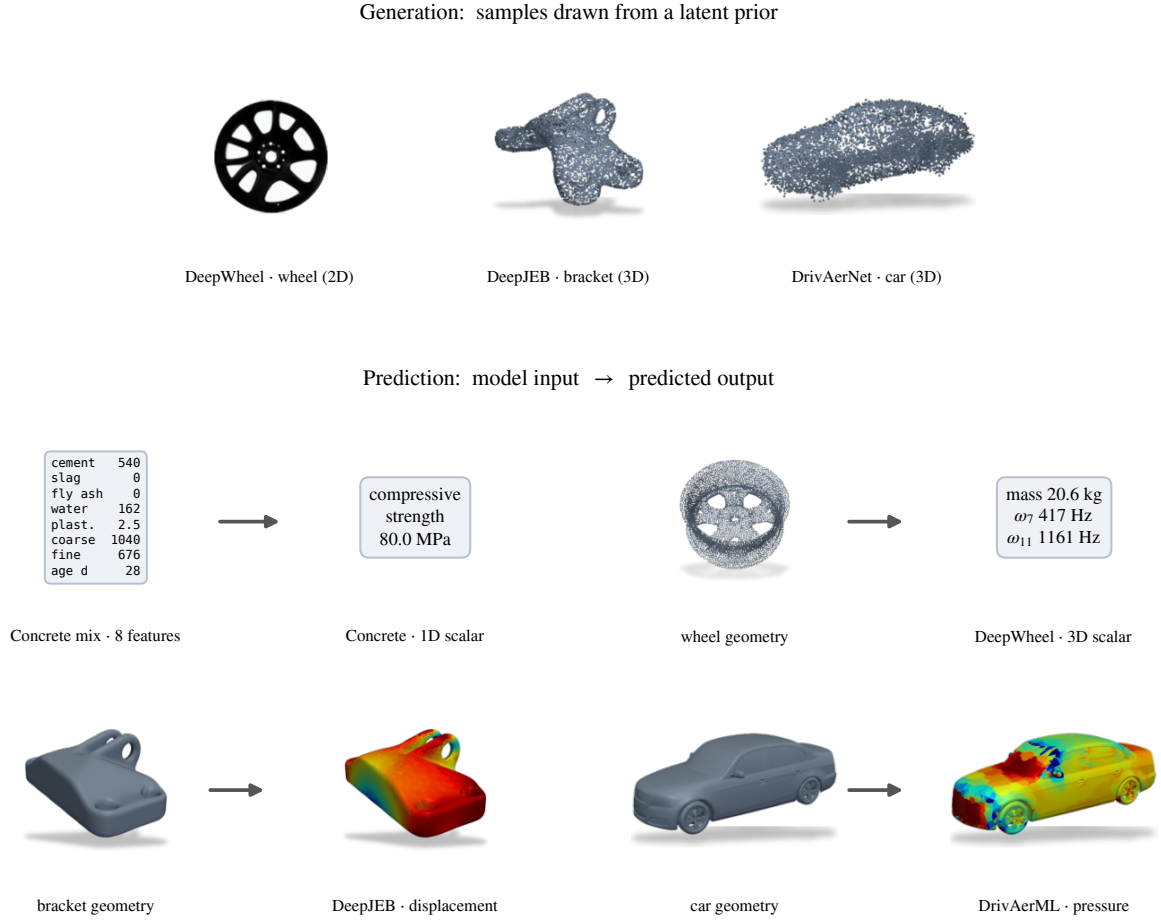


Figure 2: Representative tasks across PhysicsBench, ordered as in Table 1 by dimension and, at the top level, generation before prediction. Geometry is shaded neutral grey, whether generated or given as model input, and predicted fields use the jet colormap. The 2D field-prediction tasks are shown separately with the qualitative results in Section 4.4.

for, so their pooled scores rest on narrower coverage than the full-coverage models and are read per dataset in Section 4.4. AB-UPT is further reported under a research license that permits evaluation use but bars public deployment, so it is ranked on the DrivAerML boards in this paper and withheld from the public leaderboard. Its scores are our own measurements, obtained by training and evaluating the authors’ released implementation under the same procedure applied to every other model, rather than values quoted from its source paper. Each task hosts a family of models implemented as described in their source papers, with occasional capacity-reduced variants for the small-data regime documented as distinct entries.

Generation spans GAN [7], VAE [8], and diffusion [10] models in 2D, and SDF [26], GAN [72], flow [9], score-based [73], autoencoder [74], and diffusion [75] models in 3D. Scalar regression uses point-cloud backbones [76] in 3D, CNN and vision-transformer (ViT) image backbones [44, 45] in 2D, and tabular and time-series models in 1D. The 1D tabular models are an MLP, FT-Transformer [46], NODE [77], TabNet [47], TabPFN [48], gradient-boosted trees [78, 79], Gaussian processes [80], and ridge regression [81], and the 1D time-series models target remaining-useful-life prediction [82, 83]. Field

Table 2: Models evaluated in PhysicsBench, grouped by task. Parameter counts are read from the released results, and n/a marks the estimators for which the benchmark records none, namely the tree, kernel, and in-context tabular baselines. The 3D field inventory additionally includes the official AB-UPT, reported on DrivAerML only.

Model	Category	Params (M)	Reference	Model	Category	Params (M)	Reference
1D scalar prediction				2D field prediction			
BiLSTM	RNN	0.15	2018 [91]	Attention U-Net	U-Net	7.98	MIDL 2018 [92]
CNN-LSTM	Hybrid	0.04	—	DPT-Hybrid	DPT	122.38	ICCV 2021 [42]
DAST	Transformer	0.07	2022 [83]	FPN (ResNet-18)	FPN	15.56	CVPR 2017 [41, 44, 93]
DCNN	CNN	0.02	2018 [94]	GLPN	DPT	61.22	2022 [95]
FT-Transformer	Tabular-DL	0.10	NeurIPS 2021 [46]	ResNet-UNet	U-Net	14.41	MICCAI 2015 [40, 44]
Gaussian Process	Classical	n/a	2006 [80]	SegFormer-B0	Transformer	3.71	NeurIPS 2021 [43]
LightGBM	Tree	n/a	NeurIPS 2017 [79]	U-Net	U-Net	7.85	MICCAI 2015 [40]
LSTM	RNN	0.06	2017 [82]	U-Net++	U-Net	9.16	DLIA 2018 [96]
MLP	MLP	0.04	—	3D geometry generation			
NODE	Tabular-DL	0.01	ICLR 2020 [77]	3D-GAN	GAN	74.98	NeurIPS 2016 [72]
Random Forest	Classical	n/a	2001 [97]	AtlasNet	AtlasNet	28.77	CVPR 2018 [74]
Ridge	Classical	n/a	1970 [81]	DeepSDF	SDF	2.15	CVPR 2019 [26]
TabNet	Tabular-DL	0.01	AAAI 2021 [47]	Diffusion3D	Diffusion	3.88	CVPR 2021 [75]
TabPFN	Foundation	n/a	Nature 2025 [48]	PointFlow	Flow	1.43	ICCV 2019 [9]
TCN	CNN	0.03	2018 [50]	ShapeGF	Score	4.86	ECCV 2020 [73]
XGBoost	Tree	n/a	KDD 2016 [78]	3D scalar prediction			
2D image generation				DGCNN	Graph	1.80	ACM TOG 2019 [90]
DCGAN	GAN	23.95	ICLR 2016 [98]	PCT	Transformer	1.24	CVM 2021 [99]
DDPM	Diffusion	71.44	NeurIPS 2020 [10]	PCT-Small	Transformer	0.36	CVM 2021 [99]
GAN (Basic)	GAN	76.37	NeurIPS 2014 [7]	Point Transformer	Transformer	12.15	ICCV 2021 [100]
LSGAN	GAN	39.09	ICCV 2017 [101]	Point Transformer-Small	Transformer	0.83	ICCV 2021 [100]
R1GAN	GAN	23.95	ICML 2018 [102]	PointMLP	MLP	3.14	ICLR 2022 [103]
VAE (Basic)	VAE	50.72	ICLR 2014 [8]	PointMLP-Elite	MLP	0.48	ICLR 2022 [103]
VQVAE	VAE	4.89	NeurIPS 2017 [104]	PointNet	PointNet	0.08	CVPR 2017 [4]
WGAN-CP	GAN	23.95	ICML 2017 [105]	PointNet++	PointNet	1.47	NeurIPS 2017 [76]
WGAN-GP	GAN	23.95	NeurIPS 2017 [106]	PointNet++ Lite	PointNet	0.27	adapted from [76]
2D scalar prediction				3D field prediction			
ConvNeXt-Tiny	CNN	28.02	CVPR 2022 [107]	AB-UPT	UPT	8.75	TMLR 2025 [35]
DenseNet-121	CNN	7.22	CVPR 2017 [108]	DoMINO	Neural Operator	24.31	2025 [89]
EfficientNet-B0	CNN	4.34	ICML 2019 [109]	GeoFLARE	Transformer	26.41	2026 [86–88]
ResNet-18	CNN	11.31	CVPR 2016 [44]	GeoFNO	Neural Operator	1.55	JMLR 2023 [85]
ResNet-34	CNN	21.42	CVPR 2016 [44]	GeoTransolver	Transformer	29.49	2025 [86]
SimpleCNN	CNN	0.42	—	LinearNO	Neural Operator	3.33	AAAI 2026 [84]
ViT-Tiny	Transformer	5.55	ICML 2021 [45]	LinearNO-Big	Neural Operator	11.05	AAAI 2026 [84]
				PointNet	PointNet	3.67	CVPR 2017 [4]
				RegDGCNN	Graph	1.44	ACM TOG 2019 [90]
				Transolver	Transformer	3.78	ICML 2024 [6]
				Transolver++	Transformer	1.74	ICML 2025 [110]

prediction uses neural operators and geometry transformers, including Transolver [6], LinearNO [84], Geo-FNO [85], GeoTransolver [86], GeoFLARE [87, 88], DoMINO [89], and AB-UPT [35], together with point- and graph-based backbones such as PointNet [4] and RegDGCNN [90] in 3D, and U-Net [40], FPN [41], and dense-prediction transformer [42] architectures in 2D.

The predictive family is predominantly Computer-Aided Engineering (CAE) emulators for structural, aerodynamic, and porous-flow fields and their derived quantities. It also includes a small set of adjacent tasks that share the same input-to-output regression over quantities of interest (QoIs), the same metric suite, and the same evaluation procedure. These are a monocular-depth reference task, a computer-vision problem included for cross-domain reference rather than a CAE surrogate, and prognostic remaining-useful-life estimation. Generative and predictive families share the same procedure and leaderboard but are ranked within their own tasks and metric suites, not head-to-head. The complete per-task inventories, with parameter counts and references, appear in Table 2.

Table 3: Fixed training conventions per domain and task. Sizes define the S/M/L/XL data-scale buckets used by the leaderboard.

Domain/task	Resolution	Epochs	Batch	Sizes
1D scalar	n/a	1000	16	20/50/100/200
2D generation	128×128	1000	16	50/100/200/500
2D scalar/field	128×128	500	16	20/50/100/200
3D generation	8192 pts	1000	8	20/50/100/200
3D scalar/field	8192 pts	500	8	20/50/100/200

3.3 Unified Pipeline

The pipeline has three steps. **Step A** trains a model on a fixed number of samples and then generates standardized outputs for inference. **Step B** loads the real and predicted samples, computes the task’s metrics, and writes a single per-model result file. **Step C** aggregates these files and ranks the models, as specified in Section 3.5. Training conventions are fixed per domain and task in Table 3 so that all models in a task are trained under identical budgets. This fixes the shared procedure of data splits, resolution, epoch and batch budget, early stopping, and normalization, but not each model’s own optimizer, learning rate, and internal hyperparameters, which follow its source paper. A ranking difference is therefore attributable to the model as published, meaning its architecture and recommended configuration, and in particular is not explained by a larger-data or longer-training advantage, rather than to a controlled single-hyperparameter ablation. The specific values follow three practical constraints. Resolutions of 8192-point clouds and 128×128 images are each domain’s de-facto standard and, deliberately, the common denominator at which architectures spanning roughly five years, from established backbones to the most recent operators, run on their published configurations without structural surgery, which keeps the comparison about the models rather than about bespoke re-tuning. Batch sizes are the largest that fit GPU memory at those resolutions, 8 for the memory-heavy 3D point sets and 16 in 2D, and the higher generation budget of 1000 epochs against 500 reflects the slower convergence of adversarial, diffusion, and flow training, with early stopping trimming both in practice. The data-scale buckets are not an arbitrary cap. They mirror the reality that in engineering practice the number of accessible high-fidelity samples is small, therefore, S–XL span the regime engineers actually operate in, with 2D generation shifted upward to 50–500 only because FID is unstable and upward-biased at small sample sizes [111]. Early stopping monitors a domain-appropriate validation metric, namely FID for 2D generation, a Fréchet PointNet distance (FPD) for 3D generation, and validation MSE for all prediction tasks, checked every ten epochs, with patience of 50 checks for generation or 25 checks for prediction and a minimum of 50 or 20 epochs respectively. Inference always uses the best-validation checkpoint rather than the final epoch, and produces up to 500 samples, capped at the test-split size. Generative models that lack a native sampling prior, most notably the auto-decoder SDF model that learns one latent code per training shape rather than a generator network, are sampled for generation by fitting a Gaussian mixture to their learned training latents and decoding draws from it, so their generative quality depends on how well that latent density can be estimated from the available shapes. Training and inference wall-clock times are recorded as cost metrics.

Each model run writes one result file. A new model is added by committing that single file, which avoids merge conflicts between contributors. The leaderboard is a deterministic function of the committed results that any user can regenerate. Non-gradient estimators such as TabPFN and gradient-boosted trees bypass the gradient trainer through a thin scikit-learn-style adapter but reuse the identical inference and scoring path, hence the comparison remains fair.

Every model is trained at a fixed seed, and cells are additionally rerun at two further seeds. A leaderboard is a pairwise comparison, so the reporting basis is fixed per task and never per model, and every model on one board is measured the same way. Ranking averaged models against un-averaged ones would strip the run-to-run luck from some competitors and not others, which is the one asymmetry a max-over-models ranking cannot absorb. A task is therefore reported as the per-cell mean over the three runs only where every one of its cells carries the complete rerun set, and as the single baseline run otherwise. Five of the seven tasks meet that condition, namely 1D scalar, 2D generation, 2D scalar, 2D field, and 3D scalar prediction. The two that do not are 3D generation, where four of its 84 cells are short a rerun, and 3D field prediction, where three of the four standalone models named in Section 4.4 are reported from a single run, leaving 236 of its 1526 cells unreplicated. Appendix B reports how far the rankings move with the training run, including what changes when every task is placed on the mean of its repeated runs.

3.4 Metric Suite

Metrics are organized into three families and selected according to the task, as summarized in Table 4. The geometric-fidelity family evaluates generated images and point clouds using distributional, perceptual, and geometric measures. For 2D generation, the metrics include FID [112], Inception Score [113], precision, recall, density, and coverage [114], LPIPS [115], and MS-SSIM [116]. For 3D generation, the metrics include Fréchet PointNet distance and the set-level Chamfer-based measures MMD, COV, and 1-NNA [9, 31], together with precision, recall, density, and coverage. The prediction-accuracy family evaluates physical fields and scalar outputs using MAE, RMSE, MAPE, R^2 , and relative L_2 error, supplemented by task-specific measures. Vector and modal-field tasks use the Modal Assurance Criterion (MAC) [117], sign agreement, and extremal agreement. Depth-regression tasks use AbsRel, sqRel, and $\delta < 1.25$ [118]. Scalar-prediction tasks additionally use maximum absolute error and the Pearson and Spearman correlation coefficients. The computational-cost family reports parameter count, training time, and inference time.

Two of these metric families assess engineering validity rather than relying exclusively on the pixel-wise or point-wise mean errors commonly used in ML benchmarks. PhysicsBench extends conventional leaderboard evaluation with five ranked engineering-validity metrics. Four metrics, *sign agreement*, *extremal agreement*, *manifold- Δ* , and *uniformity- Δ* , are introduced in this work. The fifth, the Modal Assurance Criterion (MAC) [117], is adapted from structural dynamics. All five metrics are ranked alongside mean error because they quantify failure modes that standard error and distributional metrics do not explicitly isolate.

For field prediction, a low MAE does not guarantee physically correct behavior. A model may predict the wrong loading direction or place stress or pressure extrema in incorrect regions. Sign agreement measures sign consistency between the predicted and reference fields, while extremal agreement measures the spatial agreement between their extrema. The sign and scale-invariant MAC measures the alignment of mode shapes and vector-field patterns up to a global sign and amplitude, thereby separating structural-pattern agreement from magnitude error.

For geometry generation, manifold- Δ measures local manifold validity, whereas uniformity- Δ measures the uniformity of point sampling over the generated geometry. These metrics distinguish two different geometric failures, namely local non-manifold structure and nonuniform point concentration such as clustering along seams. Standard distributional metrics, including FID, FPD, precision, recall, density, and coverage, do not explicitly isolate either failure. Consequently, a generator may obtain favorable distributional scores while producing point clouds that are unsuitable for downstream meshing or simulation.

Table 4: Metric suite by task family, where $\uparrow$ and $\downarrow$ mark higher-is-better and lower-is-better. The scalar-prediction row applies to the 1D, 2D, and 3D scalar tasks. All tasks additionally report parameters and train and infer time. The generation metrics LPIPS, MS-SSIM, and PSNR follow the direction conventions defined in [Appendix A](#).

Task family	Metrics
2D generation	IS $\uparrow$, FID $\downarrow$, LPIPS $\uparrow$, PSNR $\uparrow$, MS-SSIM $\downarrow$, Precision $\uparrow$, Recall $\uparrow$, Density $\uparrow$, Coverage $\uparrow$
3D generation	FPD $\downarrow$, MV-FID $\downarrow$, MMD-CD $\downarrow$, COV-CD $\uparrow$, 1-NNA-CD $\downarrow$, MS-SSIM $\downarrow$, Precision $\uparrow$, Recall $\uparrow$, Density $\uparrow$, Coverage $\uparrow$, Manifold- Δ $\downarrow$, Uniformity- Δ $\downarrow$
Scalar prediction	MAE $\downarrow$, RMSE $\downarrow$, MAPE $\downarrow$, R^2 $\uparrow$, Rel- L_2 $\downarrow$, MaxAE $\downarrow$, Pearson $\uparrow$, Spearman $\uparrow$
Field prediction	MAE $\downarrow$, RMSE $\downarrow$, MAPE $\downarrow$, R^2 $\uparrow$, Rel- L_2 $\downarrow$, and for 3D also MAC $\uparrow$, Sign Agree $\uparrow$, Extremal Agree $\uparrow$, for 2D also PSNR $\uparrow$, SSIM $\uparrow$, and for depth AbsRel $\downarrow$, sqRel $\downarrow$, $\delta < 1.25$ $\uparrow$

Such engineering-specific measures are generally absent from general-purpose ML leaderboards or are treated as secondary to a single fidelity metric. PhysicsBench instead treats engineering validity as a first-class ranking criterion because a prediction or generated design with low conventional error but invalid physics or geometry remains unusable. [Appendix A](#) provides formal definitions of these metrics and of the standard metrics listed above.

Consistent with this design principle, every displayed quality metric is included in the ranking, and no quality metric is reported for display only. Each task is therefore reported under the two leaderboard views defined in [Section 3.5](#). The quality view carries the computational-cost metrics for reference at zero weight, so the ranking is decided by quality alone. The efficiency view promotes those same cost metrics to ranked metrics beside the quality ones, so a model is scored at once on what it delivers and on what it costs. Those cost metrics are the subset $\mathcal{E}$ of [Algorithm 1](#). Each view therefore ranks models using exactly the criteria assigned nonzero weight in it.

3.5 BenchRank: Debiased Graph-Based Ranking

A practitioner-facing leaderboard must reduce a task’s many metrics to a single ranking, but the obvious reductions all mislead. Ranking by one headline metric such as FID alone or R^2 alone discards the rest of the suite, including the very field- and shape-validity metrics that distinguish a usable prediction from a metrically-close but physically wrong one. Averaging a normalized score instead double-counts correlated metrics, since MAE and RMSE move together, and lets a single large-scale metric dominate a naive mean. We are aware of no engineering benchmark that supplies a multi-metric ranking correcting for this. We therefore introduce **BenchRank**, a graph-based ranking algorithm designed for this setting. It adopts two established primitives as building blocks, Spearman-correlation debiasing of the metric weights and PageRank centrality for scoring. What BenchRank contributes is the head-to-head dominance graph it constructs over the full metric suite, the viability gate that removes degenerate models, and the clipped geometric-mean aggregation that makes cross-dataset scores comparable. Models are compared pairwise across the whole metric suite at once. For each ordered pair of models we accumulate a signed magnitude over the metrics, adding a term wherever the first model beats the second by more than a per-metric threshold and subtracting a term wherever it is beaten by more than that threshold, with each term growing as $\log(1+z^2)$ in the standardized gap z , or as $\log(1+z)$ for cost metrics. Whenever this net margin is positive we add a single directed edge from the weaker to the stronger model as an endorsement, weighted by the net margin and detailed in [Algorithm 1](#). Each metric’s threshold is the

$1-\tau$ quantile of that metric’s observed pairwise gaps at $\tau=0.6$, so that roughly a fraction τ of pairs count as decisive on it while the remainder are suppressed as ties, which leaves the dominance graph neither fully connected nor disconnected. The threshold is clipped to between 0.05 and 5 median absolute deviations of that metric, so that a metric whose gaps are heavy-tailed relative to its dispersion cannot set its own threshold from outliers alone. Metric weights are debiased by redundancy. Each metric’s weight is $w = 1/(1 + \alpha \rho)$, where ρ is its summed Spearman correlation with the other metrics at $\alpha=1$, so mutually redundant metrics are down-weighted. A model’s score is its PageRank [119] centrality in this weighted endorsement graph, which is high when the model is preferred by many strong competitors across the metric suite, computed with damping 0.85 via `networkx` [120] and scaled to a $[0, 100]$ Total Score.

Two robustness mechanisms complete the ranking. A viability gate excludes degenerate models. A model that is a median-absolute-deviation outlier at $k=3$ on all of a task’s gated metrics is removed from the graph and assigned a floor score below all viable models. Mode collapse itself needs no dedicated rule, because a collapsed generator scores poorly on the coverage and distributional metrics and is demoted to the lower ranks by the score on its own. We deliberately apply no analogous gate to the regression tasks. A cell in which every model scores $R^2 < 0$ is not noise to be removed but decision-relevant information, since it tells a practitioner the task is unlearnable at that scale, so we retain and rank it and flag it as indicative. This signal is reflected in the BenchRank score rather than gated out of it. Within a viable cell, a single mean-collapsing model is instead demoted by the rank-correlation metrics Pearson and Spearman, which a constant predictor cannot satisfy, as discussed in Section 4.4.2. A dedicated regression viability gate remains a possible future refinement. Across evaluation cells, one per dataset and quantity channel, a model’s Total Score is aggregated by a clipped geometric mean with floor 0.01 rather than an arithmetic mean, so a model that collapses on any single cell is penalized more heavily than one that is uniformly mediocre. A model evaluated on only a subset of a task’s cells aggregates over that subset alone, so its pooled score is not directly commensurable with a full-coverage model’s and must be read per dataset, as detailed in Section 4.4. Ranking ties break deterministically by model name, making the leaderboard reproducible regardless of input order. Leaderboards are produced per data-scale bucket from S to XL in both the quality and the efficiency view. Algorithm 1 states the complete procedure, from dominance-graph construction through the viability gate and the cross-cell geometric mean.

A final clarification concerns how the figures report ranking versus raw metrics. BenchRank’s total score is a relative centrality re-normalized within each task and scale bucket so that the top model scores 100, while the bottom of the interval rises with the share of model pairs the metric suite separates, from 20 when it separates none to 40 when it separates all, and lies between 32 and 40 across the leaderboards reported here. The score is therefore deliberately not comparable across scales or tasks and carries no physical unit. The trajectory and Pareto figures of Section 4 therefore plot the raw primary metric, namely R^2 , FID, or FPD, whose absolute magnitude and cross-scale trend the score cannot express. The score is thus the selection layer that says which model to pick within a bucket, and the raw metrics are the evidence layer that says how good each model is in physical units. We report both rather than collapsing one into the other.

4 Results and Discussion

We evaluate the full model set under the procedure of Section 3. Wall-clock training and inference times are reported on a common NVIDIA RTX PRO 6000 with 96 GB of memory, with each model, dataset, and scale cell trained and evaluated on a single GPU. Running the full suite on a single device calls for a

Algorithm 1 BenchRank: debiased graph-based ranking for one task at a fixed data scale.

Require: per-cell metric matrices $\{M^c\}_{c \in C}$, one evaluation cell per (dataset, quantity channel), each $M^c \in \mathbb{R}^{n \times m}$ (n models, m metrics), with per-metric direction ($\uparrow/\downarrow$); cost-metric subset $\mathcal{E}$ and margin map $g(z) = \log(1+z^2)$ on the quality metrics $j \notin \mathcal{E}$, $\log(1+z)$ on $\mathcal{E}$; gated-metric subset G ; MAD_j the normal-consistency-scaled ($1.4826\times$) median absolute deviation of metric j ; redundancy strength α , decisive-gap fraction τ , threshold bounds $\gamma_{\min} < \gamma_{\max}$ in units of MAD_j , PageRank damping δ , gate factor k , geometric-mean floor ε

Ensure: Total Score $s \in [0, 100]^n$ and the induced ranking

```

1: for each evaluation cell  $c \in C$  do
2:    $V \leftarrow$  all models except those worse than  $\text{median}_j + k \text{MAD}_j$  on every  $j \in G$   $\triangleright$  viability gate
3:   restrict  $M^c$  to  $V$  and negate every  $\downarrow$  metric, so larger is better
   – debiased weights and thresholds –
4:   for each metric  $j$  do
5:      $\rho_j \leftarrow \sum_{l \neq j} |\text{Spearman}(M^c_{:,j}, M^c_{:,l})|$   $\triangleright$  summed rank-correlation
6:      $w_j \leftarrow 1/(1 + \alpha \rho_j)$   $\triangleright$  redundant metrics down-weighted
7:      $\theta_j \leftarrow \text{clip}(\text{quantile}_{1-\tau}\{|M^c_{aj} - M^c_{bj}| : a < b\}, [\gamma_{\min}, \gamma_{\max}] \text{MAD}_j)$   $\triangleright \approx \tau$  of pairs exceed  $\theta_j$ 
8:   end for
9:   normalize the weights so that  $\sum_j w_j = 1$ 
   – weighted endorsement graph (net pairwise dominance) –
10:   $E \leftarrow \emptyset$ 
11:  for each unordered pair  $\{a, b\} \subseteq V$  do
12:     $\Delta_j \leftarrow M^c_{aj} - M^c_{bj}$  for every metric  $j$ 
13:     $\nu \leftarrow \sum_{j: |\Delta_j| > \theta_j} \text{sign}(\Delta_j) w_j g(|\Delta_j|/\theta_j)$   $\triangleright$  net margin of  $a$  over  $b$ 
14:    if  $\nu \neq 0$  then
15:      add edge loser  $\rightarrow$  winner, weight  $|\nu|$   $\triangleright a$  wins iff  $\nu > 0$ 
16:    end if
17:  end for
   – PageRank centrality, then rescale –
18:   $p \leftarrow \text{PageRank}(E, \delta)$ ;  $\hat{d} \leftarrow |E|/(|V|(|V|-1))$   $\triangleright$  realized density,  $\hat{d} \leq 1/2$ 
19:  affinely map  $p$  over  $V$  onto  $[20+40\hat{d}, 100]$ , giving  $s^c$   $\triangleright$  top model scores 100
20:  assign each non-viable model a floor below  $\min_{i \in V} s^c_i$ 
21: end for
   – cross-cell aggregation –
22: for each model  $i$ :  $C_i \leftarrow \{c \in C : i \text{ evaluated on } c\}$   $\triangleright$  each model’s own coverage
23:  $s_i \leftarrow (\prod_{c \in C_i} \max(s^c_i, \varepsilon))^{1/|C_i|}$   $\triangleright$  clipped geo. mean; partial coverage not commensurable
24: return  $s$  and the ranking, breaking ties by model name  $\triangleright$  deterministic, input-order independent

```

high-memory card, because DoMINO’s footprint exceeds the 80 GB of an A100, and the 96 GB here accommodates every model with room to spare. The central empirical finding is twofold. Within a task, the best model often changes with the data scale, and across the benchmark no single architecture is best everywhere. This holds not merely because the tasks differ, but because rankings reorder with scale and dataset even among models that compete head-to-head, and both effects are obscured by conventional single-task, single-scale evaluation.

Table 5: Top-ranked model per task and data scale under the BenchRank quality view. The 1D scalar task is reported as two rows, one per model pool, namely tabular and time-series RUL.

Task	S	M	L	XL
1D scalar: tabular (Concrete, Airfoil)	TabPFN	TabPFN	TabPFN	NODE
1D scalar: time-series RUL (CMAPSS)	CNN-LSTM	TCN	TCN	DAST
2D image generation	VAE (Basic)	DDPM	DDPM	DDPM
2D scalar prediction	SimpleCNN	SimpleCNN	ConvNeXt-Tiny	ConvNeXt-Tiny
2D field prediction	U-Net++	U-Net++	U-Net++	FPN (ResNet-18)
3D geometry generation	DeepSDF	DeepSDF	DeepSDF	PointFlow
3D scalar prediction	Point Transformer-Small	DGCNN	Point Transformer-Small	Point Transformer-Small
3D field prediction	GeoFLARE	GeoFLARE	GeoFLARE	GeoFLARE

Note. The 3D-field winner GeoFLARE is a standalone model evaluated on DrivAerML only, so its pooled rank reflects narrower coverage than the full-coverage baselines and must be read per dataset, as detailed in Section 4.4. AB-UPT is additionally reported under a research license and excluded from the public leaderboard.

4.1 No Universal Winner

Table 5 reports the top-ranked model for each task at each data scale. No single architecture wins across tasks, and the top model changes as the training-set size grows in six of the seven tasks, 3D field prediction being the only exception. The 1D scalar task is reported as two rows, tabular regression on Concrete and Airfoil and time-series RUL on CMAPSS, because these span disjoint model sets, so a single pooled ranking would compare models that never competed head-to-head. A practitioner cannot, therefore, read a single “best model” off the benchmark. The right choice is conditioned on the task and the available data scale, which is precisely the decision support the leaderboard is designed to provide.

4.2 Data-Scale Crossovers and Small-Data Behavior

The benchmark’s controlled scales from S to XL expose data-efficiency effects that fixed-budget academic evaluations miss, as shown in Figure 3. In 3D geometry generation, DeepSDF is the most data-efficient generator on the well-behaved DeepJEB and DeepWheel shapes, attaining the lowest FPD there at the smaller scales. Its cross-dataset FPD in Figure 3(b) is nonetheless highest at scale S, inflated by its collapse on the non-watertight DrivAerNet cars, as detailed in Section 4.4. BenchRank ranks it first at the three smaller scales all the same, at S even though PointFlow’s aggregate FPD is far lower at 18 against 78, because DeepSDF wins the rest of the metric suite. PointFlow takes first at XL, where its broader distributional coverage, with cross-dataset mean recall 0.40 against 0.21 and coverage 0.49 against 0.35, combines with a now-lower FPD. This is a case in which a single headline metric and the full-suite ranking disagree. In 2D image generation, the ordering inverts, since a VAE leads at S while the diffusion model DDPM takes over from M onward, consistent with diffusion models’ known appetite for data. In 3D scalar regression, capacity-reduced variants lead almost throughout, with Point Transformer-Small first at every scale but M and PCT-Small first on the DeepJEB structural response at S, in a regime where their full-capacity counterparts tend to collapse toward mean prediction. The same scale-dependent orderings recur across the prediction tasks, as shown in Figure 4. These crossovers are the kind of finding the benchmark is built to surface.

The scaling curves also expose non-monotonic behavior that a converged model should not exhibit. For several generators a quality metric worsens as the training set grows. Examples are GAN (Basic) on the DeepJEB 2D images, where FID rises from 164.3 at M to 179.8 at L, DeepSDF on DeepJEB 3D shapes, where FPD rises monotonically from 7.5 at S to 17.7 at XL, and 3D-GAN, whose cross-dataset FPD rises from 38 at L to 100 at XL. Since more data ought not to degrade a well-trained generator,

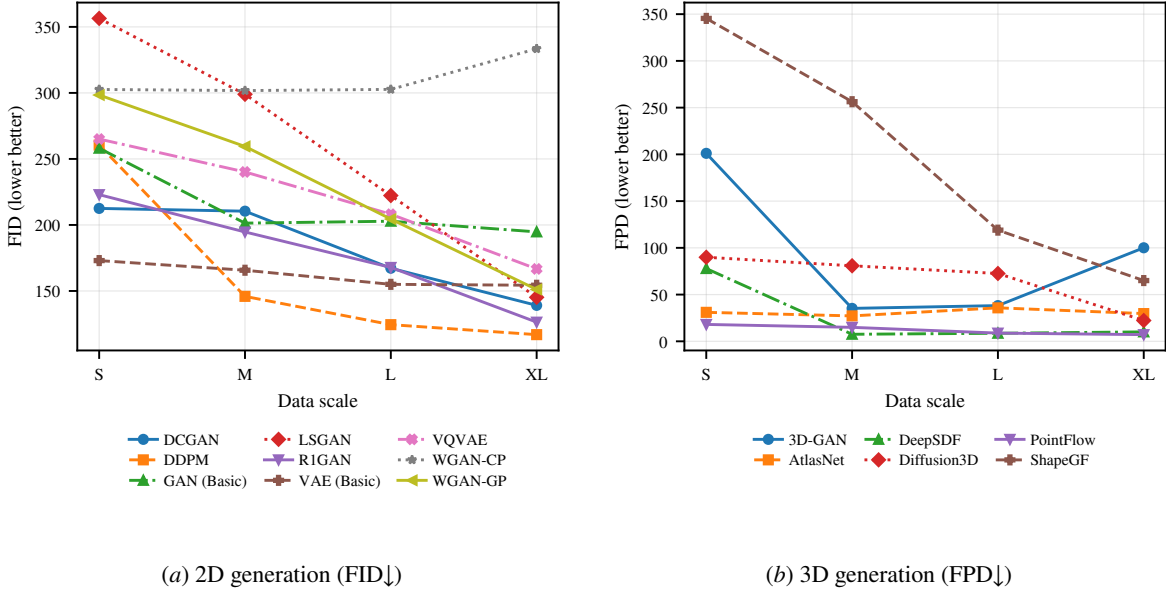


Figure 3: Primary metric versus data scale, one line per model, for (a) 2D generation, scored by FID, and (b) 3D generation, scored by FPD. Prediction-task trajectories are in Figure 4.



we read these reversals as symptoms of training instability rather than as data-efficiency findings. The 2D case survives repetition at further seeds, which makes it a property of the model rather than of one draw. We therefore present scale-dependent orderings as indicative, and flag the affected cells rather than over-interpret them.

4.3 Efficiency–Accuracy Trade-off

Because parameter count and run time are ranked metrics, the benchmark also exposes the efficiency frontier in Figure 5, and the efficiency view re-ranks models once cost is counted. The frontier is task-dependent. In scalar regression, parameter count is a poor proxy for utility in the small-data regime, and the capacity-reduced backbones Point Transformer-Small at 0.8M and PCT-Small at 0.4M sit on or near the frontier, dominating their full-capacity counterparts. On DrivAerML 3D field prediction, where the large standalone operators compete on a common dataset, the ≈ 26 M GeoFLARE leads the ranking at every scale while the larger ≈ 29 M GeoTransolver follows and the comparably large ≈ 24 M DoMINO trails both, and the much smaller official AB-UPT at ≈ 8.8 M sits with the Transolver family well behind them at scale S before climbing past DoMINO into third place from M onward. At XL, AB-UPT reaches the best pooled R^2 of the whole set at under a third of the parameters of the models that outrank it, as detailed in Section 4.4, so larger is not reliably better even within one task. Cross-dataset efficiency must be read with care, because models with partial dataset coverage are not directly comparable, again as detailed in Section 4.4. The cost-justified choice depends on the task and the data scale, which the efficiency view makes explicit.



4.4 Per-Task Results

We summarize each task. Full leaderboards for all datasets and scales, in both the quality and the efficiency view, accompany the benchmark.

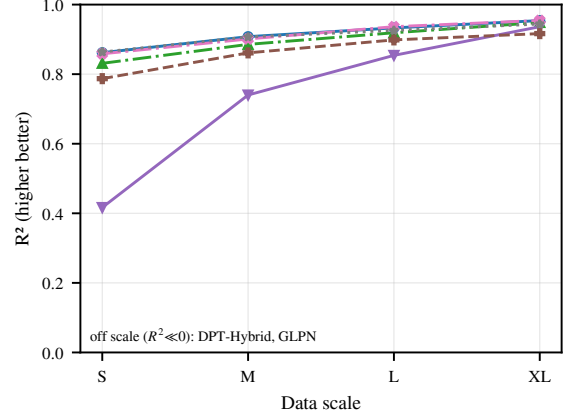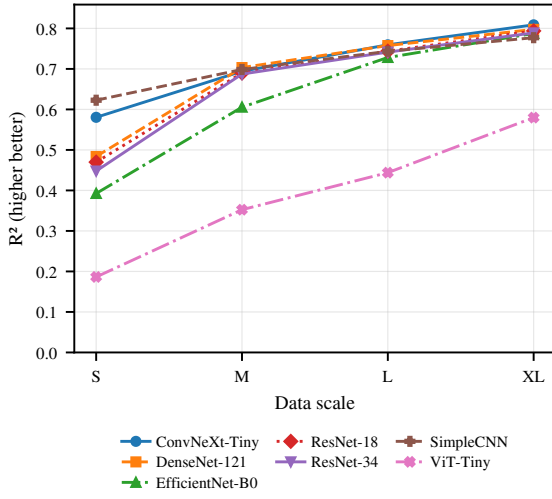

(a) 2D scalar prediction ($R^2 \uparrow$)

(b) 2D field prediction ($R^2 \uparrow$)

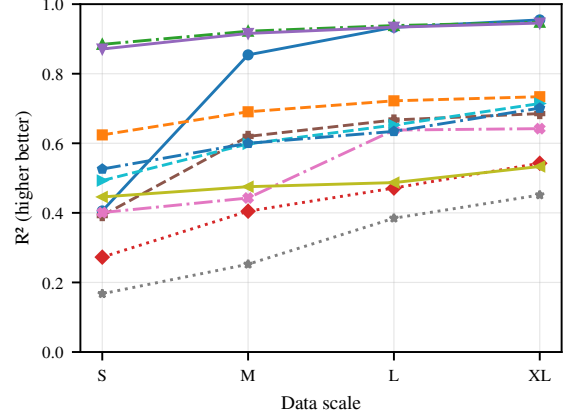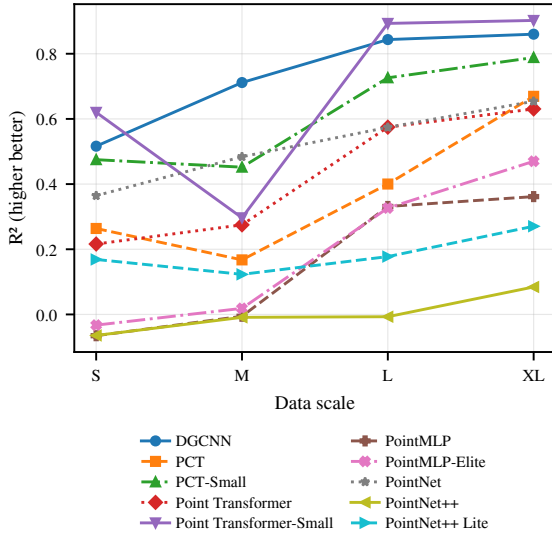


(c) 3D scalar prediction ($R^2 \uparrow$)

(d) 3D field prediction ($R^2 \uparrow$)


Figure 4: Primary accuracy R^2 versus data scale from S to XL, one line per model, for the prediction tasks, namely (a) 2D scalar, (b) 2D field, (c) 3D scalar, and (d) 3D field. Each panel is a cross-dataset aggregate.

4.4.1 Field Prediction

3D field prediction must be read per dataset, because four of its models have non-uniform coverage. The standalone GeoFLARE, GeoTransolver, DoMINO, and the official AB-UPT are evaluated on DrivAerML only, which is the automotive-aero dataset they were developed for, while the Transolver family, RegDGCNN, GeoFNO, LinearNO, and PointNet are evaluated across all 3D-field datasets. On DrivAerML, where these models compete on a common dataset, GeoFLARE leads at every scale, as shown at scale S in Table 6, with GeoTransolver second throughout. DoMINO is third at that scale and AB-UPT takes the place from M onward, with the Transolver family behind both. The leading three

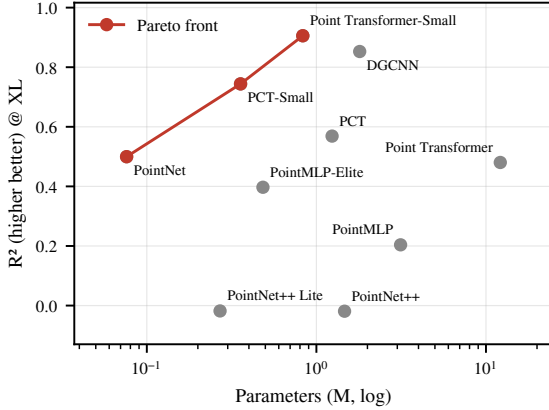

(a) 3D scalar prediction (DeepWheel)

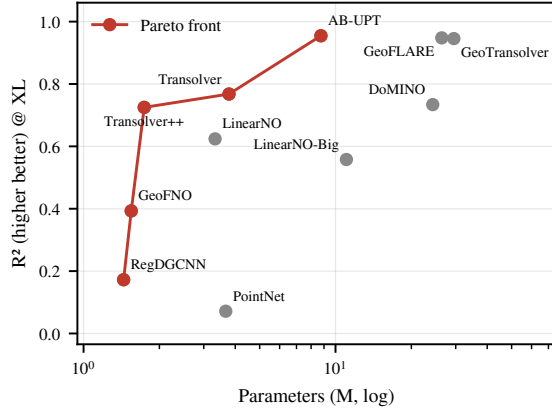

(b) 3D field prediction (DrivAerML)

Figure 5: Parameters versus accuracy, given as R^2 at scale XL, for two 3D tasks. The red curve marks the Pareto frontier, with (a) 3D scalar prediction on **DeepWheel** and (b) 3D field prediction on **DrivAerML**.

separate decisively, whereas ranks six through eight sit within 0.75% and 0.36% of total score of one another, and the three models below the printed top-eight cut fall within 1.6 points of rank six. That band is a near-tie of the kind [Appendix B](#) shows a reweighting can reorder, so we do not read an order within it. GeoFLARE and GeoTransolver share a geometry encoder and differ in how the latent tokens mix, since GeoFLARE substitutes FLARE low-rank self-attention for the physics-attention slices of its sibling. The substitution wins on accuracy at 26.41M parameters against 29.49M and at broadly comparable training cost, roughly two thirds of its sibling’s on the surface configuration but about a quarter more on the volume one, which makes it the clearest case in the benchmark of an attention mechanism, rather than capacity or geometry handling, carrying the improvement. That advantage is largest where data is scarcest. Averaged over the DrivAerML cells, GeoFLARE’s improvement in relative L_2 over its sibling falls monotonically from 8.4% at scale S to 6.4% at M, 4.4% at L, and 2.2% at XL, so the newer attention buys most in the small-data regime and the two converge as data accumulates. This DrivAerML board pools the surface and volume configurations, so its MAE and RMSE average components of differing physical units and are read as relative magnitudes rather than a single physical error. The pooled ordering also hides a split between the two configurations. On volume, GeoFLARE is first at every scale. On surface it is first at the two smaller scales, whereas GeoTransolver recovers the lead at L and XL even though GeoFLARE retains the better squared error there, the two being separated by at most 0.001 in R^2 and the ranking turning instead on percentage error and sign agreement. At the largest scale AB-UPT attains the best pooled R^2 of 0.955, against 0.946 for GeoTransolver and 0.948 for GeoFLARE, yet places third once the full metric set is aggregated, a reminder that a single accuracy statistic and a multi-metric ranking need not agree. All models are scored on the same seeded 8192-point query set, but their geometry encoders ingest their published input. The Transolver family, GeoFNO, LinearNO, PointNet, and AB-UPT encode the same 8192-point sample, whereas GeoFLARE and GeoTransolver sample 50k surface points and DoMINO encodes the full mesh, so the common accuracy axis compares predictions at identical query points, not identical geometry-input budgets. AB-UPT’s largest-scale accuracy is therefore reached at the same 8192-point budget as the transformers ranked above it and is not an input-resolution artifact, while GeoFLARE, GeoTransolver, and DoMINO additionally benefit from the richer geometry their architectures are built to consume. On the DeepJEB structural load cases and DrivAerNet center-plane, the Transolver family and RegDGCNN lead the common-coverage set.

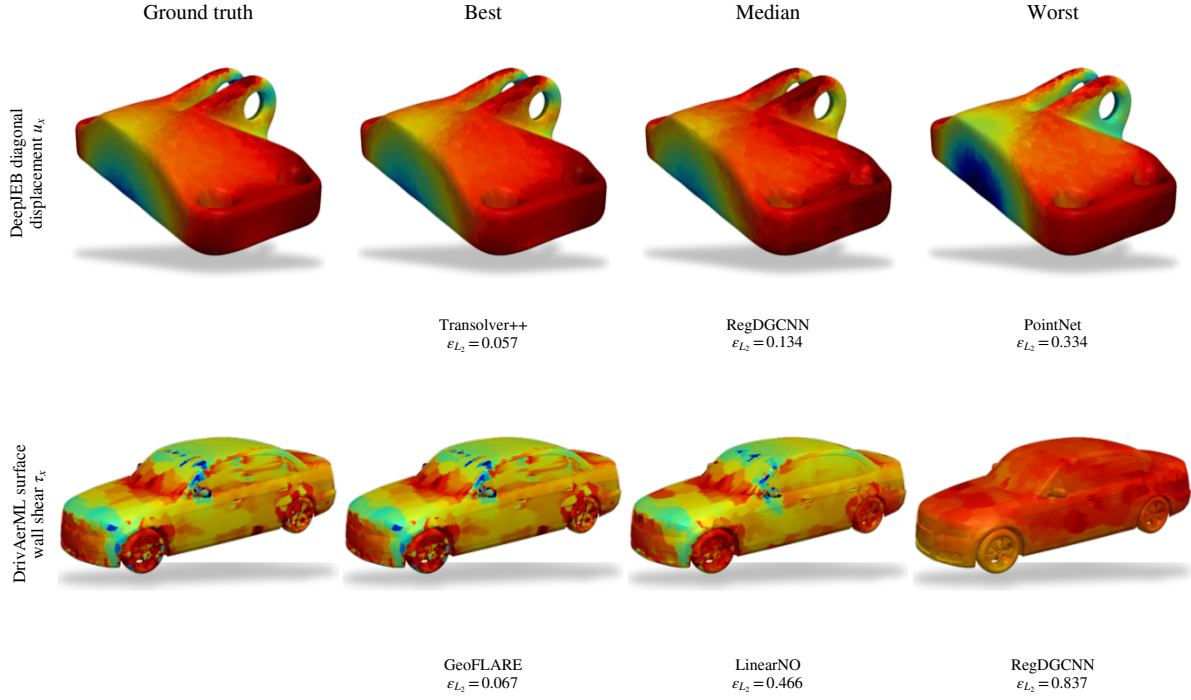


Figure 6: Qualitative 3D field prediction at scale XL. Each row shows the ground truth and the best-, median-, and worst-performing model on one held-out sample, for DeepJEB diagonal-load displacement u_x on top and DrivAerML surface wall shear τ_x below. Models are ordered by their relative L_2 error over all components of the solve and labelled with ϵ_{L_2} for the component shown. Each row shares one jet color scale, and every model predicts the same seeded query set on the identical geometry.

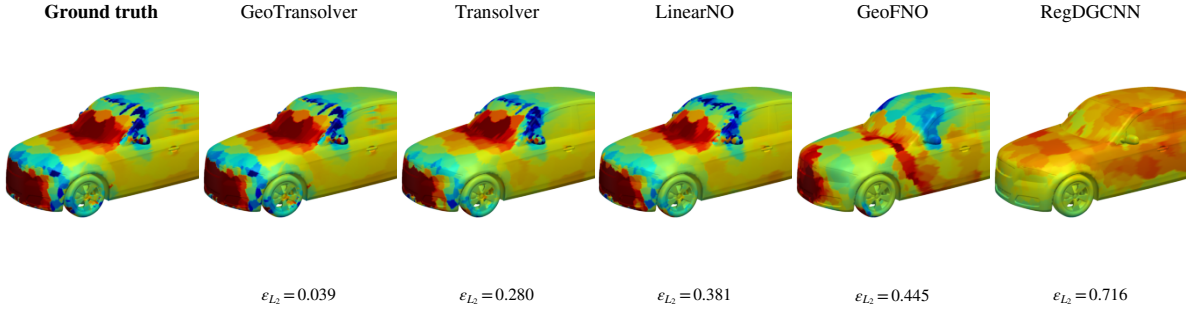


Figure 7: Local view of the DrivAerML surface-pressure case at scale XL. The ground truth is at left, followed by five models ordered best to worst from left to right by relative L_2 error.

We therefore do not read the pooled cross-dataset aggregate, in which GeoFLARE, GeoTransolver, and AB-UPT top the high-data scales, as evidence of uniform superiority. Their pooled rank reflects narrower, easier coverage that omits the hardest DeepJEB cases. Across the 3D-field datasets, the gap between operators and point/graph baselines is largest on the coupled displacement/stress and modal problems, where the Modal Assurance Criterion and sign/extremal-agreement metrics separate physically faithful predictions from those that merely minimize pointwise error. The two co-produced quantities are also not equally learnable. Every model attains a lower relative error on displacement than on stress in all

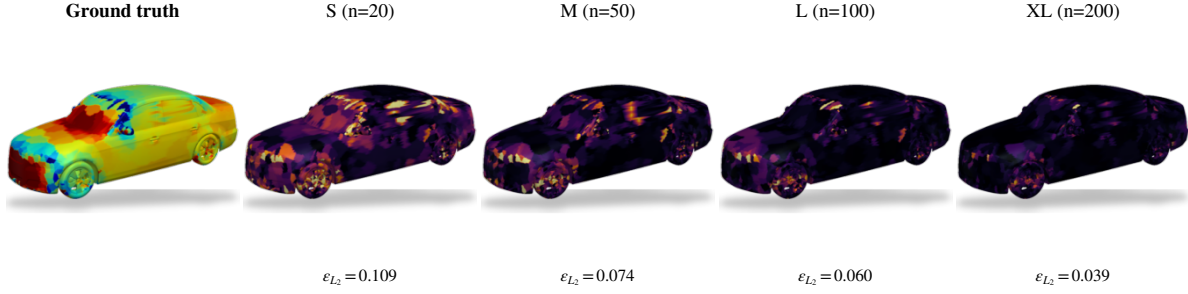


Figure 8: Field prediction error versus data scale on the DrivAerML surface-pressure case. The ground-truth pressure field is at left in jet, and the remaining panels map the absolute error $|\text{pred} - \text{GT}|$ of GeoTransolver on the same held-out car for the model trained at scale S through XL, on one shared error scale where darker is lower error. Each panel is labelled with its relative L_2 error ϵ_{L_2} .

sixteen combinations of four load cases and four data scales, and at scale XL the best model reaches R^2 of 0.93 to 0.98 on displacement against only 0.76 to 0.83 on stress, so a target-level average of the two reports an accuracy neither channel attains, which the component ranking level exists to expose. On the modal problem every model scores $R^2 < 0$, worse than mean prediction, at all four scales, and the task is never learned regardless of data size. We deliberately report and rank these cells rather than hide them. An all- $R^2 < 0$ result is itself decision-relevant, since it tells a practitioner that no model in the pool solves this task at this scale, while the relative order among the failed models is flagged as indicative only. Figure 6 contrasts the best-, median-, and worst-ranked model on one DeepJEB displacement and one DrivAerML wall-shear case. The best model tracks the reference almost exactly on the raw engineering geometry, at relative L_2 error ≈ 0.06 and 0.07 for the two rows, while the worst washes out the field structure entirely, so the leaderboard ordering is visible directly and not only in the aggregate metrics. In the wall-shear row that failure is unmistakable, since the worst model returns a near-uniform field and loses both the high-shear bands over the windscreen and roof and the reversed-flow patches at the wheel wakes and the base, which the sign of τ_x separates. The two rows are the diagonal load case, which is the hardest of the DeepJEB cases for the best model at every scale, and wall shear, which is harder than the pressure field of the same solve for every model in the pool, so the figure understates rather than flatters achievable accuracy. Figure 7 zooms the DrivAerML surface-pressure case to the front region and shows that the residual is structured, concentrated at the front-stagnation region and wheels and recovered only by the strongest models. The analogous DeepJEB residual concentrates at the bracket bolt holes. Figure 8 isolates the data-scale axis on the same DrivAerML surface-pressure case, where one of the two strongest models, GeoTransolver, already predicts the field well at every scale, so the gain shows most clearly in the absolute-error map, which contracts as data grows while the relative L_2 error falls roughly threefold, from 0.11 at scale S to 0.04 at XL, the qualitative counterpart of the R^2 -versus-scale trajectory in Figure 4(d). In 2D field prediction, five of the eight models take the top spot at some scale or dataset, with U-Net++, Attention U-Net, and FPN (ResNet-18) trading it most often. Achieved accuracy varies widely across the four datasets even at the smallest scale. At S the best model reaches $R^2=0.96$ on the single-channel AirFRANS flow field p/ρ and 0.93 on the structural stress field, 0.82 on Darcy pressure, and only 0.66 on monocular depth for DeepWheel. Because each target is normalized differently, and because depth is scored on a foreground mask as described below, these R^2 are an achieved-accuracy spread, not a strict cross-dataset difficulty ranking. For depth, the regression metrics are computed on a foreground mask so that the large constant background cannot inflate scores. The background is roughly half the frame, so without this correction a model is rewarded for trivially

Table 6: 3D field prediction on **DrivAerML** at scale S, quality view, top 8, pooled over the surface and volume configurations. AB-UPT is reported under a research license and excluded from the public leaderboard.

Rank	Model	Total Score	MAE ↓	RMSE ↓	MAPE (%) ↓	R^2 ↑	Rel-L2 ↓	MAC ↑	Sign Agree ↑	Extremal Agree ↑
1	GeoFLARE	100.00	2.78	4.88	48.02	0.88	0.28	0.97	0.89	0.87
2	GeoTransolver	89.03	3.15	5.58	50.04	0.87	0.30	0.97	0.89	0.86
3	DoMINO	57.37	10.51	18.29	77.53	0.62	0.54	0.71	0.81	0.67
4	AB-UPT	40.29	12.62	18.77	116.06	0.41	0.72	0.63	0.71	0.47
5	Transolver++	39.00	13.86	21.28	116.54	0.36	0.74	0.60	0.70	0.42
6	LinearNO-Big	36.21	12.99	20.13	138.30	0.23	0.82	0.54	0.64	0.33
7	Transolver	35.94	13.32	20.48	136.87	0.24	0.82	0.54	0.64	0.34
8	LinearNO	35.81	14.54	21.87	137.76	0.23	0.82	0.54	0.64	0.37

predicting it, which illustrates how an engineering-appropriate metric definition changes the ranking. The DeepJEB structural problem additionally exposes a displacement target alongside stress. The same U-Net and FPN leaders learn it cleanly, with six of the eight models reaching $R^2 > 0.9$ at scale XL, while DPT-Hybrid trails the field at 0.37 after scoring below zero on displacement at every smaller scale, down to $R^2 \approx -8$ at S. The 2D-field task also yields one of the benchmark’s sharpest reversals of conventional wisdom, with a nuance a single-task evaluation would miss. The smallest model is the most reliable, and the largest pretrained ones are erratic. The 7.8M from-scratch U-Net is uniformly strong across all four 2D-field datasets, reaching $R^2 = 0.57\text{--}0.99$, whereas the 122.4M depth-pretrained DPT-Hybrid, a MiDaS model, and the 61.2M GLPN are erratic across channels. Both collapse to $R^2 < 0$ at every scale on the Darcy-pressure field, down to $R^2 \approx -10$, and on the AirfRANS eddy-viscosity channel, far worse than predicting the mean field, and DPT-Hybrid additionally falls below zero on both DeepJEB structural channels at the smaller scales. Each is nonetheless strong on some targets, GLPN reaching $R^2 > 0.9$ on the AirfRANS velocity components at the larger scales and DPT-Hybrid taking the top rank on monocular depth at S, so neither is uniformly weak and neither is uniformly reliable. In this small-data engineering-field regime, parameter count and large-scale natural-image pretraining are not generic advantages, since they help only within-domain. This is a direct inversion of the dense-prediction intuition that bigger, depth-pretrained transformers transfer best, and exactly the kind of result a single-task academic evaluation would not surface. Figure 9 shows ground-truth and predicted fields for the four 2D-field datasets, on the real geometries the benchmark targets, showing for AirfRANS the streamwise velocity, the most legible of its four channels, and for DeepJEB the stress field, the harder of its two structural targets.

4.4.2 Scalar Prediction

Scalar regression most sharply exposes small-data behavior. In 3D, on DeepWheel mass and modal, a compact point backbone leads at scale S, namely a capacity-reduced Point-Transformer variant on both, at $R^2 \approx 0.60$, while full-capacity transformers collapse toward mean prediction. By scale XL the same tasks are largely solved, at $R^2 \approx 0.93$ for mass and 0.89 for modal, a data-efficiency trend overall, though the intermediate scales remain the least settled stretch of the curve in Figure 4(d). The same capacity-driven pattern recurs on the **DeepJEB** coupled structural response, where displacement and stress are predicted jointly from a single checkpoint, from 2D-image and 3D-point-cloud inputs. Compact point and image backbones lead, reaching $R^2 \approx 0.9$ in 3D at scale XL, while the full-capacity PointNet++ collapses to mean prediction at the three smaller scales and recovers only to $R^2 = 0.24$ at XL. The 1D tabular tasks show a complementary pattern. On Concrete at $n=20$, the in-context foundation model TabPFN leads at $R^2 = 0.61$, with FT-Transformer, random-forest, and Gaussian-process close behind, whereas LightGBM collapses to the mean at $R^2 \approx 0$ and falls below the top-8 shown in Table 7. The

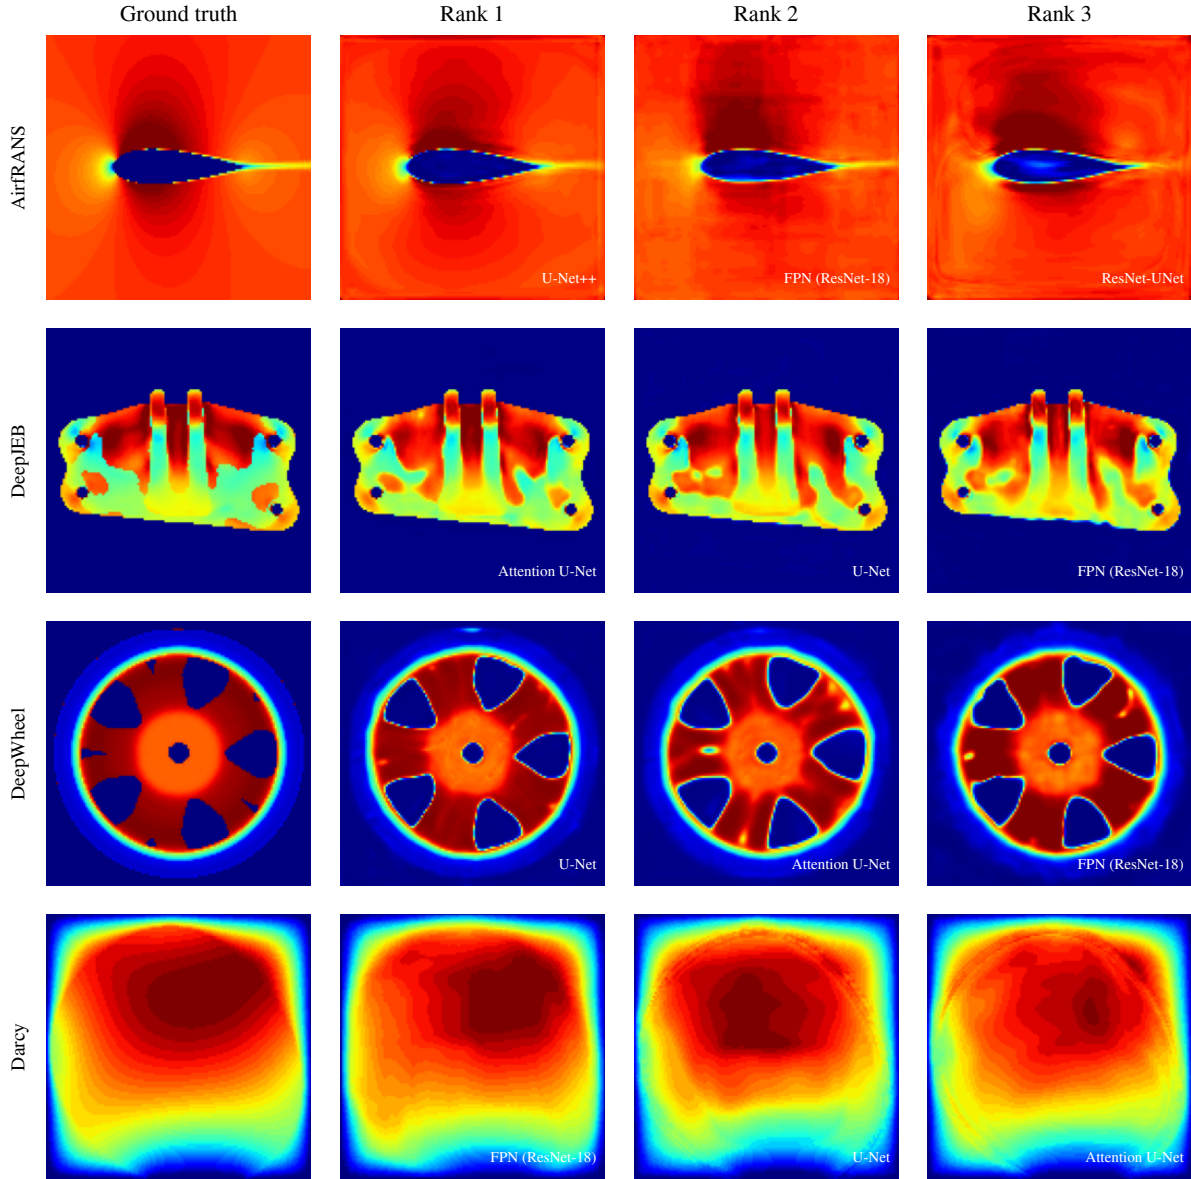


Figure 9: Qualitative 2D field prediction at scale XL. Each row shows ground truth and the top-three ranked models on one test sample per dataset, for AirfRANS: streamwise velocity u , DeepJEB: stress, DeepWheel: depth, and Darcy: pressure. Ranks are those of the field shown, not of the dataset aggregate over all of its targets. Each row shares a jet color scale, and the model is named in each panel.

other gradient-boosted baseline, XGBoost, reaches $R^2=0.51$, and the from-scratch deep models MLP and TabNet trail at $R^2=0.35$ and 0.31 , so the small-sample regime inverts the usual tabular ordering. On Airfoil the lead rotates through Ridge, TabPFN, FT-Transformer, and the MLP as the scale grows. Across the pooled tabular scales the top model shifts from TabPFN at the three smaller sizes to the deep NODE model at XL, as the per-scale trajectories in Figure 10 show, and no gradient-boosted model leads at any scale, because even the XL size of 200 rows stays below the regime where boosted trees overtake in-context and deep learners. On CMAPSS remaining-useful-life, no model exceeds $R^2 \approx 0$ at

Table 7: 1D tabular regression on Concrete at scale S, with $n=20$, quality view, top 8, showing the complete ranked metric set for scalar prediction.

Rank	Model	Total Score	MAE ↓	RMSE ↓	MAPE (%) ↓	R^2 ↑	Rel-L2 ↓	MaxAE ↓	Pearson ↑	Spearman ↑
1	TabPFN	100.00	8.43	10.38	27.07	0.61	0.27	31.83	0.79	0.79
2	FT-Transformer	55.30	8.64	10.91	27.44	0.57	0.28	34.63	0.78	0.80
3	Random Forest	44.53	9.19	11.32	29.69	0.54	0.29	33.69	0.76	0.75
4	Gaussian Process	44.19	9.09	11.53	29.23	0.52	0.29	33.17	0.73	0.73
5	NODE	41.19	9.27	11.61	29.56	0.52	0.30	37.91	0.72	0.74
6	XGBoost	41.10	9.20	11.74	29.80	0.51	0.30	39.28	0.75	0.77
7	Ridge	39.59	9.54	12.29	29.84	0.46	0.31	44.29	0.69	0.73
8	MLP	37.52	10.62	13.50	34.77	0.35	0.35	41.85	0.64	0.64

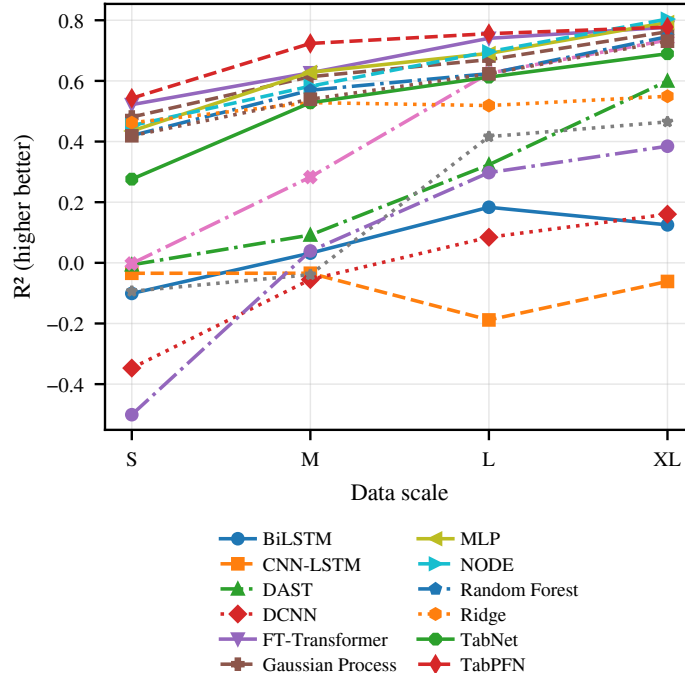


Figure 10: Primary accuracy R^2 versus data scale for 1D scalar prediction, one line per model. The tabular models are scored on Concrete and Airfoil pooled and the time-series models on CMAPSS, so the two pools share the axis without competing.

scale S. The best sit near zero and the weakest fall to $R^2 \approx -0.5$, because 20 run-to-failure engines is barely above mean prediction for a 543×24 time-series, with separation emerging only at larger scales. Here it is the rank-correlation metrics Pearson and Spearman, which a constant predictor cannot satisfy, that prevent a mean-collapsing model from appearing competitive on error-only metrics. The viability gate itself is configured for the generation tasks, as described in Section 3.5, and does not act on these regression cells.

4.4.3 Generation

The generation tasks display the clearest data-scale crossovers. In 2D image generation, a VAE ranks first at scale S on all three datasets, but the diffusion model DDPM takes the top rank from M onward and at XL. This is a reminder that BenchRank rewards distributional coverage and diversity, not FID alone,

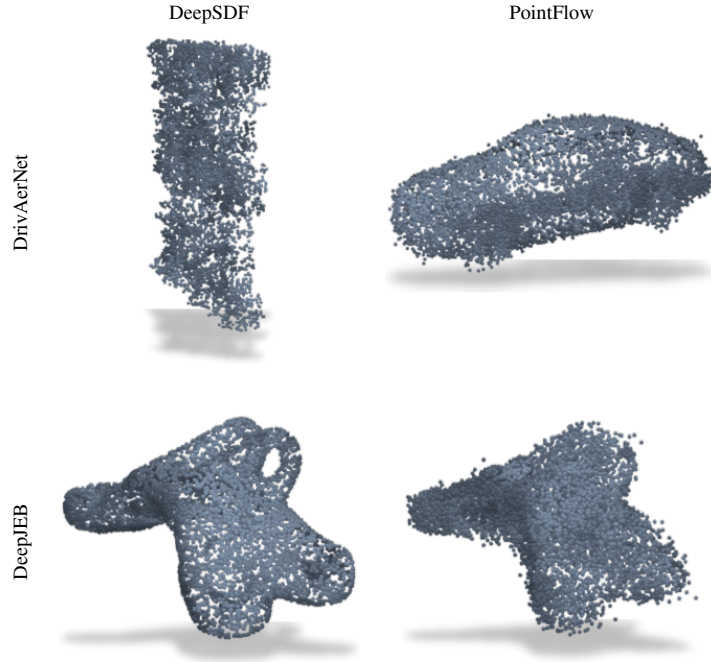


Figure 11: Qualitative 3D geometry generation at the smallest scale, with $n=20$. Point clouds from the SDF auto-decoder DeepSDF and the continuous-normalizing-flow generator PointFlow on two datasets, namely DrivAerNet cars and DeepJEB brackets.

so the best single-metric model is not always the best-ranked one. DeepWheel is the hardest 2D domain throughout. Its thin spoke structures, chrome specularity, and near-achromatic renders keep FID high for every model, and the top-ranked model’s FID stays ≈ 143 at XL against ≈ 79 on DrivAerNet, which the benchmark surfaces as an intrinsic data difficulty rather than a model defect. In 3D geometry generation, the SDF model DeepSDF is the most data-efficient on the well-behaved DeepJEB and DeepWheel shapes, with the lowest FPD at the smaller scales, while PointFlow tops the cross-dataset ranking at XL. The most striking case is DrivAerNet. Its non-watertight car meshes give the signed-distance field an ill-posed inside/outside target, and because DeepSDF generates by sampling a Gaussian mixture fit to its learned latent codes, as described in Section 3.3, at scale S that mixture is estimated from only twenty shapes. The two effects together collapse its samples to a flat sheet at $\text{FPD} \approx 221$, whereas PointFlow, which has a native sampling prior, stays robust at $\text{FPD} \approx 9$. This is a data-starved generation failure, not a failure to reconstruct, and the per-scale, per-dataset leaderboard surfaces it directly. Figure 11 makes the contrast visible. On DrivAerNet DeepSDF collapses to a flat sheet while PointFlow recovers a car, yet on the well-behaved DeepJEB bracket DeepSDF is the cleanest generator. Beyond FPD, the two structural metrics expose independent failures. On DeepWheel AtlasNet keeps $\text{Manifold-}\Delta$ low at ≈ 0.01 – 0.02 , giving locally clean 2-manifold patches, yet its $\text{Uniformity-}\Delta$ runs over an order of magnitude higher than DeepSDF’s, at 0.23 – 0.30 against ≤ 0.01 , because its patch decoder clumps points along seams. This is a non-uniformity that FPD and $\text{Manifold-}\Delta$ both miss and that $\text{Uniformity-}\Delta$ is designed to expose.

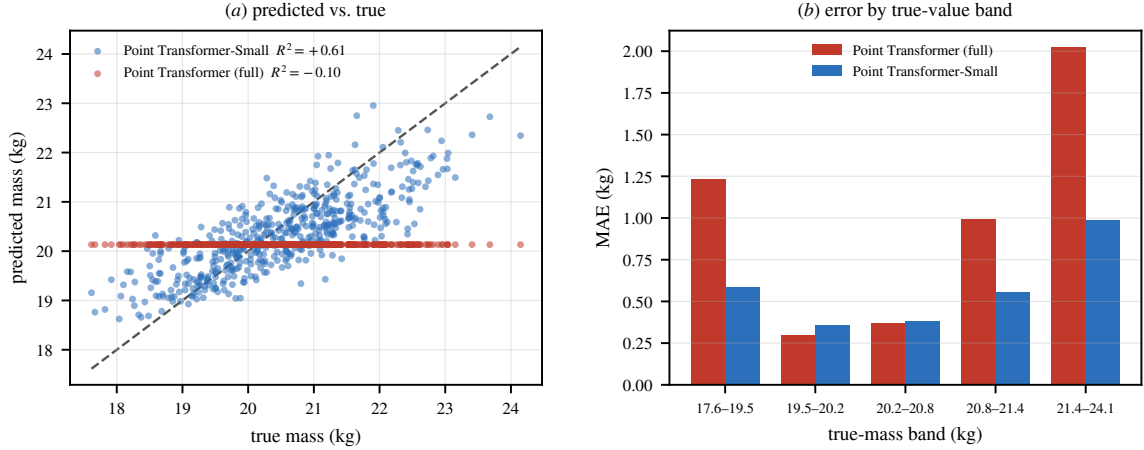


Figure 12: Capacity-driven mean collapse on DeepWheel mass at scale S, for Point Transformer at 12.1M parameters against its capacity-reduced sibling Point Transformer-Small at 0.8M.

4.5 Academic vs. Industrial Performance

Taken together, the results show that an architecture’s standing at large academic scale is a weak predictor of its standing in the small-data, real-geometry regime that engineers face. We take that academic standing as reported in the originating publications, which we treat as a qualitative reference rather than re-measure here. Architectures that headline academic leaderboards are frequently not the best choice at scale S. These include diffusion models for generation, high-capacity or heavily pretrained transformers for regression, and implicit SDF generators on watertight benchmark shapes. At scale S they are beaten by a VAE, by capacity-reduced, classical, or from-scratch convolutional models, and by a flow model on non-watertight geometry, respectively. Figure 12 illustrates the mechanism on one controlled pair. The full-capacity Point Transformer and its capacity-reduced sibling Point Transformer-Small differ only in width, yet on DeepWheel mass at scale S the full model collapses to the mean and ignores the geometry, emitting a prediction with no variance at all, while the smaller model recovers the true value, with the error concentrated in the tails where a mean prediction is most wrong. We attribute this primarily to the data-scale effect, which we vary directly. We do not claim to isolate a distinct “industrial-domain” effect, since scale and data domain are not varied independently here, and we run no academic-scale or academic-domain control on the same models. Disentangling them is left to future work. The actionable conclusion is conservative but firm. Rankings do not transfer across data scale and must be measured. This is the core of PhysicsBench’s decision-support thesis. Rather than a universal champion, the benchmark delivers a per-task, per-scale recommendation grounded in the conditions engineers actually face, and a reproducible procedure for re-deriving it as data, models, and scales change.

Anti-Trend Cases Are Genuine

A few models buck the prevailing trend in which more data yields better results, and we audited each to confirm it is genuine model behavior in this regime rather than a pipeline artifact. On 2D fields, the depth-pretrained GLPN collapses to negative R^2 on the Darcy-pressure field and on the AirfRANS eddy-viscosity channel at every scale, even while it reaches $R^2 > 0.9$ on the AirfRANS velocity components at the larger scales and stays mid-pack on the DeepJEB structural channels. This is genuine per-field negative transfer on those targets, not a loading fault, and its pretrained weights load correctly.

On the smallest 3D scalar tasks the full-capacity Point Transformer and PCT transformers collapse toward mean prediction, and the reduced Point Transformer variant dips at the intermediate scale M before recovering. This is the capacity-data mismatch that motivates the capacity-reduced variants we include. In generation, 3D-GAN degrades at the largest 3D scale owing to GAN training instability, and weight-clipping WGAN-CP trails at the larger 2D scales, the documented weakness of weight clipping relative to gradient-penalty WGANs. In every case the per-scale leaderboard surfaces the behavior rather than hiding it, as seen in Figure 4.

Worked Example

Concretely, a practitioner facing the DeepJEB structural field problem with roughly 100 high-fidelity simulations, which is the L bucket, reads that dataset’s own 2D-field L leaderboard. On this dataset, and unlike the pooled winner reported in Table 5, FPN (ResNet-18) with 15.6M parameters ranks first in the quality view, ahead of the 8.0M Attention U-Net and the 7.8M U-Net, so it is the default recommendation. Notably the FPN’s lead comes from higher structural similarity, with SSIM 0.89 against 0.84 and 0.82, even though Attention U-Net has marginally better pixel PSNR at 28.8 against 27.9, a marginally better R^2 at 0.95 against 0.94, and equal MAE 0.02. This is exactly the field-fidelity-over-pixel-error tradeoff the suite is built to expose. If that model must run inside a design-optimization loop on a single workstation GPU, the practitioner switches to the efficiency view, which counts parameters and run time. That view reorders the same three models, promoting Attention U-Net to first and U-Net to second while FPN falls to third, because the two smaller models match or beat FPN on every ranked quality metric except SSIM, at half the parameters. The benchmark does not return “the best model” in the abstract. It returns the model whose accuracy and cost fit this task at this scale, and it lets the practitioner re-run the recommendation as the dataset grows. We stress that the chosen margin, meaning how much accuracy a practitioner will trade for efficiency, is a deployment decision the leaderboard informs but does not make.

5 Conclusion

We introduced PhysicsBench, a unified benchmark and leaderboard, deployed as the Engineering AI Leaderboard, that evaluates generative and predictive models under a single standardized procedure on industrial engineering datasets, across seven tasks spanning 1D, 2D, and 3D domains and a controlled range of data scales. PhysicsBench couples industrial and public CAD/CFD/FEA data with a common metric suite and BenchRank, a debiased graph-based ranking in which every reported quality metric is also a ranked metric and computational cost is reported separately in an efficiency view. Each family is ranked within its own tasks rather than head-to-head against the other. The central findings are that no single model dominates across tasks and that the best model frequently changes with the available data scale. A useful recommendation is therefore conditioned on both the task and the data budget rather than on a universal best model. By measuring competing models under common industrial conditions with a debiased and reproducible ranking, PhysicsBench turns “state-of-the-art” from a self-reported claim into an openly published result that engineers can build on.

5.1 Limitations

Several limitations bound the present study and frame its claims. **Statistical.** The reported value is the mean over a cell’s repeated training runs, and that basis is fixed per task rather than per model, since ranking averaged models against un-averaged ones would remove the run-to-run luck from some

competitors and not others. Five of the seven tasks are reported on that mean, and 3D generation and 3D field prediction fall back to the single baseline run because their rerun sets are incomplete, as Section 3.3 details. The leaderboards carry no per-cell confidence intervals, and the training run is examined separately in Appendix B. Closely-spaced ranks may therefore lie within run-to-run noise, and those crossover narratives should be read as indicative. Several generators also show non-monotonic scaling, in which a quality metric worsens as the training set grows, as reported in Section 4.2. A converged model should not exhibit this behavior. Where the reruns exist, the effect survives averaging and is therefore a property of the model rather than of one draw. Where they do not, part of the swing may still be run-to-run. We deliberately retain these anomalies in the published results rather than smoothing them over, and broadening the repeated-run coverage remains open work. **Ranking.** BenchRank’s hyperparameters, namely target dominance-graph density, redundancy strength, PageRank damping, and the viability-gate threshold, are fixed by construction. A post-hoc sensitivity study in Appendix B shows that the rankings are largely insensitive to them, with mean Kendall $\tau=0.98$ under $\pm$ perturbation and rank-1 stable in 95% of cells, and positively but not perfectly correlated with simpler normalized-mean and Borda aggregators. That study is post-hoc and does not cover an Elo-style aggregator or the viability-gate threshold. The [0, 100] Total Score is an ordinal, within-task-and-scale normalization anchored at 100 for the top model, not a cardinal or cross-task-comparable quality measure. **Coverage.** Some tasks rest on a single dataset, a few coupled problems are scored on a single output channel, and the smallest scales can leave certain tasks near mean prediction, as in remaining-useful-life regression with only tens of trajectories. Four standalone 3D-field models, GeoFLARE, GeoTransolver, DoMINO, and the official AB-UPT, are evaluated on DrivAerML only, so the pooled cross-dataset 3D-field aggregate mixes models of differing coverage and must be read per dataset, as detailed in Section 4.4. License constraints exclude some recent models from the public leaderboard, though the models remain fully evaluable for research and we report their measured metrics. A substantial fraction of the evaluation cells, all of the DeepWheel and DrivAerNet tasks, rests on CC BY-NC data. This license permits the academic evaluation reported here but not commercial redistribution, so while the PhysicsBench methodology and evaluation procedure transfer directly to commercial practice, a commercial adopter would re-apply them to its own or permissively-licensed data before deploying the resulting models. **Governance.** As a vendor-hosted “living” leaderboard whose authors also contribute datasets and, internally, models, the platform depends for its long-term value on maintenance, versioned “as-of” rankings, and anti-gaming validation of contributed results. We exclude all author-affiliated in-house models from publication regardless of their measured rank, so the policy applies whether an in-house model would have won or lost, but a fuller governance and conflict-of-interest policy is needed. Finally, rankings reflect the fixed training budgets and metric suite adopted here, and alternative budgets or metrics could reorder closely-spaced models.

5.2 Future Work

Natural extensions include broadening dataset and task coverage, multi-channel field prediction, surface-cleanliness and downstream CAD/B-rep convertibility metrics for generated geometry, continuously updated rankings as new models are contributed, and moving from passive ranking toward an agentic recommendation that selects a model given a task, a dataset, and resource constraints. Among these, the agentic recommendation is the most immediately promising direction for future research, since it turns a published ranking into an answer to the question an engineer actually asks. Widening the repeated-run coverage would place every task’s scale-dependent findings on the same statistical footing.

Acknowledgment

This work was supported by grants from the Ministry of Science and ICT (GTL24033-000, N10250154, and No. 2022-0-00986), the Ministry of Trade, Industry and Energy (RS-2025-02317327 and RS-2025-25444634), the Ministry of Oceans and Fisheries (PET0050), and Korea Hydro & Nuclear Power Co., Ltd. (No. 8-Tech-07).

Conflict of Interest

There are no conflicts of interest.

Data Availability

The public leaderboard is hosted at <https://leaderboard.narnia.ai>. The data behind it, namely the per-model benchmark scores and per-metric values for every ranked run, are publicly available at <https://github.com/Narnialabs/leaderboard>. Those files label each model by the short identifier under which its results are released, and the map from those identifiers to the display names used here ships with the released data. The one exception is AB-UPT, whose research license withholds it from the release, so the 3D field-prediction boards in this paper rank a model that the released files do not contain.

Appendix A Metric Definitions

This appendix gives precise definitions of the quality metrics that Section 3.4 references but does not spell out. These are both the engineering-specific validity metrics PhysicsBench introduces or adapts, whose motivation and necessity are argued in Section 3.4, and the less-familiar standard metrics adopted from the generative-modeling and vision literature. Throughout, let N be the number of points or query locations in a sample, let $\hat{y}$ be the prediction, and let y be the ground truth. Norms and dot products are taken per sample, and results are averaged over the sample set. The first five entries are the engineering-specific validity metrics, namely two pattern-quality measures of sign and extremal agreement, two structural-quality measures of manifold- and uniformity- Δ , and the vector and modal MAC. The remainder are the standard adopted metrics.

Sign Agreement ($\uparrow$). The fraction of points at which the predicted and true fields share sign, written $\frac{1}{N} \sum_i [\text{sign}(\hat{y}_i) = \text{sign}(y_i)]$ with an Iverson bracket, which measures whether the field loads in the correct direction.

Extremal Agreement ($\uparrow$). Recall of the peak region. With $k = \lceil 0.1N \rceil$ and $T_k(\cdot)$ the index set of the k largest-magnitude entries, it is $|T_k(\hat{y}) \cap T_k(y)|/k$, which measures whether the predicted stress and pressure concentrations coincide with the true top-10% hot spots.

Manifold- Δ ($\downarrow$). $|t_{\text{gen}} - t_{\text{real}}|$, where the local “thinness” $t = \text{mean}_i \lambda_3^{(i)} / (\lambda_1^{(i)} + \lambda_2^{(i)} + \lambda_3^{(i)})$ averages the smallest normalized PCA eigenvalue over each point’s k -NN neighborhood with $k=20$. A clean 2-manifold surface gives $t \rightarrow 0$ and an isotropic blob gives $t \rightarrow 1/3$, so the Δ penalizes generated shapes whose local dimensionality departs from the real data.

Uniformity- Δ ($\downarrow$). $|c_{\text{gen}} - c_{\text{real}}|$, where c is the coefficient of variation of k -NN distances with $k=8$, a proxy for how evenly points are sampled over the shape. It is complementary to Manifold- Δ . A

generator can place points on a locally clean surface, giving low Manifold- Δ , yet clump them along seams, giving high Uniformity- Δ , which leaves under-resolved regions that hinder downstream meshing and simulation, so the two are reported separately.

Modal Assurance Criterion (MAC, $\uparrow$). For a vector or modal field with predicted and reference vectors $\hat{\phi}$ and ϕ , this is the squared cosine similarity $\text{MAC} = |\hat{\phi} \cdot \phi|^2 / (\|\hat{\phi}\|^2 \|\phi\|^2)$. It is invariant to sign and scale, since ϕ and $-\phi$ both give $\text{MAC}=1$, so it measures mode-shape and direction alignment independently of amplitude [117], and, being sign-invariant, it is complementary to sign agreement above. It is defined only for vector and modal fields such as displacement components and mode shapes. Scalar components such as stress or pressure leave it undefined, and it is reported as N/A for them.

PRDC ($\uparrow$). Precision, Recall, Density, and Coverage computed from the k -nearest-neighbor manifolds of the real and generated feature embeddings [114]. Recall and Coverage collapsing while Precision holds is the signature of mode collapse.

For 3D geometry generation we additionally report standard point-cloud distributional and fidelity measures. *FPD* ($\downarrow$) is the Fréchet distance between Gaussian fits to PointNet++ feature embeddings of the real and generated sets, the point-cloud analogue of FID. *MV-FID* ($\downarrow$) is a multi-view FID that renders each cloud to sixteen fixed depth-buffer views and computes the image FID over the rendered views, capturing silhouette and surface fidelity that a single global feature distance can miss. *MS-SSIM* ($\downarrow$) is additionally computed pairwise among those rendered views as a diversity proxy, where lower values indicate more varied generated shapes, following the same repurposed direction convention used in 2D generation below. For set-level geometric fidelity we adopt the standard point-cloud generation procedure under Chamfer distance [9, 31]. *MMD-CD* ($\downarrow$), the minimum matching distance, averages over each reference cloud the Chamfer distance to its nearest generated cloud, measuring sample fidelity. *COV-CD* ($\uparrow$), the coverage, is the fraction of reference clouds that are the nearest neighbor of at least one generated cloud, measuring mode coverage and thus directly penalizing collapse. *1-NNA-CD* ($\downarrow$) is the leave-one-out 1-nearest-neighbor two-sample accuracy [9], which classifies each cloud in the pooled real and generated set by the label of its nearest neighbor. Its ideal value is 0.5, at which real and generated are indistinguishable, and higher values indicate a distinguishable generator that is under-fit or mode-collapsed. In the small-data regime studied here every model scores above 0.5, so we treat 1-NNA-CD as lower-is-better. These set-level metrics replace an earlier pairwise Chamfer, EMD, and F-Score summary that matched each generated cloud to an arbitrary reference and hence rewarded a mode-collapsed generator emitting a single near-central shape.

For 2D depth regression we additionally report the standard monocular-depth metrics AbsRel, sqRel, and threshold accuracy $\delta < 1.25$ [118], computed on the foreground mask, as described in Section 4.4.

For 2D generation, three otherwise-standard reconstruction metrics are repurposed as unconditional-generation proxies, with their directions set accordingly. LPIPS and MS-SSIM are computed pairwise among the generated samples as diversity proxies, so higher LPIPS ($\uparrow$) and lower MS-SSIM ($\downarrow$), meaning broader coverage and less mode collapse, are preferred, deliberately opposite to their usual reconstruction-similarity convention. PSNR ($\uparrow$) is a coarse whole-set fidelity proxy, higher when the generated pixel statistics sit closer to the real set on these aligned, centered engineering renders. It is one of eight jointly-ranked metrics rather than a headline score.

Appendix B BenchRank Ranking Robustness

BenchRank’s hyperparameters are fixed by construction, as described in Section 3.5. Here we show that the resulting rankings are largely insensitive to them, using only post-processing of the committed per-run results, with no retraining, on the same basis as the paper’s leaderboards, namely the published per-task seed basis and the same model pool, which adds the official AB-UPT on DrivAerML to the published set as Section 3.2 describes. For seven representative task leaderboards, each at all four data scales, we recompute the quality-view ranking under one-at-a-time perturbations of the three knobs. These are redundancy strength $\alpha \in \{0.5, 2.0\}$ with default 1.0, decisive-gap fraction $\tau_d \in \{0.5, 0.7\}$ with default 0.6, and PageRank damping $\delta \in \{0.80, 0.90\}$ with default 0.85. We then measure the Kendall τ -b rank correlation against the default ranking, reported in Table 8. Across all 168 task, scale, and perturbation comparisons the mean τ -b is 0.98, with a worst case of 0.79, and the top-ranked model is unchanged in 160 of 168 cells, or 95%. The ranking is most stable to damping at mean τ =1.00 and to α at 0.99, and most sensitive to the decisive-gap fraction at mean 0.94, which accounts for six of the eight rank-1 flips. Five of those eight fall on one pair of boards, 2D field prediction at M and L, where the default top two are separated by 0.01% and 0.21% of total score, so the ranking there is a near-tie that any reweighting can turn over. The other three sit on the two pooled multi-dataset scalar boards, where the decisive-gap fraction changes how strongly per-dataset evidence is debiased before the cross-dataset aggregation.

A fourth design choice is examined separately because it is not a hyperparameter, namely the rule that rescales each cell’s centrality onto a reported interval before the cells are aggregated. Within a cell every candidate rule is an increasing affine map of the same centrality vector, so no strict within-cell reversal occurs in any of the 260 cells and such a rule can act only through the cross-dataset geometric mean. Replacing the reported interval, whose lower end tracks the realized dominance-graph density, with a fixed interval leaves the pooled ranking at mean τ -b 0.98 and changes the top-ranked model in 1 of 28 task-scale boards, and replacing it with a scale-free centrality ratio gives mean 0.95 and changes the same 1. That board is 2D field prediction at L, where the default top two sit within 0.21% of total score.

The training run is examined on the same footing. Recomputing every board with each task placed on the mean of its repeated runs leaves the pooled ranking at mean τ -b 0.97 with a worst case of 0.73 and changes one top-ranked model, in 1 of 28 task-scale boards. That board is 3D generation at M, where the change does not reverse a decisive result but dissolves one. The two leading models sit 42.33% apart before averaging and within 0.38% of each other after, so the recomputed board reports them as effectively tied rather than reversing a settled order.

The size of the run-to-run variation behind these figures shows up directly in the per-cell spreads. Take 2D generation. Over its 108 cells the standard deviation of FID across the three runs is 3.9% of the cell’s own value at the median and 10.2% at the ninetieth percentile. On the reported boards the leading model is ahead of the runner-up by 48.5% of total score at the median, against a run-to-run spread in that score of 1.2% at the median and 6.1% at the ninetieth percentile. Ranking each of the three runs on its own returns the published top model on all twelve of that task’s board-and-run combinations.

As an external check, we also compare the default BenchRank ranking against two simpler aggregators computed from the same cross-dataset metric matrix, a min–max normalized mean and a Borda count. BenchRank is positively but not perfectly correlated with both, at mean τ -b 0.72 and 0.75, which confirms that its debiased, dominance-graph aggregation is not a relabeling of a naive average. The agreement is lowest exactly where naive aggregation is known to fail, namely the pooled, unequal-coverage 3D-field board and the multi-dataset 1D-scalar tasks with near-mean-collapse cells, which is precisely where a redundancy-debiased ranking is designed to differ. This study is post-hoc. The seed basis is fixed per task rather than per model, because ranking averaged models against un-averaged ones inside one board

would remove the run-to-run luck from some competitors and not others, as Section 5 sets out. We did not test an Elo-style aggregator. The analysis is reproducible from the released per-run scores by re-running the ranking procedure under the stated perturbations, except for the AB-UPT rows of the 3D-field boards, which its research license withholds from the release.

Table 8: BenchRank ranking robustness, with all four scales pooled per task. Columns give the Kendall τ -b of the quality ranking against the default under hyperparameter perturbation as min and mean, the share of the four scales crossed with the six perturbations whose top model is unchanged, labeled “Rank-1 stable”, and τ -b against a normalized-mean and a Borda aggregator.

Task	#(scale) cells	Kendall τ (min / mean)	Rank-1 stable	τ vs norm-mean	τ vs Borda
2D generation	4	0.94 / 1.00	24/24	0.76	0.82
3D generation	4	0.87 / 0.98	24/24	0.90	0.90
2D field prediction	4	0.79 / 0.95	19/24	0.73	0.77
2D scalar prediction	4	0.90 / 0.99	23/24	0.81	0.86
3D scalar prediction	4	0.96 / 0.99	24/24	0.94	0.96
3D field prediction	4	0.85 / 0.97	24/24	0.57	0.66
1D scalar prediction	4	0.83 / 0.96	22/24	0.29	0.31

References

- [1] Alexander I. J. Forrester and Andy J. Keane. Recent advances in surrogate-based optimization. *Progress in Aerospace Sciences*, 45(1–3):50–79, 2009. doi: [10.1016/j.paerosci.2008.11.001](https://doi.org/10.1016/j.paerosci.2008.11.001).
- [2] Lu Lu, Pengzhan Jin, Guofei Pang, Zhongqiang Zhang, and George Em Karniadakis. Learning nonlinear operators via DeepONet based on the universal approximation theorem of operators. *Nature Machine Intelligence*, 3(3):218–229, 2021. doi: [10.1038/s42256-021-00302-5](https://doi.org/10.1038/s42256-021-00302-5).
- [3] Zongyi Li, Nikola Borislavov Kovachki, Kamyar Azizzadenesheli, Burigede Liu, Kaushik Bhattacharya, Andrew M. Stuart, and Anima Anandkumar. Fourier neural operator for parametric partial differential equations. In *International Conference on Learning Representations (ICLR)*. OpenReview.net, 2021. doi: [10.48550/arXiv.2010.08895](https://doi.org/10.48550/arXiv.2010.08895).
- [4] Charles Ruizhongtai Qi, Hao Su, Kaichun Mo, and Leonidas J. Guibas. PointNet: Deep learning on point sets for 3d classification and segmentation. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 77–85. IEEE Computer Society, 2017. doi: [10.1109/CVPR.2017.16](https://doi.org/10.1109/CVPR.2017.16).
- [5] Nikola B. Kovachki, Zongyi Li, Burigede Liu, Kamyar Azizzadenesheli, Kaushik Bhattacharya, Andrew M. Stuart, and Anima Anandkumar. Neural operator: Learning maps between function spaces with applications to PDEs. *Journal of Machine Learning Research*, 24(89):1–97, 2023. doi: [10.48550/arXiv.2108.08481](https://doi.org/10.48550/arXiv.2108.08481).
- [6] Haixu Wu, Huakun Luo, Haowen Wang, Jianmin Wang, and Mingsheng Long. Transolver: A fast transformer solver for PDEs on general geometries. In *International Conference on Machine Learning (ICML)*, volume 235 of *Proceedings of Machine Learning Research*, pages 53681–53705. PMLR, 2024. doi: [10.48550/arXiv.2402.02366](https://doi.org/10.48550/arXiv.2402.02366).
- [7] Ian J. Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron C. Courville, and Yoshua Bengio. Generative adversarial nets. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 2672–2680, 2014. doi: [10.48550/arXiv.1406.2661](https://doi.org/10.48550/arXiv.1406.2661).

- [8] Diederik P. Kingma and Max Welling. Auto-encoding variational Bayes. In *International Conference on Learning Representations (ICLR)*, 2014. doi: [10.48550/arXiv.1312.6114](https://doi.org/10.48550/arXiv.1312.6114).
- [9] Guandao Yang, Xun Huang, Zekun Hao, Ming-Yu Liu, Serge J. Belongie, and Bharath Hariharan. PointFlow: 3d point cloud generation with continuous normalizing flows. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 4540–4549. IEEE, 2019. doi: [10.1109/ICCV.2019.00464](https://doi.org/10.1109/ICCV.2019.00464).
- [10] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2020. doi: [10.48550/arXiv.2006.11239](https://doi.org/10.48550/arXiv.2006.11239).
- [11] Lyle Regenwetter, Amin Heyrani Nobari, and Faez Ahmed. Deep generative models in engineering design: A review. *Journal of Mechanical Design*, 144(7):071704, 2022. doi: [10.48550/arXiv.2110.10863](https://doi.org/10.48550/arXiv.2110.10863).
- [12] Namwoo Kang. Generative AI-driven design optimization: Eight key application scenarios. *JMST Advances*, 7(1–2):105–111, 2025. doi: [10.1007/s42791-025-00097-1](https://doi.org/10.1007/s42791-025-00097-1).
- [13] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. ImageNet: A large-scale hierarchical image database. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 248–255, 2009. doi: [10.1109/cvpr.2009.5206848](https://doi.org/10.1109/cvpr.2009.5206848).
- [14] Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael S. Bernstein, Alexander C. Berg, and Li Fei-Fei. ImageNet large scale visual recognition challenge. *International Journal of Computer Vision*, 115(3):211–252, 2015. doi: [10.1007/s11263-015-0816-y](https://doi.org/10.1007/s11263-015-0816-y).
- [15] Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R. Bowman. GLUE: A multi-task benchmark and analysis platform for natural language understanding. In *International Conference on Learning Representations (ICLR)*, 2019. doi: [10.18653/v1/w18-5446](https://doi.org/10.18653/v1/w18-5446).
- [16] Alex Wang, Yada Pruksachatkun, Nikita Nangia, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R. Bowman. SuperGLUE: A stickier benchmark for general-purpose language understanding systems. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 3261–3275, 2019. doi: [10.48550/arXiv.1905.00537](https://doi.org/10.48550/arXiv.1905.00537).
- [17] Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. In *International Conference on Learning Representations (ICLR)*. OpenReview.net, 2021. doi: [10.48550/arXiv.2009.03300](https://doi.org/10.48550/arXiv.2009.03300).
- [18] Simon Ott, Adriano Barbosa-Silva, Kathrin Blagec, Jan Brauner, and Matthias Samwald. Mapping global dynamics of benchmark creation and saturation in artificial intelligence. *Nature Communications*, 13(1): 6793, 2022. doi: [10.1038/s41467-022-34591-0](https://doi.org/10.1038/s41467-022-34591-0).
- [19] Makoto Takamoto, Timothy Praditia, Raphael Leiteritz, Dan MacKinlay, Francesco Alesiani, Dirk Pflüger, and Mathias Niepert. PDEBench: An extensive benchmark for scientific machine learning. In *Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks Track*, 2022. doi: [10.52202/068431-0117](https://doi.org/10.52202/068431-0117).
- [20] Ruben Ohana, Michael McCabe, Lucas Meyer, Rudy Morel, Fruzsina Julia Agocs, Miguel Beneitez, Marsha Berger, Blakesley Burkhart, Stuart B. Dalziel, Drummond B. Fielding, Daniel Fortunato, Jared A. Goldberg, Keiya Hirashima, Yan-Fei Jiang, Rich R. Kerswell, Suryanarayana Maddu, Jonah Miller, Payel Mukhopadhyay, Stefan S. Nixon, Jeff Shen, Romain Watteaux, Bruno Régaldo-Saint Blancard, François Rozet, Liam Holden Parker, Miles D. Cranmer, and Shirley Ho. The well: a large-scale collection of diverse physics simulations for machine learning. In *Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks Track*, 2024. doi: [10.52202/079017-1430](https://doi.org/10.52202/079017-1430).

- [21] Florent Bonnet, Jocelyn Ahmed Mazari, Paola Cinnella, and Patrick Gallinari. AirfRANS: High-fidelity computational fluid dynamics dataset for approximating reynolds-averaged navier–stokes solutions. In *Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks Track*, 2022. doi: [10.52202/068431-1705](https://doi.org/10.52202/068431-1705).
- [22] Mohamed Elrefaie, Florin Morar, Angela Dai, and Faez Ahmed. DrivAerNet++: A large-scale multimodal car dataset with computational fluid dynamics simulations and deep learning benchmarks. In *Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks Track*, 2024. doi: [10.52202/079017-0016](https://doi.org/10.52202/079017-0016).
- [23] Mohamed Elrefaie, Dule Shu, Matt Klenk, and Faez Ahmed. CarBench: A comprehensive benchmark for neural surrogates on high-fidelity 3D car aerodynamics. *arXiv preprint arXiv:2512.07847*, 2025. doi: [10.48550/arXiv.2512.07847](https://doi.org/10.48550/arXiv.2512.07847).
- [24] Sarthak Kapoor, Harsh Vardhan, Umesh Timalisina, Sumit Kumar, Peter Volgyesi, and Janos Sztipanovits. Data-efficient surrogate modeling for engineering design: Ensemble-free batch-mode deep active learning for regression. *arXiv preprint arXiv:2211.10360*, 2022. doi: [10.48550/arXiv.2211.10360](https://doi.org/10.48550/arXiv.2211.10360).
- [25] Florian Felten, Gabriel Apaza, Gerhard Bräunlich, Cashen Diniz, Xuliang Dong, Arthur Drake, Milad Habibi, Nathaniel J. Hoffman, Matthew Keeler, Soheyl Massoudi, Francis G. VanGessel, and Mark D. Fuge. EngiBench: A framework for data-driven engineering design research. In *Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks Track*, 2025. doi: [10.52202/085713-0003](https://doi.org/10.52202/085713-0003).
- [26] Jeong Joon Park, Peter R. Florence, Julian Straub, Richard A. Newcombe, and Steven Lovegrove. DeepSDF: Learning continuous signed distance functions for shape representation. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 165–174. Computer Vision Foundation / IEEE, 2019. doi: [10.1109/CVPR.2019.00025](https://doi.org/10.1109/CVPR.2019.00025).
- [27] Lyle Regenwetter, Brent Curry, and Faez Ahmed. BIKED: A dataset for computational bicycle design with machine learning benchmarks. *Journal of Mechanical Design*, 144(3):031706, 2022. doi: [10.1115/1.4052585](https://doi.org/10.1115/1.4052585).
- [28] Rundui Wu, Chang Xiao, and Changxi Zheng. DeepCAD: A deep generative network for computer-aided design models. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 6752–6762. IEEE, 2021. doi: [10.1109/iccv48922.2021.00670](https://doi.org/10.1109/iccv48922.2021.00670).
- [29] Noah J. Bagazinski and Faez Ahmed. Ship-D: Ship hull dataset for design optimization using machine learning. In *ASME International Design Engineering Technical Conferences (IDETC-CIE)*, 2023. doi: [10.1115/detc2023-117003](https://doi.org/10.1115/detc2023-117003).
- [30] Angel X. Chang, Thomas Funkhouser, Leonidas Guibas, Pat Hanrahan, Qixing Huang, Zimo Li, Silvio Savarese, Manolis Savva, Shuran Song, Hao Su, Jianxiong Xiao, Li Yi, and Fisher Yu. ShapeNet: An information-rich 3D model repository. Technical Report arXiv:1512.03012 [cs.GR], Stanford University — Princeton University — Toyota Technological Institute at Chicago, 2015.
- [31] Panos Achlioptas, Olga Diamanti, Ioannis Mitliagkas, and Leonidas J. Guibas. Learning representations and generative models for 3d point clouds. In *International Conference on Machine Learning (ICML)*, volume 80 of *Proceedings of Machine Learning Research*, pages 40–49. PMLR, 2018. doi: [10.48550/arXiv.1707.02392](https://doi.org/10.48550/arXiv.1707.02392).
- [32] Zongyi Li, Nikola B. Kovachki, Chris Choy, Boyi Li, Jean Kossaifi, Shourya P. Otta, Mohammad Amin Nabian, Maximilian Stadler, Christian Hundt, Kamyar Azizzadenesheli, and Anima Anandkumar. Geometry-informed neural operator for large-scale 3D PDEs. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023. doi: [10.52202/075280-1556](https://doi.org/10.52202/075280-1556).
- [33] Zhongkai Hao, Zhengyi Wang, Hang Su, Chengyang Ying, Yinpeng Dong, Songming Liu, Ze Cheng, Jian Song, and Jun Zhu. GNOT: A general neural operator transformer for operator learning. In *International Conference on Machine Learning (ICML)*, volume 202 of *Proceedings of Machine Learning Research*, pages 12556–12569. PMLR, 2023. doi: [10.48550/arXiv.2302.14376](https://doi.org/10.48550/arXiv.2302.14376).

- [34] Benedikt Alkin, Andreas Fürst, Simon Schmid, Lukas Gruber, Markus Holzleitner, and Johannes Brandstetter. Universal physics transformers: A framework for efficiently scaling neural operators. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2024. doi: [10.52202/079017-0793](https://doi.org/10.52202/079017-0793).
- [35] Benedikt Alkin, Maurits Bleeker, Richard Kurlle, Tobias Kronlachner, Reinhard Sonnleitner, Matthias Dorfer, and Johannes Brandstetter. AB-UPT: Scaling neural CFD surrogates for high-fidelity automotive aerodynamics simulations via anchored-branched universal physics transformers. *Transactions on Machine Learning Research (TMLR)*, 2025, 2025. doi: [10.48550/arXiv.2502.09692](https://doi.org/10.48550/arXiv.2502.09692).
- [36] Alvaro Sanchez-Gonzalez, Jonathan Godwin, Tobias Pfaff, Rex Ying, Jure Leskovec, and Peter W. Battaglia. Learning to simulate complex physics with graph networks. In *International Conference on Machine Learning (ICML)*, volume 119 of *Proceedings of Machine Learning Research*, pages 8459–8468. PMLR, 2020. doi: [10.48550/arXiv.2002.09405](https://doi.org/10.48550/arXiv.2002.09405).
- [37] Tobias Pfaff, Meire Fortunato, Alvaro Sanchez-Gonzalez, and Peter W. Battaglia. Learning mesh-based simulation with graph networks. In *International Conference on Learning Representations (ICLR)*, 2021. doi: [10.48550/arXiv.2010.03409](https://doi.org/10.48550/arXiv.2010.03409).
- [38] Maziar Raissi, Paris Perdikaris, and George E. Karniadakis. Physics-informed neural networks: A deep learning framework for solving forward and inverse problems involving nonlinear partial differential equations. *Journal of Computational Physics*, 378:686–707, 2019. doi: [10.1016/j.jcp.2018.10.045](https://doi.org/10.1016/j.jcp.2018.10.045).
- [39] Zongyi Li, Hongkai Zheng, Nikola Kovachki, David Jin, Haoxuan Chen, Burigede Liu, Kamyar Aziz-zadenesheli, and Anima Anandkumar. Physics-informed neural operator for learning partial differential equations. *arXiv preprint arXiv:2111.03794*, 2021. doi: [10.48550/arXiv.2111.03794](https://doi.org/10.48550/arXiv.2111.03794).
- [40] Olaf Ronneberger, Philipp Fischer, and Thomas Brox. U-Net: Convolutional networks for biomedical image segmentation. In *Medical Image Computing and Computer-Assisted Intervention (MICCAI)*, volume 9351 of *Lecture Notes in Computer Science*, pages 234–241. Springer, 2015. doi: [10.1007/978-3-319-24574-4_28](https://doi.org/10.1007/978-3-319-24574-4_28).
- [41] Tsung-Yi Lin, Piotr Dollár, Ross B. Girshick, Kaiming He, Bharath Hariharan, and Serge J. Belongie. Feature pyramid networks for object detection. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 936–944, 2017. doi: [10.1109/CVPR.2017.106](https://doi.org/10.1109/CVPR.2017.106).
- [42] René Ranftl, Alexey Bochkovskiy, and Vladlen Koltun. Vision transformers for dense prediction. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 12159–12168, 2021. doi: [10.1109/ICCV48922.2021.01196](https://doi.org/10.1109/ICCV48922.2021.01196).
- [43] Enze Xie, Wenhai Wang, Zhiding Yu, Anima Anandkumar, Jose M. Alvarez, and Ping Luo. SegFormer: Simple and efficient design for semantic segmentation with transformers. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 12077–12090, 2021. doi: [10.48550/arXiv.2105.15203](https://doi.org/10.48550/arXiv.2105.15203).
- [44] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 770–778, 2016. doi: [10.1109/CVPR.2016.90](https://doi.org/10.1109/CVPR.2016.90).
- [45] Hugo Touvron, Matthieu Cord, Matthijs Douze, Francisco Massa, Alexandre Sablayrolles, and Hervé Jégou. Training data-efficient image transformers & distillation through attention. In *International Conference on Machine Learning (ICML)*, volume 139 of *Proceedings of Machine Learning Research*, pages 10347–10357, 2021. doi: [10.48550/arXiv.2012.12877](https://doi.org/10.48550/arXiv.2012.12877).
- [46] Yury Gorishniy, Ivan Rubachev, Valentin Khrulkov, and Artem Babenko. Revisiting deep learning models for tabular data. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 18932–18943, 2021. doi: [10.48550/arXiv.2106.11959](https://doi.org/10.48550/arXiv.2106.11959).

- [47] Sercan Ö. Arik and Tomas Pfister. TabNet: Attentive interpretable tabular learning. In *AAAI Conference on Artificial Intelligence*, pages 6679–6687. AAAI Press, 2021. doi: [10.1609/aaai.v35i8.16826](https://doi.org/10.1609/aaai.v35i8.16826).
- [48] Noah Hollmann, Samuel Müller, Lennart Purucker, Arjun Krishnakumar, Max Körfer, Shi Bin Hoo, Robin Tibor Schirrmeyer, and Frank Hutter. Accurate predictions on small data with a tabular foundation model. *Nature*, 637(8044):319–326, 2025. doi: [10.1038/s41586-024-08328-6](https://doi.org/10.1038/s41586-024-08328-6).
- [49] Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural Computation*, 9(8):1735–1780, 1997. doi: [10.1162/neco.1997.9.8.1735](https://doi.org/10.1162/neco.1997.9.8.1735).
- [50] Shaojie Bai, J. Zico Kolter, and Vladlen Koltun. An empirical evaluation of generic convolutional and recurrent networks for sequence modeling. *arXiv preprint arXiv:1803.01271*, 2018. doi: [10.48550/arXiv.1803.01271](https://doi.org/10.48550/arXiv.1803.01271).
- [51] Peter Mattson, Christine Cheng, Cody Coleman, Greg Diamos, Paulius Micikevicius, David Patterson, Hanlin Tang, Gu-Yeon Wei, Peter Bailis, Victor Bittorf, David Brooks, et al. MLPerf training benchmark. In *Proceedings of Machine Learning and Systems (MLSys)*, volume 2, pages 336–349, 2020. doi: [10.48550/arXiv.1910.01500](https://doi.org/10.48550/arXiv.1910.01500).
- [52] Vijay Janapa Reddi, Christine Cheng, David Kanter, Peter Mattson, Guenther Schmuelling, Carole-Jean Wu, Brian Anderson, Maximilien Breughe, Mark Charlebois, William Chou, et al. MLPerf inference benchmark. In *ACM/IEEE 47th Annual International Symposium on Computer Architecture (ISCA)*, pages 446–459, 2020. doi: [10.1109/ISCA45697.2020.00045](https://doi.org/10.1109/ISCA45697.2020.00045).
- [53] Percy Liang, Rishi Bommasani, Tony Lee, Dimitris Tsipras, Dilara Soylu, Michihiro Yasunaga, Yuta Koreeda, et al. Holistic evaluation of language models. *Transactions on Machine Learning Research (TMLR)*, 2023. doi: [10.48550/arXiv.2211.09110](https://doi.org/10.48550/arXiv.2211.09110).
- [54] Robert Stojnic and Ross Taylor. Papers with code. <https://paperswithcode.com>, 2018. Community machine-learning SOTA-tracking platform (Meta AI); launched 2018, retired 2025.
- [55] Kaggle (Google LLC). Kaggle competitions documentation. <https://www.kaggle.com/docs/competitions>, 2026. Accessed 2026.
- [56] Edward Beeching, Clémentine Fourrier, Nathan Habib, Alina Lozovskaia, Thomas Wolf, et al. Open LLM leaderboard. Hugging Face Spaces, <https://huggingface.co/spaces/open-llm-leaderboard>, 2024. v1 2023–2024; v2 2024–2025.
- [57] Mostafa Dehghani, Yi Tay, Alexey A. Gritsenko, Zhe Zhao, Neil Houlsby, Fernando Diaz, Donald Metzler, and Oriol Vinyals. The benchmark lottery. *arXiv preprint arXiv:2107.07002*, 2021. doi: [10.48550/arXiv.2107.07002](https://doi.org/10.48550/arXiv.2107.07002).
- [58] Inioluwa Deborah Raji, Emily Denton, Emily M. Bender, Alex Hanna, and Amandalynne Paullada. AI and the everything in the whole wide world benchmark. In *Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks Track*, 2021. doi: [10.48550/arXiv.2111.15366](https://doi.org/10.48550/arXiv.2111.15366).
- [59] Douwe Kiela, Max Bartolo, Yixin Nie, Divyansh Kaushik, Atticus Geiger, Zhengxuan Wu, Bertie Vidgen, Grusha Prasad, Amanpreet Singh, Pratik Ringshia, Zhiyi Ma, Tristan Thrush, Sebastian Riedel, Zeerak Waseem, Pontus Stenetorp, Robin Jia, Mohit Bansal, Christopher Potts, and Adina Williams. Dynabench: Rethinking benchmarking in NLP. In *Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL-HLT)*, pages 4110–4124, 2021. doi: [10.18653/v1/2021.naacl-main.324](https://doi.org/10.18653/v1/2021.naacl-main.324).
- [60] Oscar Sainz, Jon Ander Campos, Iker García-Ferrero, Julen Etxaniz, Oier Lopez de Lacalle, and Eneko Agirre. NLP evaluation in trouble: On the need to measure LLM data contamination for each benchmark. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 10776–10787, 2023. doi: [10.18653/v1/2023.findings-emnlp.722](https://doi.org/10.18653/v1/2023.findings-emnlp.722).

- [61] Rachel L. Thomas and David Uminsky. Reliance on metrics is a fundamental challenge for AI. *Patterns*, 3(5):100476, 2022. doi: [10.1016/j.patter.2022.100476](https://doi.org/10.1016/j.patter.2022.100476).
- [62] Kawin Ethayarajh and Dan Jurafsky. Utility is in the eye of the user: A critique of NLP leaderboards. In *Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4846–4853, 2020. doi: [10.18653/v1/2020.emnlp-main.393](https://doi.org/10.18653/v1/2020.emnlp-main.393).
- [63] Mostafa Dehghani, Anurag Arnab, Lucas Beyer, Ashish Vaswani, and Yi Tay. The efficiency misnomer. In *International Conference on Learning Representations (ICLR)*, 2022. doi: [10.48550/arXiv.2110.12894](https://doi.org/10.48550/arXiv.2110.12894).
- [64] Joelle Pineau, Philippe Vincent-Lamarre, Koustuv Sinha, Vincent Larivière, Alina Beygelzimer, Florence d’Alché Buc, Emily Fox, and Hugo Larochelle. Improving reproducibility in machine learning research (a report from the NeurIPS 2019 reproducibility program). *Journal of Machine Learning Research*, 22(164): 1–20, 2021. doi: [10.48550/arXiv.2003.12206](https://doi.org/10.48550/arXiv.2003.12206).
- [65] Yongmin Kwon and Namwoo Kang. Three-dimensional deep shape optimization with a limited dataset. *Engineering Applications of Artificial Intelligence*, 159:111504, 2025. doi: [10.1016/j.engappai.2025.111504](https://doi.org/10.1016/j.engappai.2025.111504).
- [66] Léo Grinsztajn, Edouard Oyallon, and Gaël Varoquaux. Why do tree-based models still outperform deep learning on typical tabular data? In *Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks Track*, 2022. doi: [10.52202/068431-0037](https://doi.org/10.52202/068431-0037).
- [67] Duncan C. McElfresh, Sujay Khandagale, Jonathan Valverde, Vishak Prasad C., Benjamin Feuer, Chinmay Hegde, Ganesh Ramakrishnan, Micah Goldblum, and Colin White. When do neural nets outperform boosted trees on tabular data? In *Advances in Neural Information Processing Systems (NeurIPS), Datasets and Benchmarks Track*, 2023. doi: [10.52202/075280-3337](https://doi.org/10.52202/075280-3337).
- [68] Neil Ashton, Charles Mockett, Marian Fuchs, Louis Fliessbach, Hendrik Hetmann, Thilo Knacke, Norbert Schonwald, Vangelis Skaperdas, Grigoris Fotiadis, Astrid Walle, Burkhard Hupertz, and Danielle C. Maddix. DrivAerML: High-fidelity computational fluid dynamics dataset for road-car external aerodynamics. *arXiv preprint arXiv:2408.11969*, 2024. doi: [10.48550/arXiv.2408.11969](https://doi.org/10.48550/arXiv.2408.11969). CC BY-SA.
- [69] Seongjun Hong, Yongmin Kwon, Dongju Shin, Jangseop Park, and Namwoo Kang. DeepJEB: 3d deep learning-based synthetic jet engine bracket dataset. *Journal of Mechanical Design*, 147(4):041703, 2025. doi: [10.1115/1.4067089](https://doi.org/10.1115/1.4067089). dataset.narnia.ai, ODC-By v1.0.
- [70] Soyoung Yoo and Namwoo Kang. DeepWheel: Generating a 3d synthetic wheel dataset for design and performance evaluation. *Journal of Mechanical Design*, 148(5):051702, 2026. doi: [10.1115/1.4069899](https://doi.org/10.1115/1.4069899). dataset.narnia.ai, CC BY-NC 4.0.
- [71] Soyoung Yoo, Sunghee Lee, Seongsin Kim, Kwang Hyeon Hwang, Jong Ho Park, and Namwoo Kang. Integrating deep learning into CAD/CAE system: Generative design and evaluation of 3D conceptual wheel. *Structural and Multidisciplinary Optimization*, 64(4):2725–2747, 2021. doi: [10.1007/s00158-021-02953-9](https://doi.org/10.1007/s00158-021-02953-9).
- [72] Jiajun Wu, Chengkai Zhang, Tianfan Xue, William T. Freeman, and Joshua B. Tenenbaum. Learning a probabilistic latent space of object shapes via 3d generative-adversarial modeling. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 82–90, 2016. doi: [10.48550/arXiv.1610.07584](https://doi.org/10.48550/arXiv.1610.07584).
- [73] Ruojin Cai, Guandao Yang, Hadar Averbuch-Elor, Zekun Hao, Serge Belongie, Noah Snavely, and Bharath Hariharan. Learning gradient fields for shape generation. In *European Conference on Computer Vision (ECCV)*, volume 12348 of *Lecture Notes in Computer Science*, pages 364–381. Springer, 2020. doi: [10.1007/978-3-030-58580-8_22](https://doi.org/10.1007/978-3-030-58580-8_22).
- [74] Thibault Groueix, Matthew Fisher, Vladimir G. Kim, Bryan C. Russell, and Mathieu Aubry. AtlasNet: A papier-mâché approach to learning 3d surface generation. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 216–224. IEEE, 2018. doi: [10.1109/CVPR.2018.00030](https://doi.org/10.1109/CVPR.2018.00030).

- [75] Shitong Luo and Wei Hu. Diffusion probabilistic models for 3d point cloud generation. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 2837–2845, 2021. doi: [10.1109/cvpr46437.2021.00286](https://doi.org/10.1109/cvpr46437.2021.00286).
- [76] Charles R. Qi, Li Yi, Hao Su, and Leonidas J. Guibas. PointNet++: Deep hierarchical feature learning on point sets in a metric space. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 5099–5108, 2017. doi: [10.48550/arXiv.1706.02413](https://doi.org/10.48550/arXiv.1706.02413).
- [77] Sergei Popov, Stanislav Morozov, and Artem Babenko. Neural oblivious decision ensembles for deep learning on tabular data. In *International Conference on Learning Representations (ICLR)*, 2020. doi: [10.48550/arXiv.1909.06312](https://doi.org/10.48550/arXiv.1909.06312).
- [78] Tianqi Chen and Carlos Guestrin. XGBoost: A scalable tree boosting system. In *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining (KDD)*, pages 785–794. ACM, 2016. doi: [10.1145/2939672.2939785](https://doi.org/10.1145/2939672.2939785).
- [79] Guolin Ke, Qi Meng, Thomas Finley, Taifeng Wang, Wei Chen, Weidong Ma, Qiwei Ye, and Tie-Yan Liu. LightGBM: A highly efficient gradient boosting decision tree. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 3146–3154, 2017.
- [80] Carl Edward Rasmussen and Christopher K. I. Williams. *Gaussian Processes for Machine Learning*. MIT Press, 2006. doi: [10.7551/mitpress/3206.001.0001](https://doi.org/10.7551/mitpress/3206.001.0001).
- [81] Arthur E. Hoerl and Robert W. Kennard. Ridge regression: Biased estimation for nonorthogonal problems. *Technometrics*, 12(1):55–67, 1970. doi: [10.1080/00401706.1970.10488634](https://doi.org/10.1080/00401706.1970.10488634).
- [82] Shuai Zheng, Kosta Ristovski, Ahmed Farahat, and Chetan Gupta. Long short-term memory network for remaining useful life estimation. In *IEEE International Conference on Prognostics and Health Management (ICPHM)*, pages 88–95, 2017. doi: [10.1109/ICPHM.2017.7998311](https://doi.org/10.1109/ICPHM.2017.7998311).
- [83] Zhizheng Zhang, Wen Song, and Qiqiang Li. Dual-aspect self-attention based on transformer for remaining useful life prediction. *IEEE Transactions on Instrumentation and Measurement*, 71:1–11, 2022. doi: [10.1109/TIM.2022.3160561](https://doi.org/10.1109/TIM.2022.3160561).
- [84] Wenjie Hu, Sidun Liu, Peng Qiao, Zhenglun Sun, and Yong Dou. Transolver is a linear transformer: Revisiting physics-attention through the lens of linear attention. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, volume 40, pages 408–416, 2026. doi: [10.1609/aaai.v40i1.37003](https://doi.org/10.1609/aaai.v40i1.37003).
- [85] Zongyi Li, Daniel Zhengyu Huang, Burigede Liu, and Anima Anandkumar. Fourier neural operator with learned deformations for PDEs on general geometries. *Journal of Machine Learning Research*, 24(388): 1–26, 2023. doi: [10.48550/arXiv.2207.05209](https://doi.org/10.48550/arXiv.2207.05209).
- [86] Corey Adams, Rishikesh Ranade, Ram Cherukuri, and Sanjay Choudhry. GeoTransolver: Learning physics on irregular domains using multi-scale geometry aware physics attention transformer. *arXiv preprint arXiv:2512.20399*, 2025. doi: [10.48550/arXiv.2512.20399](https://doi.org/10.48550/arXiv.2512.20399).
- [87] Deepak Akhare, Mohammad Amin Nabian, Corey Adams, Sudeep Chavare, and Sanjay Choudhry. High-fidelity industrial crash dynamics prediction via geometry-aware operator learning with memory-efficient low-rank attention. *arXiv preprint arXiv:2605.27758*, 2026. doi: [10.48550/arXiv.2605.27758](https://doi.org/10.48550/arXiv.2605.27758).
- [88] Vedant Puri, Aditya Joglekar, Sri Datta Ganesh Bandreddi, Kevin Ferguson, Yu-hsuan Chen, Yongjie Jessica Zhang, and Levent Burak Kara. FLARE: Fast low-rank attention routing engine. *arXiv preprint arXiv:2508.12594*, 2025. doi: [10.48550/arXiv.2508.12594](https://doi.org/10.48550/arXiv.2508.12594).

- [89] Rishikesh Ranade, Mohammad Amin Nabian, Kaustubh Tangsali, Alexey Kamenev, Oliver Hennigh, Ram Cherukuri, and Sanjay Choudhry. DoMINO: A decomposable multi-scale iterative neural operator for modeling large scale engineering simulations. *arXiv preprint arXiv:2501.13350*, 2025. doi: [10.48550/arXiv.2501.13350](https://doi.org/10.48550/arXiv.2501.13350).
- [90] Yue Wang, Yongbin Sun, Ziwei Liu, Sanjay E. Sarma, Michael M. Bronstein, and Justin M. Solomon. Dynamic graph CNN for learning on point clouds. *ACM Transactions on Graphics*, 38(5):146:1–146:12, 2019. doi: [10.1145/3326362](https://doi.org/10.1145/3326362).
- [91] Jiujuan Wang, Guilin Wen, Shaopu Yang, and Yongqiang Liu. Remaining useful life estimation in prognostics using deep bidirectional LSTM neural network. In *Prognostics and System Health Management Conference (PHM-Chongqing)*, pages 1037–1042, 2018. doi: [10.1109/PHM-Chongqing.2018.00184](https://doi.org/10.1109/PHM-Chongqing.2018.00184).
- [92] Ozan Oktay, Jo Schlemper, Loic Le Folgoc, Matthew Lee, Mattias Heinrich, Kazunari Misawa, Kensaku Mori, Steven McDonagh, Nils Y. Hammerla, Bernhard Kainz, Ben Glocker, and Daniel Rueckert. Attention U-Net: Learning where to look for the pancreas. In *Medical Imaging with Deep Learning (MIDL)*, 2018. doi: [10.48550/arXiv.1804.03999](https://doi.org/10.48550/arXiv.1804.03999).
- [93] Alexander Kirillov, Ross B. Girshick, Kaiming He, and Piotr Dollár. Panoptic feature pyramid networks. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 6399–6408, 2019. doi: [10.1109/CVPR.2019.00656](https://doi.org/10.1109/CVPR.2019.00656).
- [94] Xiang Li, Qian Ding, and Jian-Qiao Sun. Remaining useful life estimation in prognostics using deep convolution neural networks. *Reliability Engineering & System Safety*, 172:1–11, 2018. doi: [10.1016/j.ress.2017.11.021](https://doi.org/10.1016/j.ress.2017.11.021).
- [95] Doyeon Kim, Woonghyun Ka, Pyunghwan Ahn, Donggyu Joo, Sehwan Chun, and Junmo Kim. Global-local path networks for monocular depth estimation with vertical CutDepth. *arXiv preprint arXiv:2201.07436*, 2022. doi: [10.48550/arXiv.2201.07436](https://doi.org/10.48550/arXiv.2201.07436).
- [96] Zongwei Zhou, Md Mahfuzur Rahman Siddiquee, Nima Tajbakhsh, and Jianming Liang. UNet++: A nested U-Net architecture for medical image segmentation. In *Deep Learning in Medical Image Analysis (DLMIA)*, volume 11045 of *Lecture Notes in Computer Science*, pages 3–11. Springer, 2018. doi: [10.1007/978-3-030-00889-5_1](https://doi.org/10.1007/978-3-030-00889-5_1).
- [97] Leo Breiman. Random forests. *Machine Learning*, 45(1):5–32, 2001. doi: [10.1023/A:1010933404324](https://doi.org/10.1023/A:1010933404324).
- [98] Alec Radford, Luke Metz, and Soumith Chintala. Unsupervised representation learning with deep convolutional generative adversarial networks. In *International Conference on Learning Representations (ICLR)*, 2016. doi: [10.48550/arXiv.1511.06434](https://doi.org/10.48550/arXiv.1511.06434).
- [99] Meng-Hao Guo, Jun-Xiong Cai, Zheng-Ning Liu, Tai-Jiang Mu, Ralph R. Martin, and Shi-Min Hu. PCT: Point cloud transformer. *Computational Visual Media*, 7(2):187–199, 2021. doi: [10.1007/s41095-021-0229-5](https://doi.org/10.1007/s41095-021-0229-5).
- [100] Hengshuang Zhao, Li Jiang, Jiaya Jia, Philip H. S. Torr, and Vladlen Koltun. Point transformer. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 16239–16248. IEEE, 2021. doi: [10.48550/arXiv.2012.09164](https://doi.org/10.48550/arXiv.2012.09164).
- [101] Xudong Mao, Qing Li, Haoran Xie, Raymond Y. K. Lau, Zhen Wang, and Stephen Paul Smolley. Least squares generative adversarial networks. In *IEEE International Conference on Computer Vision (ICCV)*, pages 2813–2821. IEEE Computer Society, 2017. doi: [10.1109/ICCV.2017.304](https://doi.org/10.1109/ICCV.2017.304).
- [102] Lars M. Mescheder, Andreas Geiger, and Sebastian Nowozin. Which training methods for GANs do actually converge? In *International Conference on Machine Learning (ICML)*, volume 80 of *Proceedings of Machine Learning Research*, pages 3478–3487, 2018. doi: [10.48550/arXiv.1801.04406](https://doi.org/10.48550/arXiv.1801.04406).

- [103] Xu Ma, Can Qin, Haoxuan You, Haoxi Ran, and Yun Fu. Rethinking network design and local geometry in point cloud: A simple residual MLP framework. In *International Conference on Learning Representations (ICLR)*, 2022. doi: [10.48550/arXiv.2202.07123](https://doi.org/10.48550/arXiv.2202.07123).
- [104] Aaron van den Oord, Oriol Vinyals, and Koray Kavukcuoglu. Neural discrete representation learning. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 6306–6315, 2017. doi: [10.48550/arXiv.1711.00937](https://doi.org/10.48550/arXiv.1711.00937).
- [105] Martin Arjovsky, Soumith Chintala, and Léon Bottou. Wasserstein generative adversarial networks. In *International Conference on Machine Learning (ICML)*, volume 70 of *Proceedings of Machine Learning Research*, pages 214–223, 2017. doi: [10.48550/arXiv.1701.07875](https://doi.org/10.48550/arXiv.1701.07875).
- [106] Ishaan Gulrajani, Faruk Ahmed, Martin Arjovsky, Vincent Dumoulin, and Aaron C. Courville. Improved training of wasserstein GANs. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 5767–5777, 2017. doi: [10.48550/arXiv.1704.00028](https://doi.org/10.48550/arXiv.1704.00028).
- [107] Zhuang Liu, Hanzi Mao, Chao-Yuan Wu, Christoph Feichtenhofer, Trevor Darrell, and Saining Xie. A ConvNet for the 2020s. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 11966–11976, 2022. doi: [10.1109/CVPR52688.2022.01167](https://doi.org/10.1109/CVPR52688.2022.01167).
- [108] Gao Huang, Zhuang Liu, Laurens van der Maaten, and Kilian Q. Weinberger. Densely connected convolutional networks. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 2261–2269, 2017. doi: [10.1109/CVPR.2017.243](https://doi.org/10.1109/CVPR.2017.243).
- [109] Mingxing Tan and Quoc V. Le. EfficientNet: Rethinking model scaling for convolutional neural networks. In *International Conference on Machine Learning (ICML)*, volume 97 of *Proceedings of Machine Learning Research*, pages 6105–6114, 2019. doi: [10.48550/arXiv.1905.11946](https://doi.org/10.48550/arXiv.1905.11946).
- [110] Huakun Luo, Haixu Wu, Hang Zhou, Lanxiang Xing, Yichen Di, Jianmin Wang, and Mingsheng Long. Transolver++: An accurate neural solver for PDEs on million-scale geometries. In *International Conference on Machine Learning (ICML)*, volume 267 of *Proceedings of Machine Learning Research*. PMLR, 2025. doi: [10.48550/arXiv.2502.02414](https://doi.org/10.48550/arXiv.2502.02414).
- [111] Min Jin Chong and David A. Forsyth. Effectively unbiased FID and inception score and where to find them. In *IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 6069–6078, 2020. doi: [10.1109/CVPR42600.2020.00611](https://doi.org/10.1109/CVPR42600.2020.00611).
- [112] Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. GANs trained by a two time-scale update rule converge to a local nash equilibrium. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 6626–6637, 2017. doi: [10.48550/arXiv.1706.08500](https://doi.org/10.48550/arXiv.1706.08500).
- [113] Tim Salimans, Ian J. Goodfellow, Wojciech Zaremba, Vicki Cheung, Alec Radford, and Xi Chen. Improved techniques for training GANs. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 2226–2234, 2016. doi: [10.48550/arXiv.1606.03498](https://doi.org/10.48550/arXiv.1606.03498).
- [114] Muhammad Ferjad Naeem, Seong Joon Oh, Youngjung Uh, Yunjey Choi, and Jaesun Yoo. Reliable fidelity and diversity metrics for generative models. In *International Conference on Machine Learning (ICML)*, volume 119 of *Proceedings of Machine Learning Research*, pages 7176–7185. PMLR, 2020. doi: [10.48550/arXiv.2002.09797](https://doi.org/10.48550/arXiv.2002.09797).
- [115] Richard Zhang, Phillip Isola, Alexei A. Efros, Eli Shechtman, and Oliver Wang. The unreasonable effectiveness of deep features as a perceptual metric. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 586–595, 2018. doi: [10.1109/cvpr.2018.00068](https://doi.org/10.1109/cvpr.2018.00068).
- [116] Zhou Wang, Alan C. Bovik, Hamid R. Sheikh, and Eero P. Simoncelli. Image quality assessment: From error visibility to structural similarity. *IEEE Transactions on Image Processing*, 13(4):600–612, 2004. doi: [10.1109/TIP.2003.819861](https://doi.org/10.1109/TIP.2003.819861).

- [117] Randall J. Allemang and David L. Brown. A correlation coefficient for modal vector analysis. In *Proceedings of the 1st International Modal Analysis Conference (IMAC)*, pages 110–116, 1982.
- [118] David Eigen, Christian Puhersch, and Rob Fergus. Depth map prediction from a single image using a multi-scale deep network. In *Advances in Neural Information Processing Systems (NeurIPS)*, pages 2366–2374, 2014. doi: [10.48550/arXiv.1406.2283](https://doi.org/10.48550/arXiv.1406.2283).
- [119] Lawrence Page, Sergey Brin, Rajeev Motwani, and Terry Winograd. The PageRank citation ranking: Bringing order to the web. *Stanford InfoLab Technical Report*, 1999.
- [120] Aric A. Hagberg, Daniel A. Schult, and Pieter J. Swart. Exploring network structure, dynamics, and function using NetworkX. In *Proceedings of the 7th Python in Science Conference (SciPy)*, pages 11–15, 2008. doi: [10.25080/tcwg9851](https://doi.org/10.25080/tcwg9851).