

CHARTER: AUDITING REFERENCE SUBSTITUTION IN HIERARCHICAL COMPACT-EVIDENCE EVALUATION FOR COMPUTATIONAL PATHOLOGY

Hyun Do Jung¹ Jungwon Choi² Soojung Choi¹ Yujin Oh^{1,†} Hwiyoung Kim^{3,†}

¹Yonsei University

²KAIST

³Hallym University Chuncheon Sacred Heart Hospital

ABSTRACT

In digital pathology, compact evidence is often used to explain or audit predictions made by whole-slide image multiple instance learning models. In hierarchical compact-evidence pipelines, candidate filtering introduces a strategy-specific candidate-conditioned prediction alongside the original full-bag prediction. If the evaluation reference changes while the intended target remains the original full-bag prediction, however, not only can the measured fidelity of the same compact evidence change, but comparisons between competing candidate strategies can also change. To make this dependence explicit, we introduce CHARTER, a reference-aware evaluation charter that asks researchers to **DECLARE** the intended target and reference, **QUANTIFY** candidate-induced prediction shift, and **AUDIT** the stability of comparative conclusions. Across the 15 comparisons in our main five-seed Random- K audit, 4 showed determinate reversals; in a matched native-ranking stress test, the ACMIL comparison changed from REVERSED to PRESERVED. CHARTER turns otherwise implicit candidate-filtering and reference choices into an auditable evaluation specification, helping distinguish genuine preservation of the intended prediction from apparent gains induced by changing the prediction being explained.

1 INTRODUCTION

Whole-slide images (WSIs) are commonly represented as large bags of image patches and analyzed using multiple instance learning (MIL) to produce slide-level predictions (Lu et al., 2021; Shao et al., 2021). Recent studies have attempted to provide compact evidence showing which patches support such predictions, or to use such evidence to interpret or audit model decisions beyond reporting predictive performance alone (Kapse et al., 2024; Hense et al., 2024). In particular, filtering informative patches into a compact subset can make model evidence more tractable to inspect and evaluate than examining the whole bag. Thus, the question of which subset best explains or preserves the model prediction itself becomes an important evaluation question.

Prior compact-evidence studies have addressed two related evaluation questions. One asks how well selected evidence preserves label-based downstream predictive performance, while another asks how well a compact subset preserves a fixed reference prediction in terms of fidelity or sufficiency (Kapse et al., 2024; Carter et al., 2019; DeYoung et al., 2020). However, rather than selecting the final subset directly from the full bag, a hierarchical compact-evidence pipeline may first construct an intermediate candidate pool, within which further ranking or selection is performed to obtain the final subset. In such a pipeline, the original full-bag prediction is shared across candidate strategies, whereas the candidate-conditioned prediction is generated from each strategy’s own candidate pool. Candidate-conditioned evaluation can therefore compare competing strategies against different, strategy-specific prediction references even when the intended target is the same original full-bag prediction.

Consider applying two candidate-filtering strategies to a single WSI. The candidate pool produced by the first strategy almost preserves the original full-bag prediction, whereas the candidate pool produced by the second strategy may shift the prediction substantially. After selecting a compact

[†]Corresponding authors: yujinoh@yuhs.ac, hykim@hallym.or.kr

subset from each candidate pool and evaluating each subset against its corresponding candidate-pool prediction, the fidelities of the two strategies are calculated with respect to different prediction targets. In contrast, using the original full-bag prediction as a common reference allows the two strategies to be compared in terms of how well they preserve the same target. This does not mean that the candidate-conditioned prediction is an invalid reference; rather, using a strategy-specific reference may change the comparison when the intended target is the original full-bag prediction.

A concrete motivating instance is FOCI (Jung et al., 2026a), a hierarchical compact-evidence pipeline that applies candidate pre-filtering before final subset selection. Such an intermediate stage introduces a natural distinction between preserving the prediction from the candidate pool and preserving the original full-bag prediction. We therefore investigate this distinction as a measurement problem in hierarchical compact-evidence evaluation, holding the final subset prediction fixed while changing only its evaluation reference.

We audit reference substitution in a controlled setting using frozen WSI-MIL predictors by separately measuring candidate-induced prediction shift, reference-specific compact-subset fidelity, and the comparative gap between candidate strategies. The results show that the magnitude of the reference effect is not uniform across settings. In LUAD-TP53, large candidate-induced prediction shifts are accompanied by strong reference effects, such that the categorical conclusion of candidate comparisons can change, whereas the three-architecture CRC-MSI subset of the main audit shows comparatively small reference effects together with small candidate-induced shifts. Clean NSCLC shows heterogeneous regimes across architectures. We further observe determinate reversals under a controlled Random- K evaluation, while the categorical outcome changes under a matched native-ranking stress test in a directly comparable setting, indicating that comparative conclusions can depend on the ranking protocol. Importantly, native ranking does not eliminate reference dependence: even when the categorical outcome is no longer reversed in the tested setting, a substantial reference-dependent comparative gap can remain.

Based on these results, rather than proposing a new selector or trainable method, we introduce CHARTER, a reference-aware evaluation charter for hierarchical compact-evidence evaluation. It comprises three actions: **DECLARE** the intended scientific target and prediction reference, **QUANTIFY** candidate-induced prediction shift, and **AUDIT** the stability of comparative conclusions across reference choices and relevant ranking protocols. When the original full-bag prediction is the intended target, fidelity to that prediction should be reported as the primary result, while candidate-conditioned fidelity should be reported separately as a conditional result.

In summary, we make three contributions:

- **We formulate reference substitution as an explicit evaluation problem in hierarchical compact-evidence pipelines.** We separate $X \rightarrow C \rightarrow S$ and distinguish the common original reference $q_0 = f(X)$ from the strategy-specific candidate-conditioned reference $q_C = f(C)$, making explicit that both fidelity and candidate comparisons can change even for a fixed subset prediction $p = f(S)$.
- **We show that reference substitution can change comparative conclusions.** Under controlled Random- K , **4 of 15 comparisons were classified as REVERSED**; in a matched native-ranking stress test, ACMIL changed from **REVERSED to PRESERVED**, while a substantial reference-dependent comparative effect remained.
- **We introduce CHARTER as an actionable reference-aware evaluation charter.** CHARTER requires researchers to **DECLARE** the intended target and reference, **QUANTIFY** candidate-induced prediction shift, and **AUDIT** conclusion stability, making otherwise implicit reference choices auditable and separating original-target preservation from candidate-conditioned fidelity.

2 RELATED WORK

2.1 WSI-MIL AND COMPACT EVIDENCE

WSI-MIL interpretability has expanded beyond attention visualization to include region-wise contributions, informative patch selection, compact evidence, and faithfulness evaluation. Additive MIL directly decomposes predictions into region-wise contributions (Javed et al., 2022), SI-MIL constructs an interpretable branch by selecting salient Top- K patches (Kapse et al., 2024), and xMIL

quantitatively evaluates the faithfulness of histopathology MIL explanations (Hense et al., 2024). ReaMIL proposes an approach that directly learns compact evidence through a sufficiency-oriented objective (Jung et al., 2026b). Collectively, these methods construct, represent, or assess compact evidence once a prediction of interest has been specified. Our work instead asks which prediction should serve as the reference when the selected evidence is obtained through an intermediate candidate stage.

2.2 FAITHFULNESS AND SUBSET-BASED EVALUATION

Sufficiency and faithfulness with respect to reduced or rationale-only inputs are well established in the compact-rationale literature. SIS identifies small input subsets that preserve the original model decision (Carter et al., 2019), while ERASER evaluates rationale faithfulness through sufficiency on rationale-only inputs and comprehensiveness under rationale removal (DeYoung et al., 2020). Carton et al. further characterize these behaviors using fidelity curves as rationale content is progressively removed (Carton et al., 2020). Related work in graph explanation considers compact subgraphs and distinguishes evaluation goals and fidelity notions (Akkas & Azad, 2024; Amara et al., 2022); more broadly, Jacovi and Goldberg emphasize that the faithfulness criterion itself must be stated explicitly (Jacovi & Goldberg, 2020).

Together, these studies motivate evaluating reduced evidence against a specified model behavior. They do not, however, resolve the hierarchical case in which an intermediate candidate stage produces another prediction before the final compact subset is evaluated. Our focus is this narrower situation, where both the original full-bag prediction and the candidate-conditioned prediction can plausibly serve as evaluation references.

2.3 EVALUATION SENSITIVITY AND REFERENCE SUBSTITUTION

Measured faithfulness and method rankings can depend on the explanation metric or evaluation protocol (Chan et al., 2022). Tomsett et al. show that differences in saliency-metric computation can alter measured fidelity and comparative rankings (Tomsett et al., 2020), while MetaQuantus studies disagreement among explanation-quality estimators and the resulting ranking instability (Hedström et al., 2023). Perturbation-based approaches, including xMIL, likewise assess changes in model output when evidence is removed or restricted (Hense et al., 2024).

Our setting isolates a different source of variation. The fidelity criterion need not change; instead, each strategy’s candidate pool induces its own candidate-conditioned prediction reference. We therefore hold each final compact-subset prediction fixed, evaluate it against both the common original full-bag prediction and the corresponding strategy-specific candidate-conditioned prediction, and examine how the resulting candidate-specific reference effects propagate to pairwise comparisons. In the literature we examined, this particular separation of a fixed subset prediction, a common original reference, and strategy-specific candidate-conditioned references has not been explicitly characterized in comparative evaluation.

3 REFERENCE SUBSTITUTION IN HIERARCHICAL COMPACT-EVIDENCE EVALUATION

3.1 HIERARCHICAL COMPACT-EVIDENCE PIPELINE

In WSI-MIL, a slide is represented as a bag of patch-level representations (Ilse et al., 2018; Lu et al., 2021; Shao et al., 2021), from which compact evidence can be selected or assessed for interpretation and auditing (Kapse et al., 2024; Hense et al., 2024). We consider a hierarchical setting in which the full bag X is first reduced to an intermediate candidate pool C , from which ranking or selection produces a final compact subset S . Critically, candidate filtering does not merely restrict the search space for S ; it can also change the model output before the final subset is evaluated (Fig. 1).

The same frozen MIL predictor f is applied at all three stages, yielding the original full-bag prediction $q_0 = f(X)$, candidate-conditioned prediction $q_C = f(C)$, and compact-subset prediction $p = f(S)$. Thus, q_0 and q_C differ because the input bag changes, not because different predictors are used.

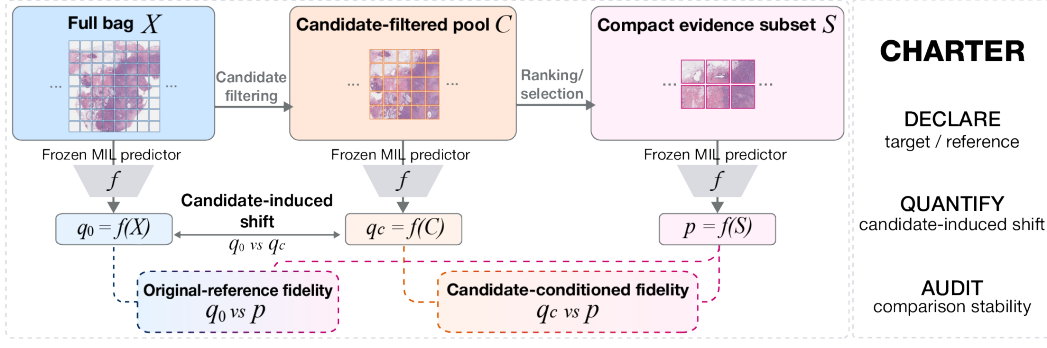


Figure 1: **Reference substitution in hierarchical compact-evidence evaluation and CHARTER.** The same frozen MIL predictor is applied to the full bag X , candidate pool C , and compact subset S , producing q_0 , q_C , and p . Candidate filtering can move the prediction reference before compact-subset fidelity is assessed. CHARTER makes the intended target, reference shift, and comparative stability explicit.

If the intended scientific target is the original full-bag prediction, the relevant fidelity question is how well p preserves q_0 . Conversely, q_C is a legitimate reference when the candidate-conditioned prediction is itself the intended target. The problem arises when the intended target remains q_0 , but the evaluation instead uses q_C as the fidelity reference. We refer to this change in prediction reference as *reference substitution*.

3.2 REFERENCE-DEPENDENT FIDELITY

We quantify the prediction shift induced by candidate filtering as

$$\delta_C = D(q_0, q_C). \quad (1)$$

For a fixed compact subset S and its prediction $p = f(S)$, we define the two reference-specific fidelity errors as

$$e_{\text{orig}} = D(p, q_0), \quad e_{\text{cond}} = D(p, q_C). \quad (2)$$

These two errors evaluate the same compact-subset prediction against different references and therefore answer different fidelity questions; smaller values indicate higher fidelity to the corresponding reference. We use total variation (TV) distance for D throughout our experiments. Importantly, when comparing original-reference and candidate-conditioned fidelity, the subset S and prediction p are held fixed; only the prediction reference changes.

3.3 COMPARATIVE CONCLUSIONS UNDER REFERENCE SUBSTITUTION

The same distinction extends to comparisons between candidate strategies: different candidate constructions can induce different reference effects, so changing the reference may also alter their relative comparison. For a candidate construction strategy g , let $C_g = g(X)$ denote its candidate pool, $S_g \subset C_g$ the compact subset obtained under a fixed ranking or selection protocol, $q_{C_g} = f(C_g)$ its candidate-conditioned prediction, and $p_g = f(S_g)$ its subset prediction. Fidelity success with respect to a reference q requires p_g to have the same predicted class as q and satisfy $D(p_g, q) \leq \epsilon$. We denote the corresponding success rates by $\text{Succ}_g^{\text{orig}}$ and $\text{Succ}_g^{\text{cond}}$ and define the candidate-specific reference effect as

$$B_g = \text{Succ}_g^{\text{cond}} - \text{Succ}_g^{\text{orig}}. \quad (3)$$

Thus, B_g measures how much the aggregate fidelity-success rate of strategy g changes when the reference is changed from q_0 to q_{C_g} .

For two candidate strategies A and B , their reference-specific comparative gaps are

$$\Delta_{\text{orig}} = \text{Succ}_A^{\text{orig}} - \text{Succ}_B^{\text{orig}}, \quad \Delta_{\text{cond}} = \text{Succ}_A^{\text{cond}} - \text{Succ}_B^{\text{cond}}. \quad (4)$$

A positive gap favors strategy A , whereas a negative gap favors strategy B . We quantify the change in this comparison directly as

$$R_{A,B} = \Delta_{\text{cond}} - \Delta_{\text{orig}} = B_A - B_B. \quad (5)$$

A change in comparative gap does not by itself imply a reversal in candidate ordering. We therefore classify a comparison as **PRESERVED** when the ordering is determinate under both references and retains the same direction, **REVERSED** when it is determinate under both references but changes direction, and **RANKING-INDETERMINATE** when the ordering cannot be reliably determined under at least one reference. Consequently, a raw sign change alone is not sufficient to declare a ranking reversal.

A metric-based diagnostic and a sufficient condition for agreement of the discrete fidelity verdict are derived in Appendix A.

4 EXPERIMENTAL DESIGN

4.1 EVALUATION SCOPE

To assess whether reference-substitution effects depend on task, MIL architecture, or pathology encoder, we audit these three axes separately. The main Random- K audit contains every task-architecture pair with complete five-seed evaluations when the analysis was defined: nine MIL architectures on clean NSCLC and ABMIL (Ilse et al., 2018), TransMIL (Shao et al., 2021), and ACMIL (Zhang et al., 2024) on LUAD-TP53 and CRC-MSI (15 pairs), all derived from TCGA cohorts (Weinstein et al., 2013). Selection was based on evaluation availability rather than the observed outcome.

We broaden this audit under a common C_{L2} protocol to a 12-task $\times$ 9-architecture grid (108 cells), with 70 validated five-seed estimates. Figure 3A shows the complete common-coverage subset of 10 tasks $\times$ 3 MIL architectures (30 cells); PANDA (Bulten et al., 2022) and CAMELYON+ (Ling et al., 2025) have no validated estimate and are excluded from the reported breadth claims.

For the encoder axis, the planned grid covers three tasks, five MIL architectures, and four pathology encoders (60 cells). Of 24 validated estimates, eight task-MIL settings are matched between UNI2-h (Chen et al., 2024) and Phikon-v2 (Filiot et al., 2024), yielding the 16 estimates shown in Figure 3B. Each predictor uses five fixed seeds, $\{0, 1, 42, 1337, 2025\}$, and remains frozen during evaluation; cohort, split, analysis-unit, and architecture details are provided in Appendices B–C.

4.2 CANDIDATE CONSTRUCTION AND RANKING

Candidate construction and within-candidate ranking are separate evaluation axes: the former maps the full bag X to a candidate pool C , whereas the latter produces the compact subset S . The primary candidate constructions are C_{L2} , which selects the top- M candidates by L2 norm in the frozen predictor’s token representation space, and C_{RAND} , an identity-keyed deterministic uniform random construction. For bags with fewer than M tiles, the effective candidate budget is $M_c = \min(M, N)$; both candidate constructions then retain the full bag, and subset selection uses $K_c = \min(K, M_c)$.

Random- K is the primary controlled ranker, while the tested predictor-derived native-ranking signals serve as a matched stress test of conclusion stability under model-derived ranking. For each slide, native scores are computed once from the full bag using the same frozen predictor and then restricted to the corresponding candidate pool before top- K selection. ABMIL and CLAM (Ilse et al., 2018; Lu et al., 2021) use pre-softmax gated-attention logits, ACMIL uses the mean of its five branch logits, and TransMIL uses the dot product between the pre-encoder tile embedding and learned class-token vector. Candidate-construction and ranking implementation details are provided in Appendix D.

4.3 EVALUATION AND STATISTICAL PROTOCOL

Unless otherwise specified, the default operating point is $M = 1024$, $K = 32$, and $\epsilon = 0.05$. The same frozen predictor produces q_0 , q_C , and p ; fidelity success requires predicted-class agreement with the reference and $\text{TV}(p, q) \leq \epsilon$, with p held fixed when the reference is changed.

Inference uses patient-level resampling where patient identifiers are available; for PANDA, which lacks patient identifiers, the planned evaluation uses slide-level resampling. Predictor seeds are treated as repeated model realizations rather than independent observations. Pairwise reference effects $R_{A,B}$ are computed directly within each bootstrap resample. A reference-specific ordering is determinate only when its 95% confidence interval excludes zero and its absolute gap exceeds the fixed tolerance $\tau = 0.05$; otherwise it is RANKING-INDETERMINATE. Determinate orderings retaining or changing direction are labeled PRESERVED or REVERSED, respectively; raw sign changes alone do not constitute reversals. Further statistical and aggregation details are provided in Appendix E.

Provenance and validation controls are described in Appendix F.

5 RESULTS

5.1 WHEN DOES REFERENCE SUBSTITUTION MATERIALLY CHANGE FIDELITY?

We first ask when reference substitution materially changes measured fidelity. We examine the candidate-induced prediction shift δ_C together with the corresponding candidate-specific reference effect B_g . The effect was not uniform across tasks, architectures, or candidate constructions: LUAD-TP53 showed a strong-effect regime, the three-architecture CRC-MSI subset of the main audit a comparatively small-effect regime, and clean NSCLC substantial architecture-dependent variation.

Table 1 provides a compact summary of these regimes at the default operating point, including candidate-induced shifts, candidate-specific reference effects, and the corresponding pairwise outcomes.

LUAD-TP53 showed the strongest reference-substitution regime: under C_{L2} , both candidate-induced shifts and reference effects were substantially larger than under C_{RAND} , with all three B_g estimates significant (Table 1). Within the three-architecture CRC-MSI subset of the main audit, reference effects were comparatively small, although it was not completely null: ABMIL under C_{L2} and ACMIL under C_{RAND} retained significant reference effects. Clean NSCLC exhibited substantial architecture-dependent variation; C_{L2} produced significant B_g estimates across all nine architectures, whereas under C_{RAND} only MaxMIL was significant.

Across the three tasks, candidate-induced prediction shift and candidate-specific reference effect were therefore related but distinct quantities. Settings with larger δ_C tended to show larger B_g , but whether these fidelity changes also altered candidate ordering requires a separate pairwise comparison.

Table 1: **Reference-substitution regimes under Random- K .** Candidate-specific effects and pairwise outcomes under the fixed tolerance rule for C_{L2} versus C_{RAND} .

Task	MILs	Candidate	Candidate-specific quantities			Pairwise outcome
			Prediction shift δ_C (min–max)	Fidelity effect B_g (min–max)	Sig. B_g MILs	
LUAD-TP53	3	C_{L2}	0.1585–0.2276	0.1612–0.4537	3/3	2 / 0 / 1
		C_{RAND}	0.0207–0.0287	0.006–0.0179	0/3	
CRC-MSI	3	C_{L2}	0.0124–0.018	0.0123–0.037	1/3	0 / 1 / 2
		C_{RAND}	0.0066–0.0157	0.0000–0.0173	1/3	
Clean NSCLC	9	C_{L2}	0.0179–0.0636	0.0232–0.2428	9/9	2 / 1 / 6
		C_{RAND}	0.0033–0.0141	0.0000–0.0358	1/9	

Ranges are across the listed MILs after five-seed pooling. “Sig.” indicates a pointwise 95% bootstrap confidence interval for B_g excluding zero. R/P/I = reversed / preserved / ranking-indeterminate; significance of B_g alone does not imply reversal.

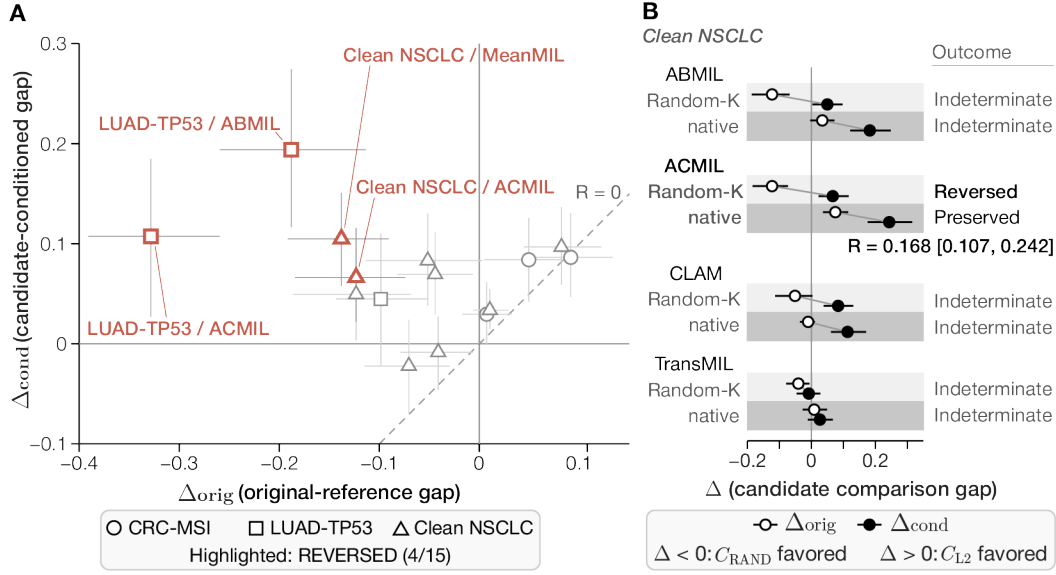


Figure 2: **Reference substitution can change comparative conclusions, with outcomes depending on the ranking protocol.** **A**, candidate gaps under the original and candidate-conditioned references; error bars denote 95% confidence intervals. REVERSED/PRESERVED outcomes require a determinate gap under both references (95% CI excluding zero and $|\Delta| > \tau = 0.05$); otherwise the comparison is RANKING-INDETERMINATE. **B**, matched comparison of controlled Random- K and the tested predictor-derived native-ranking signals.

5.2 CAN REFERENCE SUBSTITUTION CHANGE COMPARATIVE CONCLUSIONS?

We next ask whether these reference-specific fidelity changes can alter the pairwise comparison between C_{L2} and C_{RAND} . Among the 15 comparisons in the main five-seed Random- K audit, four were REVERSED, two were PRESERVED, and nine were RANKING-INDETERMINATE. All four reversals occurred in the same direction: C_{RAND} had the larger fidelity-success rate under the shared full-bag reference, whereas C_{L2} had the larger rate under the respective candidate-conditioned references. In particular, for LUAD-TP53 with ABMIL, the comparison changed from $\Delta_{\text{orig}} = -0.188$ to $\Delta_{\text{cond}} = 0.194$, with $R = 0.382 [0.296, 0.463]$, resulting in a REVERSED outcome. Clean NSCLC with MeanMIL similarly changed from -0.138 to 0.105 , with $R = 0.243 [0.175, 0.310]$, and was also REVERSED. In contrast, a significant direct R does not necessarily imply a reversal: LUAD-TP53 with TransMIL had $R = 0.143 [0.081, 0.209]$, but its outcome remained RANKING-INDETERMINATE. The remaining comparisons are shown in Fig. 2A.

Random- K removes architecture-specific subset-ranking signals; the matched native-ranking analysis tests whether reference dependence persists when predictor-derived ranking is restored. Under the matched predictor-derived rankings, none of the four clean-NSCLC comparisons was classified as REVERSED. ACMIL changed from REVERSED under Random- K to PRESERVED, whereas ABMIL, CLAM, and TransMIL remained RANKING-INDETERMINATE. Reference dependence nevertheless remained measurable: the direct effect R had a positive pointwise 95% confidence interval excluding zero for ABMIL, ACMIL, and CLAM, with ACMIL showing $R = 0.168 [0.107, 0.242]$. Thus, the absence of a determinate reversal under predictor-derived ranking does not imply that the candidate comparison is insensitive to the prediction reference. The matched ranking-protocol results are shown in Fig. 2B, with exact numerical comparisons in Appendix Table 3.

5.3 HOW BROADLY DOES THE EFFECT APPEAR ACROSS TASKS AND MIL ARCHITECTURES?

We next ask whether the reference-substitution effect observed in the main audit extends across a broader range of tasks and MIL architectures. The broader task-architecture grid contains 70

validated five-seed estimates among 108 planned cells under the common C_{L2} protocol. To make the cross-task comparison directly readable, Figure 3A shows the complete common-coverage subset of 10 tasks evaluated with ABMIL, TransMIL, and ACMIL (30 cells); this subset is defined by shared coverage rather than by the observed outcome.

The resulting pattern is heterogeneous rather than concentrated in a single task or MIL family. Substantial positive reference effects and determinate reversals coexist with small or ranking-indeterminate effects, and these differences can appear within the same task. For example, on LUAD-KRAS, ABMIL showed $R = 0.291$ [0.191, 0.383] with a REVERSED outcome, whereas TransMIL showed $R = 0.000$ [0.000, 0.000] and remained RANKING-INDETERMINATE. Thus, the broader audit suggests that reference substitution is not tied to one particular task or architecture, while its magnitude and categorical consequence remain strongly setting-dependent.

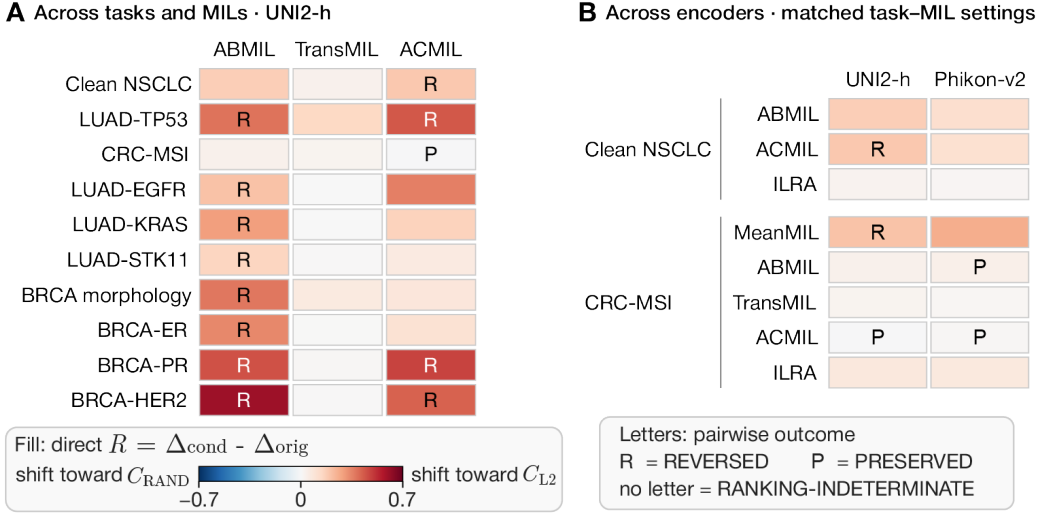


Figure 3: Breadth of the reference-substitution effect across tasks, MIL architectures, and pathology encoders. The broader audits contain 70 validated estimates among 108 planned task-MIL cells and 24 validated estimates among 60 planned encoder cells. **A**, the complete common-coverage subset of 10 tasks $\times$ 3 MIL architectures (ABMIL, TransMIL, and ACMIL; 30 cells). **B**, all eight task-MIL settings directly matched between UNI2-h and Phikon-v2 (16 estimates). Fill encodes the signed direct pairwise reference effect $R = \Delta_{\text{cond}} - \Delta_{\text{orig}}$ on a shared scale; R/P denote REVERSED/PRESERVED, and cells without a letter are RANKING-INDETERMINATE. Displayed subsets are defined by common coverage or encoder matching rather than by the observed outcome.

5.4 HOW DOES THE EFFECT VARY ACROSS PATHOLOGY ENCODERS?

We finally ask whether reference-dependent effects remain observable when the pathology feature encoder is changed. Among the 24 validated estimates in the broader encoder grid, eight task-MIL settings are directly matched between UNI2-h and Phikon-v2, yielding the 16 estimates shown in Figure 3B.

The matched comparisons show that changing the encoder can alter both the magnitude and the categorical consequence of the reference effect without consistently removing the effect itself. For CRC-MSI with MeanMIL, for example, UNI2-h showed $R = 0.203$ [0.133, 0.282] with a REVERSED outcome, whereas Phikon-v2 showed $R = 0.257$ [0.178, 0.341] while the comparison remained RANKING-INDETERMINATE. Across the eight matched Phikon-v2 settings, outcomes were 0 REVERSED, 2 PRESERVED, and 6 RANKING-INDETERMINATE, showing that continuous reference dependence can persist while categorical consequences remain encoder-dependent. The complete main-panel match is limited to UNI2-h and Phikon-v2; a single CRC-MSI/ABMIL three-encoder anchor is reported in Appendix G and does not establish broad encoder invariance.

6 CHARTER: A REFERENCE-AWARE EVALUATION CHARTER

CHARTER (Candidate-aware Hierarchical Assessment of References, Targets, and Evaluation Reporting) summarizes the preceding audit into three evaluation and reporting actions.

DECLARE the Intended Target and Reference. The previous formulation shows that reference substitution is not a simple implementation choice, but may change the scientific question being evaluated. Thus, the intended prediction target and evaluation reference should be explicitly declared. If the full-bag prediction q_0 is the intended target, fidelity to q_0 should be reported as the primary result, while the use of q_C should be explicitly stated when the candidate-conditioned prediction is the intended target. CHARTER does not force a single specific reference in all situations, but requires alignment between the intended target and the evaluation reference.

QUANTIFY Candidate-Induced Prediction Shift. Declaring the reference alone is not enough; how much the intermediate candidate filtering itself changes the prediction should also be reported. For each candidate strategy, the candidate-induced shift δ_C , together with original-reference and candidate-conditioned fidelity, makes this change explicit. This allows us to distinguish regimes in which candidate filtering approximately preserves the original prediction from regimes in which reference substitution materially changes the measured fidelity.

AUDIT Conclusion Stability. Finally, candidate comparisons should examine Δ_{orig} , Δ_{cond} , the direct pairwise reference effect $R_{A,B}$ with its uncertainty, and the final ranking label together. A nonzero reference effect does not by itself imply a determinate reversal. When the scientific claim is intended to span ranking protocols, whether the comparative conclusion remains stable should also be audited across the relevant protocols. The purpose of this stage is not to designate a particular ranker as the correct choice, but to explicitly show how dependent the reported conclusion is on the evaluation specification.

7 DISCUSSION AND LIMITATIONS

The main observation of this study is that the fidelity of compact evidence is not determined only by the selected subset itself, but also by the prediction reference against which that subset is evaluated. In hierarchical compact-evidence pipelines, this matters because candidate construction can induce strategy-specific references, so competing strategies may be judged against different preservation targets even under the same fidelity criterion. Our results show that this choice can affect both measured fidelity and comparative conclusions. The matched native-ranking result further shows that ranking stability and reference stability are distinct: ACMIL was PRESERVED under predictor-derived ranking while retaining a substantial reference-dependent comparative gap ($R = 0.168$ [0.107, 0.242]). Thus, the absence of a reversal does not by itself imply that the evaluation is insensitive to the chosen prediction reference. The candidate-conditioned prediction q_C is not intrinsically an invalid reference; the issue is whether the intended scientific target and evaluation reference are aligned.

This study establishes the existence and materiality of reference substitution in controlled WSI-MIL settings, not its field-wide prevalence. The native-ranking stress test shows protocol dependence without identifying a generally correct ranker. Prediction fidelity measures preservation of the frozen predictor, not biological or clinical validity; likewise, the sufficient-condition diagnostic is one-sided, so failure to certify does not imply disagreement or instability.

8 CONCLUSION

In hierarchical compact-evidence evaluation, intermediate candidate filtering can change the prediction reference before compact evidence is evaluated. We show that this can materially alter measured fidelity and, in some settings, comparative conclusions. CHARTER therefore calls for aligning the intended target and evaluation reference and auditing the consequences of that choice, without treating candidate-conditioned predictions as intrinsically invalid.

AI USE STATEMENT

Generative AI tools were used as assistive tools for research planning and methodological discussion, implementation and workflow support, discussion and cross-checking of experimental results and formal derivations, and manuscript and figure drafting and editing. All experiments and quantitative analyses were carried out through the authors’ documented computational pipelines. The authors reviewed and verified all AI-assisted material and take responsibility for the scientific decisions, interpretations, claims, and final content of the manuscript.

REFERENCES

- Selahattin Akkas and Ariful Azad. GNNShap: Scalable and accurate GNN explanation using shapley values. In *Proceedings of the ACM Web Conference 2024*, pp. 827–838, 2024. doi: 10.1145/3589334.3645599.
- Kenza Amara, Zhitao Ying, Zitao Zhang, Zhichao Han, Yang Zhao, Yinan Shan, Ulrik Brandes, Sebastian Schemm, and Ce Zhang. GraphFramEx: Towards systematic evaluation of explainability methods for graph neural networks. In *Proceedings of the First Learning on Graphs Conference*, volume 198 of *Proceedings of Machine Learning Research*, pp. 44:1–44:23. PMLR, 2022.
- Wouter Bulten, Kimmo Kartasalo, Po-Hsuan Cameron Chen, Peter Ström, Hans Pinckaers, Kunal Nagpal, Yuannan Cai, David F Steiner, Hester Van Boven, Robert Vink, et al. Artificial intelligence for diagnosis and gleason grading of prostate cancer: the panda challenge. *Nature medicine*, 28(1):154–163, 2022.
- Brandon Carter, Jonas Mueller, Siddhartha Jain, and David Gifford. What made you do this? understanding black-box decisions with sufficient input subsets. In *Proceedings of the Twenty-Second International Conference on Artificial Intelligence and Statistics*, volume 89 of *Proceedings of Machine Learning Research*, pp. 567–576. PMLR, 2019.
- Samuel Carton, Anirudh Rathore, and Chenhao Tan. Evaluating and characterizing human rationales. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pp. 9294–9307, 2020. doi: 10.18653/v1/2020.emnlp-main.747.
- Chun Sik Chan, Huanqi Kong, and Liang Guanqing. A comparative study of faithfulness metrics for model interpretability methods. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 5029–5038, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.acl-long.345.
- Richard J. Chen, Tong Ding, Ming Y. Lu, Drew F. K. Williamson, Guillaume Jaume, Andrew H. Song, Bowen Chen, Andrew Zhang, Daniel Shao, Muhammad Shaban, Mane Williams, Lukas Oldenburg, Luca L. Weishaupt, Judy J. Wang, Anurag Vaidya, Long Phi Le, Georg Gerber, Sharifa Sahai, Walt Williams, and Faisal Mahmood. Towards a general-purpose foundation model for computational pathology. *Nature Medicine*, 30(3):850–862, 2024. ISSN 1546-170X. doi: 10.1038/s41591-024-02857-3.
- Jay DeYoung, Sarthak Jain, Nazneen Fatema Rajani, Eric Lehman, Caiming Xiong, Richard Socher, and Byron C. Wallace. ERASER: A benchmark to evaluate rationalized NLP models. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 4443–4458, 2020. doi: 10.18653/v1/2020.acl-main.408.
- Alexandre Filiot, Paul Jacob, Alice Mac Kain, and Charlie Saillard. Phikon-v2, a large and public feature extractor for biomarker prediction, 2024. URL <https://arxiv.org/abs/2409.09173>.
- Anna Hedström, Philine Bommer, Kristoffer K. Wickstrøm, Wojciech Samek, Sebastian Lapuschkin, and Marina M.-C. Höhne. The meta-evaluation problem in explainable AI: Identifying reliable estimators with metaquantus. *Transactions on Machine Learning Research*, 2023. ISSN 2835-8856.

- Julius Hense, Mina Jamshidi Idaji, Oliver Eberle, Thomas Schnake, Jonas Dippel, Laure Ciernik, Oliver Buchstab, Andreas Mock, Frederick Klauschen, and Klaus-Robert Müller. xMIL: Insightful explanations for multiple instance learning in histopathology. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang (eds.), *Advances in Neural Information Processing Systems*, volume 37, pp. 8300–8328. Curran Associates, Inc., 2024.
- Maximilian Ilse, Jakub Tomczak, and Max Welling. Attention-based deep multiple instance learning. In *Proceedings of the 35th International Conference on Machine Learning*, pp. 2127–2136. PMLR, 2018.
- Alon Jacovi and Yoav Goldberg. Towards faithfully interpretable NLP systems: How should we define and evaluate faithfulness? In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 4198–4205, jul 2020. doi: 10.18653/v1/2020.acl-main.386.
- Syed Ashar Javed, Dinkar Juyal, Harshith Padigela, Amaro Taylor-Weiner, Limin Yu, and aaditya prakash. Additive MIL: Intrinsically interpretable multiple instance learning for pathology. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho (eds.), *Advances in Neural Information Processing Systems*, 2022.
- Hyun Do Jung, Jungwon Choi, Soojung Choi, Yujin Oh, and Hwiyoung Kim. Are compact rationales free? measuring tile selection headroom in frozen WSI-MIL, 2026a. URL <https://arxiv.org/abs/2605.12575>.
- Hyun Do Jung, Jungwon Choi, and Hwiyoung Kim. ReaMIL: Reasoning- and evidence-aware multiple instance learning for whole-slide histopathology. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision (WACV) Workshops*, pp. 40–45, March 2026b.
- Saarthak Kapse, Pushpak Pati, Srijan Das, Jingwei Zhang, Chao Chen, Maria Vakalopoulou, Joel Saltz, Dimitris Samaras, Rajarsi R. Gupta, and Prateek Prasanna. SI-MIL: Taming deep MIL for self-interpretability in gigapixel histopathology. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 11226–11237, 2024.
- Bin Li, Yin Li, and Kevin W Eliceiri. Dual-stream multiple instance learning network for whole slide image classification with self-supervised contrastive learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 14313–14323, 2021.
- Xitong Ling, Yuanyuan Lei, Jiawen Li, Junru Cheng, Wenting Huang, Tian Guan, Jian Guan, and Yonghong He. Comprehensive benchmark dataset for pathological lymph node metastasis in breast cancer sections. *Scientific Data*, 12(1):1381, 2025. ISSN 2052-4463. doi: 10.1038/s41597-025-05586-5.
- Ming Y Lu, Drew FK Williamson, Tiffany Y Chen, Richard J Chen, Matteo Barbieri, and Faisal Mahmood. Data-efficient and weakly supervised computational pathology on whole-slide images. *Nature biomedical engineering*, 5(6):555–570, 2021.
- Zhuchen Shao, Hao Bian, Yang Chen, Yifeng Wang, Jian Zhang, Xiangyang Ji, and Yongbing Zhang. TransMIL: Transformer based correlated multiple instance learning for whole slide image classification. In M. Ranzato, A. Beygelzimer, Y. Dauphin, P.S. Liang, and J. Wortman Vaughan (eds.), *Advances in Neural Information Processing Systems*, volume 34, pp. 2136–2147. Curran Associates, Inc., 2021.
- Richard Tomsett, Dan Harborne, Supriyo Chakraborty, Prudhvi Gurram, and Alun D. Preece. Sanity checks for saliency metrics. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pp. 6021–6029, 2020. doi: 10.1609/aaai.v34i04.6064.
- John N Weinstein, Eric A Collisson, Gordon B Mills, Kenna R Shaw, Brad A Ozenberger, Kyle Ellrott, Ilya Shmulevich, Chris Sander, and Joshua M Stuart. The cancer genome atlas pan-cancer analysis project. *Nature genetics*, 45(10):1113–1120, 2013.
- Jinxi Xiang, Xiyue Wang, Jun Zhang, Sen Yang, Xiao Han, and Wei Yang. Exploring low-rank property in multiple instance learning for whole slide image classification. In *The Eleventh International Conference on Learning Representations*, 2023. URL <https://openreview.net/forum?id=0lKmhBsEPFO>.

Hanwen Xu, Naoto Usuyama, Jaspreet Bagga, Sheng Zhang, Rajesh Rao, Tristan Naumann, Cliff Wong, Zelalem Gero, Javier González, Yu Gu, Yanbo Xu, Mu Wei, Wenhui Wang, Shuming Ma, Furu Wei, Jianwei Yang, Chunyuan Li, Jianfeng Gao, Jaylen Rosemon, Tucker Bower, Soohee Lee, Roshanthi Weerasinghe, Bill J. Wright, Ari Robicsek, Brian Piening, Carlo Bifulco, Sheng Wang, and Hoifung Poon. A whole-slide foundation model for digital pathology from real-world data. *Nature*, 630(8015):181–188, 2024.

Yunlong Zhang, Honglin Li, Yunxuan Sun, Sunyi Zheng, Chenglu Zhu, and Lin Yang. Attention-challenging multiple instance learning for whole slide image classification. In *European conference on computer vision*, pp. 125–143. Springer, 2024.

Eric Zimmermann, Eugene Vorontsov, Julian Viret, Adam Casson, Michal Zelechowski, George Shaikovski, Neil Tenenholtz, James Hall, David Klimstra, Razik Yousfi, Thomas Fuchs, Nicolo Fusi, Siqi Liu, and Kristen Severson. Virchow2: Scaling self-supervised mixed magnification models in pathology. *arXiv preprint arXiv:2408.00738*, 2024.

A FORMAL DIAGNOSTIC DERIVATION

For a fixed compact-subset prediction p , recall

$$e_{\text{orig}} = D(p, q_0), \quad e_{\text{cond}} = D(p, q_C), \quad \delta_C = D(q_0, q_C). \quad (6)$$

Because D is a metric, the reverse triangle inequality gives

$$|e_{\text{cond}} - e_{\text{orig}}| \leq \delta_C. \quad (7)$$

Thus, δ_C upper-bounds how much the continuous fidelity error can change solely because the prediction reference is substituted.

For the discrete FidelitySuccess criterion used in our experiments, let

$$\gamma_0 = q_{0,(1)} - q_{0,(2)} \quad (8)$$

denote the margin between the largest and second-largest probabilities of the original full-bag prediction. Under TV distance, if

$$\delta_C < \frac{\gamma_0}{2}, \quad (9)$$

the predicted class of q_C is guaranteed to agree with that of q_0 . In addition, the reverse-triangle bound implies that the threshold component of the fidelity verdict cannot change when

$$\delta_C < |e_{\text{cond}} - \epsilon|. \quad (10)$$

Defining

$$\rho = \min\left(\frac{\gamma_0}{2}, |e_{\text{cond}} - \epsilon|\right), \quad (11)$$

we therefore obtain the sufficient condition

$$\delta_C < \rho \implies Z(p; q_C) = Z(p; q_0), \quad (12)$$

where $Z(p; q)$ denotes the discrete FidelitySuccess verdict for subset prediction p evaluated against reference q .

This guarantee applies only to the corresponding sample, subset prediction, and fidelity threshold. Failure to satisfy the condition means only that verdict agreement is *not certified by this condition*; it does not imply disagreement or instability. The strict inequality is retained at the decision boundary. The continuous reverse-triangle bound requires the metric property of D , while the class-margin component above uses the TV-distance setting employed in our experiments.

B DATASETS, ENDPOINTS, SPLITS, AND COHORT PROVENANCE

Table 2: **Evaluation cohorts, analysis units, and class composition.** Evaluation N refers to the validation set used for the reported fidelity analyses. For PANDA and CAMELYON+, no validated estimate is included in the reported analyses, so N denotes the planned validation set.

Task	Unit	Evaluation N	Positive class
Clean NSCLC	Patient	95 patients (98 slides)	LUSC: 48/95 (50.5%)
LUAD-TP53	Patient	67 of 69 validation patients	TP53 mutant: 34/67 (50.7%)
CRC-MSI	Patient	81	MSI-H: 11/81 (13.6%)
LUAD-EGFR	Patient	46	EGFR mutant: 6/46 (13.0%)
LUAD-KRAS	Patient	46	KRAS mutant: 14/46 (30.4%)
LUAD-STK11	Patient	46	STK11 mutant: 7/46 (15.2%)
BRCA morphology	Patient	169 patients (179 slides)	IDC: 131/169 (77.5%)
BRCA-ER	Patient	103	ER positive: 85/103 (82.5%)
BRCA-PR	Patient	102	PR positive: 73/102 (71.6%)
BRCA-HER2	Patient	66	HER2 positive: 20/66 (30.3%)
PANDA [†]	Slide	1,699 planned slides	Cancer: 1,257/1,699 (74.0%)
CAMELYON+ [†]	Slide-level endpoint	74 planned slides	Tumour: 23/74 (31.1%)

[†]No validated estimate is reported for PANDA or CAMELYON+.

All reported fidelity quantities use the corresponding validation partition, while held-out test partitions remain sealed and do not enter the reported analyses. The NSCLC, LUAD, CRC, and BRCA tasks are derived from TCGA cohorts (Weinstein et al., 2013). Clean NSCLC uses a patient-disjoint split with seed 20260916 and 70/10/20 target fractions. LUAD-TP53 and CRC-MSI use patient-level splits with seed 20260913 and 70/15/15 fractions; the LUAD-TP53 audit includes 67 of the 69 validation patients after the documented geometry exclusion. LUAD-EGFR, LUAD-KRAS, and LUAD-STK11 use patient-level 70/10/20 splits with seed 20260916. The BRCA receptor endpoints share a patient-level 70/10/20 split generated with seed 20260913 before endpoint labels were joined.

The BRCA morphology split is patient-disjoint, but the original split seed, target ratio, and builder metadata were not recovered from the available records. PANDA (Bulten et al., 2022) uses a fixed slide-disjoint split because no patient identifier is available; the original split seed and the derivation of the stored binary benign/cancer label were not recovered. PANDA does not contribute a validated estimate to the breadth results reported in the main text.

For CAMELYON+ (Ling et al., 2025), we use a provenance-verified subset of 875 slides rather than claiming coverage of the full benchmark. The CAMELYON16 test set is retained as the sealed test partition, while CAMELYON16-train and CAMELYON17-train form the development pool. CAMELYON17 provides patient identifiers, but an authoritative patient mapping for CAMELYON16 was not identified in the available provenance sources; we therefore do not claim patient-level disjointness for the CAMELYON16 portion. No CAMELYON+ estimate enters the reported breadth results.

C MIL ARCHITECTURES AND PATHOLOGY ENCODERS

The common task-breadth panel uses nine MIL architectures: MeanMIL, MaxMIL, ABMIL (Ilse et al., 2018), CLAM (Lu et al., 2021), DSMIL (Li et al., 2021), TransMIL (Shao et al., 2021), Transformer, ILRA (Xiang et al., 2023), and ACMIL (Zhang et al., 2024).

Cross-encoder evaluation is organized around three anchor tasks—clean NSCLC, LUAD-TP53, and CRC-MSI. The planned encoder inventory comprises UNI2-h (Chen et al., 2024), Phikon-v2 (Filiot et al., 2024), Virchow2 (Zimmermann et al., 2024), and Prov-GigaPath (Xu et al., 2024). The encoder analysis under the shared C_{L2} protocol uses MeanMIL, ABMIL, TransMIL, ACMIL, and ILRA. The main-text matched panel is restricted to the eight task-MIL settings with validated estimates under both UNI2-h and Phikon-v2. Architectures requiring a different candidate-construction path are not pooled into this comparison.

Encoder comparisons require matched physical tile coordinates and footprints. Configurations that cannot satisfy this parity are excluded from matched encoder comparisons rather than harmonized through post hoc re-tiling.

D CANDIDATE CONSTRUCTION AND RANKING SPECIFICATIONS

Random candidate construction and Random- K subset selection use deterministic identity-keyed seeds so that sampled indices are invariant to row ordering and cohort filtering under an otherwise fixed experimental condition. The implemented effective budgets are $M_c = \min(M, N)$ and $K_c = \min(K, M_c)$. When $N < M$, both C_{L2} and C_{RAND} coincide with the full bag; no padding, replacement sampling, or sample exclusion is applied.

Candidate scores for C_{L2} are computed as $\|x_i\|_2$, where x_i is the predictor-specific token embedding for tile i before attention, pooling, or transformer contextualization. ABMIL, TransMIL, Transformer, ILRA, CLAM, and DSMIL include a two-dimensional positional term derived from slide-wise min-max-normalized coordinates, whereas MeanMIL, MaxMIL, and ACMIL do not use coordinates in this embedding. Thus, the score does not depend on other tiles' feature values, although coordinate-using models depend on the slide-level coordinate normalization range.

Predictor-native ranking is evaluated for ABMIL, ACMIL, CLAM, and TransMIL. For each slide, the native score for every tile is computed once from the full bag using the same frozen predictor that produces the reference and subset predictions; within each candidate pool, the K_c tiles with the highest scores are then selected. For ABMIL and CLAM, the native score is the pre-softmax gated-attention logit from the single attention branch. For ACMIL, it is the arithmetic mean of the pre-softmax gated-attention logits across its five attention branches. For TransMIL, it is the dot product between each pre-encoder tile-token embedding and the learned class-token vector. These scores are class-agnostic, are not normalized, and do not depend on K except through the number of selected tiles. Exact ties are not assigned an additional explicit tie-breaking rule.

E FIDELITY EVALUATION AND STATISTICAL ANALYSIS

Statistical inference follows a patient-first resampling strategy whenever patient identifiers are available. Predictor seeds are kept fixed as repeated model realizations and are not counted as independent patient-level observations. For PANDA, which lacks patient identifiers, the evaluation protocol uses slide-level resampling.

For pooled five-seed estimates, all binary fidelity outcomes from every slide-seed record belonging to a patient are averaged with equal record weight to form one patient-level rate for each candidate and reference. Cohort-level success rates then average these patient-level rates equally over the common patient set evaluated for both C_{L2} and C_{RAND} . Pairwise Δ_{orig} , Δ_{cond} , and R are recomputed jointly in 2,000 paired bootstrap resamples of patients with replacement, and pointwise percentile 95% confidence intervals are reported; these are not simultaneous family-wise intervals over the full grid.

For comparisons between candidate construction strategies, the direct pairwise reference effect $R_{A,B}$ is estimated by bootstrap rather than inferred from separate significance tests under the two references. Model selection and experimental decisions are made without using the held-out test sets.

As a sensitivity check on the fixed magnitude tolerance, the 15-comparison Random- K panel yielded REVERSED/PRESERVED/RANKING-INDETERMINATE counts of 6/3/6, 6/3/6, 5/3/7, 4/2/9, 3/2/10, and 3/0/12 for $\tau = 0, 0.04, 0.045, 0.05, 0.07$, and 0.10 , respectively. Under a stricter variant requiring the entire sign-consistent 95% confidence interval to lie beyond $|\Delta| = 0.05$, the counts were 2/0/13. The main analysis retains the fixed $\tau = 0.05$ rule.

Because B_g is an aggregate change in success rate, a value near zero does not imply that individual sample-level fidelity verdicts are unchanged: opposing sample-level changes may cancel in aggregate.

F PROVENANCE AND VALIDATION CONTROLS

All reported results are linked to their feature source, data split, predictor checkpoint, and evaluation configuration. Results that fail split, seed, feature-extraction, or provenance checks are excluded from the reported analyses. Protocol-incompatible configurations are excluded from matched comparisons rather than harmonized through post hoc preprocessing or cohort redefinition.

G ADDITIONAL NUMERICAL RESULTS AND BREADTH INVENTORY

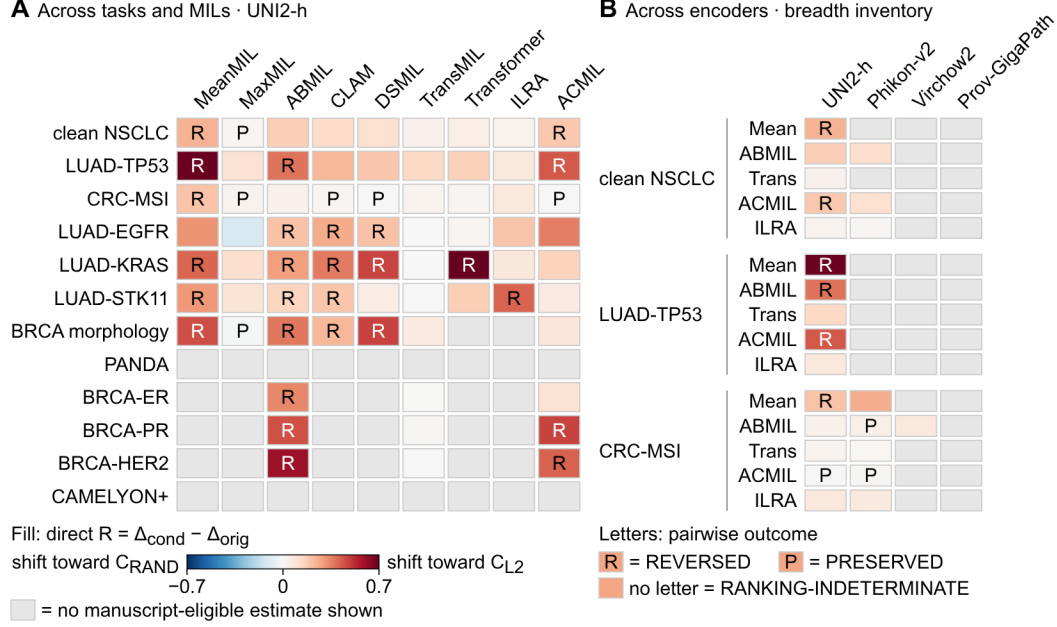


Figure 4: **Full breadth-audit inventory underlying the scoped main-text Figure 3.** Panel A shows the full task–MIL inventory for the common- C_{L2} audit, and Panel B shows the full encoder-breadth inventory over the planned anchor task–MIL settings. Colored cells denote validated estimates included in the reported analyses, with fill indicating direct $R = \Delta_{\text{cond}} - \Delta_{\text{orig}}$ and letters indicating the categorical pairwise outcome. Grey cells denote configurations without a validated estimate. The main-text Figure 3 presents complete common-coverage and encoder-matched subsets for compact comparison.

In the additional CRC-MSI/ABMIL three-encoder anchor, Virchow2 yielded $R = 0.0765$ [0.0321, 0.1235] and remained RANKING-INDETERMINATE; the corresponding UNI2-h and Phikon-v2 estimates are shown in Fig. 4.

Table 3 reports the complete five-seed pooled comparisons underlying the 15-comparison Random- K audit and the matched native-ranking stress test in the main text.

Table 3: **Full numerical results for the main Random- K audit and matched native-ranking stress test.** Results compare C_{L2} against C_{RAND} at the default operating point ($M = 1024$, $K = 32$, $\epsilon = 0.05$) using UN12-h features. Each row pools five predictor seeds (0, 1, 42, 1337, 2025) with patient-first bootstrap inference. Intervals are percentile 95% confidence intervals from 2,000 bootstrap replicates. The Random- K rows comprise the 15 five-seed comparisons reported in the main audit; the native-ranking rows comprise the four matched clean-NSCLC stress-test comparisons. Status denotes whether the direct R interval excludes zero, and Outcome denotes the categorical pairwise result under the fixed tolerance rule ($\tau = 0.05$).

Task	MIL	Ranker	n	Δ_{orig} [95% CI]	Δ_{cond} [95% CI]	direct R [95% CI]	Status	Outcome
CRC-MSI	ABMIL	Random-K	81	0.0494 [0.0049, 0.0938]	0.084 [0.042, 0.1259]	0.0346 [-0.0, 0.0741]	ns	RANKING-INDETERMINATE
CRC-MSI	ACMIL	Random-K	81	0.0914 [0.0519, 0.1333]	0.0864 [0.0469, 0.1309]	-0.0049 [-0.0297, 0.0222]	ns	PRESERVED
CRC-MSI	TransMIL	Random-K	81	0.0074 [-0.0173, 0.0321]	0.0296 [0.0, 0.0617]	0.0222 [0.0, 0.0519]	ns	RANKING-INDETERMINATE
LUAD-TP53	ABMIL	Random-K	67	-0.1881 [-0.2597, -0.1134]	0.194 [0.1164, 0.2746]	0.3821 [0.2955, 0.4627]	SIG	REVERSED
LUAD-TP53	ACMIL	Random-K	67	-0.3284 [-0.391, -0.2597]	0.1075 [0.0269, 0.1851]	0.4358 [0.3552, 0.5104]	SIG	REVERSED
LUAD-TP53	TransMIL	Random-K	67	-0.0985 [-0.1434, -0.0507]	0.0448 [-0.0209, 0.1104]	0.1433 [0.0806, 0.209]	SIG	RANKING-INDETERMINATE
Clean NSCLC	ABMIL	Random-K	95	-0.1232 [-0.1863, -0.0684]	0.0495 [0.0032, 0.0968]	0.1726 [0.1116, 0.2463]	SIG	RANKING-INDETERMINATE
Clean NSCLC	ACMIL	Random-K	95	-0.1232 [-0.1842, -0.0737]	0.0663 [0.0221, 0.1158]	0.1895 [0.1242, 0.2674]	SIG	REVERSED
Clean NSCLC	CLAM	Random-K	95	-0.0516 [-0.1137, 0.0032]	0.0832 [0.0379, 0.1306]	0.1347 [0.0779, 0.2042]	SIG	RANKING-INDETERMINATE
Clean NSCLC	DSMIL	Random-K	95	-0.0442 [-0.0822, -0.0063]	0.0695 [0.0295, 0.1116]	0.1137 [0.0737, 0.16]	SIG	RANKING-INDETERMINATE
Clean NSCLC	ILRA	Random-K	95	0.0105 [-0.0064, 0.0295]	0.0337 [0.0147, 0.0547]	0.0232 [0.0021, 0.0463]	SIG	RANKING-INDETERMINATE
Clean NSCLC	MaxMIL	Random-K	95	0.0821 [0.0442, 0.1221]	0.0968 [0.0589, 0.1368]	0.0147 [-0.0105, 0.0421]	ns	PRESERVED
Clean NSCLC	MeanMIL	Random-K	95	-0.1379 [-0.1916, -0.0905]	0.1049 [0.0579, 0.1509]	0.2428 [0.1747, 0.3095]	SIG	REVERSED
Clean NSCLC	TransMIL	Random-K	95	-0.0411 [-0.0789, -0.0063]	-0.0084 [-0.0463, 0.0274]	0.0326 [0.0147, 0.0526]	SIG	RANKING-INDETERMINATE
Clean NSCLC	Transformer	Random-K	95	-0.0705 [-0.1147, -0.0295]	-0.0221 [-0.0705, 0.0242]	0.0484 [0.0189, 0.0821]	SIG	RANKING-INDETERMINATE
Clean NSCLC	ABMIL	native	95	0.0337 [-0.0042, 0.0716]	0.1821 [0.1211, 0.2474]	0.1484 [0.0884, 0.2179]	SIG	RANKING-INDETERMINATE
Clean NSCLC	ACMIL	native	95	0.0744 [0.0358, 0.1144]	0.2428 [0.1754, 0.3144]	0.1684 [0.1073, 0.2421]	SIG	PRESERVED
Clean NSCLC	CLAM	native	95	-0.0105 [-0.0358, 0.0105]	0.1126 [0.0611, 0.1705]	0.1232 [0.0674, 0.1874]	SIG	RANKING-INDETERMINATE
Clean NSCLC	TransMIL	native	95	0.0084 [-0.0274, 0.0484]	0.0263 [-0.0116, 0.0663]	0.0179 [0.0, 0.0379]	ns	RANKING-INDETERMINATE