

Q-Strata: Hierarchical Bit Allocation for Mixed-Precision Quantization of Mixture-of-Experts LLMs

Deokjae Lee^{1,3} and Sihun Chu^{2,3} and Hyun Oh Song^{1,2,3*}

¹Department of Computer Science and Engineering, Seoul National University

²Interdisciplinary Program in Artificial Intelligence, Seoul National University

³Neural Processing Research Center

{bdbj, sihun.chu, hyunoh}@mllab.snu.ac.kr

Abstract

Mixed-precision quantization (MPQ) assigns a different bitwidth to each linear layer of a large language model (LLM) to minimize the quantization-induced quality loss under a fixed budget, but Mixture-of-Experts (MoE) models contain these layers in every expert of every MoE block, so the allocation space grows far larger than in a dense model. Existing methods either allocate within each block under a uniform per-block budget, or allocate across blocks through an additive proxy, and neither directly optimizes a model-level objective over the choices that couple the blocks. We propose Q-STRATA, a bi-level allocator that ranks within-block assignments with a cheap proxy and allocates across blocks with a model-level objective evaluated on the assembled quantized model. Its inner stage caches a Pareto frontier of candidates per block over finely spaced budgets, leaving the outer stage to set one budget per block instead of a bitwidth for every linear layer. With the search reduced to one budget per block, the outer stage optimizes this model-level objective directly, capturing the inter-block coupling that additive proxies miss. On Mixtral-8x7B-Instruct, Qwen1.5-MoE-A2.7B, and DeepSeek-V2-Lite, Q-STRATA consistently achieves lower Wiki-Text2 perplexity than uniform-bitwidth GPTQ and the state-of-the-art MoE MPQ methods MxMoE and GEMQ in the low-bit regime. The code is available at <https://github.com/snu-mllab/Q-Strata/tree/main>.

1 Introduction

Mixture-of-Experts (MoE) models such as Mixtral, DeepSeek-V3, and Qwen3 have become a leading approach for scaling large language models (LLMs) across diverse tasks (Jiang et al., 2024; DeepSeek-AI et al., 2025; Yang et al., 2025). They route each token to a small subset of experts, which

enables them to scale up model capacity without compromising compute efficiency. The trade-off of this design is a large memory footprint, since all experts must be stored even though only a few are active per token, so reducing this footprint is central to real-world deployment and calls for weight compression that exploits the MoE structure. In particular, we focus on weight-only post-training quantization (PTQ), which compresses the weights of a trained model with only a small calibration dataset and no retraining, reflecting practical deployment constraints (Frantar et al., 2023; Hubara et al., 2021).

Mixed-precision quantization (MPQ) assigns different bitwidths to the linear layers of a model to minimize the quality lost under a fixed budget, pushing the size-quality frontier of dense models beyond uniform quantization (Lee and Song, 2025). The task is naturally cast as minimizing this quality loss over a high-dimensional discrete space of bitwidth assignments. Existing methods take one of two routes. One approximates this loss as a linear sum of layer-wise proxy terms, typically from a Hessian approximation, and solves the allocation with integer linear programming (Dong et al., 2020; Chen et al., 2021). The other optimizes a model-level objective, evaluated on the assembled quantized model, in a black-box manner with model-based evolutionary search or reinforcement learning (Lee et al., 2025; Wang et al., 2020, 2019). The proxy route is suboptimal because it optimizes an approximate objective, whereas the black-box route works with the model-level objective directly and reaches higher quality at the cost of repeated model evaluations.

The problem becomes considerably harder for MoE LLMs. Each of the L MoE blocks holds E experts, and each expert contains three linear layers (gate, up, and down), so the MoE blocks alone hold $3LE$ linear layers, inducing a search space of $|Q|^{3LE}$ assignments over the $|Q|$ candi-

*Hyun Oh Song is the corresponding author.

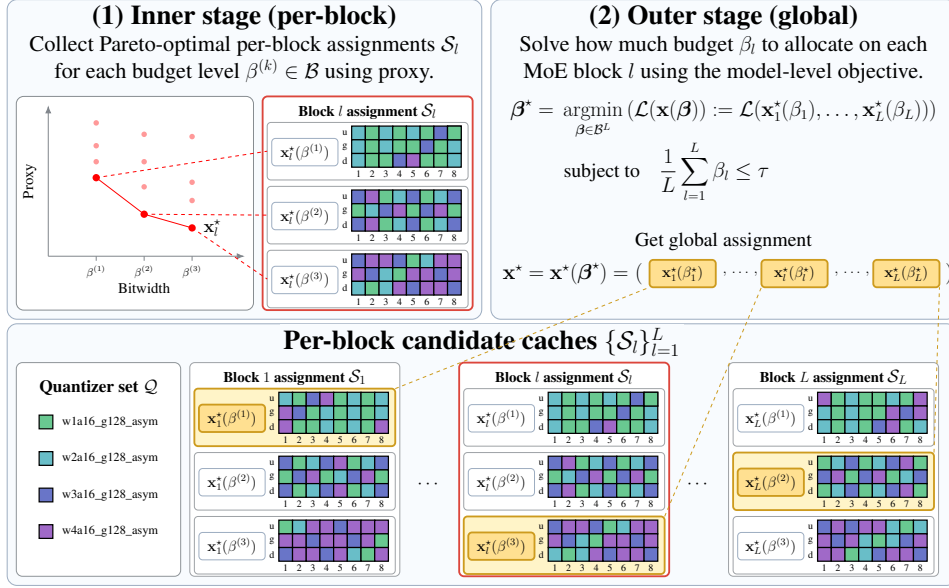


Figure 1: Overview of Q-STRATA. The inner stage uses the cheap per-block proxy score to cache, for each MoE block, a Pareto frontier of candidate assignments over the budget grid, one assignment per budget level. The outer stage selects one cached candidate per block, that is, one budget β_l per block, to minimize the model-level objective $\mathcal{L}$ directly under the average-bitwidth budget τ , then assembles them into the global assignment. This reduces the search from a bitwidth per linear layer to one budget per block.

date quantizers, far more than in a dense model. For instance, within the Qwen3 family, the dense Qwen3-32B has $7 \times 64 = 448$ linear layers, whereas the similarly sized Qwen3-30B-A3B has $3 \times 48 \times 128 = 18,432$ linear layers in its MoE blocks alone, more than forty times as many.¹ Under this high dimensionality, black-box search cannot be applied directly. MxMoE and MC-MoE instead use proxy scores to capture the differing contributions of the experts and linear layers within each MoE block, which improves over uniform quantization, but they keep every block’s budget uniform and do not allocate across blocks (Duanmu et al., 2025; Huang et al., 2025). GEMQ does allocate different budgets across blocks through a global assignment, but it still relies on an additive proxy for model quality, so it misses the dependencies that quantization creates between blocks (Deng et al., 2026). No existing quantization method for MoE LLMs directly optimizes a model-level objective over the choices that couple the blocks.

Our central observation is that bitwidth allocation comprises two distinct strata. Within a block, a low-cost proxy ranks candidate assignments reliably, as prior MoE methods demonstrate,

whereas across blocks the assignments are coupled, so their joint effect shows up only in a model-level objective evaluated on the assembled quantized model. To optimize this model-level objective directly without searching the $3LE$ -dimensional assignment space, we propose Q-STRATA, a bi-level allocator that splits the allocation along these two strata (Figure 1). Its inner stage caches a Pareto frontier of candidates per block over finely spaced budgets, and its outer stage selects one cached candidate per block to minimize the model-level objective under the global budget, operating over only L per-block budgets rather than $3LE$ individual bitwidths. We solve this outer selection with a greedy descent that starts from the most expensive budgets and repeatedly lowers the budget of the block whose reduction raises the objective least, made affordable by a lazy evaluation scheme that recomputes only a few marginals per step (Minoux, 1978). Across Mixtral-8 $\times$ 7B-Instruct (Jiang et al., 2024), Qwen1.5-MoE-A2.7B (Qwen Team, 2024), DeepSeek-V2-Lite (DeepSeek-AI et al., 2024), and Qwen3-30B-A3B (Yang et al., 2025), Q-STRATA achieves the lowest WikiText2 perplexity among the compared methods in the low-bit regime, and its outer search also serves as a standalone allocator on dense models.

¹The dense count includes all seven linear layers per block, whereas the MoE count includes only the three projections (up, gate, down) of each of the 128 experts across the 48 blocks, excluding attention and routing.

2 Preliminaries

2.1 Problem formulation

We study weight-only mixed-precision quantization (MPQ) of a Mixture-of-Experts (MoE) model with L MoE blocks indexed by $l \in [L]$, where $[n] = \{1, \dots, n\}$. Each MoE block contains E experts indexed by $e \in [E]$, and each expert holds three linear layers, the up, gate, and down projections of its feed-forward network, indexed by $i \in \mathcal{I} = \{\text{up}, \text{gate}, \text{down}\}$. A shared expert, when present, is counted as one of the E experts. We write $W_{l,e,i}$ for the full-precision weight of the linear layer (l, e, i) , projection i of expert e in MoE block l , and $|W_{l,e,i}|$ for its number of parameters. These expert linear layers, $N = 3LE$ in total, are the atomic units of bit allocation. The attention projections, the routing gate, and the embeddings hold a small fraction of the parameters and are kept at a fixed precision, so we allocate bits only over the expert linear layers (Duanmu et al., 2025).

Given a set of candidate quantizers $\mathcal{Q}$, an assignment selects a quantizer $x_{l,e,i} \in \mathcal{Q}$ for each layer, replacing its weight $W_{l,e,i}$ with the quantized weight $x_{l,e,i}(W_{l,e,i})$. We gather these choices into the local assignment $\mathbf{x}_l = (x_{l,e,i})_{e \in [E], i \in \mathcal{I}} \in \mathcal{X}_l = \mathcal{Q}^{E \times 3}$ of block l and the global assignment $\mathbf{x} = (\mathbf{x}_1, \dots, \mathbf{x}_L) \in \mathcal{X} = \mathcal{Q}^{L \times E \times 3}$.

The bit cost of block l is $C_l(\mathbf{x}_l) = \sum_{e,i} c_{l,e,i}(x_{l,e,i})$, where $c_{l,e,i}(x)$ is the storage in bits of layer (l, e, i) quantized by x , including the scale and zero-point overhead. From this we define the average bitwidth of block l , $\bar{b}_l(\mathbf{x}_l) = C_l(\mathbf{x}_l) / \sum_{e,i} |W_{l,e,i}|$, and the average bitwidth over the expert weights, $\bar{b}(\mathbf{x}) = \sum_l C_l(\mathbf{x}_l) / \sum_{l,e,i} |W_{l,e,i}|$, the total expert-weight bits over the total expert-parameter count. In the MoE models we consider, the blocks are structurally identical and share the same parameter count, so $\bar{b}(\mathbf{x})$ reduces to the mean of the per-block bitwidths, $\bar{b}(\mathbf{x}) = \frac{1}{L} \sum_l \bar{b}_l(\mathbf{x}_l)$.

MPQ minimizes $\mathcal{L}(\mathbf{x})$ at a target average bitwidth τ ,

$$\begin{aligned} & \underset{\mathbf{x} \in \mathcal{X}}{\text{minimize}} && \mathcal{L}(\mathbf{x}) \\ & \text{subject to} && \bar{b}(\mathbf{x}) \leq \tau. \end{aligned} \quad (1)$$

$\mathcal{L}(\mathbf{x})$ is a model-level objective that scores the quantized model on the calibration data. Following the protocol of Lee et al. (2025), we use the Jensen–Shannon divergence (JSD) between the next-token distributions of the quantized and full-precision

models, where a lower value indicates higher quality. The full-precision distributions are precomputed once, so evaluating $\mathcal{L}$ takes a single end-to-end forward pass of the quantized model on the calibration data.

This optimization is especially hard for MoE models, since the dimension of the assignment space, $N = 3LE$, scales with the number of experts rather than with model size or compute.

Rather than optimize over $\mathcal{X}$ monolithically, we exploit the two-level structure of the MoE model. The allocation inside a block, over its experts and projections, is captured well by a cheap block-local proxy, an estimate that needs no end-to-end forward of the quantized model, whereas the allocation across blocks couples the blocks in a way that only the model-level objective $\mathcal{L}$ reflects. This contrast lets us split this search into two tractable stages, an inner stage that collects, for each block, a set of bit-proxy trade-off solutions, and an outer stage that optimizes the per-block selection from these sets to minimize $\mathcal{L}$, the bi-level design we develop in Section 3.

2.2 Block reconstruction proxy

For the allocation inside a single MoE block, prior MoE quantization methods rely on the block-output reconstruction error (Duanmu et al., 2025; Huang et al., 2025). Let h_l be the output of MoE block l on the calibration inputs and $\hat{h}_l(\mathbf{x}_l)$ its output after quantizing the block with $\mathbf{x}_l$. The reconstruction error $\|\hat{h}_l(\mathbf{x}_l) - h_l\|^2$ depends only on the local assignment $\mathbf{x}_l$, but the gating nonlinearity and routing couple the $3E$ linear layers, so it is not additive across them. To make it decomposable, these methods approximate it by a proxy that sums the block-output distortion each linear layer induces in isolation,

$$\mathcal{D}_l(\mathbf{x}_l) = \sum_{e \in [E]} \sum_{i \in \mathcal{I}} \|\hat{h}_l^{(e,i)}(x_{l,e,i}) - h_l\|^2,$$

where $\hat{h}_l^{(e,i)}(q)$ is the block output when only linear layer (l, e, i) is quantized with quantizer q and the rest of the block is kept at full precision. Each distortion is precomputed once per layer and quantizer from a single block forward, and since it is nonzero only on the tokens routed to expert e , frequently used experts contribute more, matching their larger effect on the block output. Two properties of this proxy shape our design. It is block-separable, since $\mathcal{D}_l$ depends only on $\mathbf{x}_l$ while $\mathcal{L}$ couples all blocks,

Algorithm 1 Inner stage: per-block candidate caching

Require: quantizer set $\mathcal{Q}$, budget grid $\mathcal{B}$, per-block inputs $\{X_l\}$ and full-precision outputs $\{h_l\}$ from one calibration forward

Ensure: candidate caches $\{\mathcal{S}_l\}_{l=1}^L$

```

1: for  $l = 1$  to  $L$  do
2:   for  $(e, i, q) \in [E] \times \mathcal{I} \times \mathcal{Q}$  do
3:      $d_l(e, i, q) \leftarrow \|\hat{h}_l^{(e,i)}(q) - h_l\|^2$ 
4:   end for
5:   for  $\beta \in \mathcal{B}$  do
6:      $\mathbf{x}_l^*(\beta) \leftarrow \text{solve (2) via ILP}$ 
7:   end for
8:    $\mathcal{S}_l \leftarrow \{\mathbf{x}_l^*(\beta) : \beta \in \mathcal{B}\}$ 
9: end for
10: return  $\{\mathcal{S}_l\}_{l=1}^L$ 

```

and it is cheap, since each term needs only a forward of the single block. We therefore adopt it for the allocation inside each block and reserve $\mathcal{L}$ for the allocation across blocks.

3 Method

Q-STRATA decomposes Equation (1) into two stages that follow the two-level structure of an MoE model (Figure 1). The inner stage uses the cheap proxy $\mathcal{D}_l$ to precompute, for each MoE block, a small set of Pareto-optimal candidate assignments across budgets, and caches them. The outer stage optimizes the model-level objective $\mathcal{L}$ directly by choosing one cached candidate per block. The inner stage decides how to allocate quantizers to linear layers within each block for each budget, and the outer stage decides how to allocate budget across blocks.

3.1 Inner stage

For each MoE block l and budget β , we select the local assignment that minimizes the proxy under the budget,

$$\begin{aligned} \mathbf{x}_l^*(\beta) = \underset{\mathbf{x}_l \in \mathcal{X}_l}{\operatorname{argmin}} \quad & \mathcal{D}_l(\mathbf{x}_l) \\ \text{subject to} \quad & \bar{b}_l(\mathbf{x}_l) \leq \beta. \end{aligned} \quad (2)$$

Because the proxy decomposes over the layers, this is a multiple-choice knapsack problem (MCKP), in which the $3E$ linear layers are the choice groups and the quantizers in $\mathcal{Q}$ are the items, and choosing a quantizer for a layer contributes its bitwidth to the cost and the block-output distortion

Algorithm 2 Outer stage: lazy greedy descent

Require: caches $\{\mathcal{S}_l\}$, model-level objective $\mathcal{L}$, target average bitwidth τ

Ensure: budgets β , assignment $\mathbf{x}(\beta)$

```

1:  $\beta_l \leftarrow \beta^{(K)}$  for all  $l$ ;  $t \leftarrow 0$ ;  $\ell \leftarrow \mathcal{L}(\mathbf{x}(\beta))$ 
2:  $H \leftarrow \emptyset$ ; REFRESH( $l$ ) for all  $l \in [L]$ 
3: while  $\frac{1}{L} \sum_l \beta_l > \tau$  and  $H \neq \emptyset$  do
4:   pop block  $l$  with smallest key  $g_l$  from  $H$ 
5:   if  $\kappa_l < t$  then ▷ stale
6:     REFRESH( $l$ )
7:   else
8:     lower  $\beta_l$  one level
9:      $\ell \leftarrow \ell + g_l$ ;  $t \leftarrow t + 1$ 
10:    if  $\beta_l > \beta^{(1)}$  then REFRESH( $l$ )
11:  end if
12: end while
13: return  $\beta, \mathbf{x}(\beta)$ 

```

```

14: function REFRESH( $l$ )
15:    $\beta' \leftarrow \beta$  with  $\beta_l$  lowered one level
16:    $g_l \leftarrow \mathcal{L}(\mathbf{x}(\beta')) - \ell$ ;  $\kappa_l \leftarrow t$ 
17:   insert  $l$  into min-heap  $H$  keyed by  $g_l$ 
18: end function

```

it induces to the objective. We solve this MCKP exactly with an integer linear program (ILP) using an off-the-shelf solver (Gurobi Optimization, LLC, 2026). The distortion terms $\|\hat{h}_l^{(e,i)}(q) - h_l\|^2$ summed in $\mathcal{D}_l$ are precomputed once for every layer and quantizer, reusing the block inputs X_l from a single full-precision forward over the calibration set. We solve over a shared budget grid $\mathcal{B} = \{\beta^{(1)} < \dots < \beta^{(K)}\}$ of K equally spaced levels with step $\Delta = \beta^{(k+1)} - \beta^{(k)}$, and cache the candidates $\mathcal{S}_l = \{\mathbf{x}_l^*(\beta) : \beta \in \mathcal{B}\}$. Here, the grid resolution K controls how finely the per-block cost-distortion frontier is sampled. Caching one candidate per budget level collapses the global search from $\mathcal{Q}^{3LE}$ to a per-block budget choice $\beta \in \mathcal{B}^L$. Algorithm 1 summarizes the inner stage.

3.2 Outer stage

The outer stage assembles a global assignment from the cached candidates and optimizes the model-level objective $\mathcal{L}$ directly. Choosing a budget $\beta_l \in \mathcal{B}$ for each block yields $\mathbf{x}(\beta) = (\mathbf{x}_1^*(\beta_1), \dots, \mathbf{x}_L^*(\beta_L))$, and we solve

$$\begin{aligned} \beta^* = \underset{\beta \in \mathcal{B}^L}{\operatorname{argmin}} \quad & \mathcal{L}(\mathbf{x}(\beta)) \\ \text{subject to} \quad & \frac{1}{L} \sum_{l=1}^L \beta_l \leq \tau, \end{aligned} \quad (3)$$

with $\mathbf{x}^* = \mathbf{x}(\beta^*)$. Unlike the additive proxy of the inner stage, $\mathcal{L}$ does not decompose into a sum over the per-block choices, so this selection cannot be solved as an MCKP.

3.3 Solving the outer problem

The outer problem is a black-box combinatorial optimization over the lattice $\mathcal{B}^L$ under a budget constraint on the sum of per-block budgets, where each evaluation of $\mathcal{L}$ is a forward pass of the assembled model.

Exhaustive search over $\mathcal{B}^L$ is infeasible, and we optimize it with a greedy descent. Starting from the most expensive corner with $\beta_l = \beta^{(K)}$ for all l , we repeatedly lower one block by a single level until the average bitwidth meets τ . For a block l above the bottom level, let β^{-l} lower β_l by one grid level, giving its marginal loss increase $\delta_l(\beta) = \mathcal{L}(\mathbf{x}(\beta^{-l})) - \mathcal{L}(\mathbf{x}(\beta))$. A budgeted greedy would weigh each move's δ_l against the budget it saves (Khuller et al., 1999), but here every one-level move saves the same budget, so we lower the block with the smallest δ_l . Each step evaluates $\mathcal{L}$ on an assembled assignment, so the descent captures the coupling between blocks, but a direct implementation recomputes every δ_l at each of the $\mathcal{O}(LK)$ steps, $\mathcal{O}(L^2K)$ evaluations of $\mathcal{L}$.

Lazy acceleration. Our implementation runs this descent with lazy evaluation (Minoux, 1978). We store each block's last loss increase together with the step at which it was computed, keep them in a min-heap, and at each step pop the smallest, recompute it if stale, and apply the move once the popped value is current. Algorithm 2 gives the full procedure.

This procedure reproduces the eager descent as long as a stale loss increase only underestimates its current value, so that the min-heap never hides the least harmful move. Our $\mathcal{L}$ carries no guarantee of this condition, so we use lazy evaluation as a heuristic, justified empirically by the near-monotone growth of the marginals along the descent (Figure 2). Definition 3.1 states the diminishing-returns property under which the condition holds exactly.

Definition 3.1 (DR-submodularity on the budget grid). For $\beta \in \mathcal{B}^L$ and a block l below the top level, let β^{+l} raise β_l to the next grid level. A function $G : \mathcal{B}^L \rightarrow \mathbb{R}$ is DR-submodular if, for all $\beta \leq \beta'$ taken coordinatewise and every such block l ,

$$G(\beta^{+l}) - G(\beta) \geq G((\beta')^{+l}) - G(\beta'),$$

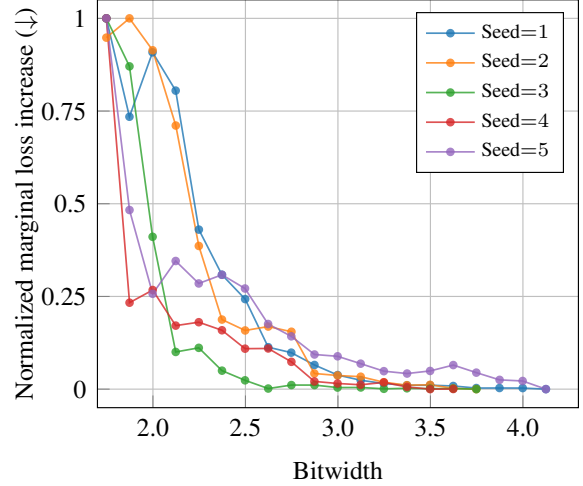


Figure 2: Empirical diminishing-returns check on DeepSeek-V2-Lite, the property that lazy descent relies on. Lowering a block by one budget grid level incurs a larger loss increase under stronger compression, increase grows toward the low-bit end. Each curve corresponds to one of five random trials.

so the gain from raising a block by one level does not increase as the other budgets grow (Soma and Yoshida, 2018).

When $G = -\mathcal{L}$ satisfies Definition 3.1, the descent only lowers budgets, so a δ_l cached at a higher budget can only be exceeded later, exactly the underestimate condition above.

Remark 3.2. If $G = -\mathcal{L}$ is DR-submodular (Definition 3.1), this lazy descent commits the same moves as the eager descent that recomputes all L marginals each step, while evaluating $\mathcal{L}$ fewer times (Minoux, 1978; Soma and Yoshida, 2018).

Empirically, $\mathcal{L}$ is close to this property. A more compressed model is more fragile, so lowering one more bitwidth level hurts quality more once few bits remain. We check this on DeepSeek-V2-Lite by following random descent paths and recording, one block at a time, the resulting loss increase δ_l from a single bitwidth level (Figure 2). This δ_l , which the heap caches, grows near-monotonically as the model is compressed, so a value cached at a higher budget typically underestimates its current one, the condition the lazy descent relies on. Appendix A gives the protocol.

Cost. The outer search's cost is its evaluations of $\mathcal{L}$, each a forward pass of the assembled model. The descent lowers budgets monotonically and uses τ only as a stopping point, so a single top-to-bottom sweep yields the assignment for every target budget along the way. Writing R for the average number of

Method	Mixtral-8×7B (46.7B - A12.9B)			Qwen1.5-MoE (14.3B - A2.7B)			DeepSeek-V2-Lite (15.7B - A2.4B)		
	Bits (↓)	Wiki2 (↓)	Acc (↑)	Bits (↓)	Wiki2 (↓)	Acc (↑)	Bits (↓)	Wiki2 (↓)	Acc (↑)
BF16	16.00	3.88	81.25	16.00	6.79	69.98	16.00	5.92	72.29
GPTQ	2.25	5.73	70.89	2.25	10.41	55.73	2.25	8.59	60.81
MxMoE	2.25	5.69	71.70	2.25	8.07	61.93	2.25	6.78	64.04
GEMQ (shared)	2.25	9.39	63.63	2.25	10.76	58.67	2.25	7.61	60.21
Q-STRATA	2.25	5.62	71.78	2.25	7.98	62.93	2.25	6.74	63.75
GPTQ [†]	2.01	11.37	44.44	2.02	18.64	43.24	2.02	13.79	47.98
MxMoE	2.00	8.03	61.42	2.00	9.06	57.16	2.00	7.46	59.73
GEMQ (shared)	2.00	19.21	53.30	2.00	15.14	53.15	2.00	10.28	53.36
Q-STRATA	2.00	6.90	63.79	2.00	8.97	58.41	2.00	7.41	59.88
MxMoE	1.75	25.20	44.58	1.75	12.49	52.38	1.75	9.90	50.95
GEMQ (shared)	1.75	21.25	49.40	1.75	23.89	48.93	1.75	19.34	44.85
Q-STRATA	1.75	12.14	52.51	1.75	11.84	53.74	1.75	9.35	52.46

Table 1: Mixed-precision quantization results on MoE LLMs across target bitwidths. All methods share the same weight-only GPTQ quantizer set (1,2,3,4 bit, group size 128, asymmetric). GPTQ, MxMoE, and Q-STRATA use the rotated setting of Section 4.1, while GEMQ (shared) deploys GEMQ’s allocation in its original rotation-free setting without router fine-tuning. Section 4.4 compares against GEMQ with the router fine-tuning of its official recipe restored, with and without rotation. [†]The 2.0-bit uniform GPTQ rows use the per-channel 2-bit format with 2.0 effective bits, since no uniform group-128 configuration meets that budget.

evaluations per committed move, the lazy descent issues $\mathcal{O}(RLK)$, smaller than the eager $\mathcal{O}(L^2K)$ by a factor L/R . In practice, R stays near 2.5, far below the 24 to 32 blocks (Table 6 in Appendix A).

4 Experiments

4.1 Setup

We mainly evaluate three MoE LLMs of different scales, Mixtral-8×7B-Instruct (46.7B - A12.9B), Qwen1.5-MoE (14.3B - A2.7B), and DeepSeek-V2-Lite (15.7B - A2.4B) (Jiang et al., 2024; Qwen Team, 2024; DeepSeek-AI et al., 2024), and scale the comparison up to Qwen3-30B-A3B (Yang et al., 2025) in Appendix D.6. All compared methods quantize weights with GPTQ (Frantar et al., 2023) and share one quantizer set, the group-128 asymmetric formats at 1, 2, 3, and 4 bits. The budget grid spans 1.25 to 4.25 bits in steps of 0.125, giving $K = 25$ levels. We report WikiText2 perplexity and the average accuracy over six zero-shot tasks, PIQA, BoolQ, WinoGrande, ARC-easy, ARC-challenge, and HellaSwag (Bisk et al., 2020; Clark et al., 2019; Sakaguchi et al., 2019; Clark et al., 2018; Zellers et al., 2019).

The baselines are uniform GPTQ, MxMoE, and GEMQ. Uniform GPTQ gives every linear layer the same bitwidth (Frantar et al., 2023). MxMoE shares our inner stage but assigns every MoE block

the same budget τ rather than optimizing per-block budgets, making it the counterpart that omits our outer stage (Duanmu et al., 2025). GEMQ allocates bitwidth globally at expert granularity, solving an ILP that minimizes a gradient-based additive proxy for model quality (Deng et al., 2026). Uniform GPTQ, MxMoE, and Q-STRATA apply the quantizers after a random Hadamard rotation without online rotation, following the protocol of Duanmu et al. (2025) (Ashkboos et al., 2024), so differences among these three reflect bit allocation alone. GEMQ is reproduced under a shared protocol, labeled GEMQ (shared) in Table 1, by taking its allocation from its own gradient-proxy ILP and deploying it with the shared quantizer set, keeping its original rotation-free setting and omitting its router fine-tuning (RFT) step, an additional training stage.² Section 4.4 additionally compares Q-STRATA against GEMQ with the RFT of its official recipe restored, with and without rotation. Full details, including the per-stage calibration sizes and the quantization scope shared by all mixed-precision methods, are in Appendix B.

²GEMQ’s original pipeline further differs from the shared protocol in its GPTQ variant (MSE range search vs. min-max), its 1-bit format (symmetric, 1.125 effective bits, vs. asymmetric, 1.25), and its evaluation context length (2048 vs. our 4096).

Bits	Outer	JSD ($\downarrow$)	Wiki2 ($\downarrow$)
2.75	Uniform	121.2	4.72
	One-shot ILP	108.2	4.64
	Ascending lazy greedy	243.9	5.62
	Lazy greedy (Q-STRATA)	107.2	4.61
2.25	Uniform	234.3	5.69
	One-shot ILP	231.6	5.64
	Ascending lazy greedy	733.6	13.22
	Lazy greedy (Q-STRATA)	229.6	5.62
1.75	Uniform	1036.5	25.20
	One-shot ILP	823.4	13.72
	Ascending lazy greedy	1195.9	32.76
	Lazy greedy (Q-STRATA)	749.4	12.14

Table 2: Outer-stage ablation on Mixtral-8 $\times$ 7B-Instruct with the inner ILP fixed. JSD is the model-level objective $\mathcal{L}$ on the calibration set.

4.2 Main results

Table 1 reports results at target bitwidths 2.25, 2.00, and 1.75. **Q-STRATA attains the lowest WikiText2 perplexity for every model at every bitwidth, and the best zero-shot accuracy in all cases but one**, DeepSeek-V2-Lite at 2.25 bits, where MxMoE leads by 0.3 points. At 1.75 bits on Mixtral, Q-STRATA more than halves the perplexity of MxMoE, 12.14 against 25.20, and improves average accuracy by almost eight points. Because MxMoE is exactly Q-STRATA without the outer stage (Section 4.1), Table 1 decomposes the two stages. The GPTQ-to-MxMoE gap isolates the inner stage’s gain, and the MxMoE-to-Q-STRATA gap isolates the outer stage’s gain, which widens as the budget tightens. The gains also persist on the larger Qwen3-30B-A3B with 18,432 expert linear layers, at a one-time search cost of 23 to 89 GPU-hours per model (Appendix D.6). Further analyses of the fidelity of the calibration objective, calibration-subset stability, downstream MMLU and GSM8K accuracy, and the representativeness of the calibration routing are in Appendices D.1 to D.4.

4.3 Outer-stage ablation

Table 2 isolates the outer stage on Mixtral-8 $\times$ 7B-Instruct with the inner ILP fixed, comparing four ways to assign the per-block budgets. Uniform gives every block the same budget and coincides with the MxMoE baseline. One-shot ILP scores each block in isolation, recording how much lowering one block to a given level raises $\mathcal{L}$ with the others kept at the highest budget level. It sums these

Bits	Method	JSD ($\downarrow$)	Wiki2 ($\downarrow$)
2.25	Direct cell-ILP (pruning-free)	109.6	6.74
	One-shot ILP	112.5	6.75
	Lazy greedy (Q-STRATA)	111.9	6.74
2.00	Direct cell-ILP (pruning-free)	184.4	7.41
	One-shot ILP	190.9	7.44
	Lazy greedy (Q-STRATA)	190.0	7.41
1.75	Direct cell-ILP (pruning-free)	410.6	10.03
	One-shot ILP	419.2	9.92
	Lazy greedy (Q-STRATA)	364.0	9.35

Table 3: Pruning-free direct cell-level ILP, which needs no inner stage but more than 8 $\times$ the model-level evaluations of our entire search, against two Q-STRATA variants that share the inner-stage pruning, on DeepSeek-V2-Lite.

per-block costs into a separable proxy for $\mathcal{L}$ and optimizes it exactly with an ILP in $(K-1)L+1$ evaluations, the search of Lee and Song (2025). Because this proxy is separable, it ignores the coupling that arises when several blocks are compressed together. Ascending greedy runs our descent in reverse, raising budgets from the cheapest corner, and trails even the uniform budget. **Our lazy greedy outer method attains the lowest JSD, the objective that the outer stage optimizes, and the lowest perplexity at every bitwidth.** The gap tracks the budget, it becomes large at 1.75 bits, where One-shot ILP trails our descent by 74 JSD. This shortfall reflects that coupling, which our descent captures by evaluating $\mathcal{L}$ directly at every step. We define each baseline in more details in Appendix C.

Does the inner-stage pruning lose candidates?

The outer stage can only pick from the proxy-pruned frontiers, so we compare against a baseline that prunes nothing. For every (expert, linear layer, bitwidth) cell, this baseline directly measures the model-level JSD change of assigning that cell each candidate bitwidth, then solves the global assignment over raw cells as a single ILP, with no inner stage and no frontier pruning, at about 15.4k end-to-end evaluations on DeepSeek-V2-Lite, more than 8 $\times$ the model-level evaluations of Q-STRATA’s entire search (Table 3, details in Appendix C). Comparing this baseline against our one-shot ILP outer stage isolates the effect of the pruning and the block decomposition, and the gap stays within about 4% in JSD with comparable perplexity at every budget, so the inner stage prunes little that the pruning-free search could exploit. The remaining 1.75-bit gap is instead attributable to the search strategy, as the de-

Model	Bits	w/o rotation				w/ rotation			
		Q-STRATA w/o RFT	Q-STRATA w/ RFT	GEMQ w/o RFT	GEMQ w/ RFT	Q-STRATA w/o RFT	Q-STRATA w/ RFT	GEMQ w/o RFT	GEMQ w/ RFT
Mixtral-8×7B	2.25	5.61	5.56	9.39	6.88	5.62	5.78	20.26	7.14
	2.00	6.78	6.59	19.21	8.65	6.90	7.17	46.11	8.70
	1.75	10.22	8.92	21.25	12.40	12.14	9.88	99.17	15.47
Qwen1.5-MoE	2.25	8.03	7.75	10.76	8.91	7.98	7.74	11.23	9.00
	2.00	9.10	8.66	15.14	11.05	8.97	8.61	15.70	10.89
	1.75	12.38	11.47	23.89	15.14	11.84	10.97	23.38	14.43
DeepSeek-V2-Lite	2.25	6.80	6.66	7.61	6.99	6.74	6.67	8.13	7.14
	2.00	7.42	7.20	10.28	8.30	7.41	7.25	12.06	8.72
	1.75	9.36	8.80	19.34	12.19	9.35	8.79	23.57	13.01

Table 4: WikiText2 perplexity of Q-STRATA and GEMQ with and without rotation and with and without GEMQ’s router fine-tuning (RFT), applied equally to both methods’ allocations under the quantizer set and GPTQ options of Table 1, at context length 4096. Note that GEMQ’s rotated allocation is not a post hoc transfer, as its statistics are recomputed on the rotated model and its ILP re-solved.

scent reaches JSD 364 where both one-shot solvers, including the pruning-free one, stall at 410 to 419, again reflecting the inter-block coupling captured during the descent.

4.4 Router fine-tuning and rotation

The shared protocol of Table 1 removes GEMQ’s router fine-tuning, so we restore it. RFT following GEMQ’s official recipe (Appendix B) is applied equally to the allocations of GEMQ and Q-STRATA at all 9 (model, budget) cells, and both methods are evaluated with and without the Hadamard rotation (Table 4). Notably, Q-STRATA attains lower perplexity than GEMQ in all 18 pairs.

Table 4 also shows that the rotated setting, inherited from MxMoE’s pipeline, is not always the better one, since the low budgets force many expert linears to 1 bit, where the effect of rotation becomes model-dependent. In particular, the strongest Mixtral results at the lowest budgets come from the rotation-free setting, and Appendix D.5 gives the full analysis of how the effect of rotation varies across models.

4.5 The outer search on dense models

The outer search does not rely on the MoE structure and works as a standalone allocator. On the dense Llama-2-7B we apply it per linear layer rather than per block. Because the layers differ in size, a one-level move no longer saves the same budget, so the descent instead weighs each move’s loss increase against the bits it saves. This is the budgeted greedy of Khuller et al. (1999), which we detail in Appendix E.

We use the HQQ quantizer set (2, 3, and 4 bits,

Method	Bits	JSD ($\downarrow$)	Queries ($\downarrow$)
One-shot ILP	3.5	0.0233	449
	3.0	0.0587	
	2.5	0.1984	
AMQ	3.5	0.0229	10,474
	3.0	0.0550	
	2.5	0.1572	
Lazy greedy	3.5	0.0228	1,378
	3.0	0.0549	
	2.5	0.1569	
Eager greedy	3.5	0.0224	70,345
	3.0	0.0539	
	2.5	0.1568	

Table 5: Search-method comparison on the dense Llama-2-7B with the HQQ quantizer set (2,3,4 bit, group size 128, asymmetric) and 2K calibration tokens, across average bitwidths 2.5 to 3.5. Lazy greedy, the search used in our outer stage, nearly matches the eager greedy at far fewer queries.

group size 128, asymmetric) and, as in the MoE experiments, take the search objective to be the JSD between the quantized and full-precision models. We compare our lazy greedy outer allocator against the state-of-the-art black-box optimizer AMQ (Lee et al., 2025), One-shot ILP, and, for the small calibration setting with 2K tokens, the eager greedy that recomputes every marginal each step.

Table 5 reports the comparison at 2K calibration tokens. Lazy greedy matches or beats AMQ at every budget while issuing far fewer queries, 1,378 against 10,474. Eager greedy is best, and

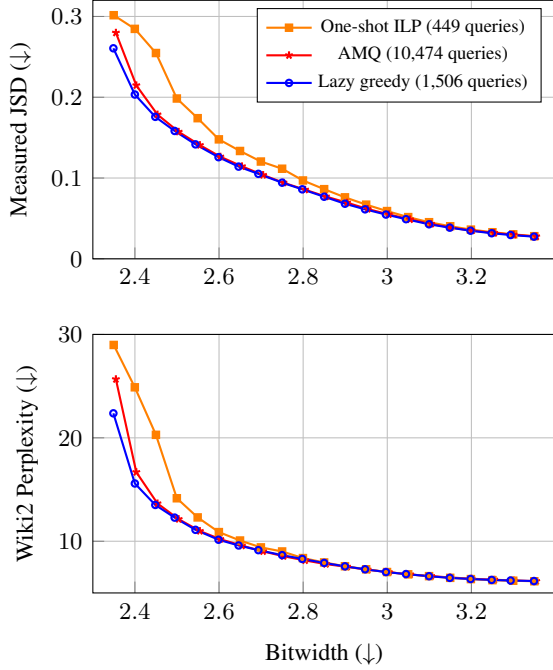


Figure 3: Search-method comparison on Llama 2-7B with the HQQ quantizer set (2,3,4 bit, group size 128, asymmetric) and 8K calibration tokens. The top panel reports measured JSD on the calibration set and the bottom panel WikiText2 test perplexity. Lazy greedy matches or beats AMQ on both at a fraction of the objective queries listed in the legend with $6.9\times$ fewer queries.

lazy greedy stays within 0.001 JSD of it while using $51\times$ fewer queries, 1,378 against 70,345, so it closely follows the eager greedy solution. Figure 3 extends the comparison across budgets at 8K calibration tokens. **Surprisingly, our lazy greedy outer method matches or beats AMQ on both while issuing $6.9\times$ fewer queries.**

5 Related Work

MPQ is often cast as a multiple-choice knapsack problem (Chen et al., 2021; Sinha and Zoltners, 1979; Malinovskii et al., 2025; Lee and Song, 2025). A line of work approximates the loss with an additive proxy, a sum of per-layer importance scores estimated either from the backward signal (Dong et al., 2019, 2020; Yao et al., 2021; Kim et al., 2026; Deng et al., 2026) or from the loss change under full forward passes (Malinovskii et al., 2025; Lee and Song, 2025), and solves the allocation with dynamic programming or integer programming (Pferschy and Scatamacchia, 2017; Gurobi Optimization, LLC, 2026). For dense models, AMQ runs an AutoML-style search with

search-space pruning and a model-based evolutionary method, scoring candidates with full forward passes (Lee et al., 2025). On the activation side, TWLA’s inter-layer-aware ILA-AMP allocates activation bitwidths across layers (Zhao et al., 2026), a complementary axis to the weight-only allocation we study.

For MoE models, prior methods score within-block assignments with block-local proxies. MC-MoE assigns a bitwidth to every expert with a linear program over a hand-designed score combining reconstruction error and routing statistics (Huang et al., 2025), and MxMoE works at the finer linear-layer granularity, minimizing a sum of block-wise reconstruction-error proxies (Duanmu et al., 2025), but both keep every block’s budget uniform. GEMQ allocates across blocks through an additive proxy resting on a first-order approximation of the loss (Deng et al., 2026). Our inner stage keeps MxMoE’s linear-layer granularity, while our outer stage optimizes the model-level objective directly across blocks.

In concurrent work, ScaleBits (Li et al., 2026) quantizes dense models at the tile level. It overlaps with us in a diminishing-returns property over its search space and a greedy allocator, but its space is far larger and finer than our per-block budgets, so it ranks moves by sensitivity-based estimates rather than by measured marginals of its objective. Our bi-level hierarchy shrinks the outer space enough to run the greedy on the objective’s marginals directly, and we use lazy evaluation only to cut redundant queries.

6 Conclusion

We introduced Q-STRATA, a bi-level allocator for mixed-precision quantization of MoE LLMs. Its inner stage ranks within-block assignments with a cheap proxy and caches one candidate per budget level, so the outer stage only needs to choose one budget per block. This reduction lets the outer stage optimize the model-level objective directly with a lazy greedy descent, capturing the coupling between blocks that additive proxies miss. On three MoE LLMs, Q-STRATA achieves lower WikiText2 perplexity than uniform GPTQ, MxMoE, and GEMQ in the low-bit regime, and the gains over MxMoE persist on the larger Qwen3-30B-A3B. The outer search also works as a standalone allocator on dense models, matching the black-box search of AMQ with far fewer objective queries.

Limitations

The outer stage evaluates the model-level objective directly, so each move is a forward pass of the assembled model. Even with lazy evaluation, this issues more such evaluations than allocators that fit an additive proxy once and then solve it in closed form. The outer search’s evaluation count grows with the block count L rather than with the total number of linear layers $3LE$, since the evaluations per move stay near 2.5 and far below L (Table 6). Because it runs once before deployment and adds nothing to inference latency, its cost is amortized over all subsequent inferences. It nonetheless remains heavier than proxy-only allocation at search time, and lowering it further is left to future work.

Acknowledgments

This work was supported by Samsung Electronics Co., Ltd. (IO250418-12669-01), Mobile eXperience (MX) Business, Samsung Electronics Co., Ltd., Institute of Information & Communications Technology Planning & Evaluation (IITP) grant funded by the Korea government (MSIT) [No. RS-2026-25524173, Ultra-Long-Term Hierarchical Memory and Reasoning Architecture for Next-Generation Omnimodal Agents, 40%; No. RS-2020-II200882, (SW STAR LAB) Development of deployable learning intelligence via self-sustainable and trustworthy machine learning, 10%; No. RS-2026-25522672, Development of Unified Reasoning Technology Mimicking Human Cognition for Hierarchical Understanding and Unbounded Problem Solving, 10%; and No. RS-2021-II211343, Artificial Intelligence Graduate School Program (Seoul National University), 10%], and National Research Foundation of Korea (NRF) grant funded by the Korea government (MSIT) (No. RS-2024-00354036, 30%). Hyun Oh Song is the corresponding author.

References

- Saleh Ashkboos, Amirkeivan Mohtashami, Maximilian L. Croci, Bo Li, Pashmina Cameron, Martin Jaggi, Dan Alistarh, Torsten Hoefler, and James Hensman. 2024. Quarot: Outlier-free 4-bit inference in rotated llms. In *NeurIPS*.
- Yonatan Bisk, Rowan Zellers, Ronan Le Bras, Jianfeng Gao, and Yejin Choi. 2020. Piqa: Reasoning about physical commonsense in natural language. In *AAAI*.
- Wei Han Chen, Peisong Wang, and Jian Cheng. 2021. Towards mixed-precision quantization of neural networks via constrained optimization. In *ICCV*.
- Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. 2019. BoolQ: Exploring the surprising difficulty of natural yes/no questions. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*.
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. 2018. Think you have solved question answering? try arc, the ai2 reasoning challenge. *arXiv:1803.05457v1*.
- DeepSeek-AI, Aixin Liu, Bei Feng, Bin Wang, Bingxuan Wang, Bo Liu, Chenggang Zhao, Chengqi Deng, Chong Ruan, Damai Dai, Daya Guo, Dejian Yang, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fuli Luo, Guangbo Hao, Guanting Chen, and 138 others. 2024. Deepseek-v2: A strong, economical, and efficient mixture-of-experts language model. In *arXiv:2405.04434*.
- DeepSeek-AI, Aixin Liu, Bei Feng, Bing Xue, Bingxuan Wang, Bochao Wu, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, Damai Dai, Daya Guo, Dejian Yang, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fucong Dai, and 181 others. 2025. Deepseek-v3 technical report. In *arXiv:2412.19437*.
- Jianing Deng, Song Wang, Dongwei Wang, Zijie Liu, Tianlong Chen, Huanrui Yang, and Jingtong Hu. 2026. Gemq: Global expert-level mixed-precision quantization for moe llms. In *ICML*.
- Zhen Dong, Zhewei Yao, Daiyaan Arfeen, Amir Gholami, Michael W Mahoney, and Kurt Keutzer. 2020. Hawq-v2: Hessian aware trace-weighted quantization of neural networks. In *NeurIPS*.
- Zhen Dong, Zhewei Yao, Amir Gholami, Michael Mahoney, and Kurt Keutzer. 2019. Hawq: Hessian aware quantization of neural networks with mixed-precision. In *ICCV*.
- Haojie Duanmu, Xiuhong Li, Zhihang Yuan, Size Zheng, Jiangfei Duan, Xingcheng Zhang, and Dahua Lin. 2025. Mxmoe: Mixed-precision quantization for moe with accuracy and performance co-design. In *ICML*.
- Elias Frantar, Saleh Ashkboos, Torsten Hoefler, and Dan Alistarh. 2023. Gptq: Accurate post-training quantization for generative pre-trained transformers. In *ICLR*.
- Leo Gao, Jonathan Tow, Baber Abbasi, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Alain Le Noac’h, Haonan Li, Kyle McDonell, Niklas Muennighoff, Chris Ociepa, Jason Phang, Laria Reynolds, Hailey

- Schoelkopf, Aviya Skowron, Lintang Sutawika, and 5 others. 2024. [The language model evaluation harness](#).
- Gurobi Optimization, LLC. 2026. [Gurobi Optimizer Reference Manual](#).
- Wei Huang, Yue Liao, Jianhui Liu, Ruifei He, Haoru Tan, Shiming Zhang, Hongsheng Li, Si Liu, and Xiaojuan Qi. 2025. Mixture compressor for mixture-of-experts llms gains more. In *ICLR*.
- Itay Hubara, Yury Nahshan, Yair Hanani, Ron Banner, and Daniel Soudry. 2021. Accurate post training quantization with small calibration sets. In *ICML*.
- Albert Q. Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, Gianna Lengyel, Guillaume Bour, Guillaume Lample, L  lio Renard Lavaud, Lucile Saulnier, Marie-Anne Lachaux, Pierre Stock, Sandeep Subramanian, Sophia Yang, and 7 others. 2024. Mixtral of experts. In *arXiv:2401.04088*.
- Samir Khuller, Anna Moss, and Joseph (Seffi) Naor. 1999. [The budgeted maximum coverage problem](#). *Information Processing Letters*, 70(1):39–45.
- Minjun Kim, Jaeri Lee, Jongjin Kim, Jeongin Yun, Yongmo Kwon, and U Kang. 2026. Lampq: Towards accurate layer-wise mixed precision quantization for vision transformers. In *AAAI*.
- Deokjae Lee and Hyun Oh Song. 2025. Q-palette: Fractional-bit quantizers toward optimal bit allocation for efficient llm deployment. In *NeurIPS*.
- Sangjun Lee, Seung-taek Woo, Jun-gyu Jin, Changhun Lee, and Eunhyeok Park. 2025. Amq: Enabling automl for mixed-precision weight-only quantization of large language models. In *EMNLP*.
- Xinlin Li, Timothy Chou, Josh Fromm, Zichang Liu, Yunjie Pan, and Christina Fragouli. 2026. Scalebits: Scalable bitwidth search for hardware-aligned mixed-precision llms. In *arXiv:2602.17698*.
- Vladimir Malinovskii, Andrei Panferov, Ivan Ilin, Han Guo, Peter Richt  rik, and Dan Alistarh. 2025. Higgs: Pushing the limits of large language model quantization via the linearity theorem. In *ACL*.
- Michel Minoux. 1978. Accelerated greedy algorithms for maximizing submodular set functions. In *Optimization Techniques*.
- Ulrich Pferschy and Rosario Scatamacchia. 2017. Improved dynamic programming and approximation results for the knapsack problem with setups. *International Transactions in Operational Research*.
- Qwen Team. 2024. [Qwen1.5-moe: Matching 7b model performance with 1/3 activated parameters](#).
- Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. 2019. Winogrande: An adversarial winograd schema challenge at scale. In *arXiv:1907.10641*.
- Prabhakant Sinha and Andris A. Zoltners. 1979. The multiple-choice knapsack problem. *Operations Research*.
- Tasuku Soma and Yuichi Yoshida. 2018. Maximizing monotone submodular functions over the integer lattice. *Math. Program.*, 172:539–563.
- Kuan Wang, Zhijian Liu, Yujun Lin, Ji Lin, and Song Han. 2019. Haq: Hardware-aware automated quantization with mixed precision. In *CVPR*.
- Tianzhe Wang, Kuan Wang, Han Cai, Ji Lin, Zhijian Liu, and Song Han. 2020. APQ: joint search for network architecture, pruning and quantization policy. In *CVPR*.
- An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, Chujie Zheng, Dayiheng Liu, Fan Zhou, Fei Huang, Feng Hu, Hao Ge, Haoran Wei, Huan Lin, Jialong Tang, and 41 others. 2025. Qwen3 technical report. In *arXiv:2505.09388*.
- Zhewei Yao, Zhen Dong, Zhangcheng Zheng, Amir Gholami, Jiali Yu, Eric Tan, Leyuan Wang, Qijing Huang, Yida Wang, Michael W. Mahoney, and Kurt Keutzer. 2021. HAWQV3: dyadic neural network quantization. In *ICML*.
- Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. 2019. Hellaswag: Can a machine really finish your sentence? In *ACL*.
- Zhixiong Zhao, Zukang Xu, Zhixuan Chen, Xing Hu, Zhe Jiang, and Dawei Yang. 2026. Twla: Achieving ternary weights and low-bit activations for llms via post-training quantization. In *ICML*.

A Empirical diminishing returns

The lazy descent (Remark 3.2) is exact when the per-block marginal loss increase $\delta_l(\beta) = \mathcal{L}(\mathbf{x}(\beta^{-l})) - \mathcal{L}(\mathbf{x}(\beta))$ does not shrink as the model is compressed, equivalently when the marginal gain of $G = -\mathcal{L}$ from restoring one level diminishes as the model grows more precise, which is the condition of Definition 3.1. We probe this on DeepSeek-V2-Lite, following ScaleBits (Li et al., 2026), which verifies the same property for MPQ at a different granularity.

For each of five trials we sample one descent chain and one block l . A chain starts at the top corner $\beta = (\beta^{(K)}, \dots, \beta^{(K)})$ and lowers a uniformly random block by one level at a time down to the bottom corner, a monotone path along which the

	Mixtral 8×7B	Qwen1.5 MoE	DeepSeek V2-Lite
Blocks L	32	24	26
Levels K	25	25	25
Commits	768	576	624
Lazy evals	1,909	1,552	1,667
Eager evals	22,327	13,537	15,802
R per move	2.49	2.69	2.67
Speedup	11.7×	8.7×	9.5×

Table 6: Cost of the outer lazy greedy descent over a full top-to-bottom sweep ($L(K - 1)$ commits). R is the average number of objective evaluations per committed move, and Speedup is the ratio of eager to lazy evaluations. Eager evals is the count an eager descent would perform along the same trace, computed from the lazy run rather than from a separate eager execution.

effective bitwidth $\bar{b}(\beta)$ decreases. At each configuration along the chain where block l is below the top level, we raise β_l by one level and record the marginal loss increase $\mathcal{L}(\mathbf{x}(\beta)) - \mathcal{L}(\mathbf{x}(\beta^{+l}))$ that its current level carries relative to one level up, on the calibration set used by the outer stage. We min-max normalize this quantity within each chain and plot it against $\bar{b}(\beta)$ in Figure 2.

All five curves rise near-monotonically as the bitwidth falls, so this marginal grows as the model is compressed. The loss increase δ_l the lazy heap caches therefore grows along the descent, so a value cached earlier at a higher budget underestimates its value later, exactly what the heap needs. $\mathcal{L}$ is not strictly DR-submodular and a few small reversals appear, but the trend is monotone enough for the cached values to serve as the underestimates the lazy heap relies on, at the per-move cost reported in Table 6.

B Experimental details

Models and quantization. We use Mixtral-8×7B-Instruct, Qwen1.5-MoE-A2.7B, and DeepSeek-V2-Lite, and, for Table 13, Qwen3-30B-A3B under the same protocol. Weights are quantized with GPTQ (Frantar et al., 2023) from the quantizer set of group-128 asymmetric weight-only formats at 1, 2, 3, and 4 bits. In the rotated setting, a random Hadamard rotation is applied offline with no online rotation, following Duanmu et al. (2025). The budget grid runs from 1.25 to 4.25 bits in steps of 0.125, so $K = 25$. For all MoE models, we do not quantize linear layers

Component	Mixtral	Qwen1.5-MoE	DSv2-Lite
Expert FFN linears	mixed	mixed	mixed
Shared expert	—	mixed	mixed
Routing gates	16-bit	16-bit	16-bit
Attention linears	16-bit	16-bit	16-bit
Dense MLP (layer 0)	—	—	16-bit
Embeddings / LM head	16-bit	16-bit	16-bit

Table 7: Quantization scope, identical for the MxMoE, GEMQ, and Q-STRATA rows of Table 1. Only expert-FFN linears are mixed-precision quantized.

outside of MoE blocks.

Quantization scope. Table 7 lists which components are quantized. The scope is identical for the three mixed-precision methods of Table 1. Only the expert-FFN linears of the MoE blocks enter the mixed-precision allocation, and every other linear layer, including the routing gates and the attention projections, stays at 16 bits.

Router fine-tuning. For Table 4 we run GEMQ’s official router fine-tuning recipe, training all routing gates for 1 epoch with learning rate 10^{-4} on the same calibration data, applied identically to GEMQ’s and Q-STRATA’s allocations.

Calibration. For the experiments on MoE models Tables 1 and 2, all calibration data is drawn from WikiText2 train at sequence length 4096 following the calibration set preparation protocol of Duanmu et al. (2025). The final GPTQ quantization uses 128 sequences. The mixed-precision search uses fewer, 64 sequences for the inner stage that builds the block-output distortions and 32 sequences for the outer stage that measures $\mathcal{L}$. Similarly, for MxMoE, we use 64 sequences for the inner stage that builds the block-output distortions and quantize the resulting assignment using 128 sequences. For GEMQ, we utilize 64 sequences to obtain a gradient based additive proxy using their implementation and quantize the resulting assignment using 128 sequences.

Evaluation. We report WikiText2 perplexity at context length 4096 and the average of six zero-shot accuracies, PIQA, BoolQ, WinoGrande, ARC-easy, ARC-challenge, and HellaSwag, computed with lm-eval-harness v0.4.5 (Gao et al., 2024). For the JSD objective, we compute JSD between the full precision model and the quantized model with top-1000 token logits in MoE experiments for memory efficiency.

Target budgets. Table 1 reports target average bitwidths 2.25, 2.00, and 1.75, and Table 2 reports 2.75, 2.25, and 1.75.

C Outer-stage baselines

The baselines of Table 2 share the inner caches $\{S_l\}$ and differ only in how they pick a budget $\beta_l \in \mathcal{B}$ per block.

Uniform. Allocate the same bitwidth for all MoE blocks.

One-shot ILP. This baseline modularizes $\mathcal{L}$ once. From the top assignment $\beta^{\text{top}} = (\beta^{(K)}, \dots, \beta^{(K)})$, for each block l and lower level $\beta^{(k)}$ it measures the marginal $m_{l,k} = \mathcal{L}(x') - \mathcal{L}(x(\beta^{\text{top}}))$, where x' lowers only block l to $\beta^{(k)}$. Treating $\sum_l m_{l,k_l}$ as a separable surrogate for $\mathcal{L}$, it selects one level per block by an MCKP under the budget constraint, solved exactly with an ILP. The surrogate needs only $(K - 1)L + 1$ evaluations of $\mathcal{L}$, all at the top model, but it assumes the per-block reductions do not interact, an assumption that breaks as several blocks are compressed together. This is the search used by Lee and Song (2025).

Ascending greedy. This is Algorithm 2 run in the opposite direction. It starts from the cheapest corner $(\beta^{(1)}, \dots, \beta^{(1)})$ and repeatedly raises the block whose one-level increase lowers $\mathcal{L}$ the most, until the average bitwidth reaches τ . It uses the same lazy heap and staleness check as our descent, and differs only in its starting corner and the direction of each move.

Direct cell-level ILP (Table 3). This pruning-free baseline measures the change in $\mathcal{L}$ when each (expert, linear layer, bitwidth) cell alone is lowered from the top assignment, and solves the global assignment over raw cells as a single MCKP with an ILP. The one-shot ILP variant of Table 3 applies the same one-shot measurement and ILP on top of our inner-stage caches, so comparing the two isolates the effect of the frontier pruning and the block decomposition.

D Additional results

D.1 Fidelity of the calibration objective

To verify that the calibration-set surrogate ranks allocations the way the final metric does, we draw 32 random allocations, all at exactly 2.0 average bits, on DeepSeek-V2-Lite at GEMQ’s native granularity of per-expert bit maps. Every allocation

Score	ρ w/o rot.	ρ w/ rot.
Calibration JSD	0.98	0.99
GEMQ additive proxy	0.42	0.28

Table 8: Spearman rank correlation between each search score and WikiText2 test perplexity over 32 random same-budget allocations (DeepSeek-V2-Lite, 2.0 average bits, per-expert bit maps), each deployed with the final GPTQ pass and evaluated end to end. GEMQ’s proxy is computed from its own gradient-weighted statistics on the corresponding (unrotated or rotated) model.

Model	Method	MMLU ($\uparrow$)	GSM8K ($\uparrow$)
Mixtral	Uniform GPTQ	24.8 (0.4)	0.1 (0.1)
	MxMoE	38.2 (0.4)	0.8 (0.2)
	Q-STRATA	42.7 (0.4)	3.7 (0.5)
	BF16	70.3 (0.4)	63.5 (1.3)
Qwen1.5-MoE	Uniform GPTQ	25.6 (0.4)	0.0 (0.0)
	MxMoE	34.4 (0.4)	4.1 (0.5)
	Q-STRATA	41.6 (0.4)	6.0 (0.7)
	BF16	61.1 (0.4)	16.5 (1.0)
DSv2-Lite	Uniform GPTQ	25.8 (0.4)	0.0 (0.0)
	MxMoE	35.8 (0.4)	8.4 (0.8)
	Q-STRATA	41.5 (0.4)	8.1 (0.8)
	BF16	58.1 (0.4)	36.5 (1.3)

Table 9: MMLU / GSM8K (5-shot, %) at 2.0 average bits. Standard errors in parentheses. Bold marks the best quantized result and any result within one standard error of it.

is deployed with the final GPTQ pass and evaluated on the WikiText2 test set. We then rank the identical allocation set by our calibration JSD and by GEMQ’s own search objective, computed from its gradient-weighted per-expert statistics for the same model and calibration data. In the rotated setting, GEMQ’s statistics are recomputed on the rotated model. The model-level JSD ranks same-budget allocations nearly perfectly by their final test perplexity, with $\rho = 0.98$ without rotation and 0.99 with rotation, while GEMQ’s additive proxy correlates far worse on the identical allocations (Table 8).

D.2 MMLU and GSM8K at 2.0 bits

Our allocation deliberately gives some experts very few bits, which raises the question of whether that silently costs capabilities that perplexity misses. The direct baseline is uniform GPTQ, which spends the identical total budget uniformly across all experts. We evaluate MMLU and GSM8K, both 5-shot, at 2.0 bits (Table 9). The non-uniform allocation preserves these capabilities better, not

Model	calib vs wiki2-test	calib vs uniform (reference)
Mixtral	0.009	0.042
Qwen1.5-MoE	0.026	0.074
DSv2-Lite	0.032	0.120

Table 10: Total-variation distance between expert-routing distributions, per-layer mean (0 = identical). The distance from the calibration distribution to the uniform distribution is given as a scale reference.

Bits	Trial 1 (paper)	Trial 2	Trial 3
2.25	7.98	7.97	7.96
2.00	8.97	9.00	8.93
1.75	11.84	11.91	11.83

Table 11: The full search pipeline re-run with different calibration subsets (Qwen1.5-MoE, WikiText2 perplexity). Each trial draws the calibration data with a different random seed, and Trial 1 is the paper’s run.

worse. Against uniform GPTQ at the same budget, Q-STRATA gains 15.7 to 17.9 MMLU points on all three models, where uniform GPTQ stays at chance level, and lifts GSM8K from at most 0.1 to between 3.7 and 8.1. It also attains the best MMLU among the compared quantized methods on all three models, and the best GSM8K among them on two of the three, with DeepSeek-V2-Lite statistically tied with MxMoE (8.1 vs 8.4, within one standard error).

D.3 Routing distributions of the calibration data

Existing allocation methods including Q-STRATA tend to give fewer bits to experts that are routed less frequently on the calibration data, so we check whether the calibration stream is representative of the routing on the test data. We trace the per-(layer, expert) routing frequencies of the full-precision models and compare the calibration stream against the WikiText2 test set with the total-variation (TV) distance, the fraction of routing mass placed differently (Table 10). The calibration routing lies roughly 3 to 5 times closer to the test routing than to the uniform reference.

D.4 Stability across calibration subsets

As a direct end-to-end check of calibration sensitivity, we re-run the entire Q-STRATA search on Qwen1.5-MoE with two fresh calibration sets drawn with different sampling seeds (Table 11). The searched allocations reproduce the paper’s per-

Uniform quantizer	Mixtral		Qwen1.5-MoE		DSv2-Lite	
	w/o	w/	w/o	w/	w/o	w/
w4 g128 (4.25 bits)	3.94	3.94	6.88	6.87	5.98	5.97
w3 g128 (3.25 bits)	4.17	4.17	7.20	7.18	6.20	6.20
w2 g128 (2.25 bits)	5.73	5.73	11.24	10.41	8.70	8.59
w1 g128 (1.25 bits)	152.5	2024.4	124495	64229	3647	4262

Table 12: Uniform GPTQ, WikiText2 perplexity, without and with rotation.

plexity closely, with the three seeds agreeing within 0.08 perplexity at every budget, so the search outcome on this model is not sensitive to the particular calibration subset.

D.5 Rotation at extreme bitwidths

To isolate the rotation pipeline from any allocation search, we quantize all three models with uniform GPTQ, with and without the offline random Hadamard rotation of MxMoE’s released implementation (Table 12). Among the group-128 asymmetric quantizers that constitute our quantizer set, rotation consistently matches or improves the rotation-free results at 2, 3, and 4 bits, in line with the common expectation. At the extreme 1-bit level, however, the effect of rotation becomes model-dependent, roughly halving the perplexity on Qwen1.5-MoE (124495 to 64229) while severely hurting Mixtral (152.5 to 2024.4).

This model-dependent 1-bit behavior explains Table 4. At the 1.75- and 2.0-bit budgets, the searched allocations assign the 1-bit quantizer to 25 to 59% of the expert linears, forced by the budget itself. The cheapest quantizer in the shared set costs 1.25 effective bits and the next-cheapest 2.25, so an average budget of 1.75 bits requires at least half of the expert linears at 1 bit. The rotated Q-STRATA results track the 1-bit row of Table 12 model by model, with rotation-free winning on Mixtral (10.22 vs 12.14 at 1.75 bits), the settings tying on DeepSeek-V2-Lite, and rotation winning on Qwen1.5-MoE.

D.6 Scalability and search cost

On Qwen3-30B-A3B, whose 48 blocks of 128 experts hold 18,432 expert linear layers, the outer stage’s gains persist, as Q-STRATA achieves lower perplexity than the inner-only MxMoE baseline at all three budgets (Table 13).

Table 14 reports the search cost in GPU-hours. Note that the search is a one-time offline cost, amortized over the deployment lifetime during which the memory and latency benefits of the deployed

Bits	Method	Wiki2 ($\downarrow$)
2.25	Uniform GPTQ	12.05
	MxMoE	8.73
	Q-STRATA	8.56
2.00	Uniform GPTQ [†]	14.97
	MxMoE	9.25
	Q-STRATA	8.97
1.75	MxMoE	10.48
	Q-STRATA	10.23

Table 13: Qwen3-30B-A3B results, WikiText2 perplexity, under the rotated setting of Section 4.1. [†]As in Table 1.

Model	Stage 1	Stage 2	Total
Mixtral-8 $\times$ 7B	2.5	20.5	23.0
Qwen1.5-MoE	12.3	11.2	23.5
DeepSeek-V2-Lite	18.0	17.5	35.5
Qwen3-30B-A3B	14.8	73.9	88.7

Table 14: Search cost of Q-STRATA in GPU-hours, measured on H100. One Stage-2 descent sweeps the entire budget range and emits the allocation at every target bitwidth, so each row is the total cost for all budgets of that model.

model accrue (Appendix D.7). Producing the deployed model afterwards is a single GPTQ pass, taking less than half an hour on one H100, and the final evaluation is paid identically by every compared method. The search cost scales linearly with the calibration-set size.

D.7 Deployment footprint and throughput

Expert weights compress by $7.1\times$ ($16/2.25$) to $9.1\times$ ($16/1.75$) across the four models. We benchmark decode with GemLite kernels, 1/2/3/4-bit dequantization plus GEMM, which natively serve our quantizer set (Table 15). The quantized models reduce the model size by 5.2 to $6.3\times$ and speed up decoding by about $1.46\times$ over the BF16 reference. At a fixed budget the decode speed differs by within about 1% between the two allocations, so in these measurements the allocation affects quality rather than serving speed. We leave further optimization of the serving stack, such as CUDA kernels specialized for heterogeneous bitwidths and a kernel-aware formulation of the mixed-precision search, to future work.

E Budgeted descent for dense models

The outer descent needs one adjustment on dense models. In the MoE setting every block holds the same number of parameters, so every one-level

Bits	Method	Model size ($\downarrow$)	Decode tok/s ($\uparrow$)
16	BF16	31.4 GB	117.9
2.25	GEMQ	6.0 GB	173.7
	Q-STRATA	6.0 GB	172.1
2.00	GEMQ	5.5 GB	173.9
	Q-STRATA	5.5 GB	172.0
1.75	GEMQ	5.0 GB	172.9
	Q-STRATA	5.0 GB	171.4

Table 15: Model size and decode throughput of the Table 1 allocations of Q-STRATA and GEMQ (shared) on DeepSeek-V2-Lite, served with GemLite kernels on one H100 at batch size 1.

move frees the same amount of budget, and Algorithm 2 ranks moves by the loss increase alone. On a dense model the choice groups are individual layers, and layers differ in parameter count. Writing w_i for the parameter count of layer i , the average bitwidth becomes the size-weighted mean $\bar{b} = \sum_i w_i b_i / \sum_i w_i$, and lowering layer i by one level frees a budget proportional to w_i . A move on a large layer therefore saves more budget than one on a small layer, and the descent ranks moves by the loss increase per unit of budget freed, $\Delta\mathcal{L}_i/(w_i\Delta)$, where Δ is the spacing of the budget grid (Khuller et al., 1999). Algorithm 2 changes in two places only. The min-heap is keyed by this ratio instead of $\Delta\mathcal{L}_i$ alone, and the stopping test compares $\bar{b}$ with τ . The lazy refresh and the staleness check are unchanged.

Dense protocol. We use HQQ quantizers at 2, 3, and 4 bits with group size 128 and asymmetric as the quantizer set. We calibrate on WikiText2 train, 2K tokens for Table 5 and 8K tokens for Figure 3, and report perplexity on WikiText2 test set at context length 2048. All methods optimize the same JSD objective on the same calibration data and differ only in how many times they evaluate it, as listed per method.

Query counts. Every method returns a full set of budgets from one run, so each count in Table 5 is the total for that single search rather than a per-budget figure. For eager greedy and lazy greedy this is one descent from 4.25 bits to the 2.5-bit target, which passes through every intermediate budget and yields the whole frontier at once. One-shot ILP fixes its surrogate with $(K - 1)L + 1$ measurements and re-solves the ILP per budget at no further query cost.