

WHICH NEGATIVES MATTER?

ASK YOUR TEXT ENCODER: ADAPTIVE SIMILARITY MARGINS FOR DENSE-CAPTION RETRIEVAL

Haoyue Liu¹ Ye Chen² Zhichao Wang¹ Xiaoying Tang^{1,3,†}

¹ School of Science and Engineering, The Chinese University of Hong Kong, Shenzhen 518172, China

² XJTU-POLIMI Joint School, Xi'an Jiaotong University, Xi'an 710049, China

³ Shenzhen Future Network of Intelligence Institute (FNii-Shenzhen)

ABSTRACT

Dense-caption retrieval has recently been improved by introducing segmentation, edge maps, LLM-filtered captions, and cross-modal modules into contrastive fine-tuning. However, these methods largely inherit the same InfoNCE objective, whose optimization can prematurely saturate under a strong pre-trained initialization: on dense captions, the loss falls below 10^{-3} on 80% of batches within the first epoch, while its gradient reaches *exact zero in fp32* in 47% of measurements. We find that this behavior is closely related to the large number of near-duplicate captions in dense-caption benchmarks, where a few highly similar negatives remain unresolved after the easy majority has already been separated. As a remedy, we introduce HN-CLIP, which uses the text encoder’s own text–text geometry to construct per-negative adaptive similarity margins. Specifically, a detached caption-similarity matrix is added to the negative logits, assigning larger margins to more similar captions without mining, synthesizing, or resampling negatives. The resulting objective requires only one caption-similarity matrix and a masked logit addition during training, with no auxiliary data, additional parameters, offline preprocessing, or inference-time overhead. Extensive experiments on four dense-caption retrieval benchmarks show that HN-CLIP improves over the strongest competitors by +2.4–+4.3 R@1 while training $2.4\times$ faster than GOAL and $5.4\times$ faster than StructXLIP. Moreover, the proposed objective improves all six tested fine-tuning frameworks on the in-domain benchmarks and reaches the strongest full-data baseline with only 20% of the training data.

1 INTRODUCTION

Contrastively pre-trained vision-language models (VLMs) (Radford et al., 2021; Zhai et al., 2023) have become a standard backbone for image–text retrieval. While their pre-training corpora mainly contain short web captions, recent benchmarks such as DOCCI (Onoe et al., 2024), DCI (Urbanek et al., 2024), and Urban-1K (Zhang et al., 2024) require models to distinguish long, detail-rich descriptions of visually similar scenes. This *dense-caption retrieval* setting has motivated a growing line of methods built on Long-CLIP (Zhang et al., 2024). FineLIP introduces a cross-modal module (Asokan et al., 2025), GOAL incorporates local matching over segmented regions (Choi et al., 2025), SmartCLIP reweights salient tokens (Xie et al., 2025), and StructXLIP further introduces structural cues from edge maps and LLM-derived lexical supervision (Ruan et al., 2026). Despite their different designs, these methods largely focus on enriching *what* supervision is provided while retaining the same global contrastive objective.

We instead investigate whether this objective remains effective during dense-caption fine-tuning. Our analysis reveals a pronounced saturation phenomenon: with a strong Long-CLIP initialization, the InfoNCE loss falls below 10^{-3} on 80% of measured batches within the first epoch, and its gradient is *exactly zero in fp32* in 47% of measurements (Fig. 4). We trace this behavior to the caption geometry of dense-caption benchmarks. Long descriptions are highly compositional and often form near-duplicate pairs: under the pre-trained Long-CLIP text encoder, each caption’s hardest negative

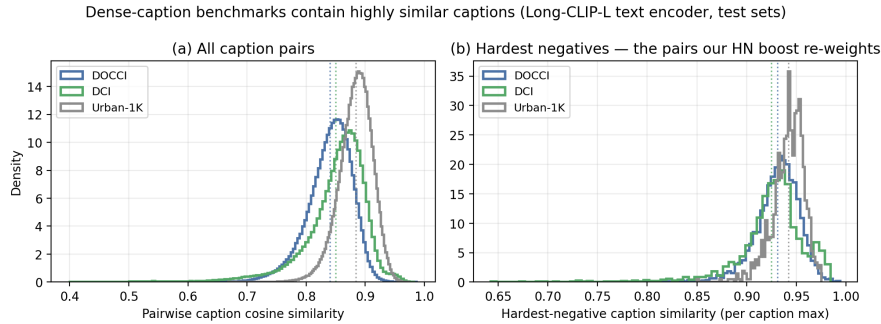


Figure 1: **Dense-caption benchmarks are dominated by hard negatives.** Distributions of (a) all pairwise caption-caption cosine similarities and (b) each caption’s hardest-negative similarity, measured with the pre-trained Long-CLIP-L text encoder on the test sets. Dotted lines mark the means. The pairs in (b) receive the strongest boosts.

reaches 0.92–0.94 cosine similarity (Fig. 1). A strong initialization therefore separates the easy majority of negatives very quickly, causing the standard objective to provide little gradient while the highly similar negatives that determine R@1 remain unresolved. This observation raises a natural question: *can the contrastive objective itself adapt its training pressure to the hard negatives already present in dense-caption batches?*

As a remedy, we introduce HN-CLIP, a simple objective-level approach that exploits the text encoder’s own representation geometry to identify hardness. Given a batch of image–caption pairs, HN-CLIP computes the caption–caption similarity matrix, detaches it from the computation graph, masks its diagonal, and adds it to the negative logits with a single coefficient γ . Each negative thus receives an adaptive margin proportional to its caption similarity: easy negatives are nearly unchanged, whereas near-duplicate captions must be separated by larger margins before their loss vanishes. Unlike conventional hard-negative strategies, HN-CLIP does not mine, synthesize, or resample negatives; the existing batch is left unchanged. Combined with a standard token-level late-interaction term (Yao et al., 2021), the method introduces no auxiliary inputs, preprocessing pipeline, architectural module, additional parameters, or inference-time computation. Experiments on four dense-caption benchmarks show that HN-CLIP achieves the best R@1 in all eight retrieval directions, outperforming the strongest competitors by +2.4–+4.3 R@1. It also trains $2.4\times$ faster than GOAL and $5.4\times$ faster than StructXLIP, surpasses the strongest full-data baseline with only 20% of the training data, and improves all six tested fine-tuning frameworks on the in-domain benchmarks.

Our contributions are summarized as follows:

- **We identify a previously overlooked optimization issue in dense-caption retrieval.** Under a strong pre-trained initialization, InfoNCE rapidly separates the easy majority of negatives and largely saturates while the highly similar negatives that determine R@1 remain unresolved. We verify this behavior through both caption-similarity statistics and direct gradient-dynamics measurements.
- **We introduce HN-CLIP, a simple adaptive-margin objective for dense-caption retrieval.** HN-CLIP converts the text encoder’s own text–text geometry into detached, per-negative similarity margins, assigning stronger training pressure to more similar captions without negative mining, synthesis, resampling, auxiliary data, architectural changes, or inference overhead.
- **We provide extensive empirical evidence for the effectiveness and generality of the proposed objective.** Across four dense-caption benchmarks, HN-CLIP achieves the best R@1 in all eight retrieval directions with gains of +2.4–+4.3 over the strongest competitors, trains substantially faster than machinery-based methods, surpasses the strongest full-data baseline using only one fifth of the training data, and improves all six tested fine-tuning frameworks on the in-domain benchmarks. Gradient analysis further connects these improvements to sustained optimization signal on hard negatives.

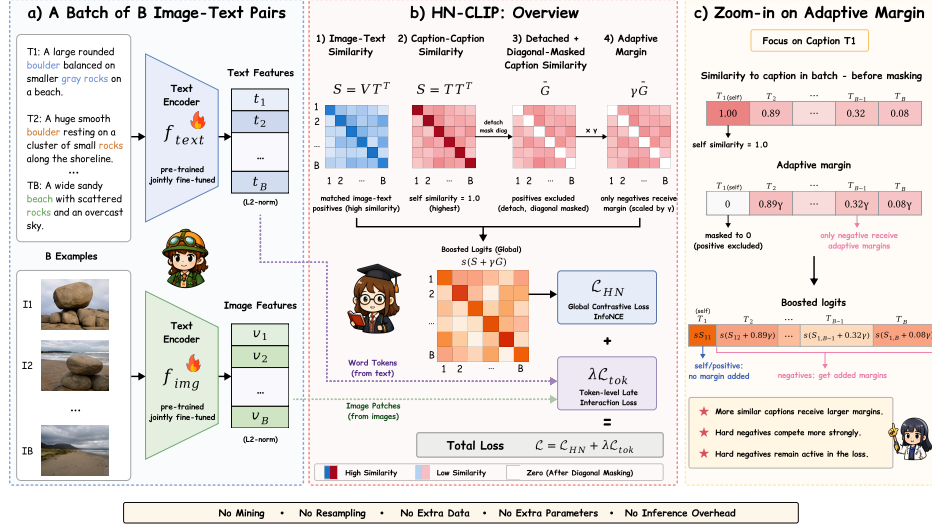


Figure 2: **Overview of HN-CLIP.** For a batch of B image-text pairs, HN-CLIP encodes images and captions with the dual encoder being fine-tuned, and forms the image-text similarity matrix $S = vt^\top$ and a detached, diagonal-masked caption-similarity matrix $\bar{G}$ from $G = tt^\top$. Their combination yields boosted logits $s(S + \gamma\bar{G})$, so near-twin negatives receive larger margins. The token-level term of Eq. (3) acts alongside this objective, improving supervision on hard negatives during training while keeping inference unchanged.

2 METHOD

In this section, we introduce HN-CLIP, which fine-tunes a pre-trained dual encoder without auxiliary data views, preprocessing pipelines, or architectural modules (Figs. 2 and 3). Training combines a text-similarity-boosted global objective with a standard token-level late-interaction term:

- (1) The *text-similarity-boosted objective* (Section 2.2), which converts the batch’s own caption-similarity matrix into per-negative adaptive margins, keeping the loss and its gradient exact on the hard negatives that decide retrieval.
- (2) A *token-level alignment branch* (Section 2.3) that the boost makes usable, contributing an additional gain where captions are longest.

We first quantify why the standard objective fails on dense captions (Section 2.1), then present both components, and close with an empirical gradient-dynamics analysis (Section 2.4).

2.1 PRELIMINARIES AND MOTIVATION

Let f_{img} and f_{txt} map images and captions into a shared d -dimensional space, and let $\{(I_i, T_i)\}_{i=1}^B$ denote a batch of B image-caption pairs. Let $\mathbf{v}_i = f_{\text{img}}(I_i)/\|f_{\text{img}}(I_i)\|$ and $\mathbf{t}_i = f_{\text{txt}}(T_i)/\|f_{\text{txt}}(T_i)\|$ denote the normalized embeddings, $S_{ij} = \mathbf{v}_i^\top \mathbf{t}_j$ the image-text similarity matrix, and s the learned inverse temperature. Standard fine-tuning minimizes the symmetric InfoNCE loss (Oord et al., 2018; Radford et al., 2021)

$$\mathcal{L}_{\text{CLIP}} = \frac{1}{2} [\text{CE}(sS, y) + \text{CE}(sS^\top, y)], \quad (1)$$

where $\text{CE}(Z, y)$ denotes row-wise softmax cross-entropy with target indices $y_i = i$. The gradient of Eq. (1) w.r.t. the logits is the classic softmax residual (Wang & Liu, 2021): each negative j is repelled

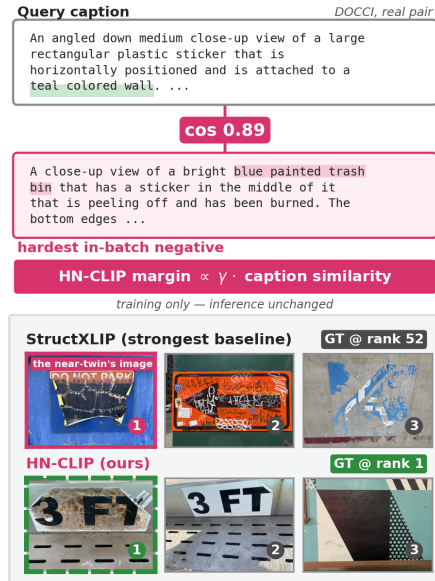


Figure 3: **Illustration of HN-CLIP.** A real DOCCI query and its hardest in-batch negative ($\cos 0.89$). The strongest baseline ranks the ground truth 52nd (its top-1 (pink) is the near-twin’s own image); HN-CLIP ranks it first.

with force proportional to its posterior probability $p_{ij} = [\text{softmax}(sS_{i,:})]_j$. When a strong pre-trained initialization such as Long-CLIP already assigns the positive a large margin over the *easy majority* of negatives, those posteriors p_{ij} become negligible and, in fp32, underflow together with the loss.

Dense-caption benchmarks make this failure mode extreme. Encoding the test captions of DOCCI, DCI, and Urban-1K with the released Long-CLIP-L text encoder, the mean *pairwise* caption similarity is 0.84, 0.85, and 0.88, and the mean over each caption’s *hardest* companion is 0.93, 0.92, and 0.94 (Fig. 1). Long descriptions of natural scenes are compositional near-duplicates; the retrieval task is decided by a handful of nearly-identical candidates. Empirically, at an effective batch of 128, $\mathcal{L}_{\text{CLIP}}$ of a Long-CLIP-L initialization collapses below 10^{-5} within the first tens of steps of fine-tuning (Fig. 4a): the batch is “solved” with respect to easy negatives long before the model separates the hard ones.

2.2 TEXT-SIMILARITY-BOOSTED HARD NEGATIVES

The diagnosis suggests the remedy: the objective must know *which* negatives are hard, and for captions this information is available for free. We compute the text-text similarity matrix $G_{ij} = \mathbf{t}_i^\top \mathbf{t}_j$ from embeddings the batch already contains, detach it from the computation graph, zero its diagonal, and add it to the logits of Eq. (1):

$$\mathcal{L}_{\text{HN}} = \frac{1}{2} [\text{CE}(s(S + \gamma \bar{G}), y) + \text{CE}(s(S + \gamma \bar{G})^\top, y)], \quad (2)$$

where $\bar{G} = \text{stopgrad}(G) \odot (\mathbf{1} - \mathbb{I})$, with $\odot$ the element-wise product, $\mathbf{1}$ the all-ones matrix, $\mathbb{I}$ the identity (masking the positives), and γ the single hyperparameter (default 0.5).

Interpretation as an adaptive margin. Because $\bar{G}$ is detached, Eq. (2) is exactly Eq. (1) evaluated on shifted logits: negative j of query i competes with an additive handicap γG_{ij} in its favor. Equivalently, the positive must beat every negative by a margin *proportional to how similar that negative’s caption is to its own*, a per-pair adaptive generalization of the fixed additive margins used in metric learning. Easy negatives (G_{ij} small) are almost unaffected; near-duplicate captions ($G_{ij} \rightarrow 1$) keep producing loss and gradient until the model separates them by the full margin. The softmax residual now concentrates exactly on the pairs identified in Fig. 1b (a formal derivation of this gradient concentration is given in Appendix B).

Remark 2.1 (Why text–text similarity). *Hardness could also be estimated from the image-text scores S being optimized, but early in training these are exactly the quantities that are wrong, and reweighting by them makes the supervision a function of the error it should correct. The text–text geometry of a pre-trained encoder is instead accurate before the first gradient step, symmetric across both retrieval directions, and the natural space in which the benchmark difficulty manifests (Fig. 1). The stop-gradient removes any differentiable path to $\bar{G}$, so no step is taken toward reshaping the model’s own margins; it does not freeze G across training, since we recompute it from the current encoder. That residual drift is deliberate: Table 3c shows it acts as an implicit annealing of the margin, and that freezing it costs up to 6.8 R@1.*

Cost. Training overhead is one $B \times B$ matrix product and one masked addition per step; there is no auxiliary forward pass, no extra encoder, no offline extraction. Inference is byte-identical to the underlying backbone. The complete reference implementation is 11 lines (Appendix B).

2.3 TOKEN-LEVEL ALIGNMENT BRANCH

The boost operates on global embeddings, and composes with supervision at a finer granularity. Following FILIP (Yao et al., 2021), we add a late-interaction term $\mathcal{L}_{\text{tok}}$ that aligns each word token with its most similar image patch (and vice versa), averaged over tokens, with in-batch negatives. The full objective is

$$\mathcal{L} = \mathcal{L}_{\text{HN}} + \lambda \mathcal{L}_{\text{tok}}, \quad \lambda = 1. \quad (3)$$

The two terms are complementary in a way our diagnosis predicts: $\mathcal{L}_{\text{HN}}$ decides *which* pairs the objective spends gradient on, $\mathcal{L}_{\text{tok}}$ decides *at what granularity* it is applied, and the second question

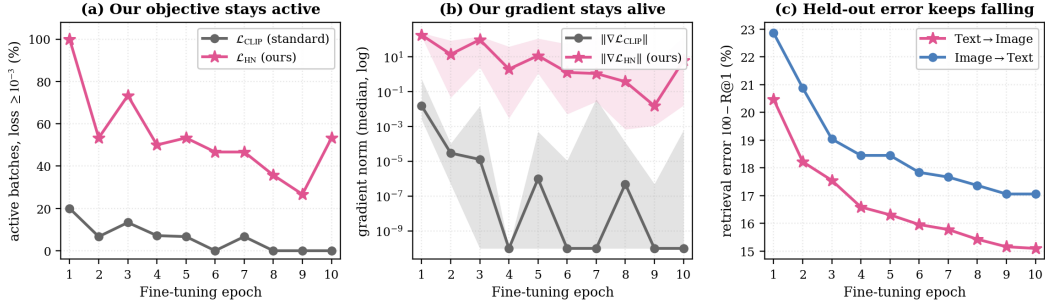


Figure 4: **Empirical gradient analysis** (Long-CLIP-L, DOCCI, 10 epochs; losses and full-parameter gradients measured every 5 optimizer steps, 148 measurements). Standard InfoNCE declares 80% of batches solved within the first epoch and its gradient is exactly zero in fp32 in 47% of measurements (median zero at five epochs; plotted clamped to 10^{-10}). The boosted loss keeps at least 26% of batches active in every epoch and, where the standard gradient is nonzero, exceeds it by 10^2 – $10^6\times$ in per-epoch median, with interquartile bands disjoint at nine epochs, and the retrieval error it buys keeps falling.

becomes material only once the first is answered, which Section 3.5 confirms. Both terms act at training time only: no parameters are added and inference stays byte-identical.

2.4 GRADIENT-DYNAMICS ANALYSIS

An objective that remains unsaturated supplies gradient diversity after the main loss converges (cf. gradient starvation; Pezeshki et al., 2021), the information-theoretic motivation behind StructXLIP’s auxiliary losses (Ruan et al., 2026). Our boost realizes the same mechanism *without any auxiliary view*, by reshaping the main objective to reduce premature saturation and keep hard negatives active longer. We verify this directly. During a 10-epoch fine-tuning run of Long-CLIP-L on DOCCI (effective batch 128) we measure, every 5 optimizer steps, both losses on the current batch, the norms of their gradients $\|\nabla_{\theta} \mathcal{L}_{\text{CLIP}}\|$ and $\|\nabla_{\theta} \mathcal{L}_{\text{HN}}\|$ w.r.t. all model parameters θ , and the cosine similarity between the two gradients (Fig. 4).

Three observations support the design. **(i) Saturation vs. persistence:** within the first epoch, $\mathcal{L}_{\text{CLIP}}$ already falls below 10^{-3} on 80% of measured batches, and from epoch 6 on it does so on essentially all of them: the standard objective simply runs out of work. In contrast, the fraction of batches on which $\mathcal{L}_{\text{HN}}$ still produces loss never falls below 26% (Fig. 4a). The standard gradient is exactly zero in 47% of measurements; on the rest, $\mathcal{L}_{\text{HN}}$ exceeds it by 10^2 – $10^6\times$ in per-epoch median (Fig. 4b). **(ii) Compatibility:** the two gradients remain positively correlated throughout ($\cos \mu=0.47$, $\sigma=0.36$), i.e., the boost steers optimization further along directions compatible with the original objective rather than against it. **(iii) Utility:** the persistent gradient is not noise: held-out retrieval error on DOCCI decreases monotonically from 20.5% to 15.1% (T $\rightarrow$ I) and 22.9% to 17.1% (I $\rightarrow$ T) across the same run (Fig. 4c), epochs after $\mathcal{L}_{\text{CLIP}}$ has flattened. The standard objective largely stops providing gradient signal; the boosted one does not. Appendix C repeats this analysis at four training-set scales on two datasets with identical conclusions.

3 EXPERIMENTS

In this section, we carry out experiments to address the following questions:

- **Q1:** Does HN-CLIP outperform machinery-based fine-tuning methods on dense-caption retrieval? See Section 3.2.
- **Q2:** Does the boost consistently improve existing fine-tuning frameworks in-domain? See Section 3.3.
- **Q3:** Do the sharpened decision boundaries transfer across domains and data scales? See Section 3.4.
- **Q4:** Which component drives the gains, and how sensitive is the single hyperparameter γ ? See Section 3.5.

Table 1: **Cross-modal retrieval performance of CLIP-based fine-tuning methods on four dense-caption benchmarks.** We report Recall@K (%) on both *Text→Image* and *Image→Text* settings. All fine-tuned methods start from the same Long-CLIP-L backbone with an identical training budget; Long-CLIP denotes the released checkpoint. Best results in **bold**; second best underlined. Δ denotes the margin over the best competitor per column, with gain in $\uparrow$ green.

Method	DOCCI						DCI					
	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
Long-CLIP[ECCV'24]	78.78	95.24	98.02	66.75	91.92	96.31	67.83	83.19	87.69	64.13	84.84	89.74
FineLIP[CVPR'25]	77.51	96.02	98.41	69.90	93.43	97.45	72.69	87.14	90.65	65.48	86.84	91.00
GOAL[CVPR'25]	81.53	97.02	98.80	80.86	96.24	98.63	<u>77.29</u>	<u>90.25</u>	93.30	<u>74.84</u>	89.94	93.25
StructXLIP[CVPR'26]	<u>84.73</u>	<u>97.69</u>	99.00	<u>82.61</u>	<u>97.08</u>	<u>98.71</u>	75.84	89.94	<u>93.65</u>	74.49	<u>90.05</u>	<u>93.40</u>
HN-CLIP	88.25	98.45	99.43	86.24	98.12	99.22	80.69	92.40	95.10	78.84	91.90	94.65
Δ	$\uparrow 3.52$	$\uparrow 0.76$	$\uparrow 0.43$	$\uparrow 3.63$	$\uparrow 1.04$	$\uparrow 0.51$	$\uparrow 3.40$	$\uparrow 2.15$	$\uparrow 1.45$	$\uparrow 4.00$	$\uparrow 1.85$	$\uparrow 1.25$

Method	Long-DCI						Urban-1K					
	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
Long-CLIP[ECCV'24]	54.61	72.80	78.33	47.35	73.04	80.10	86.10	96.50	98.10	82.40	96.70	98.30
FineLIP[CVPR'25]	59.24	77.86	83.19	49.52	75.08	82.39	82.00	95.00	97.60	77.30	95.00	97.60
GOAL[CVPR'25]	74.29	92.77	95.58	<u>73.31</u>	92.14	95.77	86.20	97.20	99.00	86.50	97.20	98.90
StructXLIP[CVPR'26]	<u>75.34</u>	<u>93.15</u>	<u>95.84</u>	72.30	92.79	<u>95.78</u>	<u>86.80</u>	<u>97.30</u>	<u>99.00</u>	<u>87.90</u>	97.10	98.40
HN-CLIP	79.03	93.76	96.34	76.44	92.79	95.91	91.10	98.10	99.40	90.30	98.20	99.30
Δ	$\uparrow 3.69$	$\uparrow 0.61$	$\uparrow 0.50$	$\uparrow 3.13$	0.00	$\uparrow 0.13$	$\uparrow 4.30$	$\uparrow 0.80$	$\uparrow 0.40$	$\uparrow 2.40$	$\uparrow 1.00$	$\uparrow 0.40$

Additional results (full-resolution numbers at deeper ranks (R@25/50), seed replication, per-direction convergence, and training-efficiency measurements) can be found in Appendices D and E.

3.1 EXPERIMENT SETUP

- **Benchmarks.** DOCCI (Onoe et al., 2024) provides 15k images with highly discriminative human descriptions (123 words on average; 9.5k train / 5.1k test). DCI (Urbanek et al., 2024) contains 7.4k images with dense, mask-aligned captions (5.4k train / 2k test); following the protocol of Choi et al. (2025) we additionally report *Long-DCI*, which evaluates the same models with the full-length captions. Urban-1K (Zhang et al., 2024) is a 1k-image test-only benchmark of urban scenes; as it provides no training split, models are fine-tuned on Visual Genome paragraph captions (Krause et al., 2017) and evaluated by transfer.
- **Compared methods.** We compare against the released Long-CLIP (Zhang et al., 2024) and against FineLIP (Asokan et al., 2025), GOAL (Choi et al., 2025), and StructXLIP (Ruan et al., 2026), all fine-tuned with their official code from the same Long-CLIP-L initialization with an identical budget.
- **Implementation.** All experiments use the Long-CLIP-L backbone (ViT-L/14; text encoder stretched to 248 tokens). HN-CLIP uses AdamW (Loshchilov & Hutter, 2017) (learning rate 2×10^{-6} , cosine schedule), effective batch 128, 10 epochs, $\gamma=0.5$, on Ascend 910B accelerators. Baselines use their official hyperparameters under the same backbone, batch size, and epoch budget; auxiliary inputs required by GOAL and StructXLIP are generated with their official pipelines. All methods are trained for the same 10-epoch budget under a shared evaluation protocol. The reported ranking is unchanged under last-epoch evaluation; a second seed on Long-DCI also preserves the R@1 ranking (mean $|\Delta|=0.4$ R@1 for HN-CLIP). We report Recall@K ($K=1/5/10$) for T→I and I→T retrieval. Every HN-CLIP number reported uses the full objective of Eq. (3) at $\gamma=0.5$, $\lambda=1$ on all four benchmarks, with no per-benchmark recipe and each term isolated in Table 3b. Full details are in Appendix D.

3.2 A1: HN-CLIP ACHIEVES COMPETITIVE PERFORMANCE WITHOUT ANY MACHINERY

The performance of HN-CLIP surpasses all machinery-based baselines. Table 1 reports the main comparison. As shown, we can observe that:

1. HN-CLIP achieves the outright best result in 23 of 24 columns, ties for best in the remaining column, and achieves the best R@1 in *all eight* directions, improving over the strongest competitor

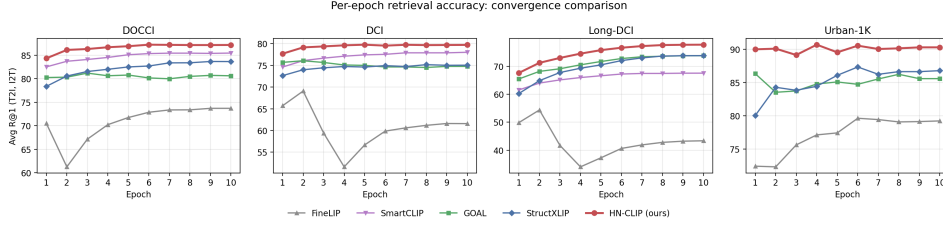


Figure 5: **Convergence comparison.** Average R@1 (T→I, I→T) per fine-tuning epoch. HN-CLIP’s first epoch matches or exceeds most baselines’ final accuracy on all four benchmarks.

Table 2: **Plug-and-play enhancement of our $\mathcal{L}_{\text{HN}}$ on CLIP-based fine-tuning.** Results on DOCCI and Long-DCI for *Text→Image* and *Image→Text* retrieval. Upper: full-parameter fine-tuning; lower: parameter-efficient tuning. Our method consistently boosts diverse CLIP variants, and the gains grow with caption length. Best in **bold**, with gain in $\uparrow$ green.

Method	DOCCI						Long-DCI					
	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
Long-CLIP[ECCV’24]	86.45	98.00	99.31	84.10	97.84	99.04	70.24	89.62	94.00	68.44	89.35	94.67
+ our $\mathcal{L}_{\text{HN}}$	88.31	98.75	99.45	86.39	98.08	99.20	78.43	92.52	95.27	76.02	91.78	94.76
Δ	$\uparrow 1.86$	$\uparrow 0.75$	$\uparrow 0.14$	$\uparrow 2.29$	$\uparrow 0.24$	$\uparrow 0.16$	$\uparrow 8.19$	$\uparrow 2.90$	$\uparrow 1.27$	$\uparrow 7.58$	$\uparrow 2.43$	$\uparrow 0.09$
FineLIP[CVPR’25]	77.51	96.02	98.41	69.90	93.43	97.45	59.24	77.86	83.19	49.52	75.08	82.39
+ our $\mathcal{L}_{\text{HN}}$	85.47	97.71	99.04	83.88	97.41	98.82	74.92	90.52	93.62	73.39	89.87	93.23
Δ	$\uparrow 7.96$	$\uparrow 1.69$	$\uparrow 0.63$	$\uparrow 13.98$	$\uparrow 3.98$	$\uparrow 1.37$	$\uparrow 15.68$	$\uparrow 12.66$	$\uparrow 10.43$	$\uparrow 23.87$	$\uparrow 14.79$	$\uparrow 10.84$
GOAL[CVPR’25]	81.53	97.02	98.80	80.86	96.24	98.63	74.29	92.77	95.58	73.31	92.14	95.77
+ our $\mathcal{L}_{\text{HN}}$	86.24	98.14	99.35	84.86	97.69	99.20	84.27	94.99	96.57	82.28	94.26	96.18
Δ	$\uparrow 4.71$	$\uparrow 1.12$	$\uparrow 0.55$	$\uparrow 4.00$	$\uparrow 1.45$	$\uparrow 0.57$	$\uparrow 9.98$	$\uparrow 2.22$	$\uparrow 0.99$	$\uparrow 8.97$	$\uparrow 2.12$	$\uparrow 0.41$
StructXLIP[CVPR’26]	84.73	97.69	99.00	82.61	97.08	98.71	75.34	93.15	95.84	72.30	92.79	95.78
+ our $\mathcal{L}_{\text{HN}}$	85.45	97.92	99.12	83.31	97.45	98.92	82.04	94.18	96.23	78.98	93.22	95.65
Δ	$\uparrow 0.72$	$\uparrow 0.23$	$\uparrow 0.12$	$\uparrow 0.70$	$\uparrow 0.37$	$\uparrow 0.21$	$\uparrow 6.70$	$\uparrow 1.03$	$\uparrow 0.39$	$\uparrow 6.68$	$\uparrow 0.43$	$\downarrow 0.13$
LoRA[ICLR’22]	80.49	96.16	98.55	77.96	95.80	98.04	60.08	80.68	86.86	58.97	80.02	86.53
+ our $\mathcal{L}_{\text{HN}}$	82.82	97.14	98.86	80.84	96.49	98.63	64.87	83.09	88.35	62.79	81.77	87.31
Δ	$\uparrow 2.33$	$\uparrow 0.98$	$\uparrow 0.31$	$\uparrow 2.88$	$\uparrow 0.69$	$\uparrow 0.59$	$\uparrow 4.79$	$\uparrow 2.41$	$\uparrow 1.49$	$\uparrow 3.82$	$\uparrow 1.75$	$\uparrow 0.78$
DoRA[ICML’24]	80.76	96.25	98.61	78.20	95.90	98.10	60.76	81.19	87.48	59.65	80.31	87.13
+ our $\mathcal{L}_{\text{HN}}$	83.41	97.33	99.00	81.41	96.65	98.67	65.46	83.57	88.61	63.38	82.15	87.56
Δ	$\uparrow 2.65$	$\uparrow 1.08$	$\uparrow 0.39$	$\uparrow 3.21$	$\uparrow 0.75$	$\uparrow 0.57$	$\uparrow 4.70$	$\uparrow 2.38$	$\uparrow 1.13$	$\uparrow 3.73$	$\uparrow 1.84$	$\uparrow 0.43$

by +3.52/ + 3.63 R@1 on DOCCI, +3.40/ + 4.00 on DCI, +3.69/ + 3.13 on Long-DCI, and +4.30/ + 2.40 on Urban-1K.

- The comparison is instructive about *where* the gain comes from: GOAL consumes segmentation masks, StructXLIP edge maps and LLM-built lexicons, FineLIP a cross-modal module, yet a plain dual encoder that refuses to ignore hard negatives outperforms all of them.
- Consistent with Section 2.4, the largest margins appear at R@1, where near-duplicates decide the outcome; at deeper ranks all methods approach ceiling and margins compress, while HN-CLIP remains best or tied-best across all Long-DCI deep-rank columns.

HN-CLIP accelerates the entire training trajectory. Fig. 5 plots per-epoch accuracy. On DOCCI the first epoch of HN-CLIP (84.3 average R@1) already exceeds the *final* accuracy of FineLIP, GOAL, and StructXLIP, and its second epoch (86.1) surpasses every baseline. Hard-negative supervision does not merely raise the endpoint; it accelerates the entire trajectory.

3.3 A2: THE BOOST CONSISTENTLY IMPROVES EXISTING FRAMEWORKS IN-DOMAIN

Consistent in-domain plug-and-play improvement. Because $\mathcal{L}_{\text{HN}}$ only modifies the logit matrix of the global contrastive term, it can replace that term inside any fine-tuning framework. Following the protocol of Ruan et al. (2026), we integrate it into the official training code of Long-CLIP, FineLIP, GOAL, and StructXLIP, and into LoRA (Hu et al., 2021) and DoRA (Liu et al., 2024) adapters on the same backbone. Table 2 shows consistent in-domain gains: every tested framework improves on both benchmarks, and R@1 gains scale with caption length, from +0.70+13.98 on DOCCI up to +3.73+23.87 on Long-DCI, exactly the regime where hard negatives are most extreme (cf. Fig. 1). StructXLIP, whose own auxiliary losses already target alignment quality, gains

Table 3: **Ablations.** (a) Sensitivity to the boost strength γ (Recall@1): every $\gamma \in [0.25, 1]$ beats $\gamma=0$ in-domain, while under transfer (Urban-1K) milder boosts generalize better. (b) Loss components under an identical recipe; only the loss changes. (c) $\bar{G}$ recomputed from the live encoder (default) vs. frozen at initialization; R@1/5/10 in Table A2. Best per column in **bold**.

(a) boost strength γ

γ	DOCCI		DCI		Long-DCI		Urban-1K		Avg
	R@1	R@1	R@1	R@1	R@1	R@1	R@1	R@1	
$\gamma=0$	86.45	84.29	79.24	77.54	70.92	68.00	91.30	93.00	81.34
$\gamma=0.25$	87.82	86.63	80.74	79.29	76.38	74.80	91.70	93.00	83.80
$\gamma=0.5$ (default)	88.25	86.24	80.69	78.84	79.03	76.44	91.10	90.30	83.86
$\gamma=0.75$	88.20	85.73	81.04	78.59	79.96	76.72	89.10	89.50	83.61
$\gamma=1.0$	87.98	85.02	80.34	78.19	79.94	76.59	87.90	88.40	83.04

(b) loss components

$\mathcal{L}_{\text{tok}}$	$\mathcal{L}_{\text{HN}}$	DCI						Long-DCI						Avg
		R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	
$\times$	$\times$	79.39	91.60	94.65	78.34	92.85	95.25	70.24	89.62	94.00	68.44	89.35	94.67	74.10
$\checkmark$	$\times$	79.24	91.55	94.25	77.54	92.95	95.35	70.92	89.51	93.90	68.00	89.12	94.17	73.92
$\times$	$\checkmark$	81.04	92.20	95.00	78.54	91.95	94.60	78.43	92.52	95.27	76.02	91.78	94.76	78.51
$\checkmark$	$\checkmark$	80.69	92.40	95.10	78.84	91.90	94.65	79.03	93.76	96.34	76.44	92.79	95.91	78.75

(c) $\bar{G}$ recomputed vs. frozen

$\bar{G}$ source	DOCCI		DCI		Long-DCI		Urban-1K		Avg
	R@1	R@1	R@1	R@1	R@1	R@1	R@1	R@1	
Recomputed $\bar{G}$ (default)	88.25	86.24	80.69	78.84	79.03	76.44	91.10	90.30	83.86
Frozen $\bar{G}$ (at init)	85.86	82.43	77.79	75.84	79.93	76.75	87.30	83.50	81.18
Δ (default – frozen)	$\uparrow 2.39$	$\uparrow 3.81$	$\uparrow 2.90$	$\uparrow 3.00$	$\downarrow 0.90$	$\downarrow 0.31$	$\uparrow 3.80$	$\uparrow 6.80$	$\uparrow 2.69$

the least but still improves; the benefit extends to PEFT (+3.7+4.8 R@1 for LoRA/DoRA on Long-DCI). DCI results and the domain-transfer setting are analyzed in Appendix E.

3.4 A3: SHARPENED BOUNDARIES TRANSFER ACROSS DOMAINS AND SCALES

Across domains. Hard-negative margins could in principle overfit dataset-specific caption statistics; Table A10 shows the opposite. Trained on DCI and transferred to DOCCI, HN-CLIP scores 85.00/83.14 R@1, higher than every baseline’s *in-domain* DOCCI result, and it leads every column of the reverse and of the harder DOCCI→Long-DCI transfer (Tables A7 and A10).

Across data scales. Fig. 6 varies the training fraction on identical subsets. HN-CLIP leads at every fraction, the margin *widens* as data shrinks to 20% (+7.3 R@1), and a fifth of the data already beats GOAL trained on all of it. When gradient steps are scarce, spending them on informative negatives matters most.

3.5 A4: ABLATION STUDIES

Loss components. Table 3b isolates each term under a strictly identical recipe, and the pattern directly tests our diagnosis. Token-level supervision *on its own* leaves accuracy where plain fine-tuning left it, exactly what Section 2.4 predicts, since a finer granularity inherits the same uniform treatment of negatives and saturates with it. Granularity is not the bottleneck; negative weighting is. Once $\mathcal{L}_{\text{HN}}$ removes that bottleneck both counts change: alone it produces the bulk of the improvement (+1.7/ + 0.2 R@1 on DCI, +8.2/ + 7.6 on Long-DCI), and the inert token branch now contributes +0.60/ + 0.42 on the hardest benchmark. *The boost is what makes finer supervision usable.*

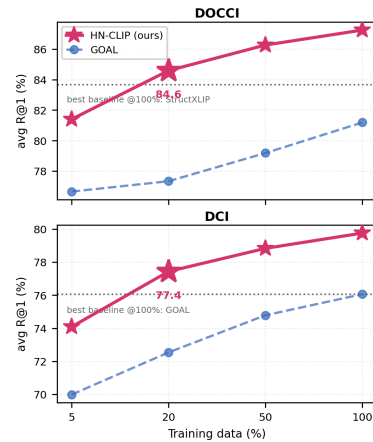


Figure 6: **Sample efficiency** (avg R@1, identical subsets). HN-CLIP at 20% of the data already clears the strongest baseline trained on 100% (dotted line, from Table 1); full numbers in Table A9.

Strength of the boost. The sweep over our only hyperparameter (Table 3a) is interpretable rather than tuned. Every in-domain $\gamma \in \{0.25, \dots, 1.0\}$ beats $\gamma=0$ by up to +9.0 R@1, while the spread *inside* the plateau is 0.8 average R@1, half its own worst-case margin over $\gamma=0$, so the choice of γ matters far less than making it nonzero. The end-points are informative: the hardest evaluation (Long-DCI) peaks at a strong boost ($\gamma=0.75$), the Urban-1K transfer at the mildest ($\gamma=0.25$), exactly what a mechanism sharpening boundaries on the *training* distribution predicts. Our untuned default $\gamma=0.5$ attains the best four-benchmark average, sits within 1 R@1 of every in-domain optimum, and since s and γ act only through their product (Appendix B.2), the plateau covers a corresponding range of temperatures.

The drift of $\bar{G}$ is load-bearing. Because the text encoder trains, the recomputed $\bar{G}$ drifts across steps; Table 3c rebuilds the boost from a frozen copy of the initial encoder to test whether that drift helps. The default wins three of four benchmarks (+2.4—+6.8 R@1) and 22 of 24 columns; the frozen variant peaks at epoch 1 on DCI and Urban-1K before declining, the signature of a margin that never relaxes. Recomputation therefore acts as an *implicit annealing* of the boost, and an independent knob corroborates the γ sweep: the never-decaying margin loses most exactly where milder boosts win, on transfer (Appendix B.2).

4 RELATED WORK

Long-text vision-language alignment. Contrastive image-text pre-training (Radford et al., 2021; Jia et al., 2021; Zhai et al., 2023) established the dual-encoder paradigm, but its ~ 77 -token window fits paragraphs poorly. Long-CLIP (Zhang et al., 2024) relaxes the constraint and is the standard backbone here; parallel work stretches the window itself (Najdenkoska et al., 2024; Wu et al., 2024) or re-captions the corpus (Fan et al., 2023; Chen et al., 2024). On this backbone, FineLIP (Asokan et al., 2025) inserts a cross-modal module, GOAL (Choi et al., 2025) adds local matching over segmented regions, SmartCLIP (Xie et al., 2025) re-weights salient tokens, DreamLIP (Zheng et al., 2024) decomposes captions, StructXLIP (Ruan et al., 2026) aligns edge maps with lexicon-filtered captions, FILIP (Yao et al., 2021) (after ColBERT (Khattab & Zaharia, 2020)) aligns word and patch tokens, and PEFT adapters (Hu et al., 2021; Liu et al., 2024) update fewer weights. All enrich *what* is aligned while inheriting the InfoNCE objective unchanged; HN-CLIP instead repairs *how* negatives inside that objective are weighted, and so composes with diverse existing fine-tuning frameworks (Section 3.3).

Hard negatives in contrastive learning. The role of negatives in contrastive learning is well established (Oord et al., 2018; He et al., 2020; Chen et al., 2020; Khosla et al., 2020; Wang & Isola, 2020), with prior work exploring importance-based reweighting (Robinson et al., 2020), synthetic mixing (Kalantidis et al., 2020), debiased objectives (Chuang et al., 2020), mined captions for compositionality (Yuksekgonul et al., 2022; Thrush et al., 2022; Hsieh et al., 2023), false-negative relabeling (Li et al., 2023; Byun et al., 2024), hardest-negative mining (Faghri et al., 2017), and score-based up-weighting (Radenovic et al., 2023). These methods largely ask *which negatives to use*; HN-CLIP instead asks *where hardness lives*, using the encoder’s pre-trained text–text geometry (Section 2.2). Unlike margin-based metric learning (Schroff et al., 2015; Wang et al., 2018; Deng et al., 2019), including embedding-dependent margins (Kim et al., 2022), our margin is per-pair, derived from text–text geometry, and detached. Unlike score-based reweighting such as DiHT, which relies on the cross-modal scores being optimized, HN-CLIP uses text–text geometry available before the first update. To our knowledge, no prior work converts caption-to-caption similarity into adaptive per-negative margins or identifies the structural saturation of the standard objective in dense-caption retrieval.

5 CONCLUSION

Dense-caption retrieval did not need more machinery; it needed an objective that kept learning. We showed that InfoNCE largely saturates within the first epoch, traced this failure to near-duplicate captions and the absence of explicit caption-level hardness, and repaired it using the same text–text geometry that exposed the problem. The resulting training-time modification sets a new state of the art on four benchmarks, matches or exceeds most baselines’ final accuracy after a single epoch,

requires only one fifth of the training data to surpass the strongest full-data baseline, and improves all six tested fine-tuning frameworks on the in-domain benchmarks.

REFERENCES

- Mothilal Asokan, Kebin Wu, and Fatima Albreiki. Finelip: Extending clip’s reach via fine-grained alignment with longer text inputs. In *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 14495–14504. IEEE, 2025.
- Jaeseok Byun, Dohoon Kim, and Taesup Moon. Mafa: Managing false negatives for vision-language pre-training. In *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 27304–27314. IEEE, 2024.
- Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Conghui He, Jiaqi Wang, Feng Zhao, and Dahua Lin. Sharegpt4v: Improving large multi-modal models with better captions. In *European Conference on Computer Vision*, pp. 370–387. Springer, 2024.
- Ting Chen, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. A simple framework for contrastive learning of visual representations. In *International conference on machine learning*, pp. 1597–1607. PmLR, 2020.
- Hyungyu Choi, Young Kyun Jang, and Chanho Eom. Goal: Global-local object alignment learning. In *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 4070–4079. IEEE, 2025.
- Ching-Yao Chuang, Joshua Robinson, Yen-Chen Lin, Antonio Torralba, and Stefanie Jegelka. De-biased contrastive learning. *Advances in neural information processing systems*, 33:8765–8775, 2020.
- Jiankang Deng, Jia Guo, Niannan Xue, and Stefanos Zafeiriou. Arcface: Additive angular margin loss for deep face recognition. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 4690–4699, 2019.
- Fartash Faghri, David J Fleet, Jamie Ryan Kiros, and Sanja Fidler. Vse++: Improving visual-semantic embeddings with hard negatives. *arXiv preprint arXiv:1707.05612*, 2017.
- Lijie Fan, Dilip Krishnan, Phillip Isola, Dina Katabi, and Yonglong Tian. Improving clip training with language rewrites. *Advances in Neural Information Processing Systems*, 36:35544–35575, 2023.
- Roopal Garg, Andrea Burns, Burcu Karagol-Ayan, Yonatan Bitton, Ceslee Montgomery, Yasumasa Onoe, Andrew Bunner, Ranjay Krishna, Jason Michael Baldrige, and Radu Soricut. Imagein-words: Unlocking hyper-detailed image descriptions. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, pp. 93–127, 2024.
- Kaiming He, Haoqi Fan, Yuxin Wu, Saining Xie, and Ross Girshick. Momentum contrast for unsupervised visual representation learning. In *2020 IEEE/CVF conference on computer vision and pattern recognition (CVPR)*, pp. 9726–9735. IEEE, 2020.
- Cheng-Yu Hsieh, Jieyu Zhang, Zixian Ma, Aniruddha Kembhavi, and Ranjay Krishna. Sugarcrepe: Fixing hackable benchmarks for vision-language compositionality. *Advances in neural information processing systems*, 36:31096–31116, 2023.
- Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*, 2021.
- Chao Jia, Yinfei Yang, Ye Xia, Yi-Ting Chen, Zarana Parekh, Hieu Pham, Quoc Le, Yun-Hsuan Sung, Zhen Li, and Tom Duerig. Scaling up visual and vision-language representation learning with noisy text supervision. In *International conference on machine learning*, pp. 4904–4916. PMLR, 2021.

-
- Yannis Kalantidis, Mert Bulent Sariyildiz, Noe Pion, Philippe Weinzaepfel, and Diane Larlus. Hard negative mixing for contrastive learning. *Advances in neural information processing systems*, 33: 21798–21809, 2020.
- Omar Khattab and Matei Zaharia. Colbert: Efficient and effective passage search via contextualized late interaction over bert. In *Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval*, pp. 39–48, 2020.
- Prannay Khosla, Piotr Teterwak, Chen Wang, Aaron Sarna, Yonglong Tian, Phillip Isola, Aaron Maschinot, Ce Liu, and Dilip Krishnan. Supervised contrastive learning. *Advances in neural information processing systems*, 33:18661–18673, 2020.
- Minchul Kim, Anil K Jain, and Xiaoming Liu. Adaface: Quality adaptive margin for face recognition. In *2022 IEEE/CVF conference on computer vision and pattern recognition (CVPR)*, pp. 18729–18738. IEEE, 2022.
- Jonathan Krause, Justin Johnson, Ranjay Krishna, and Li Fei-Fei. A hierarchical approach for generating descriptive image paragraphs. In *2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 3337–3345. IEEE, 2017.
- Haoxuan Li, Yi Bin, Junrong Liao, Yang Yang, and Heng Tao Shen. Your negative may not be true negative: Boosting image-text matching with false negative elimination. In *Proceedings of the 31st ACM international conference on multimedia*, pp. 924–934, 2023.
- Shih-Yang Liu, Chien-Yi Wang, Hongxu Yin, Pavlo Molchanov, Yu-Chiang Frank Wang, Kwang-Ting Cheng, and Min-Hung Chen. Dora: Weight-decomposed low-rank adaptation. *arXiv preprint arXiv:2402.09353*, 2024.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*, 2017.
- Ivona Najdenkoska, Mohammad Mahdi Derakhshani, Yuki M Asano, Nanne Van Noord, Marcel Worring, and Cees GM Snoek. Tulip: Token-length upgraded clip. *arXiv preprint arXiv:2410.10034*, 2024.
- Yasumasa Onoe, Sunayana Rane, Zachary Berger, Yonatan Bitton, Jaemin Cho, Roopal Garg, Alexander Ku, Zarana Parekh, Jordi Pont-Tuset, Garrett Tanzer, et al. Docci: Descriptions of connected and contrasting images. In *European Conference on Computer Vision*, pp. 291–309. Springer, 2024.
- Aaron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*, 2018.
- Mohammad Pezeshki, Oumar Kaba, Yoshua Bengio, Aaron C Courville, Doina Precup, and Guillaume Lajoie. Gradient starvation: A learning proclivity in neural networks. *Advances in Neural Information Processing Systems*, 34:1256–1272, 2021.
- Filip Radenovic, Abhimanyu Dubey, Abhishek Kadian, Todor Mihaylov, Simon Vandenhende, Yash Patel, Yi Wen, Vignesh Ramanathan, and Dhruv Mahajan. Filtering, distillation, and hard negatives for vision-language pre-training. In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 6967–6977. IEEE, 2023.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pp. 8748–8763. PmLR, 2021.
- Joshua Robinson, Ching-Yao Chuang, Suvrit Sra, and Stefanie Jegelka. Contrastive learning with hard negative samples. *arXiv preprint arXiv:2010.04592*, 2020.
- Zanxi Ruan, Songqun Gao, Qiuyu Kong, Yiming Wang, and Marco Cristani. Structxclip: Enhancing vision-language models with multimodal structural cues. *arXiv preprint arXiv:2602.20089*, 2026.

-
- Florian Schroff, Dmitry Kalenichenko, and James Philbin. Facenet: A unified embedding for face recognition and clustering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 815–823, 2015.
- Tristan Thrush, Ryan Jiang, Max Bartolo, Amanpreet Singh, Adina Williams, Douwe Kiela, and Candace Ross. Winoground: Probing vision and language models for visio-linguistic compositionality. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 5228–5238. IEEE, 2022.
- Jack Urbanek, Florian Bordes, Pietro Astolfi, Mary Williamson, Vasu Sharma, and Adriana Romero-Soriano. A picture is worth more than 77 text tokens: Evaluating clip-style models on dense captions. In *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 26690–26699. IEEE, 2024.
- Feng Wang and Huaping Liu. Understanding the behaviour of contrastive loss. In *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 2495–2504. IEEE, 2021.
- Hao Wang, Yitong Wang, Zheng Zhou, Xing Ji, Dihong Gong, Jingchao Zhou, Zhifeng Li, and Wei Liu. Cosface: Large margin cosine loss for deep face recognition. In *2018 IEEE/CVF conference on computer vision and pattern recognition*, pp. 5265–5274. IEEE, 2018.
- Tongzhou Wang and Phillip Isola. Understanding contrastive representation learning through alignment and uniformity on the hypersphere. In *International conference on machine learning*, pp. 9929–9939. PMLR, 2020.
- Wei Wu, Kecheng Zheng, Shuailei Ma, Fan Lu, Yuxin Guo, Yifei Zhang, Wei Chen, Qingpei Guo, Yujun Shen, and Zheng-Jun Zha. Lotlip: Improving language-image pre-training for long text understanding. *Advances in Neural Information Processing Systems*, 37:64996–65019, 2024.
- Shaoan Xie, Lingjing Lingjing, Yujia Zheng, Yu Yao, Zeyu Tang, Eric P Xing, Guangyi Chen, and Kun Zhang. Smartclip: Modular vision-language alignment with identification guarantees. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 29780–29790, 2025.
- Lewei Yao, Runhui Huang, Lu Hou, Guansong Lu, Minzhe Niu, Hang Xu, Xiaodan Liang, Zhenguo Li, Xin Jiang, and Chunjing Xu. Filip: Fine-grained interactive language-image pre-training. *arXiv preprint arXiv:2111.07783*, 2021.
- Mert Yuksekgonul, Federico Bianchi, Pratyusha Kalluri, Dan Jurafsky, and James Zou. When and why vision-language models behave like bags-of-words, and what to do about it? *arXiv preprint arXiv:2210.01936*, 2022.
- Xiaohua Zhai, Basil Mustafa, Alexander Kolesnikov, and Lucas Beyer. Sigmoid loss for language image pre-training. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 11941–11952. IEEE, 2023.
- Beichen Zhang, Pan Zhang, Xiaoyi Dong, Yuhang Zang, and Jiaqi Wang. Long-clip: Unlocking the long-text capability of clip. In *European conference on computer vision*, pp. 310–325. Springer, 2024.
- Kecheng Zheng, Yifei Zhang, Wei Wu, Fan Lu, Shuailei Ma, Xin Jin, Wei Chen, and Yujun Shen. Dreamlip: Language-image pre-training with long captions. In *European Conference on Computer Vision*, pp. 73–90. Springer, 2024.

CONTENTS OF APPENDIX

A	Dataset Details	13
A.1	Benchmarks and splits	13
A.2	One batch, four benchmarks	13
A.3	What near-duplicates look like	14
A.4	Statistics of the caption geometry	14
B	Method Details	20
B.1	Reference implementation	20
B.2	Gradient concentration	20
C	Extended Gradient Analysis	21
D	Implementation Details and Computational Analysis	21
D.1	Training setup and backbone choice	21
D.2	Plug-and-play integration	23
D.3	Evaluation protocol	23
E	Additional Experimental Analyses	23
E.1	Plug-and-play, all four benchmarks	23
E.2	Full-resolution ablations	24
E.3	Cross-domain evaluation	24
E.4	Robustness to the random seed	24
E.5	Sample efficiency, full numbers	24
E.6	Per-direction convergence	24
E.7	Results at deeper ranks	24
F	Additional Qualitative Results	24

A DATASET DETAILS

A.1 BENCHMARKS AND SPLITS

Table A1 summarizes the four benchmarks, all members of the recent family of hyper-detailed description datasets (Garg et al., 2024). All models are fine-tuned on the official training split of each benchmark; Long-DCI evaluates the DCI-trained models with full-length captions following the protocol of GOAL, and Urban-1K is test-only, so models are fine-tuned on Visual Genome paragraph captions and evaluated by transfer. The last two columns repeat the measurement from Section 2.1: with the pre-trained Long-CLIP-L text encoder, the mean pairwise caption cosine similarity and the mean similarity of each caption’s *hardest* companion, the statistic that motivates and, unchanged, powers $\mathcal{L}_{\text{HN}}$.

A.2 ONE BATCH, FOUR BENCHMARKS

Fig. A5 shows the matrix at the heart of HN-CLIP: for one *real* training batch ($B=8$, same random seed) per benchmark, the caption-similarity matrix $\bar{G}$ that our loss adds to the logits. The picture is the method’s motivation made visible: on every benchmark the matrix is uniformly high (off-

Table A1: **Benchmark statistics.** Mean caption length is measured on the evaluation split in words; similarities use the pre-trained Long-CLIP-L text encoder.

Benchmark	#train	#test	words	pairwise sim	hardest sim
DOCCI	9450	5100	123	0.84	0.93
DCI	5445	1999	133	0.85	0.92
Long-DCI	5445 (=DCI)	7444	134	0.85	0.93
Urban-1K	14579 (VG)	1000	107	0.88	0.94

diagonal means 0.82–0.84), i.e., *every* negative in *every* batch is a near-duplicate to some degree, and the boost assigns every one of them a proportionate margin.

A.3 WHAT NEAR-DUPPLICATES LOOK LIKE

Figs. A1 to A4 show representative near-duplicate caption pairs from each benchmark, retrieved with the *pre-trained* Long-CLIP-L text encoder (queries drawn near the 90th percentile of the hardest-companion distribution, i.e., striking but not extreme). Two different sports cars, two different dirt bikes, two different white horses: the captions describe *different images* yet reach cosine similarities of 0.93–0.97, because long descriptions of natural scenes are compositional recombinations of the same elements (shared content words highlighted). These are exactly the pairs that standard InfoNCE treats as ordinary negatives, and the pairs our margin re-weights hardest.

A.4 STATISTICS OF THE CAPTION GEOMETRY

Fig. A6 quantifies this across the four benchmarks with the same encoder: mean pairwise similarity is 0.84–0.88 (A), each caption’s hardest companion averages 0.92–0.94 (B), and 86–99% of all in-batch negatives carry a caption similarity of at least 0.8 (C): under our default $\gamma=0.5$, virtually every negative in every batch receives a non-trivial adaptive margin, and the benchmarks differ mainly in how many *extreme* ($\bar{G} \geq 0.9$) negatives they contain.

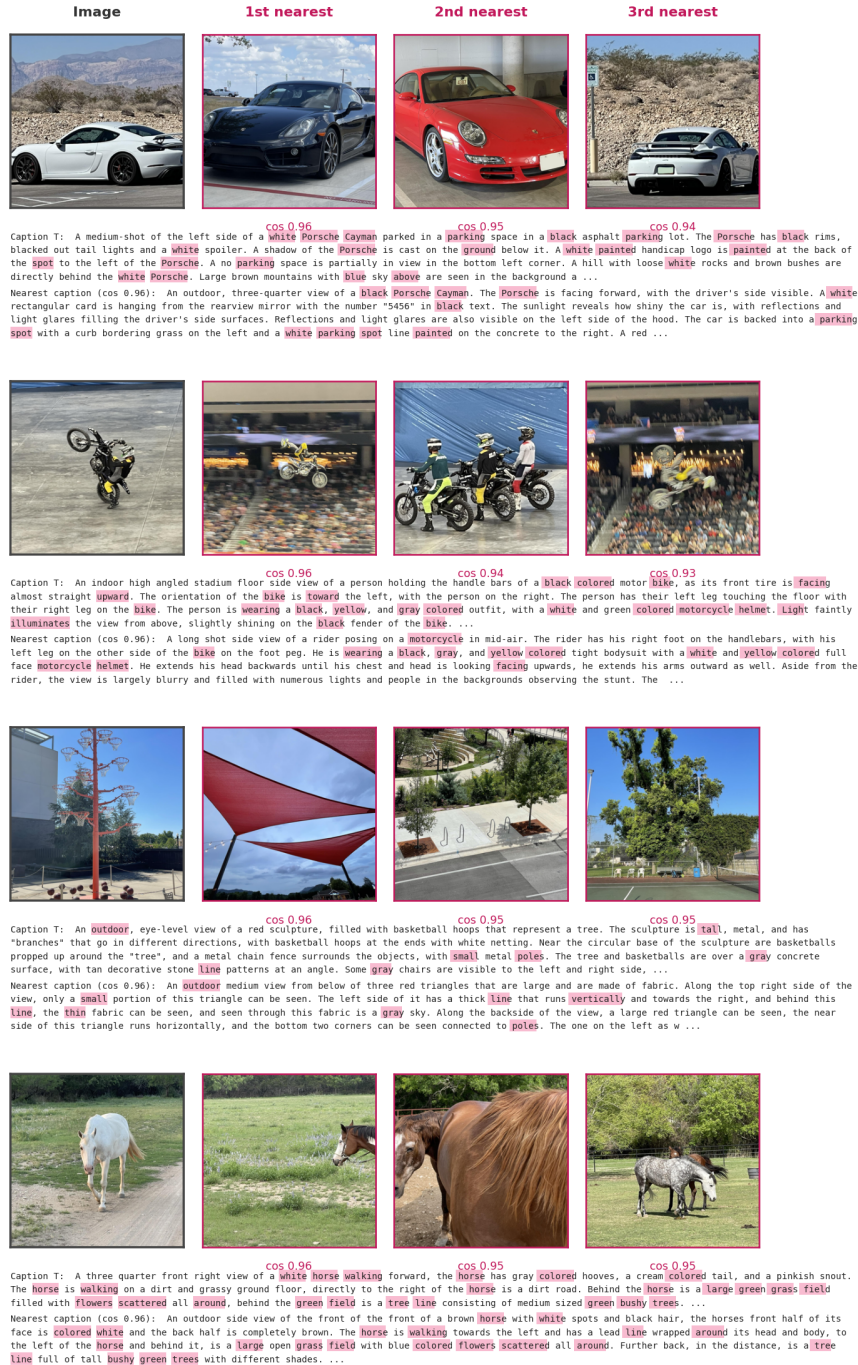


Figure A1: Near-duplicate caption pairs on DOCCI. Each row: a test image, its caption, the three nearest *other* captions' images (cosine printed underneath), and the caption texts with shared content words highlighted.



Figure A2: Near-duplicate caption pairs on DCI.

Image	1st nearest	2nd nearest	3rd nearest
			
Caption T: A bright day in the center of a park area. In the back there are some types of playground furniture a slide some swings etc. all multiple colors. In the background there is a like of dark green trees but they are not incredibly thick. On the far right there is a large gap in the tree line very bright. Top left of the area is where the bright sky is visible. The grassland in the area bright green is rather short and clear but on the right there is a small grass hill. There is a green hedge or bushes at are at the edge of the grass area as well. There is a ... Nearest caption (cos 0.97): Here is a view outside overlooking a recreational park area with multiple trees growing in grass fields. There is a green field separated by a gray asphalt sidewalk that stretches out across the land. The green grass has some bare patches on the right side of it but over the front view across is a field of many trees on it. The front tree seen is a tall dogwood type species with many lightly colored flowers or leaves on them as well as a strong trunk that is somewhat thick and thin. There are multiple shrubs on the left side with bare branches and a smal ...	cos 0.96 Caption T: A bright day in the center of a park area. In the back there are some types of playground furniture a slide some swings etc. all multiple colors. In the background there is a like of dark green trees but they are not incredibly thick. On the far right there is a large gap in the tree line very bright. Top left of the area is where the bright sky is visible. The grassland in the area bright green is rather short and clear but on the right there is a small grass hill. There is a green hedge or bushes at are at the edge of the grass area as well. There is a ... Nearest caption (cos 0.96): Here is a view outside overlooking a recreational park area with multiple trees growing in grass fields. There is a green field separated by a gray asphalt sidewalk that stretches out across the land. The green grass has some bare patches on the right side of it but over the front view across is a field of many trees on it. The front tree seen is a tall dogwood type species with many lightly colored flowers or leaves on them as well as a strong trunk that is somewhat thick and thin. There are multiple shrubs on the left side with bare branches and a smal ...	cos 0.96 Caption T: A bright day in the center of a park area. In the back there are some types of playground furniture a slide some swings etc. all multiple colors. In the background there is a like of dark green trees but they are not incredibly thick. On the far right there is a large gap in the tree line very bright. Top left of the area is where the bright sky is visible. The grassland in the area bright green is rather short and clear but on the right there is a small grass hill. There is a green hedge or bushes at are at the edge of the grass area as well. There is a ... Nearest caption (cos 0.96): Here is a view outside overlooking a recreational park area with multiple trees growing in grass fields. There is a green field separated by a gray asphalt sidewalk that stretches out across the land. The green grass has some bare patches on the right side of it but over the front view across is a field of many trees on it. The front tree seen is a tall dogwood type species with many lightly colored flowers or leaves on them as well as a strong trunk that is somewhat thick and thin. There are multiple shrubs on the left side with bare branches and a smal ...	
			
cos 0.97 Caption T: There is a strawberry plant that has a lot of leaves and strawberries on it. There are many green leaves on green stems. Most of them have curved sides and go to a point. The veins are visible on them. There are a bunch of strawberries in the middle. Many are unripe and are light green. They are rounded and have little seeds in them. There are also some ripe red ones in there, as well. Those are mostly on the right side and on the bottom. There is a right hand that is reaching out and grasping a strawberry. Three fingers are visible, including the thumb. ... Nearest caption (cos 0.97): In the front, there are many different types of short plants going along the ground. They are green. Some of them have curved ends and go to points. They make the ground a little uneven. Behind that there is a gray sign that says, "Laboratorium SNSU" and then a red and blue "BSN" logo and more writing in black. There is a building behind that. The front of the building comes out in a square shape from the front. It has rows of evenly spaced and shaped rectangular windows. You can see inside to the building. There is a square shaped overhanging. It is sol ...	cos 0.96 Caption T: There is a strawberry plant that has a lot of leaves and strawberries on it. There are many green leaves on green stems. Most of them have curved sides and go to a point. The veins are visible on them. There are a bunch of strawberries in the middle. Many are unripe and are light green. They are rounded and have little seeds in them. There are also some ripe red ones in there, as well. Those are mostly on the right side and on the bottom. There is a right hand that is reaching out and grasping a strawberry. Three fingers are visible, including the thumb. ... Nearest caption (cos 0.96): In the front, there are many different types of short plants going along the ground. They are green. Some of them have curved ends and go to points. They make the ground a little uneven. Behind that there is a gray sign that says, "Laboratorium SNSU" and then a red and blue "BSN" logo and more writing in black. There is a building behind that. The front of the building comes out in a square shape from the front. It has rows of evenly spaced and shaped rectangular windows. You can see inside to the building. There is a square shaped overhanging. It is sol ...	cos 0.96 Caption T: There is a strawberry plant that has a lot of leaves and strawberries on it. There are many green leaves on green stems. Most of them have curved sides and go to a point. The veins are visible on them. There are a bunch of strawberries in the middle. Many are unripe and are light green. They are rounded and have little seeds in them. There are also some ripe red ones in there, as well. Those are mostly on the right side and on the bottom. There is a right hand that is reaching out and grasping a strawberry. Three fingers are visible, including the thumb. ... Nearest caption (cos 0.96): In the front, there are many different types of short plants going along the ground. They are green. Some of them have curved ends and go to points. They make the ground a little uneven. Behind that there is a gray sign that says, "Laboratorium SNSU" and then a red and blue "BSN" logo and more writing in black. There is a building behind that. The front of the building comes out in a square shape from the front. It has rows of evenly spaced and shaped rectangular windows. You can see inside to the building. There is a square shaped overhanging. It is sol ...	
			
cos 0.97 Caption T: A stained glass window of a saint king. He is clad in an emerald green robe and a cloak that is red on the exterior and gold on the interior. Under his left/viewers right arm he holds a church: It has white walls, a white steeple, a gold roof with tiles shaped like feathers or scales, and a gold door. There are three arched windows above the front door and two rows of four on the side. The steeple has an arched window in each side and the spire or roof is like that of the rest of the church. In his right (viewer's right) hand he holds a gold scepter with ... Nearest caption (cos 0.97): There is a stained glass window. On the top there is a brown bird design in the window. There are a lot of feathers on it. The wings are up. Its head is curved and there is a beak. It is on a gray background. There is a worn in its mouth. It has green circles underneath it. There is a brown ring around it. There are two red circles in 10 places evenly spaced around the circle. Near the bottom of the circle are some blue panels. There are gray panels around it and a gold diamond on each side. Above the bird is a half-circle green and red curved design. Th ...	cos 0.96 Caption T: A stained glass window of a saint king. He is clad in an emerald green robe and a cloak that is red on the exterior and gold on the interior. Under his left/viewers right arm he holds a church: It has white walls, a white steeple, a gold roof with tiles shaped like feathers or scales, and a gold door. There are three arched windows above the front door and two rows of four on the side. The steeple has an arched window in each side and the spire or roof is like that of the rest of the church. In his right (viewer's right) hand he holds a gold scepter with ... Nearest caption (cos 0.96): There is a stained glass window. On the top there is a brown bird design in the window. There are a lot of feathers on it. The wings are up. Its head is curved and there is a beak. It is on a gray background. There is a worn in its mouth. It has green circles underneath it. There is a brown ring around it. There are two red circles in 10 places evenly spaced around the circle. Near the bottom of the circle are some blue panels. There are gray panels around it and a gold diamond on each side. Above the bird is a half-circle green and red curved design. Th ...	cos 0.96 Caption T: A stained glass window of a saint king. He is clad in an emerald green robe and a cloak that is red on the exterior and gold on the interior. Under his left/viewers right arm he holds a church: It has white walls, a white steeple, a gold roof with tiles shaped like feathers or scales, and a gold door. There are three arched windows above the front door and two rows of four on the side. The steeple has an arched window in each side and the spire or roof is like that of the rest of the church. In his right (viewer's right) hand he holds a gold scepter with ... Nearest caption (cos 0.96): There is a stained glass window. On the top there is a brown bird design in the window. There are a lot of feathers on it. The wings are up. Its head is curved and there is a beak. It is on a gray background. There is a worn in its mouth. It has green circles underneath it. There is a brown ring around it. There are two red circles in 10 places evenly spaced around the circle. Near the bottom of the circle are some blue panels. There are gray panels around it and a gold diamond on each side. Above the bird is a half-circle green and red curved design. Th ...	
			
cos 0.97 Caption T: This is an aerial photo of a park area. There is a lake on the right side of the image. There are droopy trees with tan leaves surrounding the edge of the lake. There are sidewalks around the lake and throughout the park area. There are two piles of rocks near the bottom of the image next to the land next to the lake. There are lampposts on either side of the sidewalks in the park. There are people in the image walking on the sidewalks. Some people are walking alone, and other people are walking with others. There are some trash cans on the grass next to ... Nearest caption (cos 0.97): Here is an aerial view overlooking a very lit city with lights and large bridge in the distance. There is a large lake seen to the left with light reflecting off it and of a dark color of water. A pair of large ferry boats that are white can be seen with two floors and many lights lining the edge of it. Many rooms are constructed into each boat. There is a walking space on the roofs. Balconies are seen on the back with enclosed areas and also railings on the 2nd floor. On the far upper left area is a big hillside seen with the grounds covered in trees wi ...	cos 0.96 Caption T: This is an aerial photo of a park area. There is a lake on the right side of the image. There are droopy trees with tan leaves surrounding the edge of the lake. There are sidewalks around the lake and throughout the park area. There are two piles of rocks near the bottom of the image next to the land next to the lake. There are lampposts on either side of the sidewalks in the park. There are people in the image walking on the sidewalks. Some people are walking alone, and other people are walking with others. There are some trash cans on the grass next to ... Nearest caption (cos 0.96): Here is an aerial view overlooking a very lit city with lights and large bridge in the distance. There is a large lake seen to the left with light reflecting off it and of a dark color of water. A pair of large ferry boats that are white can be seen with two floors and many lights lining the edge of it. Many rooms are constructed into each boat. There is a walking space on the roofs. Balconies are seen on the back with enclosed areas and also railings on the 2nd floor. On the far upper left area is a big hillside seen with the grounds covered in trees wi ...	cos 0.96 Caption T: This is an aerial photo of a park area. There is a lake on the right side of the image. There are droopy trees with tan leaves surrounding the edge of the lake. There are sidewalks around the lake and throughout the park area. There are two piles of rocks near the bottom of the image next to the land next to the lake. There are lampposts on either side of the sidewalks in the park. There are people in the image walking on the sidewalks. Some people are walking alone, and other people are walking with others. There are some trash cans on the grass next to ... Nearest caption (cos 0.96): Here is an aerial view overlooking a very lit city with lights and large bridge in the distance. There is a large lake seen to the left with light reflecting off it and of a dark color of water. A pair of large ferry boats that are white can be seen with two floors and many lights lining the edge of it. Many rooms are constructed into each boat. There is a walking space on the roofs. Balconies are seen on the back with enclosed areas and also railings on the 2nd floor. On the far upper left area is a big hillside seen with the grounds covered in trees wi ...	

Figure A3: Near-duplicate caption pairs on Long-DCI (full-length captions).

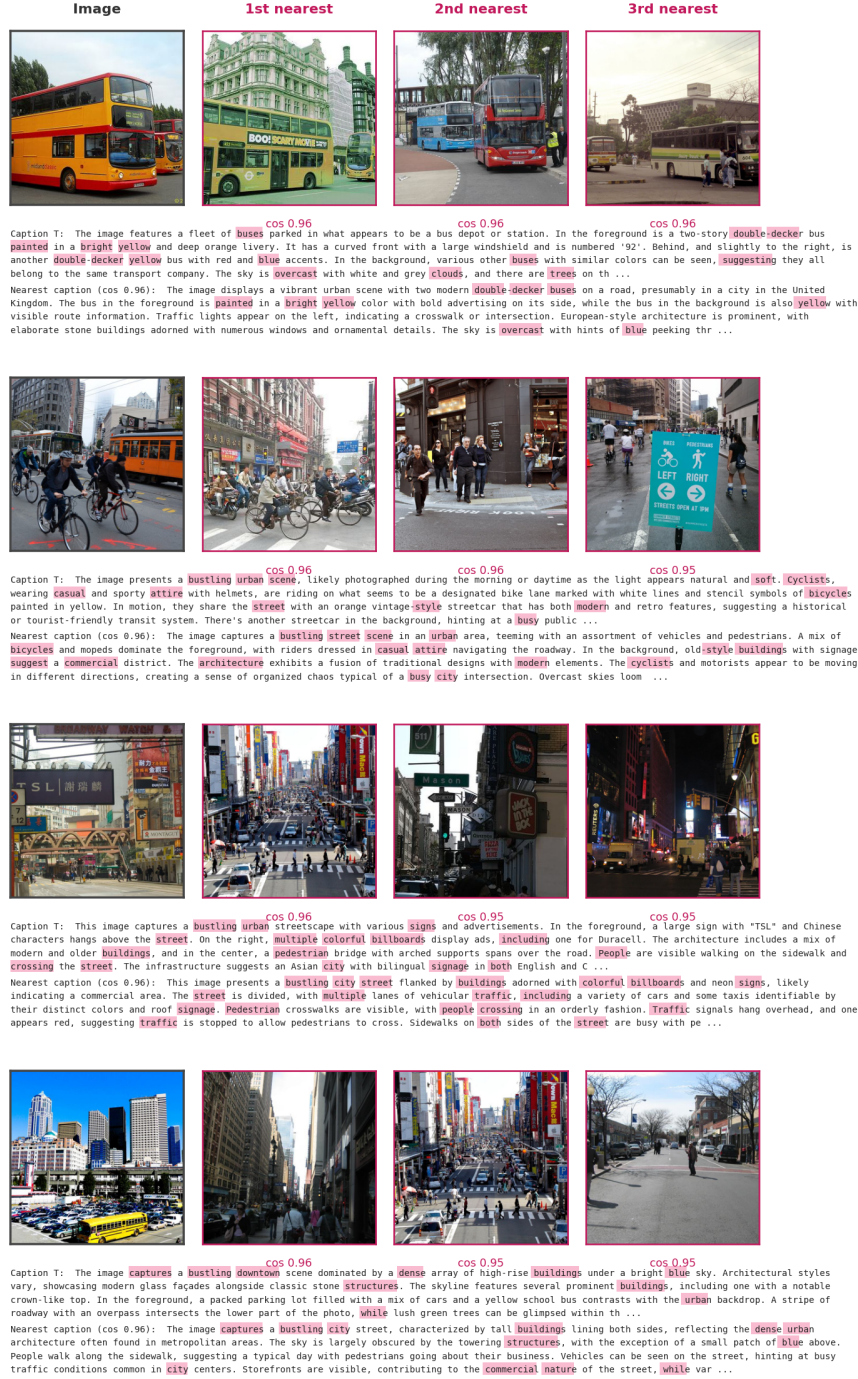


Figure A4: Near-duplicate caption pairs on Urban-1K.

One real training batch ($B = 8$) per benchmark: the caption-similarity matrix $\bar{G}$ the boost adds to the logits

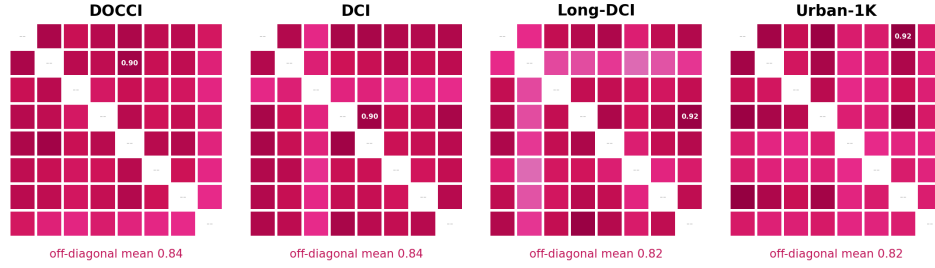


Figure A5: **One real training batch per benchmark.** Text-text similarity matrices $\bar{G}$ (pre-trained encoder; diagonal masked, max off-diagonal entry annotated). Uniformly dark = every negative is hard; this matrix, detached and scaled by γ , is the entire mechanism of HN-CLIP.

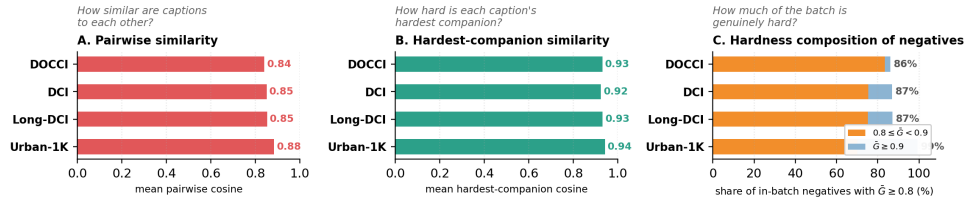


Figure A6: **Statistical analysis of the caption geometry across the four benchmarks** (pre-trained Long-CLIP-L text encoder, full test splits). (A) Mean pairwise caption similarity. (B) Mean similarity of each caption's hardest companion. (C) Composition of in-batch negatives by hardness bucket.

B METHOD DETAILS

B.1 REFERENCE IMPLEMENTATION

The complete implementation of $\mathcal{L}_{\text{HN}}$ is shown in Fig. A7, verbatim from our code base; everything else (data loading, optimizer, schedules, evaluation) is standard Long-CLIP fine-tuning.

The complete implementation of $\mathcal{L}_{\text{HN}}$ (PyTorch)

```
def hard_neg_clip_loss(img_n, txt_n, scale, gamma=0.5):
    # img_n, txt_n: L2-normalized [B, D]
    B = img_n.shape[0]
    sim = img_n @ txt_n.t() # [B, B]
    txt_sim = (txt_n @ txt_n.t()).detach()
    boost = gamma * txt_sim
    boost.fill_diagonal_(0.) # positives
    logits = scale * (sim + boost)
    targets = torch.arange(B, device=sim.device)
    return (F.cross_entropy(logits, targets)
            + F.cross_entropy(logits.t(), targets)) / 2.
```

Figure A7: **Reference implementation.** The complete implementation of $\mathcal{L}_{\text{HN}}$; data loading, optimizer, schedule, and evaluation follow standard Long-CLIP fine-tuning.

B.2 GRADIENT CONCENTRATION

Why does the boost redirect learning toward hard negatives? Write the boosted logits as $z_{ij} = s(S_{ij} + \gamma \bar{G}_{ij})$ and let $p_{ij} = \text{softmax}_j(z_{i,:})$. The gradient of the cross-entropy row term w.r.t. the similarity S_{ij} of negative j is the classic softmax residual, $\partial \mathcal{L}_i / \partial S_{ij} = s p_{ij}$: each negative is repelled with force proportional to its posterior. The boost acts entirely through this posterior. For two negatives j, k ,

$$\frac{p_{ij}}{p_{ik}} = \exp(s(S_{ij} - S_{ik})) \cdot \exp(s\gamma(\bar{G}_{ij} - \bar{G}_{ik})), \quad (4)$$

so relative repulsion is re-weighted by $\exp(s\gamma \Delta \bar{G})$: with $s \approx 100$ and $\gamma=0.5$, a caption-similarity gap of just $\Delta \bar{G} = 0.1$ multiplies the gradient ratio by $e^5 \approx 148$. Because $\bar{G}$ is detached, the re-weighting is not itself differentiated, so no gradient step is taken in the direction that would shrink the model’s own margins; and because $\bar{G}_{ii} = 0$, the positive’s force $s(p_{ii} - 1)$ is affected only through the normalizer: the positive must now beat every negative by a margin $\gamma \bar{G}_{ij}$ before its own loss vanishes. Eq. (4) is the entire mechanism: hardness enters as an additive margin, gradients concentrate multiplicatively.

Scope of the stop-gradient, and why the drift is load-bearing. Eq. (4) also makes explicit what stopgrad does not guarantee. We recompute $\bar{G}$ from the *current* text encoder at every step, so although no gradient flows through it, $\bar{G}$ inherits whatever drift the encoder undergoes under the main objective: the margins are stationary within a step but not across training. To determine whether that drift is a defect or a feature, we re-train all three models with $\bar{G}$ built instead from a frozen copy of the pre-trained text encoder, holding seed, schedule, γ , and every other setting fixed (Table A2).

The drift turns out to be load-bearing. The recomputed default wins 22 of the 24 columns, costing the frozen variant 2.4–6.8 R@1 on three of the four benchmarks, and, more diagnostically, the frozen variant’s best epoch is the *first* one on both DCI and Urban-1K, after which accuracy trends downward for the rest of training. The reason is visible in the magnitudes: with a mean off-diagonal $\bar{G}$ of 0.84 (Fig. A6), $\gamma=0.5$ and $s \approx 100$, a frozen boost imposes a sustained logit handicap of roughly 42 that never relaxes, so the model is permanently over-constrained. Recomputing $\bar{G}$ lets the boost decay as training separates the text embeddings, which amounts to an *implicit annealing of the margin*: the objective stops pushing on pairs it has already resolved. The two columns the frozen variant does win are the Long-DCI R@1 cells (+0.90/ + 0.31), the longest-caption evaluation with the largest gallery, where sustained pressure on near-duplicates remains worthwhile; even there it is 2.5–3.3 points worse at R@5 and R@10, i.e. it sharpens the top of the ranking at the cost of everything below it.

This also corroborates the γ sweep from an independent direction. There, milder boosts transferred better and $\gamma=0.25$ was optimal on Urban-1K; here, a boost that never decays, effectively the largest

cumulative margin of any setting we ran, is worst on that same transfer benchmark, trailing the default by 3.80/6.80 R@1. Two different knobs, the magnitude of the margin and its schedule, agree that sustained margin sharpens decision boundaries on the training distribution at the cost of transfer. We therefore keep the recomputed $\bar{G}$ throughout, and note that it is also the cheaper of the two: no second set of weights and no extra forward pass.

Table A2: **Recomputed vs. frozen $\bar{G}$** (Recall@K, *Text*→*Image* and *Image*→*Text*). Building the boost from a frozen copy of the pre-trained text encoder makes the margins exactly stationary but removes their implicit annealing: accuracy peaks at epoch 1 on DCI and Urban-1K and then declines, and the default wins 22 of 24 columns. Best per column in **bold**. Upper band: DOCCI and DCI; lower band: Long-DCI and the transfer setting Urban-1K.

$\bar{G}$ source	DOCCI						DCI					
	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
Recomputed $\bar{G}$ (default)	88.25	98.45	99.43	86.24	98.12	99.22	80.69	92.40	95.10	78.84	91.90	94.65
Frozen $\bar{G}$	85.86	97.61	99.18	82.43	96.82	98.73	77.79	90.80	93.35	75.84	89.49	92.95
Δ (default — frozen)	↑2.39	↑0.84	↑0.25	↑3.81	↑1.30	↑0.49	↑2.90	↑1.60	↑1.75	↑3.00	↑2.41	↑1.70
best epoch (default / frozen)	6 / 5						5 / 1					

$\bar{G}$ source	Long-DCI						Urban-1K					
	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
Recomputed $\bar{G}$ (default)	79.03	93.76	96.34	76.44	92.79	95.91	91.10	98.10	99.40	90.30	98.20	99.30
Frozen $\bar{G}$	79.93	90.84	93.82	76.75	89.54	92.62	87.30	97.70	98.90	83.50	95.90	97.90
Δ (default — frozen)	↓0.90	↑2.92	↑2.52	↓0.31	↑3.25	↑3.29	↑3.80	↑0.40	↑0.50	↑6.80	↑2.30	↑1.40
best epoch (default / frozen)	10 / 10						4 / 1					

Interaction with temperature and batch size. Eq. (4) shows that s and γ enter the gradient concentration only through their product $s\gamma$: changing the inverse temperature rescales the effective margin, so the broad γ plateau of Table 3a covers a correspondingly broad range of s at fixed γ . Batch size acts on a different axis: because essentially every in-batch negative on these benchmarks is a near-duplicate (Fig. A6C), enlarging B adds more boosted pairs rather than diluting them.

C EXTENDED GRADIENT ANALYSIS

Fig. A8 extends the gradient analysis of Fig. 4 across training-data scales: for each fraction of the training set (5/20/50/100%) and each dataset (DOCCI, DCI) we plot the raw traces of (a) both losses, (b) both gradient norms together with their ratio, and (c) the cosine between the two gradients. The picture is identical at every scale: the standard loss collapses to the numerical floor within the first epoch (gray), the boosted loss keeps producing signal (pink), their gradient-norm ratio, computed on the 79% of measurements where the standard gradient is nonzero, runs at a per-run median of 10^2 – 10^6 and peaks between 10^5 and 10^8 (dashed), and the gradient direction remains positively aligned with the standard objective throughout (median cosine 0.58, positive on 98% of measurements, bottom panels), in a 10^8 -dimensional parameter space where random directions are orthogonal in expectation, this is a strongly compatible update direction. Saturation is thus not an artifact of one training-set size; it is the default behavior of InfoNCE on dense captions, and the boost repairs it wherever it appears.

D IMPLEMENTATION DETAILS AND COMPUTATIONAL ANALYSIS

D.1 TRAINING SETUP AND BACKBONE CHOICE

All methods share the Long-CLIP-L backbone (ViT-L/14, positionally stretched 248-token text encoder), micro-batch 16 with $8\times$ gradient accumulation (effective batch 128), and the same 10-epoch training budget. We use a single backbone throughout because the task requires one: the captions in these benchmarks average 107–134 words on their evaluation splits (Table A1), well beyond the 77-token window of standard CLIP, and Long-CLIP-L is the only publicly released long-context CLIP that every compared method is also built on. Establishing that the saturation we diagnose is

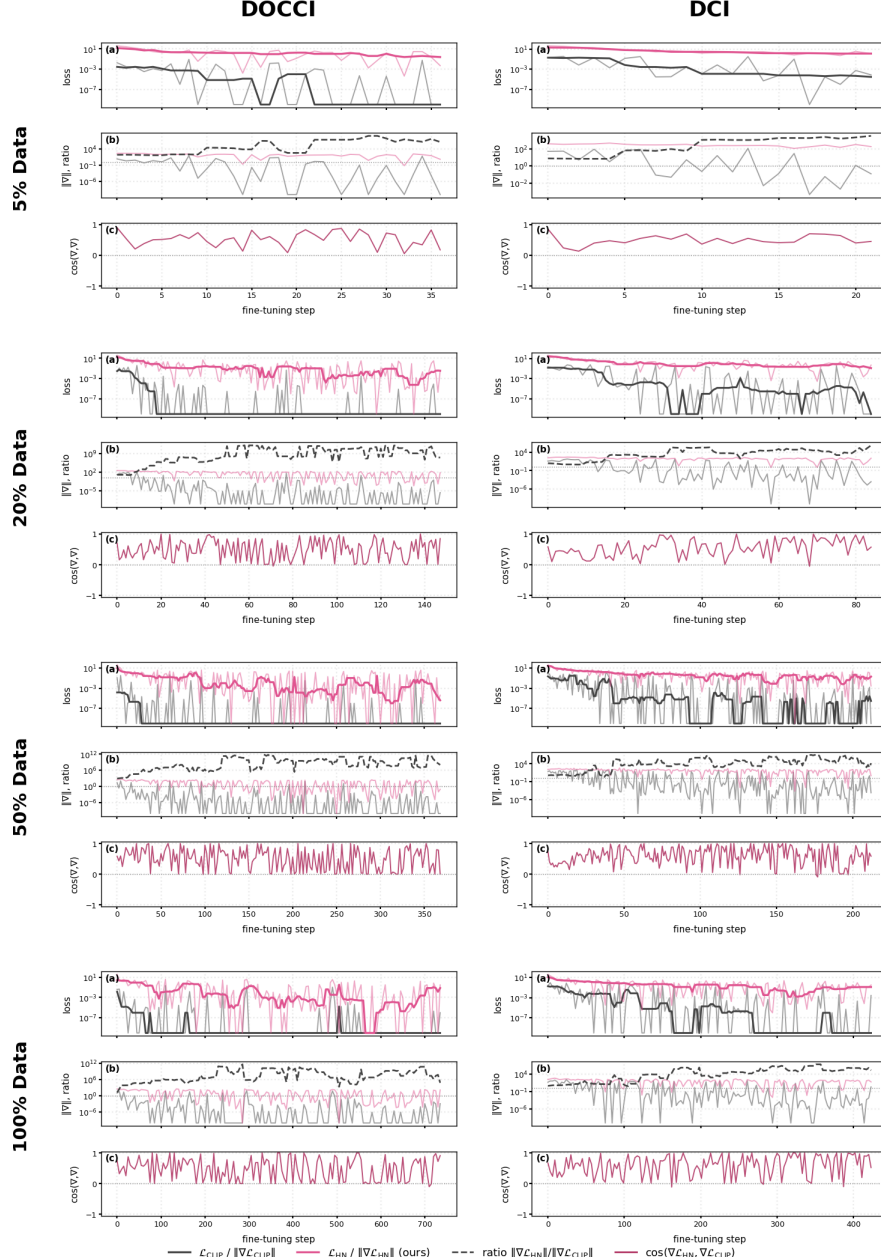


Figure A8: **Gradient dynamics across data scales.** Rows: fraction of the training set; columns: dataset. Per cell: (a) raw loss traces (thin) with running medians (thick), (b) gradient norms and their ratio (dashed), (c) gradient cosine. Log axes in (a,b); values clamped at 10^{-10} (exact zeros at fp32).

a property of InfoNCE on dense captions rather than of this particular checkpoint is therefore left to the caption-length axis, where Fig. A8 shows the same behaviour across four training-set scales and two datasets, and to the six fine-tuning frameworks of Table A4, which differ in architecture and in which parameters they train. HN-CLIP uses AdamW with learning rate 2×10^{-6} and cosine decay; baselines use their official hyperparameters (FineLIP: backbone 10^{-6} , cross-modal module 2×10^{-4} ; GOAL and StructXLIP: 5×10^{-6} ; LoRA/DoRA adapters: 5×10^{-5} , $r=16$). Table A3 reports measured training efficiency: HN-CLIP trains $2.4 \times$ faster than GOAL and $5.4 \times$ faster than StructXLIP on identical hardware while requiring no auxiliary inputs and no offline preprocessing.

Table A3: **Training-efficiency comparison** on DCI fine-tuning (10 epochs, 5.4k images, single Ascend 910B, effective batch 128). Wall-clock for GOAL/StructXLIP is measured from same-device sequential runs minus evaluation overhead; FineLIP ran in parallel and is not attributable. Offline preprocessing time (segmentation, edge extraction, LLM filtering) is *not* included in the wall-clock.

Method	Aux. training inputs	Offline prep.	Wall-clock	Throughput
Long-CLIP (plain FT)	none	none	≈ 16 min	55.5 img/s
FineLIP	none	none	—	—
GOAL	SAM segments	required	≈ 41 min	≈ 22 img/s
StructXLIP	edges + LLM lexicon	required	≈ 92 min	≈ 10 img/s
HN-CLIP (ours)	none	none	17 min	53 img/s

D.2 PLUG-AND-PLAY INTEGRATION

For the plug-and-play study we replace the *global* contrastive term of each framework with $\mathcal{L}_{\text{HN}}$ and change nothing else. Long-CLIP: the symmetric InfoNCE over global embeddings is swapped directly. FineLIP: the global term is swapped; the fine-grained cross-modal module and its losses are untouched. GOAL: the original-pair contrastive term is swapped; segment-level alignment terms are untouched. StructXLIP: the RGB-caption global term is swapped; the three structural auxiliary losses are untouched. LoRA/DoRA: adapters ($r=16$) are trained with $\mathcal{L}_{\text{HN}}$ in place of InfoNCE while the backbone stays frozen. In every case $\gamma=0.5$ without per-framework tuning.

D.3 EVALUATION PROTOCOL

All numbers in the paper are produced by one shared evaluation loop: encode the full test split with the released preprocessing (224 center crop, 248-token captions), L2-normalize, score by cosine, and report Recall@K for both directions. The same evaluation procedure is used for all methods. HN-CLIP’s lead is unchanged under last-epoch evaluation (Section 3), and the Long-DCI R@1 ranking is preserved under a second random seed (Table A8).

E ADDITIONAL EXPERIMENTAL ANALYSES

Tables A5 to A7 and A9 extend the main-text protocol to *deeper ranks* (Recall@{1, 5, 10, 25, 50}); the remaining tables in this section report R@1/5/10. In either case, R@1/5/10 of every surviving checkpoint are bit-identical to the main text. [†] marks rows whose original checkpoint was removed by disk housekeeping and re-evaluated with an identical-recipe replica (or, for Long-DCI, the seed-43 checkpoint of the seed study): their scores match the originally reported numbers within ± 0.5 R@1 typically and ± 1.3 at worst, consistent with Table A8.

E.1 PLUG-AND-PLAY, ALL FOUR BENCHMARKS

Table A4 reports the complete plug-and-play study on all four benchmarks, in the three-row format (framework / $+\mathcal{L}_{\text{HN}}$ / Δ). On the three in-domain benchmarks (DOCCI, DCI, Long-DCI), average R@1 improves for all eighteen framework–dataset combinations, R@1 improves in 35 of 36 per-direction cases, and the gains grow with caption length (up to $+23.87$ R@1 for FineLIP on Long-DCI). The transfer band (VG→Urban-1K) is deliberately included and is *mixed*: FineLIP, by far the weakest transfer baseline, gains dramatically ($+10.7 / +15.7$ R@1), GOAL is essentially unchanged ($-0.6 / +0.7$), and the remaining frameworks give up between 0.2 and 6.1 R@1. This

is consistent with the main-text finding that the boost sharpens *in-domain* discrimination (milder boosts generalize better under domain shift, Table 3a); we report the transfer band in full rather than omitting it.

E.2 FULL-RESOLUTION ABLATIONS

Table A5 extends the main-text loss ablation to all four benchmarks and all ranks, and Table A6 does the same for the γ sweep. The full objective remains the strongest configuration overall; on the transfer benchmark the four configurations compress into a narrow band with plain fine-tuning mildly ahead, mirroring Appendix E.1.

E.3 CROSS-DOMAIN EVALUATION

Table A10 reports the DCI $\leftrightarrow$ DOCCI cross-domain study discussed in Section 3.4: trained on DCI and transferred to DOCCI, HN-CLIP exceeds every baseline’s *in-domain* DOCCI result, and the reverse transfer keeps HN-CLIP ahead in all six columns. Table A7 evaluates the DOCCI-trained models on Long-DCI, a harder transfer, since both the caption style and the length change. HN-CLIP leads every column.

E.4 ROBUSTNESS TO THE RANDOM SEED

Table A8 re-trains HN-CLIP, GOAL, and StructXLIP with a second random seed under the identical recipe and evaluates on Long-DCI. All R@1 results reproduce within ± 0.4 on average, and the R@1 ranking is preserved under the second seed (largest R@1 deviation 1.28, on GOAL). Across all six metrics, the maximum seed-to-seed difference is 1.44 for HN-CLIP, reflecting modest variation at deeper ranks. We are not aware of the compared works reporting an equivalent replication.

E.5 SAMPLE EFFICIENCY, FULL NUMBERS

Table A9 lists all measurements behind Fig. 6: both benchmarks, both methods, all fractions and ranks, on identical training subsets. HN-CLIP leads or ties every cell; the average-R@1 margin (last column) *widens* as data shrinks to 20% on both benchmarks, and the 20% rows exceed GOAL’s 100% rows on both. The dotted reference line of Fig. 6 is instead the *strongest* baseline at 100% (StructXLIP on DOCCI, GOAL on DCI; Table 1), which the 20% rows also clear.

E.6 PER-DIRECTION CONVERGENCE

Fig. A9 splits Fig. 5 by retrieval direction: HN-CLIP leads in *both* directions on all four benchmarks from the first epoch, so the averaged curves hide no asymmetry. The split also exposes training instabilities of FineLIP (e.g., an I $\rightarrow$ T collapse on DCI at epoch 4) that the averaged view smooths over.

E.7 RESULTS AT DEEPER RANKS

At R@5/R@10 the fine-tuned methods approach ceiling on DOCCI and Urban-1K and margins compress there (Table 1); on DCI and Long-DCI the spread stays wide at every rank. On Long-DCI, HN-CLIP is best in three of the four R@5/R@10 columns and ties StructXLIP on the remaining I $\rightarrow$ T R@5 column, while continuing to lead all eight R@1 columns. The second seed preserves the R@1 ordering but shows modest variation at deeper ranks. The two mechanisms are complementary rather than competing: Table 2 shows that adding $\mathcal{L}_{\text{HN}}$ *inside* StructXLIP improves it further.

F ADDITIONAL QUALITATIVE RESULTS

Fig. A10 shows Text $\rightarrow$ Image retrievals on DOCCI queries whose galleries are crowded with near-duplicates, the regime our loss targets. HN-CLIP resolves the discriminative details named in the caption (lettering, flower species, signage), while the strongest baseline retrieves appearance-level look-alikes, leaving the ground truth at rank 18–52.

Table A4: **Plug-and-play enhancement of $\mathcal{L}_{\text{HN}}$ on CLIP-based fine-tuning, all four benchmarks.** Results on DOCCI, DCI, Long-DCI, and Urban-1K for *Text $\rightarrow$ Image* and *Image $\rightarrow$ Text* retrieval; per framework we report the official baseline, the same recipe with $\mathcal{L}_{\text{HN}}$ replacing its global InfoNCE term, and the per-column difference Δ (gain in $\uparrow$ green, drop in $\downarrow$ gray; differences within ± 0.15 are shown as ≈ 0). **Bold** marks the $+\mathcal{L}_{\text{HN}}$ value where it is the better of the pair. Upper band: DOCCI and DCI; lower band: Long-DCI and the transfer setting Urban-1K.

Method	DOCCI						DCI					
	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
Long-CLIP	86.45	98.00	99.31	84.10	97.84	99.04	79.39	91.60	94.65	78.34	92.85	95.25
+our $\mathcal{L}_{\text{HN}}$	88.31	98.75	99.45	86.39	98.08	99.20	81.04	92.20	95.00	78.54	91.95	94.60
Δ	$\uparrow 1.86$	$\uparrow 0.75$	≈ 0	$\uparrow 2.29$	$\uparrow 0.24$	$\uparrow 0.16$	$\uparrow 1.65$	$\uparrow 0.60$	$\uparrow 0.35$	$\uparrow 0.20$	$\downarrow 0.90$	$\downarrow 0.65$
FineLIP [†]	77.12	95.94	98.29	70.16	93.14	97.29	72.69	87.14	90.65	65.48	86.84	91.00
+our $\mathcal{L}_{\text{HN}}$	85.47	97.71	99.04	83.88	97.41	98.82	80.74	91.90	94.55	79.99	91.80	94.35
Δ	$\uparrow 8.35$	$\uparrow 1.77$	$\uparrow 0.75$	$\uparrow 13.72$	$\uparrow 4.27$	$\uparrow 1.53$	$\uparrow 8.05$	$\uparrow 4.76$	$\uparrow 3.90$	$\uparrow 14.51$	$\uparrow 4.96$	$\uparrow 3.35$
GOAL [†]	81.96	96.94	98.78	80.84	96.33	98.61	77.29	90.25	93.30	74.84	89.94	93.25
+our $\mathcal{L}_{\text{HN}}$	86.24	98.14	99.35	84.86	97.69	99.20	79.59	90.80	93.30	77.09	90.10	93.00
Δ	$\uparrow 4.28$	$\uparrow 1.20$	$\uparrow 0.57$	$\uparrow 4.02$	$\uparrow 1.36$	$\uparrow 0.59$	$\uparrow 2.30$	$\uparrow 0.55$	≈ 0	$\uparrow 2.25$	$\uparrow 0.16$	$\downarrow 0.25$
StructXLIP	84.73	97.69	99.00	82.61	97.08	98.71	75.84	89.94	93.65	74.49	90.05	93.40
+our $\mathcal{L}_{\text{HN}}$	85.45	97.92	99.12	83.31	97.45	98.92	77.34	90.75	93.10	74.14	89.89	92.30
Δ	$\uparrow 0.72$	$\uparrow 0.23$	≈ 0	$\uparrow 0.70$	$\uparrow 0.37$	$\uparrow 0.21$	$\uparrow 1.50$	$\uparrow 0.81$	$\downarrow 0.55$	$\downarrow 0.35$	$\downarrow 0.16$	$\downarrow 1.10$
LoRA	80.49	96.16	98.55	77.96	95.80	98.04	73.84	89.44	92.85	71.89	88.74	92.85
+our $\mathcal{L}_{\text{HN}}$	82.82	97.14	98.86	80.84	96.49	98.63	75.84	90.20	93.00	73.44	88.54	92.25
Δ	$\uparrow 2.33$	$\uparrow 0.98$	$\uparrow 0.31$	$\uparrow 2.88$	$\uparrow 0.69$	$\uparrow 0.59$	$\uparrow 2.00$	$\uparrow 0.76$	$\uparrow 0.15$	$\uparrow 1.55$	$\downarrow 0.20$	$\downarrow 0.60$
DoRA	80.76	96.25	98.61	78.20	95.90	98.10	74.14	89.74	93.00	72.44	89.24	92.95
+our $\mathcal{L}_{\text{HN}}$	83.41	97.33	99.00	81.41	96.65	98.67	76.24	90.45	93.15	73.89	88.59	92.30
Δ	$\uparrow 2.65$	$\uparrow 1.08$	$\uparrow 0.39$	$\uparrow 3.21$	$\uparrow 0.75$	$\uparrow 0.57$	$\uparrow 2.10$	$\uparrow 0.71$	$\uparrow 0.15$	$\uparrow 1.45$	$\downarrow 0.65$	$\downarrow 0.65$

Method	Long-DCI						Urban-1K					
	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10	R@1	R@5	R@10
Long-CLIP	70.24	89.62	94.00	68.44	89.35	94.67	91.70	99.10	99.50	93.20	99.00	99.50
+our $\mathcal{L}_{\text{HN}}$	78.43	92.52	95.27	76.02	91.78	94.76	90.60	98.30	99.40	90.20	98.30	99.40
Δ	$\uparrow 8.19$	$\uparrow 2.90$	$\uparrow 1.27$	$\uparrow 7.58$	$\uparrow 2.43$	≈ 0	$\downarrow 1.10$	$\downarrow 0.80$	≈ 0	$\downarrow 3.00$	$\downarrow 0.70$	≈ 0
FineLIP [†]	59.24	77.86	83.19	49.52	75.08	82.39	81.10	94.50	97.40	77.50	94.80	97.50
+our $\mathcal{L}_{\text{HN}}$	74.92	90.52	93.62	73.39	89.87	93.23	91.80	98.10	99.30	93.20	98.80	99.30
Δ	$\uparrow 15.68$	$\uparrow 12.66$	$\uparrow 10.43$	$\uparrow 23.87$	$\uparrow 14.79$	$\uparrow 10.84$	$\uparrow 10.70$	$\uparrow 3.60$	$\uparrow 1.90$	$\uparrow 15.70$	$\uparrow 4.00$	$\uparrow 1.80$
GOAL [†]	74.34	92.89	95.77	72.03	92.37	95.69	86.30	97.00	98.90	86.10	97.40	98.90
+our $\mathcal{L}_{\text{HN}}$	84.27	94.99	96.57	82.28	94.26	96.18	85.70	96.70	98.20	86.80	96.60	98.00
Δ	$\uparrow 9.93$	$\uparrow 2.10$	$\uparrow 0.80$	$\uparrow 10.25$	$\uparrow 1.89$	$\uparrow 0.49$	$\downarrow 0.60$	$\downarrow 0.30$	$\downarrow 0.70$	$\uparrow 0.70$	$\downarrow 0.80$	$\downarrow 0.90$
StructXLIP [†]	75.58	93.12	96.20	72.39	93.03	95.80	87.60	97.70	99.10	87.80	96.90	98.40
+our $\mathcal{L}_{\text{HN}}$	82.04	94.18	96.23	78.98	93.22	95.65	81.70	95.30	97.90	81.70	94.30	97.10
Δ	$\uparrow 6.46$	$\uparrow 1.06$	≈ 0	$\uparrow 6.59$	$\uparrow 0.19$	≈ 0	$\downarrow 5.90$	$\downarrow 2.40$	$\downarrow 1.20$	$\downarrow 6.10$	$\downarrow 2.60$	$\downarrow 1.30$
LoRA	60.08	80.68	86.86	58.97	80.02	86.53	83.20	95.60	97.60	85.90	95.80	97.50
+our $\mathcal{L}_{\text{HN}}$	64.87	83.09	88.35	62.79	81.77	87.31	83.00	95.10	97.10	83.20	95.30	97.30
Δ	$\uparrow 4.79$	$\uparrow 2.41$	$\uparrow 1.49$	$\uparrow 3.82$	$\uparrow 1.75$	$\uparrow 0.78$	$\downarrow 0.20$	$\downarrow 0.50$	$\downarrow 0.50$	$\downarrow 2.70$	$\downarrow 0.50$	$\downarrow 0.20$
DoRA	60.76	81.19	87.48	59.65	80.31	87.13	84.00	95.70	97.70	86.10	96.20	97.70
+our $\mathcal{L}_{\text{HN}}$	65.46	83.57	88.61	63.38	82.15	87.56	83.20	95.40	97.30	83.80	95.50	97.50
Δ	$\uparrow 4.70$	$\uparrow 2.38$	$\uparrow 1.13$	$\uparrow 3.73$	$\uparrow 1.84$	$\uparrow 0.43$	$\downarrow 0.80$	$\downarrow 0.30$	$\downarrow 0.40$	$\downarrow 2.30$	$\downarrow 0.70$	$\downarrow 0.20$

Table A5: **Loss ablation, full resolution** (all four benchmarks, all ranks). Best per column in **bold**.

$\mathcal{L}_{\text{tok}}$	$\mathcal{L}_{\text{HN}}$	DOCCI										DCI									
		R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50
$\times$	$\times$	86.45	98.00	99.31	99.86	99.98	84.10	97.84	99.04	99.78	99.98	79.39	91.60	94.65	97.25	97.95	78.34	92.85	95.25	97.50	98.50
$\checkmark$	$\times$	86.45	97.98	99.43	99.86	99.98	84.29	97.90	98.94	99.78	99.94	79.24	91.55	94.25	97.00	98.00	77.54	92.95	95.35	97.55	98.60
$\times$	$\checkmark$	88.31	98.75	99.45	99.84	99.98	86.39	98.08	99.20	99.82	99.96	81.04	92.20	95.00	97.40	98.10	78.54	91.95	94.60	97.50	98.20
$\checkmark$	$\checkmark$	88.25	98.45	99.43	99.86	99.98	86.24	98.12	99.22	99.84	99.94	80.69	92.40	95.10	97.35	98.15	78.84	91.90	94.65	97.40	98.30

$\mathcal{L}_{\text{tok}}$	$\mathcal{L}_{\text{HN}}$	Long-DCI										Urban-1K									
		R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50
$\times$	$\times$	70.24	89.62	94.00	97.66	98.79	68.44	89.35	94.67	98.11	98.95	91.70	99.10	99.50	99.80	99.90	93.20	99.00	99.50	99.90	100.00
$\checkmark$	$\times$	70.92	89.51	93.90	97.27	98.64	68.00	89.12	94.17	97.84	98.93	91.30	99.00	99.30	99.80	99.90	93.00	99.10	99.50	99.60	99.90
$\times$	$\checkmark$	78.43	92.52	95.27	97.21	98.47	76.02	91.78	94.76	97.31	98.29	90.60	98.30	99.40	99.60	99.80	90.20	98.30	99.40	99.80	99.80
$\checkmark$	$\checkmark^{\dagger}$	78.79	92.32	95.12	97.19	98.27	76.18	91.99	95.15	97.26	98.40	91.00	98.50	99.50	99.70	99.90	90.50	98.50	99.30	99.60	99.90

Table A6: γ sweep, full resolution (all four benchmarks, all ranks). Best per column in **bold**.

γ	DOCCI										DCI									
	R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50
$\gamma=0$	86.45	97.98	99.43	99.86	99.98	84.29	97.90	98.94	99.78	99.94	79.24	91.55	94.25	97.00	98.00	77.54	92.95	95.35	97.55	98.60
$\gamma=0.25$	87.82	98.63	99.45	99.88	99.98	86.63	98.04	99.16	99.84	99.96	80.74	92.40	95.35	97.55	98.30	79.29	92.85	95.40	97.70	98.50
$\gamma=0.5$ (default)	88.25	98.45	99.43	99.86	99.98	86.24	98.12	99.22	99.84	99.94	80.69	92.40	95.10	97.35	98.15	78.84	91.90	94.65	97.40	98.30
$\gamma=0.75$	88.20	98.67	99.49	99.82	99.96	85.73	98.00	99.25	99.78	99.98	81.04	92.20	94.70	97.20	98.25	78.59	91.05	93.90	96.90	98.25
$\gamma=1.0$	87.98	98.47	99.51	99.82	99.96	85.02	97.69	99.02	99.76	99.96	80.34	92.00	94.40	97.10	98.30	78.19	90.80	93.70	96.70	98.00

γ	Long-DCI										Urban-1K									
	R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50
$\gamma=0$	70.92	89.51	93.90	97.27	98.64	68.00	89.12	94.17	97.84	98.93	91.30	99.00	99.30	99.80	99.90	93.00	99.10	99.50	99.60	99.90
$\gamma=0.25$	76.38	92.49	95.34	97.73	98.68	74.80	91.94	95.51	97.94	98.68	91.70	98.60	99.50	99.70	99.90	93.00	98.90	99.60	99.70	99.90
$\gamma=0.5$ (default) [†]	78.79	92.32	95.12	97.19	98.27	76.18	91.99	95.15	97.26	98.40	91.00	98.50	99.50	99.70	99.90	90.50	98.50	99.30	99.60	99.90
$\gamma=0.75$	79.96	92.45	95.06	97.06	98.19	76.72	91.35	94.43	96.76	97.97	89.10	98.50	99.10	99.60	99.60	89.50	97.90	99.00	99.80	99.90
$\gamma=1.0$	79.94	92.17	94.79	96.76	97.89	76.59	90.78	93.91	96.49	97.70	87.90	98.00	99.10	99.50	99.60	88.40	97.50	98.70	99.80	99.90

Table A7: Cross-domain transfer DOCCI→Long-DCI. Best per column in **bold**.

Method	DOCCI → Long-DCI									
	R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50
Long-CLIP (zero-shot)	54.61	72.80	78.33	85.29	89.15	47.35	73.04	80.10	86.66	90.60
FineLIP [†]	54.65	73.04	79.46	85.87	89.90	46.70	73.01	80.51	87.10	90.64
GOAL [†]	55.71	74.93	80.66	86.93	90.66	56.61	75.46	81.19	87.55	91.28
StructXLIP	57.70	76.03	81.68	88.06	91.60	57.90	76.36	82.09	87.71	91.03
HN-CLIP	62.60	79.16	84.19	89.88	93.05	63.77	79.89	84.22	89.05	92.14

Table A8: Seed replication on Long-DCI. $\max |\Delta|$ is the largest absolute difference across the six metrics.

Method	Seed	R@1	R@5	R@10	R@1	R@5	R@10	$\max \Delta $
HN-CLIP (ours)	seed 42	79.03	93.76	96.34	76.44	92.79	95.91	1.44
	seed 43	78.79	92.32	95.12	76.18	91.99	95.15	
GOAL	seed 42	74.29	92.77	95.58	73.31	92.14	95.77	1.28
	seed 43	74.34	92.89	95.77	72.03	92.37	95.69	
StructXLIP	seed 42	75.34	93.15	95.84	72.30	92.79	95.78	0.36
	seed 43	75.58	93.12	96.20	72.39	93.03	95.80	

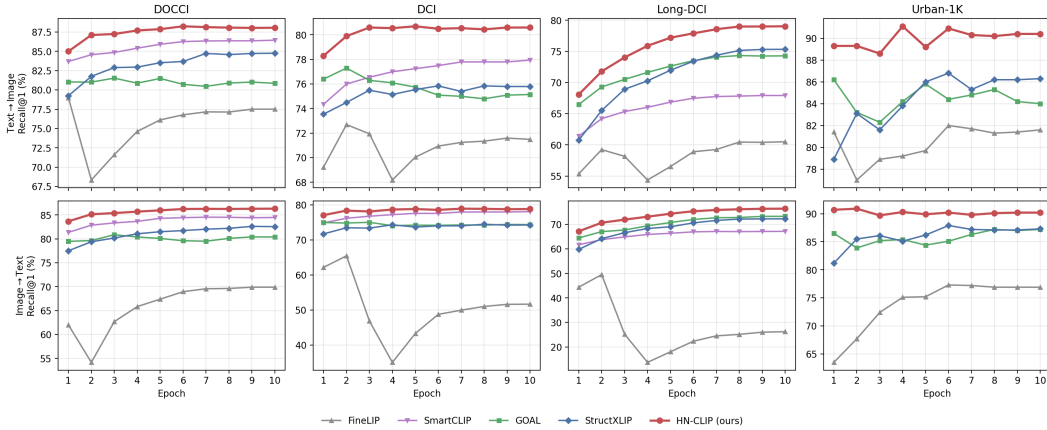


Figure A9: Per-direction convergence. Recall@1 per epoch; top: Text→Image, bottom: Image→Text.

Table A9: **Sample efficiency, full resolution.** Best per pair in **bold**; Δ is the average-R@1 margin of HN-CLIP over GOAL at that fraction.

Data	Method	R@1	R@5	R@10	R@25	R@50	R@1	R@5	R@10	R@25	R@50	Δ
DOCCI												
5%	GOAL	77.88	95.35	97.88	99.59	99.84	75.45	94.65	97.76	99.35	99.84	
	HN-CLIP	82.73	96.94	98.69	99.69	99.84	80.08	96.22	98.35	99.57	99.98	$\uparrow 4.74$
20%	GOAL	78.22	95.65	98.22	99.55	99.86	76.47	94.88	97.96	99.39	99.84	
	HN-CLIP	85.43	97.86	99.20	99.80	99.96	83.75	97.25	98.80	99.76	99.98	$\uparrow 7.25$
50%	GOAL	80.20	96.47	98.33	99.63	99.88	78.18	95.37	97.96	99.43	99.92	
	HN-CLIP	87.16	98.39	99.43	99.84	99.94	85.37	97.69	99.18	99.80	99.94	$\uparrow 7.07$
100%	GOAL [†]	81.96	96.94	98.78	99.78	99.92	80.84	96.33	98.61	99.67	99.92	
	HN-CLIP	88.25	98.45	99.43	99.86	99.98	86.24	98.12	99.22	99.84	99.94	$\uparrow 5.85$
DCI												
5%	GOAL	70.94	87.19	90.95	94.95	96.95	69.03	86.89	90.80	94.75	96.85	
	HN-CLIP	73.59	87.39	92.30	95.10	96.95	74.59	89.19	93.20	96.00	97.15	$\uparrow 4.11$
20%	GOAL	73.69	87.99	91.40	95.40	97.10	71.39	87.24	91.55	95.45	97.30	
	HN-CLIP	78.09	90.60	93.70	96.30	97.65	76.79	90.40	93.55	96.55	97.70	$\uparrow 4.90$
50%	GOAL	75.79	89.19	93.00	95.55	96.80	73.79	88.54	92.65	95.90	97.30	
	HN-CLIP	79.24	91.60	94.55	97.05	97.95	78.44	91.35	94.25	96.70	98.00	$\uparrow 4.05$
100%	GOAL	77.29	90.25	93.30	96.10	97.40	74.84	89.94	93.25	96.50	98.15	
	HN-CLIP	80.69	92.40	95.10	97.35	98.15	78.84	91.90	94.65	97.40	98.30	$\uparrow 3.70$

T2I retrieval on DOCCI test: HN-CLIP (ours) vs StructXLIP (green = ground truth)

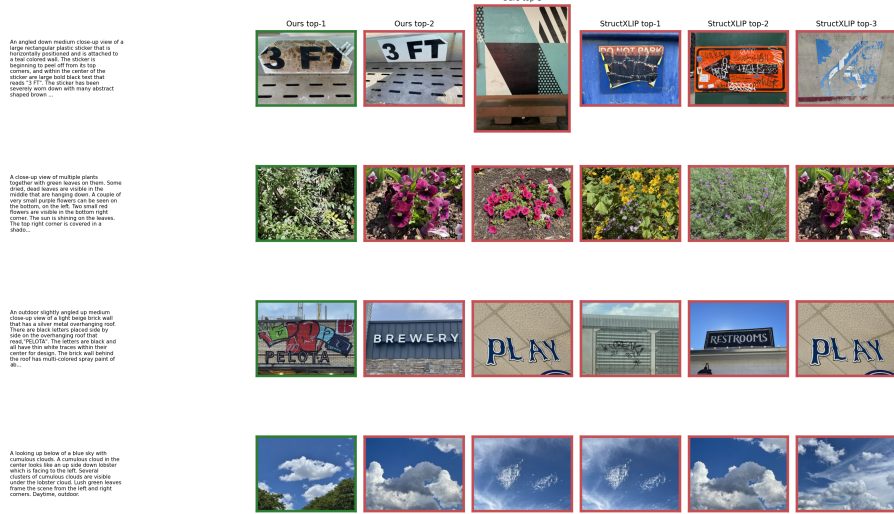


Figure A10: **Qualitative T $\rightarrow$ I retrieval on DOCCI** (green = ground truth).

Table A10: **Cross-domain generalization between DCI and DOCCI.** Train on one dataset and test on another. Values are Recall@K (%), using *Text→Image* and *Image→Text* retrieval. In-domain best in *italic bold*, cross-domain best in **bold**.

Setting	R@1	R@5	R@10	R@1	R@5	R@10
Train on DCI → Test on DCI vs. DOCCI						
Long-CLIP (DCI→DCI)	67.83	83.19	87.69	64.13	84.84	89.74
Long-CLIP (DCI→DOCCI)	78.78	95.24	98.02	66.75	91.92	96.31
FineLIP (DCI→DCI)	72.69	87.14	90.65	65.48	86.84	91.00
FineLIP (DCI→DOCCI)	80.69	96.47	98.53	65.63	91.51	96.31
GOAL (DCI→DCI)	77.29	90.25	93.30	74.84	89.94	93.25
GOAL (DCI→DOCCI)	80.14	96.25	98.39	77.24	95.22	97.90
StructXLIP (DCI→DCI)	75.84	89.94	93.65	74.49	90.05	93.40
StructXLIP (DCI→DOCCI)	76.94	95.06	97.76	74.24	94.12	97.51
HN-CLIP (DCI→DCI)	80.69	92.40	95.10	78.84	91.90	94.65
HN-CLIP (DCI→DOCCI)	85.00	97.90	99.25	83.14	96.98	98.75
Train on DOCCI → Test on DOCCI vs. DCI						
Long-CLIP (DOCCI→DOCCI)	78.78	95.24	98.02	66.75	91.92	96.31
Long-CLIP (DOCCI→DCI)	67.83	83.19	87.69	64.13	84.84	89.74
FineLIP (DOCCI→DOCCI)	77.51	96.02	98.41	69.90	93.43	97.45
FineLIP (DOCCI→DCI)	68.23	83.84	88.74	63.48	85.79	89.84
GOAL (DOCCI→DOCCI)	81.53	97.02	98.80	80.86	96.24	98.63
GOAL (DOCCI→DCI)	69.58	85.24	89.39	69.88	85.34	89.79
StructXLIP (DOCCI→DOCCI)	84.73	97.69	99.00	82.61	97.08	98.71
StructXLIP (DOCCI→DCI)	69.93	86.74	91.05	71.39	86.99	90.60
HN-CLIP (DOCCI→DOCCI)	88.25	98.45	99.43	86.24	98.12	99.22
HN-CLIP (DOCCI→DCI)	74.84	88.54	92.40	75.64	88.04	91.35