

The Router Within: Eliciting Native Skill Routing from a Frozen LLM

Ruishuo Chen¹, Xun Wang¹, Yu Chen¹, Zhuoran Li¹, and Longbo Huang¹✉

¹Institute for Interdisciplinary Information Sciences, Tsinghua University

✉ Correspondence: longbohuang@tsinghua.edu.cn

Abstract. Skills extend an LLM agent beyond its parametric knowledge, and the gain they promise rests on picking the right one. Deployed harnesses route by preloading every skill’s metadata into the context, which disperses the agent’s attention and caps the library size. Retrieval pipelines move the selection out of the context, but also out of the agent’s capability. We show that the frozen agent LLM already carries the routing signal in its own forward passes, and that two linear maps suffice to read it out with no skill text in the context. GAVEL (Glance And Verdict from a frozen LLM) reads it in two steps. A glance projects the task’s and each skill’s mid-layer states through the two maps, the only parameters trained, and scores the full library against compact per-skill banks that one forward pass builds at installation. A verdict then resumes the shortlisted skills’ forward passes and reads the model’s own likelihood and yes/no judgment, fused with the glance as a product of experts. Trained once, GAVEL transfers zero-shot to three public benchmarks and SkillTraj, our new benchmark of 372 simulated agent trajectories. On Qwen3-32B it outperforms progressive disclosure and retrieve-and-rerank pipelines that add 1.2B to 16B external parameters, by up to 13.4 points on written tasks and up to 21.9 when the need for a skill arises mid-rollout. Routing accuracy improves as the backbone does, and in a bash-agent harness the same 32B triggers the correct skill on Skill-Use more often than far larger frontier models running in Codex.

1. Introduction

Skills have become the standard way to extend an LLM agent beyond its parametric knowledge (Anthropic, 2025; Xu & Yan, 2026). A skill packages instructions, scripts, and reference files in a SKILL.md document that the agent loads into its context when a task calls for it. A well-chosen skill improves task performance, while an ill-suited one leaves it worse off than no skill at all (Li et al., 2026), and the choice grows harder as public libraries reach tens of thousands of entries (OpenAI, 2026a; Gao et al., 2026). Selecting the right skill from such a library is therefore the central problem, and current systems take one of two routes.

Deployed agents, Claude Code and Codex among them, route by progressive disclosure (Anthropic, 2025; OpenAI, 2026a): they preload every installed skill’s name and description into the system prompt and let the agent LLM itself decide which to read in full. The metadata, however, crowds the context in proportion to the library, degrading the agent’s work on the task (Liu et al., 2024; Modarressi et al., 2025). Codex therefore caps skill metadata at 2% of the context window and drops the rest (OpenAI, 2026a), confining a deployment to a small library, where routing accuracy still decays logarithmically with the number of skills (Chen et al., 2026a). The cost is intrinsic, since routing inside the context spreads the agent’s attention thin over every skill it considers and weighs

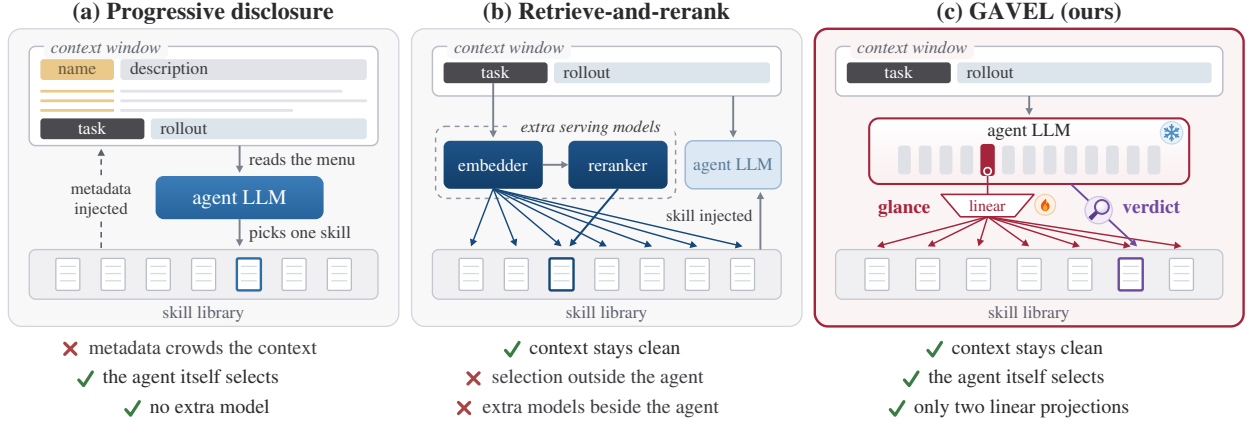


Figure 1 | Three designs for skill routing. **(a)** Progressive disclosure preloads every skill’s metadata into the prompt, crowding the context. **(b)** Retrieve-and-rerank keeps the context clean but hands selection to external models that never see the rollout. **(c)** GAVEL routes with the frozen agent LLM itself: a glance over the whole library, read from one mid-layer state through two trained linear maps, then a verdict in which the same model examines the top candidates in full.

only the summaries that fit, which omit much of what selection depends on (Zheng et al., 2026).

To lift this burden from the context, recent skill routers, following tool learning (Qin et al., 2024a; Zheng et al., 2026; Wang et al., 2026), hand the selection to external models. A retrieval pipeline, usually an embedding model and a reranker, picks skills and injects them into the context. The context is relieved, but the selection is also cut off from the agent’s capability. A standalone retriever may excel at matching text, but judges what a task needs less reliably than the agent LLM (Shi et al., 2025; Kang et al., 2026), especially amid the noisy context where the need arises mid-rollout (Lumer et al., 2025; Fei et al., 2025), and it does not improve as the agent itself does.

Selection inside the context thus taxes the agent, yet an external model does not understand tasks and skills as well as the agent does. Can a router, then, select with the agent’s capability but outside its context? The open question is through what interface, and at what cost, that understanding can be turned to routing. We propose GAVEL (Glance And Verdict from a frozen LLM), the third design in Figure 1, which draws every routing signal from the frozen agent LLM’s own forward passes through only two linear projections, and lets no skill text into the context until a skill is chosen.

GAVEL routes in two stages, a glance over the whole library followed by a verdict on its shortlist. As the LLM decodes, its intermediate layers compress the input’s semantics (Skean et al., 2025), but entangle them with much that serves only the next token (Queipo-de Llano et al., 2026), so no native read-out ranks a library’s skills (Appendix A). The glance therefore grafts a new attention head onto the model. A query map reads each task token’s state at a mid layer, a key map each skill token’s state at the same layer at installation, both trained contrastively so that a task token’s strongest match lands on a skill that serves it. Each task token votes for the skills it matches best, so its few decisive tokens are not averaged away. A new skill thus costs one forward pass and no training.

A factorized head, however, misses subtler inferences routing can turn on. Full attention over skill and task together does not, but it costs one forward pass per candidate, which no library affords, so the verdict spends it on the glance’s shortlist alone. For each it resumes the installation pass with the task appended and reads from that forward how strongly the skill primes the model for the task, and its log-odds judgment of whether the skill serves it. Unlike a pipeline’s scores, the three signals

can each be read as the same log posterior of skill given task, the glance contrastively, the likelihood generatively, the judgment discriminatively, so they fuse as a product of experts (Hinton, 2002).

We instantiate GAVEL with Qwen3-32B as the agent LLM and train its two projections, 7.9M parameters in all, once on the synthetic query-skill pairs of SkillRet (Kang et al., 2026). We then evaluate it on three public skill-selection benchmarks, which depart from that corpus in query author, document genre, and library scale. All three hand the router a written task, whereas a live agent’s need often surfaces mid-rollout, so we also build SkillTraj, a benchmark of 372 simulated agent trajectories that scores each router at that moment under four scenarios of noisy multi-turn context. Across all four, GAVEL outperforms both progressive disclosure given a well-chosen shortlist of twenty skills and retrieve-and-rerank pipelines that add 1.2B to 16B external parameters, by 13.4 points over the strongest pipeline on SRA-Bench and by 8.6 to 21.9 points across SkillTraj’s four scenarios. Ablations isolate what each stage contributes, and routing improves as the backbone does. In a minimal bash-agent harness, Qwen3-32B triggers the correct skill on Skill-Use (Han et al., 2026) more reliably than far larger open frontier models in Claude Code and Codex.

In summary, our contributions are as follows:

- We propose GAVEL (Glance And Verdict from a frozen LLM), a skill router that elicits routing from the frozen agent LLM’s own forward passes and thus improves as the agent does, with no model beside it and no skill text in the context until one is chosen.
- On the technical side, a token-level glance reads a mid layer through two linear maps against skill banks thinned to ϵ -covers with bounded distortion, and a verdict reads generative and discriminative evidence from a resumed forward pass, fused as a product of experts.
- We build SkillTraj, a benchmark of 372 simulated agent trajectories that scores a router at the moment a skill becomes needed, under four scenarios of noisy multi-turn context.
- Across three public benchmarks and SkillTraj, GAVEL outperforms progressive disclosure and retrieve-and-rerank pipelines that add up to 16B external parameters, by up to 21.9 points, and in a live harness has Qwen3-32B load the correct skill more often than far larger frontier models.

2. Related Work

Skill and tool selection. Deployed harnesses route by progressive disclosure, holding every skill’s metadata in context for the agent to read (Anthropic, 2025; OpenAI, 2026a). Retrieval-based systems move the selection to an external stack, built over API pools (Qin et al., 2024a; Lumer et al., 2025), invoked mid-rollout (Fei et al., 2025), or trained on full skill documents (Zheng et al., 2026; Wang et al., 2026). ToolkenGPT (Hao et al., 2023) has a frozen LLM emit a tool as a token, but trains one embedding per tool, so a new tool costs a training run. GAVEL instead draws the routing signal from the agent’s own forward passes, with no skill text in the context and no model beside the backbone.

Reading information out of an LLM. Probing shows that hidden states carry more than the next token needs (Alain & Bengio, 2017; Belinkov, 2022). Text-embedding work scales this read-out, turning decoder LLMs into strong encoders by fine-tuning (Wang et al., 2024; BehnamGhader et al., 2024) or by prompting alone (Springer et al., 2025). GRIT (Muennighoff et al., 2025) unifies embedding and generation in one model, but fine-tunes the whole backbone. The predictions are just as readable, and rerankers score a document by the likelihood it assigns to the query (Sachan et al., 2022; Zhuang et al., 2023) or by the model’s own yes/no relevance judgment (Nogueira et al., 2020; Sun et al., 2023). GAVEL turns these read-outs into a skill router on the frozen agent LLM itself.

3. GAVEL: Routing on the Agent’s Own Forward Passes

3.1. Problem setup and design principles

We model skill routing as follows. A skill library $\mathcal{S} = \{s_1, \dots, s_N\}$ is a set of documents, each a metadata header (name and description) followed by a body of instructions. The agent is a frozen LLM $\mathcal{M}$ decoding a rollout. At a routing point, its context x holds the task, either a user request or an execution state reached mid-rollout. A router observes x and $\mathcal{S}$ and decides which skill to load.

Current practice, as Section 1 reviewed it, gives rise to three requirements on a router. (i) *Task-only context*. Skill metadata preloaded into the prompt disperses the agent’s attention and hurts its work on the task (Liu et al., 2024; Modarressi et al., 2025), so no skill text may enter the context until one is chosen. (ii) *No standalone model*. The agent LLM judges a task’s needs more reliably than a standalone retriever (Shi et al., 2025; Kang et al., 2026), so selection should inherit that capability and improve as the agent does, with anything added on top lightweight. (iii) *Installation-time indexing*. Skills are files dropped in a folder, and public libraries hold tens of thousands that keep changing (Gao et al., 2026), so no training may be run for a new skill.

GAVEL satisfies all three (Figure 2). The glance (Sections 3.2 and 3.3) ranks the full library by matching hidden states of $\mathcal{M}$ on the task against those that a single forward pass extracts per skill at installation, with no training run. The verdict (Section 3.4) re-examines the shortlist with a few forward passes of $\mathcal{M}$ over skill and task together, and Section 3.5 fuses their three read-outs as a product of experts. Throughout, $h_\ell(c)$ denotes the layer- ℓ hidden states of $\mathcal{M}$ on input c .

3.2. The glance: token-level read-out of the frozen forward pass

The routing signal has to come out of the hidden states of $\mathcal{M}$, which compress the input into its semantics (Skean et al., 2025) but entangle it with much that serves only the next token (Queipo-de Llano et al., 2026), so no native read-out ranks a library (Appendix A).

The glance therefore grafts a new attention head onto the frozen $\mathcal{M}$, a trained query map W_q and key map W_s with no value path. Both maps read one intermediate layer ℓ^* , chosen at the floor of the model’s compression valley (Skean et al., 2025; Queipo-de Llano et al., 2026), where the matrix entropy of the hidden states bottoms out, roughly 70% of the way through our backbone. Training the read-out at every depth confirms this unsupervised criterion (Appendix B).

Intuitively, W_q reads out of a task token’s state the capability it asks for, and W_s reads out of a skill token’s state the capability it offers. The head costs little on the query side, since the states $h_{\ell^*}(x)_i$ of the task tokens are a byproduct of the decoding $\mathcal{M}$ performs anyway, and each becomes a unit query $q_i \propto W_q h_{\ell^*}(x)_i$. On the skill side, when a skill s is installed we render it once in a fixed prompt $r(s)$ (Appendix G), run one forward pass, and store a unit key $d_j^s \propto W_s h_{\ell^*}(r(s))_j$ for every token j of the metadata header and body. The head attends across sequences, from a live context into documents encoded elsewhere, and so carries no positional encoding. The resulting bank $\{d_j^s\}_j$ is the head’s key cache for the skill, filled by that single forward pass.

At a routing point the head performs hard attention into this bank. Each task token keeps its strongest logit against every skill, as in late-interaction retrieval (Khattab & Zaharia, 2020),

$$m_i(s) = \max_j \langle q_i, d_j^s \rangle. \quad (1)$$

We train W_q and W_s once, contrastively, with the span mean $\bar{m}(s) = \text{mean}_i m_i(s)$ as the match score. Each training task carries a set $\mathcal{S}^+$ of gold skills, negatives $\mathcal{S}^-$ are drawn from the rest of the library,

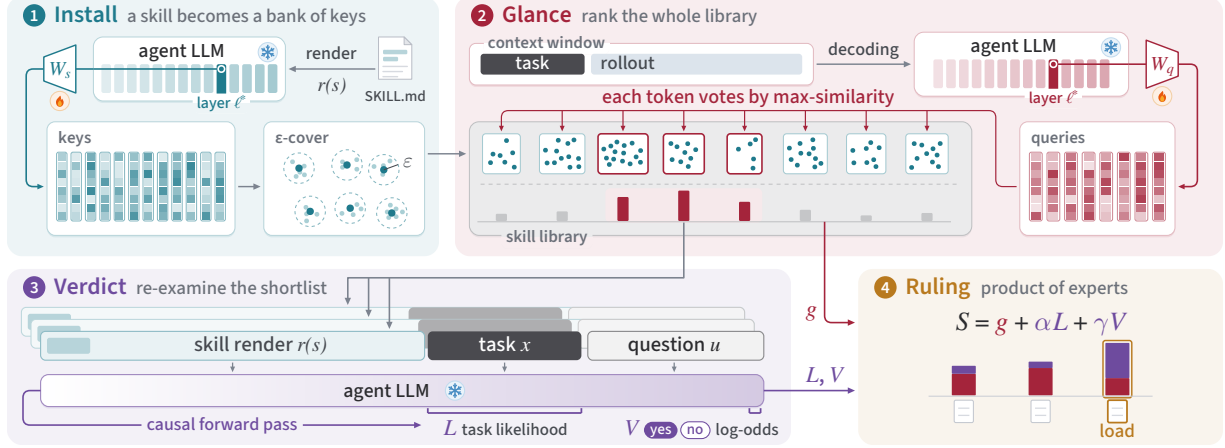


Figure 2 | The GAVEL pipeline. *Install*: W_s maps a new skill’s layer- ℓ^* states in the frozen agent LLM to a bank of keys thinned by an ϵ -cover. *Glance*: W_q reads the same layer as the model decodes; each task token votes by max-similarity over every bank, ranking the whole library. *Verdict*: the model re-examines each shortlisted skill against the task, giving the task likelihood L and the yes/no log-odds V . *Ruling*: a product of experts over glance and verdict picks the skill to load.

and the loss is the multi-positive contrastive

$$\mathcal{L} = -\log \frac{\sum_{s \in S^+} e^{\tau \tilde{m}(s)}}{\sum_{s \in S^+ \cup S^-} e^{\tau \tilde{m}(s)}} \quad (2)$$

at temperature τ . Gradients stop at h_{ℓ^*} , so training updates only the two maps and $\mathcal{M}$ stays frozen.

At routing time, however, we do not read the head out by that mean. Only a handful of task tokens point at the right skill, and as the span grows the rest, each somewhat similar to every skill, bury the handful by sheer number. Instead, each token votes, contributing $m_i(s)$ only to its top- k skills:

$$g(s|x) = \frac{1}{\sum_i w_i} \sum_{i: s \in \mathcal{T}_i} w_i m_i(s), \quad \mathcal{T}_i = \text{top-}k \text{ skills under } m_i. \quad (3)$$

The normalization keeps g on the scale of the mean the head was trained with, where w_i is an adjustable decay that favors recent tokens, and $k = \min(10, \max(3, \text{round}(0.1N)))$ is 10 for any library of at least 100 skills. Glancing the whole library is thus one sweep of the head over the bank.

3.3. Compressing the skill bank to an ϵ -cover

The glance trains nothing at installation, but it stores a key per token, so the bank grows with the library’s total length. Much of it is redundant. A document that dwells on one capability leaves a cluster of keys pointing nearly the same way, and since every read-out passes through the max of Eq. (1), a single representative serves the whole cluster. At installation we therefore keep only a subset $C_s \subseteq D_s = \{d_j^s\}_j$ with every discarded key within distance ϵ of a retained one.

Proposition 1 (Distortion, proved in Appendix D). *Let $C_s \subseteq D_s$ be an ϵ -cover of the unit-norm bank D_s in Euclidean distance. Then for every unit vector q ,*

$$\max_{d \in D_s} \langle q, d \rangle - \epsilon \leq \max_{c \in C_s} \langle q, c \rangle \leq \max_{d \in D_s} \langle q, d \rangle.$$

Compression thus lowers each score by at most ε and inflates none, and the vote of Eq. (3) inherits the bound for every skill clear of the top- k cuts (Appendix D).

We build the cover by a farthest-first traversal of a skill’s keys (Gonzalez, 1985), repeatedly retaining the key farthest from those already retained until every remaining key lies within ε of them.

The retained set is also ε -separated, so its size is pinned between the covering and packing numbers of D_s at scale ε (Proposition 2, Appendix D), and the bank a skill ends up with is sized by the number of ε -distinguishable directions its tokens span rather than by its length. Since compression coarsens the geometry the query map was trained against, we let W_q take one short fine-tune against the training library’s compressed banks under the same loss, with W_s and the keys frozen.

3.4. The verdict: native signals under the model’s full attention

The single factorized head that makes the glance cheap also denies it the subtler semantic inferences on which a routing decision can turn. Once the library is cut to a shortlist, we can afford the frozen model’s full attention over skill and task together. The verdict therefore continues the render $r(s)$ encoded at installation with the task, the order of classical query-likelihood scoring (Ponte & Croft, 1998), which also leaves the installation pass a reusable prefix, and reads its signals from the predictive distribution p_M of one forward pass over this continuation.

As the pass advances over the task, the predictive distribution at each position scores the task token that actually comes next, with the skill now in the prefix. The mean log-likelihood of the task,

$$L(s|x) = \frac{1}{|x|} \sum_{i=1}^{|x|} \log p_M(x_i | r(s), x_{<i}), \quad (4)$$

measures how well the skill anticipates the task (Sachan et al., 2022). For the second read-out we close the continuation with a fixed question u (Appendix G), whether this skill provides what the task needs, and take the model’s log-odds of yes over no at the final position,

$$V(s|x) = \log \sum_{t \in \mathcal{Y}} p_M(t | r(s), x, u) - \log \sum_{t \in \mathcal{N}} p_M(t | r(s), x, u), \quad (5)$$

where $\mathcal{Y}$ and $\mathcal{N}$ collect the spellings of yes and no (Nogueira et al., 2020). Since u follows the task, the causal mask leaves every task position untouched, so one pass yields both read-outs.

3.5. The ruling: a product of experts

A retrieve-and-rerank pipeline runs on signals of different kinds playing different roles, most commonly an embedding model’s similarity that screens the collection and a reranker model’s discriminative score that reorders the survivors and supersedes it. The three scores of GAVEL, however, stand in a different relation. With the prior uniform over the library, each can be read as an estimate of the same log posterior $\log p(s|x)$, on a scale of its own.

The glance g reads it contrastively, as the score minimizing the multi-positive InfoNCE loss of Section 3.2 is the log ratio of the posterior to the negative-sampling distribution, up to a shift shared by every skill under a task (van den Oord et al., 2018). Summing Eq. (4) over task positions gives $\log p_M(x | r(s))$, the log-likelihood of the task with the skill as the condition, which Bayes’ rule turns into the log posterior under the uniform prior up to another such shift, so the likelihood L reads it generatively. The division by $|x|$ moves no ranking, only putting tasks of every length on one scale.

The judgment V is the model’s own posterior on the skill’s relevance when asked, a discriminative reading stated rather than derived.

We therefore rule by the product of experts (Hinton, 2002),

$$S(s|x) = g(s|x) + \alpha L(s|x) + \gamma V(s|x), \quad (6)$$

so that e^S multiplies the three experts, and any one of them can veto a candidate the other two merely tolerate. The coefficients are exchange rates that convert the nats of the likelihood and the judgment onto the glance’s scale, and tempering exponents that discount an overconfident expert. GAVEL loads the skill whose S is highest among the candidates the glance shortlisted.

4. Experiments

4.1. Setup

Our main experiments run GAVEL on Qwen3-32B (Yang et al., 2025) as the frozen agent backbone, where the matrix-entropy criterion of Section 3.2 places the read-out after block 45 of the model’s 64 (Appendix B). The projections W_q and W_s , with 7.9M parameters in total, are trained once, at temperature $\tau = 40$, on 51,104 of SkillRet’s training queries (Kang et al., 2026), written by Qwen3.5 over 9,084 skills collected from public repositories. The cover radius $\varepsilon = 0.83$ is fixed on the same split, and shrinks the skill banks about $8.5\times$ at a cost of at most 1.6 points on any benchmark below. The exchange rates $(\alpha, \gamma) = (1.0, 0.025)$ and the pruning margin $\Delta = 0.133$ are calibrated on SkillRet’s validation split, and only the candidates the glance scores within Δ of its best, roughly nine on average, receive a verdict. With the projections and these four scalars held fixed, every number on every other library is zero-shot. Appendix E rebuilds the pipeline on a Gemma backbone and repeats the main comparison. Appendix F collects further ablations.

4.2. Routing from written tasks

We first evaluate routing from written tasks on three benchmarks. SkillRet’s official test set (v1) pairs 4,997 Claude-written queries with a library of 6,660 held-out skills. SRA-Bench (Su et al., 2026) changes the genre on both sides, with tasks from six reasoning and coding benchmarks and 26,262 skills, most collected from the web. It ships no test split, so we evaluate a stratified sample of 861 tasks. Eval-Core, SkillRouter’s own benchmark adapted from SkillsBench (Li et al., 2026), poses 75 real `task.md` queries against 78K documents in two pools (Zheng et al., 2026).

A router is scored by whether the single skill it commits to serves the task, Hit@1 over the full library. On all three benchmarks gold labels miss adequate skills, as exhaustive annotation is impractical. We therefore score Hit@1 by adjudication. GPT-5.6 Sol (high) (OpenAI, 2026c) compares the committed skill with every gold in both orders, given only the task and both documents. The skill is credited when it wins at least as often as it loses across all golds. Appendix H gives examples of under-annotated queries, the unadjudicated scores, and a human check of the verdicts.

4.2.1 Comparison with current practice

GAVEL is compared against the best of current practice. Progressive disclosure cannot survey thousands of skills in context, so we give it a retrieval front end. Qwen3-Embedding-8B (Zhang et al., 2025), the top open embedding model on MTEB, shortlists twenty skills for the agent to pick from. Retrieve-and-rerank comes in the form SkillRouter ships, a 0.6B embedder and a 0.6B reranker trained for

skill selection (Zheng et al., 2026), and in a scaled-up general-purpose form, Qwen3-Embedding-8B followed by Qwen3-Reranker-8B. Alongside them we keep BM25 as the lexical anchor, and SKILLRET-Emb-0.6B, trained on SkillRet by its authors (Kang et al., 2026).

As shown in Figure 3, GAVEL leads all three benchmarks at both stages. The full pipeline beats the strongest pipeline by 3.8 points on SkillRet, 13.4 on SRA-Bench, and 1.3 to 2.7 on Eval-Core, and the glance alone is the strongest retrieval stage on SRA-Bench and Eval-Core while coming within a point of the best embedder on SkillRet (candidate-pool recall tells much the same story, Appendix H.3). The two trained embedders, SKILLRET-Emb-0.6B and SkillRouter’s, match the glance on SkillRet, whose queries and skills resemble their training data. However, once the query style shifts from conversational user requests to the task.md project files of Eval-Core, both begin to lag, and when the skills shift as well, from SKILL.md files written for agents to the procedural web pages of SRA-Bench, both fall below even BM25, the out-of-domain failure dense retrievers are known for (Thakur et al., 2021).

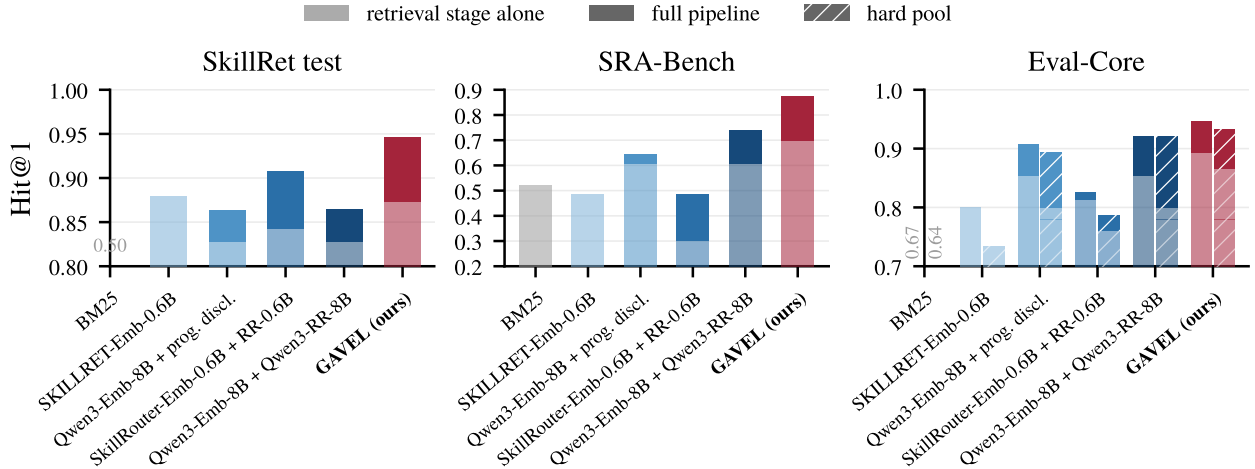


Figure 3 | Routing from written tasks. Light fill is the retrieval stage committing its top-1 alone, dark fill the full pipeline built on it, and on Eval-Core the hatched bar is the hard pool. Where BM25 falls below the plotted range its score is printed in place of the bar.

The untrained Qwen3-Embedding-8B exhibits the opposite preference. On Eval-Core and SRA-Bench, matching a task file against a skill document is close to the web-scale retrieval it was trained for, and it fares well. SkillRet’s conversational requests share little vocabulary with the skill body (Shi et al., 2025; Kang et al., 2026), and there it trails even the far smaller trained embedders. Whether the shortlist is then handed to progressive disclosure or to a dedicated reranker, these widely practiced pipelines place an external model beside the agent, from 1.2B to 16B parameters against our 7.9M, but none of them closes the gap to a router read out of the agent itself.

4.2.2 Ablations

We next replace one design choice at a time, keep the rest fixed, and rerun the three benchmarks. Figure 4 reports how far each variant falls below the unmodified router.

Glance → Jina-ColBERT-v2. The glance could win merely by scoring at a finer granularity, every token pair rather than one vector pair, and not by what it reads from the agent. So Jina-ColBERT-v2 (Jha et al., 2024), a retriever trained for exactly this late-interaction scoring, takes the glance’s place. It nominates the shortlist and stands in for g in the ruling, with (α, γ) calibrated exactly as ours are,

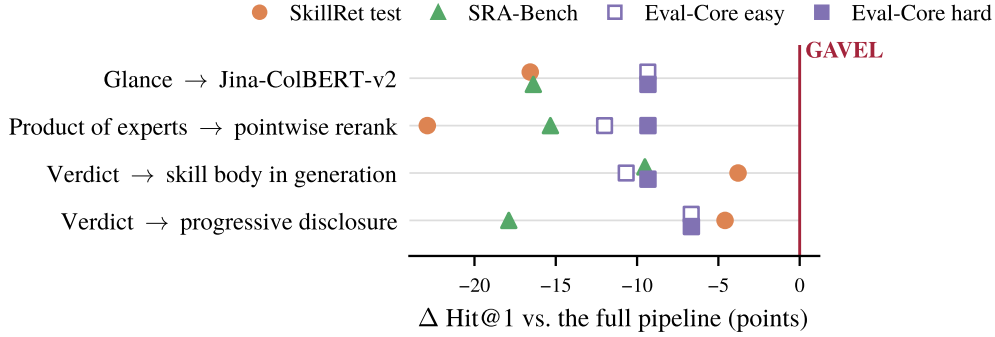


Figure 4 | Ablations. Each row replaces one design choice of GAVEL and shows how far the full pipeline drops on each benchmark, in points against the unmodified router (red line). On Eval-Core the hollow marker is the easy pool and the filled one the hard pool.

yet loses badly on every benchmark even with the verdict behind it. The glance profits from the far better compression of the agent LLM it reads, not from how the tokens are compared.

Product of experts → pointwise rerank. We restore the classical division of labor, retrieval only nominating and a reranker alone deciding, by committing to V , the backbone’s judgment of each candidate on its own, and discarding g and L . This runs into the poor calibration of self-reported judgment (Qin et al., 2024b), and on SkillRet it scrambles the ambiguous queries.

Verdict → skill body in generation. This variant appends the skill after the task, takes the mean log-likelihood of its body in place of the query-likelihood of Eq. (4), and reads V with the same question. But a body’s likelihood speaks more to how much the skill resembles the model’s own writing than to whether it serves the task, a bias the query-likelihood shares across all skills, leaving their ordering intact. Indeed the calibration discards the document-likelihood outright, driving α to zero, and on the remaining two signals the variant falls visibly behind on every benchmark.

Verdict → progressive disclosure. Handing the glance’s twenty candidates to the menu of progressive disclosure tests whether the verdict earns its forward passes over letting the agent read the shortlist itself. The menu comes closest on Eval-Core, whose curated skills carry descriptions that summarize them well. But it falls far behind on SRA-Bench, where telling the right skill apart takes the long procedural detail in its body, yet the pick rests on metadata that cannot hold it. This is the information loss Zheng et al. (2026) identify, which the verdict escapes by reading the full body. Placing the twenty full bodies in the menu itself does not close the gap either (Appendix F.1).

4.3. Routing mid-rollout

The benchmarks above hand the router a written task that states its need in a single clean turn. A live agent instead works from a long multi-turn context, and the need may surface only as it works through the task. We therefore build SkillTraj, a new skill-routing benchmark of simulated agent rollouts. Each of its 372 trajectories is a multi-turn dialogue with tool calls, rendered in the backbone’s chat template, and marks the point at which a skill from the held-out SkillRet library of 6,660 becomes needed; a router is scored on the skill it commits to at that point.

The points cover four scenarios, by where the need comes from: stated outright by the user (*user request*, 116), revealed by a tool result (*tool evidence*, 106), created by the agent’s own written plan (*agent plan*, 105), or arising after the agent has read the wrong skill and must reroute with the misleading document still in context (*wrong-skill recovery*, 45). Each trajectory is written by GPT-5.6

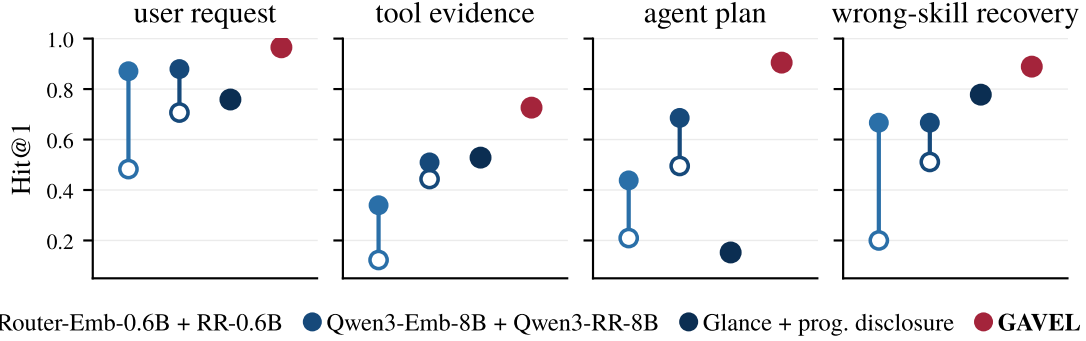


Figure 5 | Routing mid-rollout on SkillTraj, a panel per scenario. A retrieve-and-rerank pipeline has two points, hollow when it swallows the full trajectory, filled when it keeps only the last message.

Sol (OpenAI, 2026c) and admitted by a Claude judge only if the need is absent before the marked point, present after it, and solved by the gold skill (further checks in Appendix H.4).

On these trajectories GAVEL reads the context where it already sits, inside the agent’s own forward pass. The glance sets the vote decay to $w_i = 2^{-a_i/64}$, where a_i counts the tokens between position i and the decision point, so recent messages weigh most. The verdict then continues from the most recent message, putting the backbone’s reasoning to work on a need only partly spelled out. A conventional retrieve-and-rerank pipeline must instead decide what to render for its retriever, either the whole noisy context, whose embedding mixes every topic the trajectory has touched, or only the latest turn, at the risk of losing the evidence that matters. Figure 5 compares GAVEL against each pipeline taken both ways and against progressive disclosure, constrained to decode a menu index.

GAVEL leads every scenario, by 8.6 to 21.9 points over the strongest other system. These trajectories sit far from anything SkillRouter was trained on, and it falls behind the larger untrained Qwen3 models in every scenario, furthest when the full multi-turn noise has to be swallowed. Yet the larger models cannot iron the noise out either; in all four scenarios they are better served by the clean last message than by the full context that holds all the usable evidence. Progressive disclosure brings back the coarse, metadata-bound picking that hurt it most on SRA-Bench. It holds its own on *wrong-skill recovery*, where the agent has just watched a skill fail and sums up the missing capability in a sentence that a name and a description match just fine, but collapses on *agent plan*, where the freshly drafted plan carries details only the skill body can confirm.

4.4. End-to-end deployment

We further integrate GAVEL end to end into mini-swe-agent (Yang et al., 2024), a minimal bash-agent harness. While every benchmark above hands the router its moment, a live rollout requires a gate that decides when to attempt a skill call. We therefore train one, taking the decision points of SkillTraj as positives and trajectories built the same way but never warranting a skill as negatives. It reads the glance scores the preceding tokens have accumulated over the library and the final-layer state from which the model predicts its next token. Once it stays on for two consecutive tokens, GAVEL attempts a selection, and if the verdict judges even the winner unfit, $V < 0$, loads nothing.

We test the integration on Skill-Use (Han et al., 2026), a benchmark of 177 executable tasks over a curated library of 79 skills, built to measure how reliably a model and harness invoke the right skill under progressive disclosure. As Table 1 shows, under the progressive-disclosure prompt (Appendix I) Qwen3-32B almost never reads a skill at all. With GAVEL integrated, however, the same frozen model

Table 1 | Trigger rate on Skill-Use, the fraction of tasks on which the correct skill is loaded, with frontier numbers from its paper.

System	Trigger
<i>Progressive disclosure</i>	
GLM-5.1 (in Codex)	.706
MiniMax-M3 (in Codex)	.864
Qwen3.6-Max (in Codex)	.684
DeepSeek-V4-Pro (in Codex)	.650
Qwen3-32B (in mini-swe-agent)	.011
<i>Retrieve and rerank</i>	
Qwen3-Emb-8B + Qwen3-Reranker-8B	.897
SkillRouter-Emb-0.6B + Reranker-0.6B	.800
<i>Ours</i>	
Qwen3-32B + GAVEL (in mini-swe-agent)	.909

triggers the correct skill in more than 90% of the tasks, drawing on ability it already carried (in another 5% the router holds its fire and loads nothing). That puts it ahead of every open frontier model in Codex, and ahead of the retrieve-and-rerank pipelines, which load a skill on every trajectory whether one is needed or not. Appendix I walks through transcripts in which GAVEL invokes a skill mid-rollout, and Appendix J compares its cost with progressive disclosure over a whole session.

4.5. Scaling with backbone capability

Much of the appeal of progressive disclosure is that its judgment of skill selection improves for free as the agent LLM does. GAVEL in fact shares this advantage, as Figure 6 shows. On SRA-Bench both the glance stage and the full form climb as the backbone grows in size and steps up in generation, though GAVEL on a 0.6B model, one that all but fails at picking from a metadata menu, already beats the 32B under progressive disclosure, which here has the same backbone pick from a menu of twenty candidates retrieved by Qwen3-Emb-8B (adjudicated recall $\approx .93$). Even on Qwen3.8-27B, whose agentic ability draws level with far larger frontier models on many benchmarks (Qwen Team, 2026), picking from the metadata menu still trails GAVEL on the same backbone by 12.2 points.

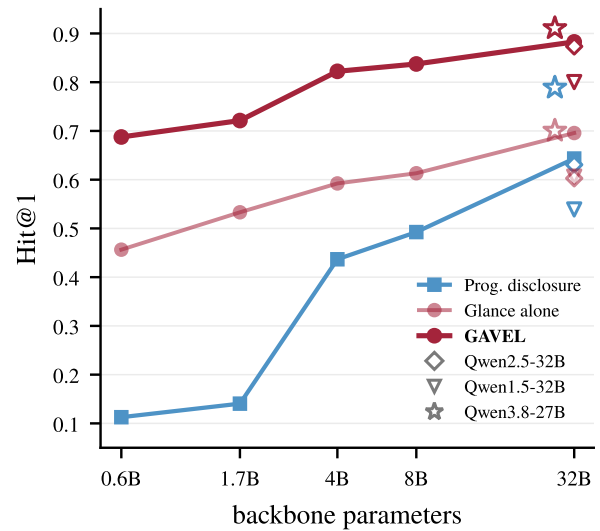


Figure 6 | Routing accuracy on SRA-Bench as the backbone grows more capable, across Qwen3 sizes (solid lines), across generations at a fixed 32B (hollow markers), and onto Qwen3.8-27B (stars).

5. Conclusion

We presented GAVEL, a router that returns skill selection to the agent LLM without placing anything in its context. The glance scores the full library from a mid-layer read-out of the frozen backbone, the verdict re-scores the shortlist from the model’s own generative and discriminative predictions, and two linear projections are all that is trained. Across three public benchmarks and SkillTraj this native read-out outperforms progressive disclosure and retrieve-and-rerank pipelines that add up to 16B external parameters, and in a live harness it has Qwen3-32B load the correct skill more often than far larger frontier models. The frozen backbone already carries the capability that skill selection requires, and a learned read-out is enough to put it to work. Whether the same read-out also routes tools, memories, or MCP servers from an agent’s own forward passes is a question we leave open.

References

- Alain, G. and Bengio, Y. Understanding intermediate layers using linear classifier probes. In *International Conference on Learning Representations (ICLR), Workshop Track*, 2017.
- Anthropic. Equipping agents for the real world with agent skills. <https://www.anthropic.com/engineering/equipping-agents-for-the-real-world-with-agent-skills>, 2025.
- BehnamGhader, P., Adlakha, V., Mosbach, M., Bahdanau, D., Chapados, N., and Reddy, S. LLM2Vec: Large language models are secretly powerful text encoders. In *First Conference on Language Modeling (COLM)*, 2024.
- Belinkov, Y. Probing classifiers: Promises, shortcomings, and advances. *Computational Linguistics*, 48(1): 207–219, 2022.
- Chen, C., Yu, Q., Gu, Y., Huang, Z., Li, H., Liu, H., Liu, S., Liu, J., Peng, D., Wang, J., Yan, Z., Meng, F., Qin, E., Che, C., and Hu, M. The scaling laws of skills in LLM agent systems. *arXiv preprint arXiv:2605.16508*, 2026a.
- Chen, Y., Chen, R., Wang, X., Li, Z., and Huang, L. Optimal skill selection for LLM agents with provable bicriteria guarantees. *arXiv preprint arXiv:2608.19993*, 2026b.
- Fei, X., Zheng, X., and Feng, H. MCP-Zero: Active tool discovery for autonomous LLM agents. *arXiv preprint arXiv:2506.01056*, 2025.
- Gao, Y., Li, Z., Yuan, Y., Ji, Z., Ma, P., and Wang, S. Skillreducer: Optimizing LLM agent skills for token efficiency. *arXiv preprint arXiv:2603.29919*, 2026.
- Gemma Team. Gemma 4 technical report. *arXiv preprint arXiv:2607.02770*, 2026.
- Gonzalez, T. F. Clustering to minimize the maximum intercluster distance. *Theoretical Computer Science*, 38: 293–306, 1985.
- Han, J., Xu, Y., Liao, Y., Wang, X., Jiang, Z., Di, Z., Lu, F., Hu, Z., and Xiao, Y. Skill-use: Can LLMs actually use skills in agentic harnesses? *arXiv preprint arXiv:2608.04828*, 2026.
- Hao, S., Liu, T., Wang, Z., and Hu, Z. ToolkenGPT: Augmenting frozen language models with massive tools via tool embeddings. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023.
- Hinton, G. E. Training products of experts by minimizing contrastive divergence. *Neural Computation*, 14(8): 1771–1800, 2002.
- Jha, R., Wang, B., Günther, M., Mastrapas, G., Sturua, S., Mohr, I., Koukounas, A., Akram, M. K., Wang, N., and Xiao, H. Jina-ColBERT-v2: A general-purpose multilingual late interaction retriever. In *Proceedings of the Fourth Workshop on Multilingual Representation Learning (MRL @ EMNLP)*, 2024.
- Kang, R., Cho, H., and Kim, Y. Skillret: A large-scale benchmark for skill retrieval in LLM agents. *arXiv preprint arXiv:2605.05726*, 2026.

- Khattab, O. and Zaharia, M. ColBERT: Efficient and effective passage search via contextualized late interaction over BERT. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR)*, 2020.
- Li, X., Liu, Y., Chen, W., et al. Skillsbench: Benchmarking how well agent skills work across diverse tasks. *arXiv preprint arXiv:2602.12670*, 2026.
- Ling, G., Zhong, S., and Huang, R. Agent skills: A data-driven analysis of Claude skills for extending large language model functionality. *arXiv preprint arXiv:2602.08004*, 2026.
- Liu, N. F., Lin, K., Hewitt, J., Paranjape, A., Bevilacqua, M., Petroni, F., and Liang, P. Lost in the middle: How language models use long contexts. *Transactions of the Association for Computational Linguistics*, 12: 157–173, 2024.
- Lumer, E., Gulati, A., Subbiah, V. K., Basavaraju, P. H., and Burke, J. A. Scalemcp: Dynamic and auto-synchronizing model context protocol tools for LLM agents. In *Computational Intelligence: 17th International Joint Conference (IJCCI 2025)*, pp. 23–42. Springer, 2025.
- Modarressi, A., Deilamsalehy, H., Dernoncourt, F., Bui, T., Rossi, R. A., Yoon, S., and Schütze, H. Nolima: Long-context evaluation beyond literal matching. In *Proceedings of the 42nd International Conference on Machine Learning (ICML)*, 2025.
- Muennighoff, N., Su, H., Wang, L., Yang, N., Wei, F., Yu, T., Singh, A., and Kiela, D. Generative representational instruction tuning. In *International Conference on Learning Representations (ICLR)*, 2025.
- Nogueira, R., Jiang, Z., Pradeep, R., and Lin, J. Document ranking with a pretrained sequence-to-sequence model. In *Findings of the Association for Computational Linguistics: EMNLP 2020*, 2020.
- OpenAI. Build skills. <https://learn.chatgpt.com/docs/build-skills>, 2026a.
- OpenAI. Conversation state. <https://developers.openai.com/api/docs/guides/conversation-state>, 2026b.
- OpenAI. Previewing GPT-5.6 Sol: a next-generation model. <https://openai.com/index/previewing-gpt-5-6-sol/>, 2026c.
- Ponte, J. M. and Croft, W. B. A language modeling approach to information retrieval. In *Proceedings of the 21st Annual International ACM SIGIR Conference on Research and Development in Information Retrieval*, pp. 275–281, 1998.
- Qin, Y., Liang, S., Ye, Y., Zhu, K., Yan, L., Lu, Y., Lin, Y., Cong, X., Tang, X., Qian, B., Zhao, S., Hong, L., Tian, R., Xie, R., Zhou, J., Gerstein, M., Li, D., Liu, Z., and Sun, M. Toolllm: Facilitating large language models to master 16000+ real-world APIs. In *International Conference on Learning Representations (ICLR)*, 2024a.
- Qin, Z., Jagerman, R., Hui, K., Zhuang, H., Wu, J., Yan, L., Shen, J., Liu, T., Liu, J., Metzler, D., Wang, X., and Bendersky, M. Large language models are effective text rankers with pairwise ranking prompting. In *Findings of the Association for Computational Linguistics: NAACL 2024*, 2024b.
- Queipo-de Llano, E., Arroyo, Á., Barbero, F., Dong, X., Bronstein, M., LeCun, Y., and Shwartz-Ziv, R. Attention sinks and compression valleys in LLMs are two sides of the same coin. In *International Conference on Learning Representations (ICLR)*, 2026.
- Qwen Team. Qwen3.8-27b. <https://huggingface.co/Qwen/Qwen3.8-27B>, 2026.
- Sachan, D. S., Lewis, M., Joshi, M., Aghajanyan, A., Yih, W.-t., Pineau, J., and Zettlemoyer, L. Improving passage retrieval with zero-shot question generation. In *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2022.
- Shi, Z., Wang, Y., Yan, L., Ren, P., Wang, S., Yin, D., and Ren, Z. Retrieval models aren’t tool-savvy: Benchmarking tool retrieval for large language models. In *Findings of the Association for Computational Linguistics: ACL 2025*, 2025.

- Skean, O., Arefin, M. R., Zhao, D., Patel, N., Naghiyev, J., LeCun, Y., and Shwartz-Ziv, R. Layer by layer: Uncovering hidden representations in language models. In *International Conference on Machine Learning (ICML)*, 2025.
- Springer, J. M., Kotha, S., Fried, D., Neubig, G., and Raghunathan, A. Repetition improves language model embeddings. In *International Conference on Learning Representations (ICLR)*, 2025.
- Su, W., Long, J., Ai, Q., He, Q., Tang, Y., Wang, C., Tu, Y., Wang, Y., and Liu, Y. Skill retrieval augmentation for agentic AI. *arXiv preprint arXiv:2604.24594*, 2026.
- Sun, W., Yan, L., Ma, X., Wang, S., Ren, P., Chen, Z., Yin, D., and Ren, Z. Is ChatGPT good at search? investigating large language models as re-ranking agents. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2023.
- Thakur, N., Reimers, N., Rüchlé, A., Srivastava, A., and Gurevych, I. BEIR: A heterogeneous benchmark for zero-shot evaluation of information retrieval models. In *Thirty-fifth Conference on Neural Information Processing Systems, Datasets and Benchmarks Track*, 2021.
- van den Oord, A., Li, Y., and Vinyals, O. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*, 2018.
- Wang, L., Yang, N., Huang, X., Yang, L., Majumder, R., and Wei, F. Improving text embeddings with large language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (ACL)*, 2024.
- Wang, Z., Wen, W., Ji, Q., Chen, K., Qiao, R., and Sun, X. Skill is not document: Query-conditioned compatibility for LLM agent skill routing. *arXiv preprint arXiv:2606.03565*, 2026.
- Xu, R. and Yan, Y. Agent skills for large language models: Architecture, acquisition, security, and the path forward. *arXiv preprint arXiv:2602.12430*, 2026.
- Yang, A., Li, A., Yang, B., et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- Yang, J., Jimenez, C. E., Wettig, A., Lieret, K., Yao, S., Narasimhan, K., and Press, O. SWE-agent: Agent-computer interfaces enable automated software engineering. In *Advances in Neural Information Processing Systems*, 2024.
- Zhang, Y., Li, M., Long, D., Zhang, X., Lin, H., Yang, B., Xie, P., Yang, A., Liu, D., Lin, J., Huang, F., and Zhou, J. Qwen3 embedding: Advancing text embedding and reranking through foundation models. *arXiv preprint arXiv:2506.05176*, 2025.
- Zheng, Y., Zhang, Z., Ma, C., Yu, Y., Zhu, J., Wu, Y., Xu, T., Dong, B., Zhu, H., Huang, R., and Yu, G. Skillrouter: Skill routing for LLM agents at scale. *arXiv preprint arXiv:2603.22455*, 2026.
- Zhuang, S., Liu, B., Koopman, B., and Zuccon, G. Open-source large language models are strong zero-shot query likelihood models for document ranking. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, 2023.

Appendix

The organization of the appendix is as follows:

- Appendix A: We present three read-outs that lean further on the backbone’s native machinery, each of which fails, and describe how each failure informs the adopted design.
- Appendix B: We describe how the read-out layer ℓ^* is selected.
- Appendix C: We provide the training details of the two projections W_q and W_s .
- Appendix D: We provide the ε -cover compression procedure for the key banks and prove its guarantees on score distortion and bank size.
- Appendix E: We rebuild the full pipeline on a Gemma backbone of comparable size to test the method beyond the Qwen family.
- Appendix F: We provide additional ablations, including progressive disclosure over full skill bodies (F.1), the removal of a single verdict signal (F.2), and the replacement of the glance with an off-the-shelf embedder (F.3).
- Appendix G: We reproduce every prompt template used in the experiments verbatim.
- Appendix H: We provide benchmark details, including examples of under-annotated golds (H.1), raw scores and the agreement between the judge and human labels (H.2), the candidate-pool recall of every retrieval stage (H.3), and the construction of SkillTraj (H.4).
- Appendix I: We walk through transcripts from the Skill-Use rollouts.
- Appendix J: We analyze the cost of skill routing per session.
- Appendix K: We discuss the gate and routing behind a cloud API.

A. Native read-outs that fail

The glance reads $\mathcal{M}$ through two trained maps and aggregates the per-token scores under a hand-crafted decay w_i , rather than through machinery the model already owns. This appendix records three alternatives that lean further toward the native machinery. Each fails, and each failure fixes one piece of the adopted design.

Native attention keys as the matching space. Attention already computes token-level query-key matches, so the most native glance would use them directly, indexing a skill by the pre-rotary keys the backbone’s own heads assign to its tokens and matching the task’s native queries against that bank. Without training, the best of 24 configurations of head selection, low-rank whitening, and aggregation reaches Hit@1 .001 on the SkillRet validation library of 10,123 skills, against .918 for the trained glance head, and exact zeros on SRA-Bench, where even its recall at 20 falls below random ranking. Most of the loss comes from calibration, since native scores are not comparable across documents encoded in separate sequences. Restricted to a 20-candidate shortlist, the same read-out scores .099, twice in-pool chance. Training a mixer over per-head scores does not repair it. The mixture becomes a usable shortlist reranker but drops 7.6 points when asked to rank the full library, and its weights are library-bound, losing 1.2 points on the library they were fitted on and 24 on another. Equal-weight and non-negative mixtures collapse further, which rules out negative weights as the cause. The native keys do carry a real signal, one to two orders of magnitude too faint. The best single head reaches .084 alone, and the ranking of heads is stable across libraries, yet no a priori criterion finds the good ones (the head placing the most attention mass on the gold document ranks 29th by retrieval). Trained projections are what turn this signal into a usable one.

Initializing from native heads. The trained head still needs an initialization and a shape, and the native machinery might supply both, stacking the query and key maps of six strong native heads up to the glance’s dimension as the initialization of W_q and W_s , or keeping six separate heads whose scores average. On the SkillRet validation library, native initialization ends 0.7 points below random initialization, the multi-head shape 0.6 points below the single wide head, and the two combined lose 4.6. Selecting which heads to stack contributes nothing either, as six randomly chosen heads beat the six the mixer above weights highest by 1.3 points. The glance head is therefore a single map, randomly initialized.

Trained retrieval tokens. The decay w_i in the vote of Section 3.2 is the one hand-crafted piece of the glance, and native attention is the natural candidate to replace it: append 64 trained retrieval tokens to the context, let each aggregate the preceding tokens through the backbone’s own attention, pass their hidden states through W_q , and average their votes. Trained on the same corpus as the glance, the tokens learn a recency read-out instead, settling their attention on the most recent stretch of context rather than allocating it by content. We attribute this more to the data than to the idea. The plentiful supervision consists of clean single-turn requests, where the recent context is the task and recency is a sufficient policy, so nothing forces the tokens to allocate attention selectively, yet the router must survive contexts whose trigger sits buried mid-history. We therefore keep the hand-crafted decay, and leave learned aggregation, trained on data that rewards selectivity, to future work.

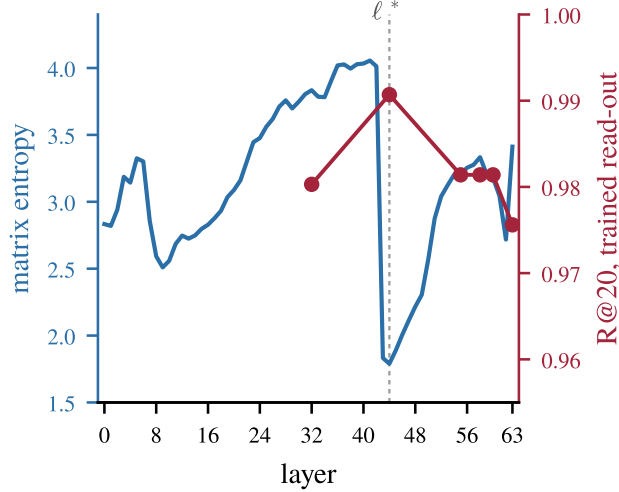


Figure 7 | Selecting ℓ^* . Left axis: matrix-based entropy of the token states of a rendered skill, median over 500 skills, sink token removed. Right axis: R@20 of the read-out trained at each of six candidate depths, on the validation queries. The trained scan peaks at the entropy floor the unsupervised criterion picks.

B. Layer selection

We locate ℓ^* with a criterion measured on our own backbone and corpus. For one rendered skill, let Z stack its layer- ℓ token states. The matrix-based entropy $S_1 = -\sum_k p_k \log p_k$ over the normalized spectrum $p = \lambda(ZZ^\top)/\text{tr}(ZZ^\top)$ measures how many directions the states occupy (Skean et al., 2025). A massive-activation token dominates this spectrum wherever it appears, turning the entropy into a measure of the sink rather than the representation (Queipo-de Llano et al., 2026); since the spans the glance reads never contain that token, we drop the top-norm token before taking the spectrum. Figure 7 plots the median over 500 skills in the render $r(s)$. The entropy climbs through the first two thirds of the depth, collapses from 4.01 to 1.83 across a single block, bottoms out at layer 44 of 64, the output of block 45 (roughly 70% depth), and recovers toward the output. We set $\ell^* = 44$.

A trained scan then checks the choice against retrieval. At each of six candidate depths (layers 32, 44, 55, 58, 60, 63) we train W_q and W_s under one frozen recipe and rank the full library for the validation queries. Layer 44 comes first on R@20 (Figure 7).

Run zero-shot, the same comparison inverts. By raw cosine over span-pooled states of the same render on a 4,000-document library, layer 44 is the second-worst of the 34 depths we banked (R@20 .503, against .916 at layer 60), and the spread across depths is 44 points. Embedding read-outs peak in the compression phase (Skean et al., 2025). Here they do so only through trained projections, as raw similarity cannot read the compressed states.

C. Training details

The two projections W_q and W_s are 768×5120 matrices without bias, 7.9M parameters in all, initialized at random. Both are trained on the SkillRet training split with the loss of Section 3.2 at a fixed temperature $\tau = 40$, in fp32, with AdamW at a constant learning rate of 10^{-3} and weight decay 0.01 for 24,000 steps. Gradients stop at the backbone’s states, which are computed once and stored. A step packs tasks until their gold and negative skills reach a budget of 200K tokens, at most 256 tasks, with negatives sampled from the rest of the library at every step. During training a skill contributes at most 8,192 tokens of keys; at evaluation the only truncation is the 30,720-token serving budget (Appendix G). After the banks are compressed, W_q alone is fine-tuned for a further

3,000 steps against the compressed keys under the same loss and optimizer at a learning rate of 10^{-4} , chosen on the validation split, with W_s and the banks frozen. On the written-task benchmarks the vote weights w_i of Eq. (3) are uniform, and the decay of Section 4.3 applies only mid-rollout.

D. Compression guarantees

Throughout, $D = \{d_1, \dots, d_n\}$ is the key set of one skill, every $\|d_j\| = 1$, and distances are Euclidean. A subset $C \subseteq D$ is an ε -cover of D if every $d \in D$ has some $c \in C$ with $\|d - c\| \leq \varepsilon$, and ε -separated if $\|c - c'\| \geq \varepsilon$ for all distinct $c, c' \in C$. The covering number $N_\varepsilon(D)$ is the smallest size of an ε -cover of D by its own points, and the packing number $\mathcal{P}_\varepsilon(D)$ the largest size of an ε -separated subset.

Proof of Proposition 1. The upper bound holds because $C_s \subseteq D_s$, so the max on the left ranges over a subset. For the lower bound, let d^* attain $\max_{d \in D_s} \langle q, d \rangle$ and let $c \in C_s$ cover it, $\|d^* - c\| \leq \varepsilon$. By Cauchy–Schwarz,

$$\langle q, c \rangle = \langle q, d^* \rangle - \langle q, d^* - c \rangle \geq \langle q, d^* \rangle - \|q\| \|d^* - c\| \geq \max_{d \in D_s} \langle q, d \rangle - \varepsilon. \quad \square$$

The bound carries through the vote of Eq. (3). Fix a task x with weights w_i and $W = \sum_i w_i$, and write $\tilde{m}_i(s)$, $\tilde{\mathcal{T}}_i$ and $\tilde{g}(s|x)$ for the score, top- k set and vote computed over ε -covers of every bank. For a skill s let $a_i(s)$ be the k -th largest of $\{m_i(s') : s' \neq s\}$, and let $B_x(s) = \{i : |m_i(s) - a_i(s)| \leq \varepsilon\}$ be the tokens on which s sits within ε of the top- k boundary.

Corollary 1 (Vote stability). *For every task x , skill s and $\varepsilon \leq 1$,*

$$|\tilde{g}(s|x) - g(s|x)| \leq \varepsilon + \frac{1}{W} \sum_{i \in B_x(s)} w_i.$$

In particular, when $B_x(s)$ is empty, so that s clears every token’s top- k boundary by more than ε , membership is unchanged and $g(s|x) - \varepsilon \leq \tilde{g}(s|x) \leq g(s|x)$, so compression lowers the vote by at most ε and never raises it.

Proof. Proposition 1 applied to every skill gives $m_i(s') - \varepsilon \leq \tilde{m}_i(s') \leq m_i(s')$ for all i and s' . Take $i \notin B_x(s)$. If $m_i(s) > a_i(s) + \varepsilon$, then $s \in \mathcal{T}_i$, and $\tilde{m}_i(s) \geq m_i(s) - \varepsilon > a_i(s)$ still exceeds the k -th largest compressed score among the other skills, which can only have fallen, so $s \in \tilde{\mathcal{T}}_i$. If instead $m_i(s) < a_i(s) - \varepsilon$, then $s \notin \mathcal{T}_i$, and the k other skills scoring at least $a_i(s)$ still score at least $a_i(s) - \varepsilon > m_i(s) \geq \tilde{m}_i(s)$ after compression, so $s \notin \tilde{\mathcal{T}}_i$. Membership is therefore unchanged off $B_x(s)$, and there the term $w_i m_i(s)$, when present, falls by at most εw_i and never rises, since $\tilde{m}_i(s) \leq m_i(s)$. On $B_x(s)$ a term may appear or vanish, moving by at most w_i since every score is an inner product of unit vectors, or change by at most $\varepsilon w_i \leq w_i$. Summing over i and dividing by W gives the bound. $\square$

The bound is a worst case. Cauchy–Schwarz is tight in Proposition 1 only when q is collinear with $d^* - c$, which for unit vectors forces $\langle q, d^* \rangle \leq \varepsilon/2$, a key that barely matches the query to begin with. On the tokens that decide a routing, q lies close to its best key d^* , and there $\langle q, d^* - c \rangle \approx 1 - \langle d^*, c \rangle = \|d^* - c\|^2/2 \leq \varepsilon^2/2$, which is 0.34 at the $\varepsilon = 0.83$ of Section 4.1 against the linear 0.83, in line with the cost of at most 1.6 points reported there.

Proposition 2 (Bank size). *The traversal returns a C_s that is simultaneously an ε -cover and ε -separated (retained keys are pairwise at least ε apart), hence $N_\varepsilon(D_s) \leq |C_s| \leq \mathcal{P}_\varepsilon(D_s)$, where N_ε and $\mathcal{P}_\varepsilon$ are the covering and packing numbers of D_s at scale ε .*

Proof of Proposition 2. The traversal stops precisely when every key of D_s lies within ε of the retained set, so C_s is an ε -cover. For separation, consider the moment a key was retained. It was the farthest key from the set retained so far, and the traversal had not yet stopped, so its distance to every earlier key was at least ε . Applying this to the later of any two retained keys shows C_s is ε -separated. The size bounds then follow from the definitions: an ε -cover has at least $N_\varepsilon(D_s)$ points, and an ε -separated subset at most $\mathcal{P}_\varepsilon(D_s)$. $\square$

We remark that the two ends of the bracket are within one scale factor of each other, $\mathcal{P}_{2\varepsilon}(D) \leq N_\varepsilon(D) \leq \mathcal{P}_\varepsilon(D)$: a maximal ε -separated set is already an ε -cover, since a key farther than ε from all of it could be added; and a ball of radius ε contains at most one point of a 2ε -separated set.

E. A non-Qwen backbone

Every number in the body of the paper reads a Qwen backbone. This appendix rebuilds the pipeline end to end on gemma-4-31b-it (Gemma Team, 2026), a backbone of comparable size from a different family, with a different chat template, interleaved sliding-window attention, and logit soft-capping. Nothing is transferred from the Qwen build. The read-out depth is selected anew on SkillRet validation and lands at block 34 of the model’s 60, the projections are retrained with the recipe of Section 4.1, the cover radius is refit on the training split at $\varepsilon = 0.77$, and the exchange rates $(\alpha, \gamma) = (0.15, 0.003)$ are recalibrated on the validation split. The pair sits well below the Qwen values of Section 4.1 because the exchange rates absorb the scale of the signals they convert. Among the twenty candidates a validation query shortlists, both verdict read-outs spread about three times wider on Gemma than on Qwen3-32B (median within-query standard deviation 14.8 against 4.5 nats for V , 0.75 against 0.23 nats per token for L), while the glance spreads about the same (0.061 against 0.052), so a coefficient a third the size carries the same weight. The three benchmarks are then scored as in Section 4.2, by the same judge under the same rule.

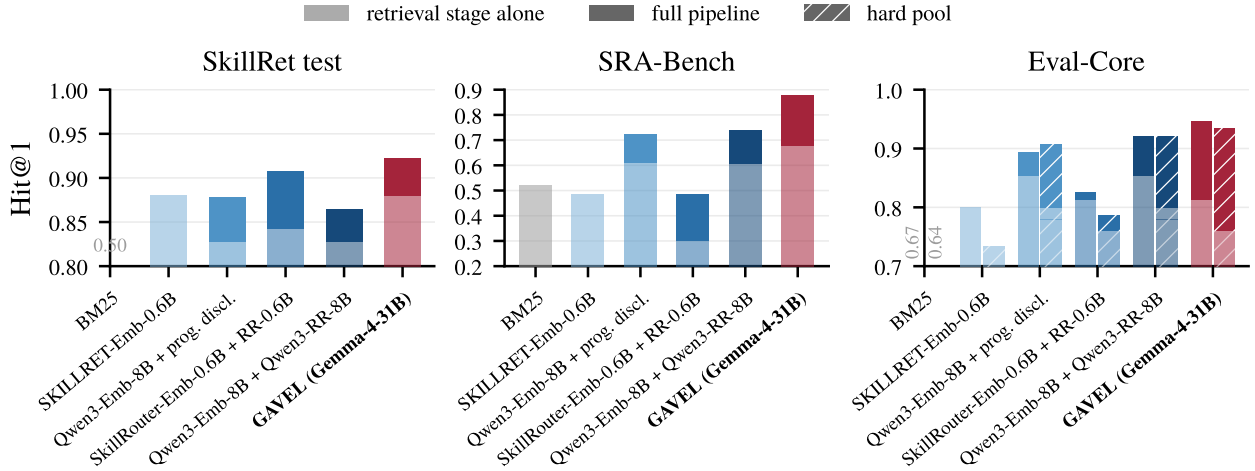


Figure 8 | The comparison of Figure 3 with the routing backbone changed to Gemma-4-31B. The baselines do not involve that backbone, so their bars carry over from Figure 3; the rebuilt parts are GAVEL itself and the in-context picker of progressive disclosure. Bars read as before, light fill for the retrieval stage alone, dark fill for the full pipeline, hatched for Eval-Core’s hard pool, and a below-range BM25 score printed in place of its bar.

Figure 8 shows the result. The shape survives the family change, and GAVEL again posts the highest adjudicated score on all three benchmarks. Compressing the skill banks changes its SkillRet and

SRA-Bench scores by at most 0.7 points.

F. Additional ablations

F.1. Progressive disclosure over full skill bodies

The progressive-disclosure baseline of Section 4.2.1 shows the agent twenty names and descriptions. Here we rerun it with the menu expanded: the shortlist and the picker are unchanged, but each entry now carries the full SKILL.md below its metadata, so the agent reads twenty complete skills before answering with an index. With Qwen3-32B’s window extended to 131K tokens by YaRN, the twenty bodies fit for every query of every benchmark; the longest prompt is 124K tokens. Table 2 gives the scores.

Table 2 | Progressive disclosure picking from the twenty full skill bodies, against the metadata menu of Figure 3 and GAVEL, under the same retrieval front end, picker, and judge.

	SkillRet test		SRA-Bench		Eval-Core easy		Eval-Core hard	
	raw	adj.	raw	adj.	raw	adj.	raw	adj.
Metadata menu	.6526	.8635	.5633	.6434	.5467	.9067	.5467	.8933
Full-body menu	.6510	.8417	.6353	.7131	.5867	.9067	.5333	.8667
GAVEL	.8459	.9460	.8223	.8734	.6933	.9467	.6933	.9333

The bodies help only on SRA-Bench, whose entries are procedural web pages with uninformative titles; there both scores rise by seven points. On SkillRet the adjudicated score falls by 2.2 points, and on Eval-Core the changes amount to one to three queries. GAVEL stays 16 adjudicated points ahead on SRA-Bench and 10 on SkillRet. Missing information does not explain the remaining errors: on SkillRet the gold’s complete body is in the prompt for 92% of the queries, and the picker chooses another skill in 29% of them. The context cost, meanwhile, is large. The median prompt grows from 1.3K tokens to 28K–52K, and a single pick takes 26 to 124 seconds of prefill.

F.2. Dropping one verdict signal

The ablation of Figure 4 that commits to V alone removes the glance and the likelihood together. Here we remove one verdict signal at a time from the ruling of Eq. (6), leaving the glance, its shortlist, and the compressed banks as they are, so that $g + \alpha L$ rules on the likelihood alone and $g + \gamma V$ on the judgment alone. Table 3 reports both beside the glance alone and the full ruling, with SkillTraj pooled over its 372 trajectories.

Table 3 | Dropping one verdict signal from the ruling, with the glance alone and the full ruling for reference.

	SkillRet test		SRA-Bench		Eval-Core easy		Eval-Core hard		SkillTraj	
	raw	adj.	raw	adj.	raw	adj.	raw	adj.	raw	adj.
Glance alone (g)	.7681	.8725	.6272	.6957	.6800	.8933	.6400	.8667	.7043	.7366
$g + \alpha L$	.8241	.9266	.7758	.8153	.7333	.8400	.7200	.8133	.7769	.8172
$g + \gamma V$	.6870	.8981	.7561	.8351	.6667	.9067	.6533	.8933	.7769	.8253
GAVEL ($g + \alpha L + \gamma V$)	.8459	.9460	.8223	.8734	.6933	.9467	.6933	.9333	.8253	.8710

The full ruling scores highest on every benchmark, ahead of the better single-signal variant by 1.9 adjudicated points on SkillRet, 3.8 on SRA-Bench, 4.6 on SkillTraj, and three queries on each

Eval-Core pool. The two signals do not lift the glance evenly. The judgment raises it on every library, whereas the likelihood raises it by 5.4 points on SkillRet, 12.0 on SRA-Bench, and 8.1 on SkillTraj but lowers it by four queries on each Eval-Core pool. Which single signal is worth more depends on the library. The likelihood carries SkillRet, whose queries spell out the task in enough detail for the right skill to anticipate them closely, whereas the judgment carries SRA-Bench and SkillTraj, where the question is whether a procedural page or a mid-rollout state calls for the skill, which the model answers better when asked than when made to predict the task’s wording. The two signals miss different queries, and the product of experts keeps the union of what each gets right.

F.3. Replacing the glance with an off-the-shelf embedder

The Jina-ColBERT-v2 variant of Figure 4 replaces the glance with a late-interaction retriever and loses on every benchmark. Here the replacement is Qwen3-Embedding-8B, the largest retrieval stage of Figure 3. It nominates the twenty candidates and its cosine similarity stands in for g in the ruling of Eq. (6), with (α, γ) calibrated on the validation split exactly as ours are, while the verdict passes are unchanged. Table 4 reports the variant beside the embedder alone, the embedder followed by Qwen3-Reranker-8B as in Figure 3, the glance alone, and the full ruling, with SkillTraj pooled over its 372 trajectories and the embedder given the last message, as in Figure 5.

Table 4 | Replacing the glance with Qwen3-Embedding-8B, with the embedder alone, the embedder under Qwen3-Reranker-8B, the glance alone, and the full ruling for reference.

	SkillRet test		SRA-Bench		Eval-Core easy		Eval-Core hard		SkillTraj	
	raw	adj.	raw	adj.	raw	adj.	raw	adj.	raw	adj.
Qwen3-Emb-8B alone	.6540	.8273	.5528	.6074	.5600	.8533	.5200	.8000	.5511	.5806
+ Qwen3-Reranker-8B	.6918	.8645	.6458	.7398	.6667	.9200	.6533	.9200	.6774	.6935
+ verdict	.7232	.9168	.7956	.8513	.6400	.9333	.6400	.9200	.7339	.7796
Glance alone (g)	.7681	.8725	.6272	.6957	.6800	.8933	.6400	.8667	.7043	.7366
GAVEL	.8459	.9460	.8223	.8734	.6933	.9467	.6933	.9333	.8253	.8710

The verdict lifts the embedder’s shortlist by 9.0 adjudicated points on SkillRet, 24.4 on SRA-Bench, and 19.9 on SkillTraj, and on that same shortlist it outscores Qwen3-Reranker-8B on every benchmark, by 5.2, 11.2, and 8.6 points on the three larger libraries. The variant nevertheless stays behind GAVEL on every benchmark, by 2.9 adjudicated points on SkillRet, 2.2 on SRA-Bench, one query on each Eval-Core pool, and 9.1 on SkillTraj, where the embedder has to be handed the last message while the glance reads the rollout as it goes.

The glance’s edge over the embedder goes beyond this margin, since the two draw their signal from different places. An embedder is a second model that has to run its own forward pass over every task before it can rank anything, whereas the glance reads the states the agent produces as it decodes, so the shortlist costs one sweep of the head over the bank and nothing more. The embedder also stays what it was trained to be, while the glance is read out of the agent and climbs with its size (Section 4.5). The prospect this opens is an agent capable enough that the glance alone settles the routing, the whole library ranked in passing by the model already at work on the task, with no verdict behind it at all.

G. Prompt templates

This appendix collects the prompts the experiments run: the three templates GAVEL feeds the backbone, the two baseline forms that place skill text in the context instead, and the prompt of the adjudicated Hit@1. Placeholders stand in braces. Every template is wrapped in the backbone’s chat template in non-thinking mode, whose control tokens are shown where their exact position matters.

The skill render $r(s)$

```
<|im_start|>user
Here is an agent skill (SKILL.md):
name: {name}
description: {description}
{body}
Here is a user task:
```

At installation the glance runs one forward pass over this render and stores a key for every token of the metadata header and body. The body enters in full; the only truncation is the 30,720-token serving budget.

The task render

```
<|im_start|>user
{task}<|im_end|>
<|im_start|>assistant
<think>
</think>
```

On the written-task benchmarks the glance reads the task tokens’ states from this render. Mid-rollout there is no template of ours: the glance reads the live context exactly as the harness renders it.

The verdict continuation

```
<|im_start|>user
Here is an agent skill (SKILL.md):
name: {name}
description: {description}
{body}
Here is a user task: {task}
Does this skill provide what that task needs? Answer yes or no:<|im_end|>
<|im_start|>assistant
<think>
</think>
```

The continuation extends $r(s)$ token for token. L is the mean log-likelihood over the task span, and V is read at the final position with spelling sets $\mathcal{Y} = \{\text{yes}, \text{Yes}, \text{YES}\}$ and $\mathcal{N} = \{\text{no}, \text{No}, \text{NO}\}$, each spelling taken with and without a leading space, all single tokens in the backbone’s vocabulary.

Progressive disclosure: the metadata menu

```
{task}
Here is the list of agent skills available to you. Each line is one skill, written as 'index.  name:
description'.
1. {name}: {description}
2. {name}: {description}
...
Which one of the skills above should be loaded to do this task? Reply with its index number and nothing
else.
```

Descriptions enter untruncated. On the written-task benchmarks the arm decodes greedily and commits to the first in-range integer in the output; a reply that names no candidate counts as a miss. On SkillTraj the trajectory context stands in for the task, the labels widen to zero-padded 01–20 so that none is a prefix of another, the prompt closes with Answer: , and decoding is constrained to the label tokens, so the arm always commits to a candidate.

Ablation: the skill body in the generation

```
{task}
Here is an agent skill (SKILL.md):
name: {name}
description: {description}
{body}
Does this skill provide what that task needs? Answer yes or no:
```

The variant of Section 4.2.2 reads from this reversed order the mean log-likelihood of the body span and the same yes/no log-odds at the final position.

The adjudication prompt

You are judging a skill-routing decision for an AI coding agent.
Below is a task, followed by two candidate skill documents, A and B. Exactly one of them will be loaded FIRST to help the agent carry out this task.
Decide which skill is the better first choice for THIS task.
Rules:

- Judge by whether the skill provides the specific capability the task actually needs -- not by topical similarity, writing quality, or document length.
- Honor hard requirements stated in the task (required tools or libraries, data access, output formats, explicit instructions). A skill that cannot satisfy them cannot win.
- A skill that is merely about the task's topic but cannot perform the needed work loses to one that can.
- The task may need several skills overall; judge only which of these two is the more useful FIRST pick.
- Answer "tie" if both serve the task about equally well -- including the case where the two documents are near-identical copies of the same skill.

```
[TASK]
{task}
[SKILL A]
name: {name_a}
description: {desc_a}
```

```
{body_a}
[SKILL B]
name: {name_b}
description: {desc_b}
{body_b}
Answer with a single JSON object and nothing else:
{"winner": "A" | "B" | "tie", "reason": "<one sentence>"}
```

The judge fills A with the committed skill and B with a gold, then once more with the roles swapped, and is never told which side is which.

H. Benchmark details and disclosures

Section 4.2 scores every router by adjudicated Hit@1. This appendix shows the under-annotation that calls for it, pairs every adjudicated score with its raw one, checks the judge against human labels, reports the candidate-pool recall of every retrieval stage, and details the construction of SkillTraj. Eval-Core is scored on both pools its authors ship, the easy pool of 78,361 documents and the hard pool, which adds 780 adversarial distractors to it.

H.1. Under-annotated golds: examples from all three benchmarks

The three libraries are collected from public skill repositories and the open web, where the same capability routinely exists as more than one document. The gold annotations name one of them, and a router that returns a different but fully adequate skill is counted wrong by raw Hit@1. The three examples below, one per benchmark, show what such a miss looks like; how far raw Hit@1 sits below the adjudicated score is reported system by system in the next subsection.

The mildest form is a library that holds the same skill twice. The SkillRet library contains two skills named mcp-builder, scraped from the repositories @xenitV1/Antigravity-Workflows and @jscraik/Agent-Skills, and the annotation lists only the former. For the query below our router returns the other one, and the judge prefers it in both orders, calling the annotated gold “generic” with “outdated transport guidance”.

SkillRet: two copies of one skill, one annotated

Query (q-00425)

I want to create a server that exposes our internal “FieldNotes” geospatial survey dataset (stored in PostGIS) so that Claude and other LLM-based agents can query it through the Model Context Protocol. [...] Can you design the full MCP server architecture for this — including which capabilities should be tools vs. resources, how to structure the URI scheme for individual records, input validation best practices for the geo queries, proper error handling patterns, and a reference implementation in TypeScript

Annotated gold

name: **mcp-builder**
description: MCP (Model Context Protocol) server building principles. Tool design, resource patterns, best practices.

Committed skill (counted as a raw miss)

name: **mcp-builder**

description: Create MCP (Model Context Protocol) servers that enable LLMs to interact with external services through well-designed tools, resources, and prompts. [...]

SRA-Bench pads its 636 curated skills with 25,626 documents crawled from the web, meant as distractors, and only the curated set is annotated. The distractors are real skill documents, and some of them serve the tasks. The task below asks for an SVM classification with scikit-learn. Its golds are a scikit-learn reference and a guide to Python’s warnings module from the curated set; our router returns a scikit-learn skill from the distractor pool, and the judge sides with it in all four comparisons.

SRA-Bench: an adequate skill among the distractor documents

Query (bigcodebench_00859)

Perform an **SVM classification** of the iris dataset and warn if the accuracy is less than 0.9. The warning action is set to ‘always’. The test size for the train-test split is 0.33. [...the function signature and output contract follow]

Annotated golds

name: **scikit-learn** — Practical Reference for Preprocessing, Regression, Clustering, and Vectorization

description: Guide for correct sklearn API usage: scalers, PCA, regression, clustering, text vectorization, and common pitfalls.

name: warnings — simplefilter, warn, glob extensions, shutil.move

description: Guide for Python warnings module: simplefilter placement, conditional flags, file transfer error patterns, and distinction from logging.warning.

Committed skill (web_22564, counted as a raw miss)

name: **scikit-learn**

description: The industry standard library for machine learning in Python. Provides simple and efficient tools for predictive data analysis, covering classification, regression, clustering, dimensionality reduction, model selection, and preprocessing.

The extreme form is a verbatim copy. In Eval-Core’s 78K pool the gold skill for the task below, rdkit, appears a second time under a different identifier. The two documents share their description word for word and their bodies differ only marginally (4-gram Jaccard .92). Our router returns the copy, raw Hit@1 counts a miss, and the judge’s verdict on the pair opens with “Both documents provide essentially identical RDKit guidance”.

Eval-Core: a verbatim copy of the gold in the pool

Query (find-topk-similar-chemicals, sic)

Find the top k similar chemicals in molecules.pdf to any chemicals you are given. For converting chemical names into molecular representations, you need to use an external chemistry resources like PubChem or RDKit. For computing similarity, use Morgan fingerprints with Tanimoto similarity (radius = 2, include chirality). [...]

Annotated gold (gt/rdkit)

name: **rdkit**

description: Cheminformatics toolkit for fine-grained molecular control. SMILES/SDF parsing, descriptors (MW, LogP, TPSA), fingerprints, substructure search, 2D/3D generation, similarity, reactions. [...]

Committed skill (development/rdkit-sanand0-scientific-research, counted as a raw miss)

name: **rdkit**

description: identical, word for word.

H.2. Adjudication: raw scores and human agreement

Tables 6–8 pair every adjudicated score plotted in Figures 3, 4 and 5 with the same system’s raw Hit@1, which credits only the annotated golds. Adjudication lifts every system, and on every benchmark it lifts a baseline more than GAVEL. Progressive disclosure gains 21.1 points on SkillRet and 36.0 on Eval-Core easy against GAVEL’s 10.0 and 25.3, and on SRA-Bench the 8B pipeline gains 9.4 against 5.1. The comparisons the paper rests on do not depend on the judge either. In every column of the three tables the raw Hit@1 of the full GAVEL pipeline is above every other row’s, the four ablated variants included. The judge sees only the task and the two documents, and a top-1 matching an annotated gold is credited without a judge call.

We validate the judge against human annotation on 200 pairs, and the two agree on the credit decision on 171 of them (86%). The unit is one judged pair, a task together with the non-gold skill a system committed and one annotated gold, which the judge compared in both orders. Aggregating the two orders sorts each pair into three classes, depending on whether the committed skill wins more orders than the gold, the two split or tie, or the gold wins more. We stratify the judged pairs by benchmark and by this verdict and draw 200 of them, 50 per benchmark, balanced across the three classes as far as the class counts allow. SkillTraj has only 14 pairs where the judge prefers the committed skill, and the shortfall goes to the largest class. The authors label the pairs under the judge’s own instructions, seeing only the task and the two skills in randomized order, blind to which is the annotated gold and to what the judge said, and pick the better first load or call them equal. Table 5 cross-tabulates the two verdicts.

Table 5 | Human agreement with the adjudicating judge on 200 pairs, stratified by benchmark and by the judge’s verdict. Rows are the judge’s two-order verdict on a (task, committed skill, gold) pair; columns are the authors’ blind verdict on the same pair.

Judge’s verdict	<i>n</i>	Human verdict			agreement
		committed	equal	gold	
Committed skill better	65	42	18	5	.646
Equal	68	16	38	14	.559
Gold better	67	3	7	57	.851

Where the two disagree they rarely point in opposite directions. On the 132 pairs where the judge picked a side, the human label lands on the opposite side 8 times. Of the 68 pairs the judge tied, the annotators tie 38 and give 14 to the gold, and since the crediting rule counts a tie as credit, those 14 are credited against the human label. In all, the annotators would withhold credit on 19 pairs the judge credited and grant it on 10 the judge withheld, a lean toward generosity of 9 pairs in 200. We treat the human labels as a check on the judge and no more. A skill document runs to thousands of

Eliciting Native Skill Routing from a Frozen LLM

tokens of instructions, scripts, and reference material, and whether it serves a task can turn on a detail deep in the body that an annotator reads less closely than the model does, so a disagreement does not by itself say which side erred.

Table 6 | Raw Hit@1 beside the adjudicated scores of Figure 3. Indented rows are the retrieval stage committing its top-1 alone, the light bar segments of the figure.

	SkillRet test		SRA-Bench		Eval-Core easy		Eval-Core hard	
	raw	adj.	raw	adj.	raw	adj.	raw	adj.
BM25	.3786	.5007	.4820	.5226	.5600	.6667	.5200	.6400
SKILLRET-Emb-0.6B	.7699	.8797	.4204	.4855	.6267	.8000	.5733	.7333
Qwen3-Emb-8B + prog. discl.	.6526	.8635	.5633	.6434	.5467	.9067	.5467	.8933
<i>retrieval stage alone</i>	.6540	.8273	.5528	.6074	.5600	.8533	.5200	.8000
SkillRouter-Emb-0.6B + RR-0.6B	.8301	.9077	.4135	.4866	.6667	.8267	.6133	.7867
<i>retrieval stage alone</i>	.7416	.8427	.2462	.3031	.6000	.8133	.5333	.7600
Qwen3-Emb-8B + Qwen3-RR-8B	.6918	.8645	.6458	.7398	.6667	.9200	.6533	.9200
<i>retrieval stage alone</i>	.6540	.8273	.5528	.6074	.5600	.8533	.5200	.8000
GAVEL (ours)	.8459	.9460	.8223	.8734	.6933	.9467	.6933	.9333
<i>retrieval stage alone</i>	.7681	.8725	.6272	.6957	.6800	.8933	.6400	.8667

Table 7 | Raw Hit@1 beside the adjudicated scores of Figure 4. Every row is the full pipeline with one design choice replaced.

	SkillRet test		SRA-Bench		Eval-Core easy		Eval-Core hard	
	raw	adj.	raw	adj.	raw	adj.	raw	adj.
GAVEL (reference)	.8459	.9460	.8223	.8734	.6933	.9467	.6933	.9333
Glance → Jina-ColBERT-v2	.5968	.7803	.6690	.7096	.6400	.8533	.6400	.8400
Product of experts → pointwise rerank	.4068	.7170	.6109	.7201	.5333	.8267	.5333	.8400
Verdict → skill body in generation	.7835	.9081	.7108	.7782	.6800	.8400	.6800	.8400
Verdict → progressive disclosure	.7354	.9001	.5958	.6945	.6000	.8800	.6000	.8667

H.3. Candidate-pool recall of the retrieval stages

Table 9 reports every retrieval front end of Figures 3 and 4 on its own: raw Hit@1 of its top-1, and R@20, the fraction of queries whose top-20 candidate pool contains an annotated gold. A second stage only reorders this pool, so R@20 caps the raw Hit@1 of any pipeline built on the front end. Both columns credit annotated golds only, and outside Eval-Core, where 75 queries leave more room for chance, they order the front ends largely the same way.

H.4. SkillTraj: construction and examples

Each trajectory starts from its gold skill, drawn from the held-out SkillRet library of 6,660 with at most two trajectories per skill. GPT-5.6 Sol then writes the full dialogue against a scenario brief. The setting is a plain tool-using assistant whose system prompt lists no skills; a trajectory spans two to eight user turns and up to five tool calls with their results. Alongside the dialogue the generator returns machine-checkable anchors, the marked routing point and, when that point sits inside an assistant message, the verbatim sentence that creates it. Both are verified programmatically. The

Eliciting Native Skill Routing from a Frozen LLM

Table 8 | Raw Hit@1 beside the adjudicated scores of Figure 5, per scenario.

	user request		tool evidence		agent plan		wrong-skill recovery	
	raw	adj.	raw	adj.	raw	adj.	raw	adj.
SkillRouter-Emb-0.6B + RR-0.6B								
<i>full context</i>	.4741	.4828	.1132	.1226	.2095	.2095	.2000	.2000
<i>last message</i>	.8621	.8707	.3019	.3396	.4286	.4381	.6667	.6667
Qwen3-Emb-8B + Qwen3-RR-8B								
<i>full context</i>	.6897	.7069	.4057	.4434	.4762	.4952	.5111	.5111
<i>last message</i>	.8707	.8793	.4717	.5094	.6762	.6857	.6667	.6667
Glance + prog. disclosure	.7500	.7586	.4528	.5283	.1429	.1524	.7556	.7778
GAVEL (ours)	.9483	.9655	.6509	.7264	.8476	.9048	.8667	.8889

Table 9 | Raw Hit@1 and top-20 candidate-pool recall of the retrieval stages behind Figures 3 and 4.

	SkillRet test		SRA-Bench		Eval-Core easy		Eval-Core hard	
	Hit@1	R@20	Hit@1	R@20	Hit@1	R@20	Hit@1	R@20
BM25	.3786	.6410	.4820	.8235	.5600	.7467	.5200	.7467
Jina-ColBERT-v2	.4156	.7226	.4483	.7445	.4667	.7867	.4533	.7867
SKILLRET-Emb-0.6B	.7699	.9680	.4204	.7008	.6267	.8933	.5733	.8933
SkillRouter-Emb-0.6B	.7416	.9490	.2462	.6225	.6000	.8133	.5333	.8000
Qwen3-Emb-8B	.6540	.9172	.5528	.9117	.5600	.8533	.5200	.8533
Glance (ours)	.7681	.9706	.6272	.9675	.6800	.8800	.6400	.8533

sentence must appear in the message exactly, and the prefix up to the routing point must tokenize identically to the full rendering, so the point is a real token position of the live context.

Admission is judged blind. The judge, Claude Sonnet 4.6, sees only prefixes truncated at the point under test, never the continuation, and the two views of a before-versus-after check are judged independently, in random order. The bar is the one stated in the main text. The need must exceed what a generic assistant can serve, or depend on the skill’s specific mechanisms, and the gold must solve it when shown among its nine nearest library neighbors with identities hidden; when the judge finds a neighbor that serves the need as well, the trajectory is dropped or the neighbor is recorded as a second gold. The leakage screen bans the gold’s name and its variants outright and flags long verbatim overlap with its body (n -gram and longest-common-substring screens over every message, tool argument, and tool result), sending flagged trajectories to a blind audit. A trajectory that fails any check is regenerated from scratch, never patched. The rest of this subsection walks the four scenarios, each with an excerpt from a real trajectory around its routing point.

User request. The need arrives inside a user message and the routing point closes that turn; across trajectories it ranges from the opening request to late in the dialogue. In the example below it lands three exchanges in, after the dialogue has built up context that has nothing to do with the skill:

User request

User: I'm organizing a two-day staff retreat for a 12-person nonprofit team. [...] Can you suggest a theme and a short tagline that feel warm but not cheesy?

[The assistant answers; two more exchanges polish the invitation and sketch the run-of-show.]

User: Now build the actual Obsidian .canvas file for this retreat, not a Mermaid diagram or an image. Return only the file contents. Use the native nodes-and-edges object structure, with separate group objects for Friday and Saturday placed before their contained items so the backgrounds stay underneath. [...] Connect the agenda in chronological order with side-specific anchors and arrowheads, including the overnight transition from Friday to Saturday.

◀routing point

Gold skill json-canvas — Create and edit JSON Canvas files (.canvas) with nodes, edges, groups, and connections. Use when working with .canvas files, creating visual canvases, mind maps, flowcharts, or when the user mentions Canvas files in Obsidian.

Tool evidence. A tool result reveals the need. The generator quotes the revealing span verbatim, and the judge reads the trajectory truncated just before and just after the result; the need must be absent in the first reading and present in the second. In the example the user's request, diagnosing a failed benchmark run, could still be ordinary debugging; the fetched report is what reveals a hard-exploration problem:

Tool evidence

[Two earlier exchanges cover the repository's setup and a passing test run.]

User: The overnight benchmark report is published at `metrics.example.net/runs/nightly-1842`. Diagnose why it missed the target, implement a concrete fix in this repository, and validate the change.

Assistant: I'll retrieve the benchmark record, then trace the relevant training path and apply the fix. *[calls]* `fetch_url`

Tool: Nightly run 1842 [...] Benchmark: Labyrinth-Key-Image-v1. Budget: 2,000,000 environment steps. Target: `success_rate ≥ 0.25`. Result: `success_rate = 0.00`. External reward: 0 on every transition except +1 after collecting a hidden key and reaching the locked exit. [...]

◀routing point

Gold skill exploration-strategies — Master ϵ -greedy, UCB, curiosity-driven, RND, intrinsic motivation exploration.

Agent plan. No new user or tool information intervenes; the agent's own working text spells out the sub-task in one sentence, and the routing point is that sentence's final token, in the middle of the message. The truncations at the sentence's two ends are judged as in tool evidence. In the example nothing the user asks calls for a skill on its own; the need appears when the agent decides its draft should fold in the team's recorded lessons:

Agent plan

User: Help me put together a 45-minute retrospective agenda for our billing migration rollout.
[The assistant proposes a structure and asks about attendees and tone.]

User: It'll be eight engineers, the PM, and our support lead. Keep it constructive and fairly direct. The rollout finished two weeks late, but there were no customer-facing outages.

Assistant: That group is small enough for a structured discussion [...] I'll keep the opening neutral, spend more time on the delay than on celebration, and end with a short list of owned actions. Before I finalize it, I should search the Markdown files in the vault's Areas/AI/Memory directory by both note text and frontmatter concept tags, then prioritize any billing-migration matches by importance so the retrospective incorporates the team's previously recorded lessons.
◀*routing point* [...]

Gold skill recall — Search Obsidian memories by keyword and concept.

Wrong-skill recovery. The user establishes the need, but the assistant misdiagnoses it and opens the SKILL.md of a wrong skill, sampled from the gold's nearest library neighbors with near-copies of the gold excluded; its body enters the context verbatim as the tool result. The assistant tries to apply it, fails, and writes a recovery sentence naming the capability it actually needs, which is the routing point. The judge additionally confirms that the document already in context cannot serve the need:

Wrong-skill recovery

[An earlier exchange names a git branch for the change at hand.]

User: Before I add a background job that retries failed invoice exports, find the strongest existing example in our codebase. I need the exact file and line references, the standard implementation flow and conventions it demonstrates, common pitfalls, and the matching testing approach so I can follow the project's established pattern.

Assistant: I'll focus specifically on an established background-job example rather than giving generic queueing advice. [...] *[loads the skill]* anti-duplication

Loaded skill: name: anti-duplication [...] description: Before implementing new code (end-points, components, services, models), search the codebase for existing patterns to reuse. [...]

Assistant: The guidance I opened is aimed at preventing duplicate implementations [...] That does not identify and rank the canonical background-job example [...] What is actually needed is to locate the codebase's canonical background-job implementation and return exact line references, its standard flow, conventions, pitfalls, and matching test examples. ◀*routing point* [...]

Gold skill pattern-finder — Find implementation examples and design patterns in the codebase. Use when user asks “how to implement X”, “how does this project do X”, “show me examples of X”, “where is X implemented”, or needs to follow existing code conventions.

I. Deployment walkthroughs

This appendix walks through transcripts from the Skill-Use rollouts behind Table 1, run in mini-swe-agent¹ and reproduced verbatim. The frontier models’ rows in that table come from the Skill-Use paper, which reports each model in both Codex and Claude Code; we quote the Codex numbers, the higher of the two for every model. The gate is read at every decoded token, so a firing interrupts the message wherever it happens to stand. On a load, the half-written message stays in the context exactly as far as it got, the chosen skill’s full SKILL.md is appended as a [skill loaded: ...] message, and the assistant turn starts over with the skill in view. Across the 177 tasks the router commits 181 loads; most fire within the opening sentence of the first response, seventeen in a later turn, after command output has entered the context. The interrupted position is marked *◀gate fires*.

In the first transcript the agent sets out on its own, even guessing the right tool. The opening attempt fails on a wrong path, and the gate stays quiet through the search that follows; it fires the moment the agent reports the form found and turns to the filling itself:

Filling a W-4 form

User: A new employee onboarding needs to fill out the IRS W-4 form. The form template is at forms/fw4.pdf [...] I have already prepared the employee information FDF data file employee_w4.fdf. Please use this data to fill the W-4 form. Note: after filling, the employee still needs to sign and confirm themselves, so do not lock the form; keep it editable. [...]

Assistant: To fill the W-4 form using the provided FDF data file, I will use the pdftk tool. [...] pdftk forms/fw4.pdf fill_form employee_w4.fdf output fw4_filled.pdf

Output: Error: Unable to find file. Error: Failed to open input PDF file: forms/fw4.pdf
[An *ls forms/* fails the same way; a *find* then locates the form. The gate stays quiet through all three observations.]

Assistant: I have located the fw4.pdf file in the ./assets/SF *◀gate fires*

Loaded pdftk-server (gold) — “Skill for using the command-line tool pdftk (PDFtk Server) for working with PDF files. Use when asked to [...] fill PDF forms [...]” The restarted turn completes the interrupted sentence, re-issues fill_form on the found path, and the filled form is saved unflattened, editable as the task requires.

In the next transcript the gate fires as the reply is about to name the need:

¹<https://github.com/SWE-agent/mini-swe-agent>

Migrating an endpoint to a new SDK

User: The product review endpoint in [...] /review-service/ needs to be updated to follow the current Vercel AI SDK v6 implementation patterns. Preserve the existing validation behavior and keep the caller-facing JSON contract unchanged.

Assistant: I need to examine the current implementation of the product review endpoint to understand what changes are required to align it with the *gate fires*

Loaded vercel-ai-sdk (gold) — “Guide for Vercel AI SDK v6 implementation patterns including generateText, streamText, [...] structured output with Output helpers [...]” The next turn finishes the sentence, “...to align it with the Vercel AI SDK v6 patterns,” and the eventual edit is the one the skill prescribes, replacing the v5 generateObject with generateText plus an Output.object schema.

The deepest fire of the run lands a hundred-plus tokens into a third-turn message, after the agent has read an instruction file and dumped the form’s text — the gate fires in the message that consolidates that evidence into edits, midway through an email address:

Editing a PDF form after the evidence is in

User: You are given a PDF file at [...] and a text file at [...] containing natural language instructions and updated information. Your task is to update this PDF using the latest information provided in the text file and follow all the instructions in it. [...]

[The agent reads the instruction file — a student’s corrected personal information and an appeal reason — then dumps the form: a university insurance-waiver appeal holding a nickname, a wrong email, a wrong ID.]

Assistant: I now see the structure of the PDF form. The task requires me to update the following fields with the information from the text file: 1. Student Name: Replace “Yaya” with “Jinya Jiang”. 2. Student PID#: Redact “A88888888” to show only the last 4 digits [...] 3. UCSD E-mail: Update “jiang@gmail.com” to “jiang@ *gate fires*

Loaded pdf-editing-14 (gold) — “Complete guide for reading and editing PDF documents with PyMuPDF.” The restarted turn folds the checklist into a PyMuPDF script following the skill’s rules — replace at the original position, redact with white fill — and submits the edited form.

The last transcript has two fires on one task. The gold loads on the first decoded word; two commands later, the moment the connector’s OAuth configuration scrolls into the context, the gate fires again and loads a skill that is not the marked gold but one the task genuinely needs:

Hardening a connector, two loads

User: Our partner team wants to submit the Salesforce connector package in [...] for a managed pilot. Sign-in works during maker testing, but the security reviewer says the current authentication flow and submission package are not sufficient for agent-mediated use. Please harden the package [...] including the reviewer handoff artifacts and a concise security note.

Assistant: I *gate fires*

Loaded power-platform-mcp-connector-suite (gold) — “Generate complete Power Platform custom connector with MCP integration for Copilot Studio — includes schema generation, troubleshooting, and validation.”

[An ls surveys the package; a dump of apiDefinition.swagger.json ends on the connector’s OAuth security block.]

Assistant: The *gate fires again*

Loaded api-security-best-practices (not the gold) — “Implement secure API design patterns including authentication, authorization, input validation, rate limiting, and protection against common API vulnerabilities.” Exactly what hardening the authentication flow calls for. The rollout goes on to work through the package and ships the hardened connector with the security note the task asks for.

The progressive-disclosure row of Table 1 runs Qwen3-32B in the same harness with no router. The skills enter the way the convention prescribes, through the system prompt below, and each skill’s full SKILL.md sits on disk at the path the prompt names, one cat away.

Progressive disclosure in the harness: the baseline system prompt

You are a helpful assistant that can interact with a computer.

Your response must contain exactly ONE bash code block with ONE command (or commands connected with && or |).

Explain your reasoning before your command.

[the harness’s standard formatting example, rules, and command examples, unchanged from mini-swe-agent]

Available skills

The following agent skills are installed. Each one’s full instructions live at skills/<name>/SKILL.md, which you can read with cat. If a skill applies to the task, read its SKILL.md first and follow it.

- {name}: {description}

...

Under this prompt the model reads a skill on 2 of the 175 tasks that call for one. The listing itself serves the model well enough, since forcing its first action to read the one skill it picks from that listing raises the score to .834. The failure sits in the unprompted decision to consult a skill at all. That decision is a trained harness habit. Even the frontier models of Table 1, post-trained amid the skills ecosystem, swing by up to 38 points in trigger rate between the two harnesses the benchmark measures (Han et al., 2026), and Qwen3-32B predates that ecosystem altogether (Yang et al., 2025; Anthropic, 2025), so nothing in its training rewards pausing mid-task to read installed documentation. GAVEL supplies the trigger from outside the model’s habits, and the same backbone reaches .909.

J. The cost of routing

We price what one session spends on skill routing. Let the session make T model calls, let the library hold n skills, and let the gate fire m times, each firing one GAVEL attempt to find a suitable skill for

the current state. A skill carries roughly 100 tokens of metadata and a 1,895-token body, the mean over 40,285 publicly listed skills (Ling et al., 2026); a query carries 239 tokens, the mean over the SkillRet test set. Prices are GPT-5.6 Sol’s official rates². Neither router decodes extra tokens, and both inject the chosen body after routing, so those costs cancel. Budgeting the injected bodies themselves is a separate problem (Chen et al., 2026b).

The gate and the glance read hidden states the rollout computes anyway, and the key bank is built offline once per library, so GAVEL pays only for verdicts — nine forwards per firing under the pruning margin of Section 4.1, each prefiling one candidate’s metadata and body followed by the query:

$$C_{\text{GAVEL}} = m \times 9 \times (100 + 1,895 + 239) \times \$4/10^6 \approx \$0.080 m.$$

The bill is independent of n and T , and it is paid off-path: the forwards are batched prefills that never enter the rollout’s context. Progressive disclosure keeps its $100n$ -token metadata menu in the prompt prefix, and the serving API is stateless: every one of the T calls re-sends the context, and “all previous input tokens ... are billed as input tokens” each time (OpenAI, 2026b). The menu is therefore written to the prompt cache once and read back at the cached rate on the other $T - 1$ calls:

$$C_{\text{PD}} = 100n \times (\$5 + \$0.40 (T - 1))/10^6 \approx \$4 \times 10^{-5} nT.$$

At realistic scales both bills are small and close: three firings cost \$0.24, and a hundred-skill menu over fifty calls costs \$0.25. Which is smaller turns on m/T and n ; GAVEL is the cheaper router once n exceeds roughly $2,000 m/T$.

Latency follows the same shape. The gate reads a state the rollout has already computed, and the glance is one matrix multiply of the projected query tokens against the bank, milliseconds on a GPU. The wait is the verdict: nine prefills of about 2.2K tokens each, batched in parallel, on the order of half a second per firing on a modern serving stack, and less once the per-skill prefixes are KV-cached. That pause is paid once per firing. Progressive disclosure adds no separate stage, but every decoded token of the session attends over the $100n$ menu positions; the prompt cache spares their recompute, and the attention scan over them stays on every step.

The menu’s real cost is the window it occupies. It holds $100n$ tokens of the model’s finite context for the whole session, and metadata held in front of every call disperses the model’s attention and degrades its performance on the task itself (Liu et al., 2024; Modarressi et al., 2025). A verdict forward never enters that window: the nine prefills run off-path, and their skill prefix is query-independent, so a serving stack can cache it per skill and pay fresh input only for the live query.

²<https://platform.openai.com/docs/pricing>, August 2026: \$4.00 per million input tokens, \$0.40 per million cached reads, \$5.00 per million cache writes. We ignore the long-context surcharge on requests beyond 272K input tokens.

K. Discussion

The gate. The gate of Section 4.4 is a linear classifier over two read-outs the rollout already produces, the glance scores that the context has accumulated over the library and the final-layer state at the current position, and it fires once it stays on for two consecutive tokens. We trained it once on SkillTraj and did not engineer it further, since the question Section 4.4 asks is whether the routing signal survives a live rollout, not how precisely a call can be timed. Two designs would time it better. A sequence model over the history of glance scores would watch the need build up across positions instead of judging each one alone, and a backbone fine-tuned to emit a dedicated skill-call token would fold the decision into decoding itself. Either leaves the glance and the verdict unchanged, since the gate only decides when they run, and we leave both to future work.

Routing behind a cloud API. Our experiments run the backbone locally, while many agents call it through a hosted API. GAVEL moves there by letting the provider host the router. The two projections are trained once per model on a corpus of task–skill pairs with a contrastive loss, and shipped with the model the way a tokenizer is. A client uploads its skills, and the provider builds the compressed bank from them in one forward pass each, as it would write a prompt cache. On each call the glance runs inside the prefill the provider already performs, reading the hidden states beside the KV cache it keeps for those tokens, and the verdict prefills the shortlisted skills off-path with each skill prefix served from the prompt cache. The response carries the chosen skill, or nothing when the verdict abstains, and the gate runs in the same place from the same states. Nothing crosses the API beyond the skills at installation and the routing decision on each call.