

NeuralZip: Reusable Setup for Fast Lossless Compression

Martín Bravo^{1,2,3,*}

Samuel Horváth¹

Gonzalo Navarro²

Andrés Abeliuk^{2,3}

¹Mohamed bin Zayed University of Artificial Intelligence, Abu Dhabi, UAE

²Department of Computer Science, University of Chile, Santiago, Chile

³National Center for Artificial Intelligence (CENIA), Santiago, Chile

Abstract

Lossless compression can reduce the storage and movement of model weights without changing their floating-point values, but repeated statistical analysis and code construction add computational overhead. We study whether the statistical structure of exponents can be prepared once and reused. For this, we introduce NEURALZIP, which groups chunks with similar exponent distributions, shares Huffman codes, and selectively represents recurring exponent tuples using packed exponents, thereby achieving additional moderate compression ratios. A setup chooses these representations before subsequent encodings, while every encoding still processes the current tensor values. In floating-point model checkpoints, post-setup compression is $1.81\text{--}21.33\times$ faster than the baselines and achieves exact bit-to-bit reconstruction. We show that this setup can be precomputed and transferred from another compatible architecture, preserving similar compression ratios and avoiding the need to amortize setup costs. Therefore, compression adaptation is transferable and reusable. Training checkpoints demonstrate continued reuse as the weights evolve. Finally, GPU experiments reduce active memory usage by up to 27.5% while reproducing the logits exactly.

et al., 2021). Foundation models, in particular, have undergone a rapid transformation in recent years, with substantial improvements in performance, precision, and practical usefulness (Bommasani et al., 2021, OpenAI, 2023).

The exponential growth in the size of foundation models has introduced significant challenges in storage and energy consumption (Hershcovitch et al., 2025, Patterson et al., 2021). Given this, compression has become a natural partial solution to this problem. For example, deployment is difficult on devices with limited resources, such as mobile phones, embedded systems, local agents, and edge environments. Compression can allow resource-constrained edge devices to load models that would otherwise be too large. Similarly, model hubs distribute checkpoints to inference machines at increasing scale. Nearly three million public model repositories and approximately two billion downloads across the Qwen family were recorded during the first seven months of 2026 (Yakefu et al., 2026). Therefore, it is important to find techniques that allow compression to be fast and efficient.

To address this, several compression techniques have been developed, such as *quantization* (Gholami et al., 2021, Gray, 1984), which reduces numerical precision to decrease the model size and accelerate inference. *Pruning* (LeCun et al., 1989, Zhu and Gupta, 2017) removes low-relevance connections or parameters. *Knowledge distillation* (Gou et al., 2021) trains a smaller model to imitate a larger one. *Low-rank factorization* (Saha et al., 2024, Sundrani et al., 2025) and parameter sharing reduce redundancy in model parameters, and *sparse or selectively activated models* (Ma et al., 2022) use only a fraction of their parameters during inference.

These techniques introduce important limitations. First, they do not preserve the original model: after compression, the exact original weights cannot be recovered unless a copy is stored. Second, the reduction is lossy, so it can degrade accuracy or generation quality. Third, they may require additional training, which adds computational cost. These limitations moti-

1 INTRODUCTION

Modern society increasingly relies on intelligent systems, which have motivated the training of models at a very large scale. These models solve problems in areas such as medicine (Singhal et al., 2023), education (Kasneji et al., 2023), and software development (Chen

*Correspondence to: martin.bravo@mbzuai.ac.ae.

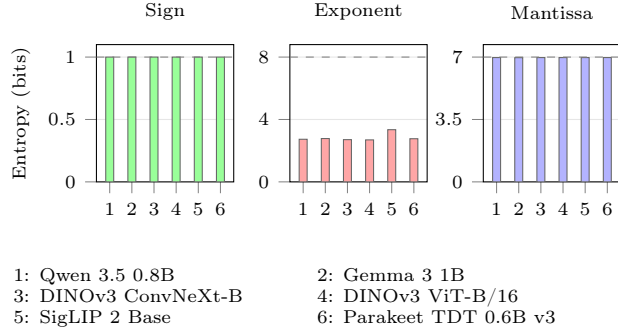


Figure 1: Empirical entropy by floating-point field in BF16.

vate studying compression methods that reduce storage while keeping the original parameters exactly recoverable and enabling fast compression of models already available in model hubs and on end devices.

A notable example of a *lossless* compressor is ZIPNN (Hershcovitch et al., 2025), which exploits the skewed distribution of floating-point exponents and compresses them using Huffman coding. ZIPNN reports strong compression results across vision and language models while preserving the original parameters exactly. Another relevant approach is DFLOAT11 (Zhang et al., 2025), which introduces a dynamic-length floating-point representation for efficient GPU inference while preserving the model parameters exactly. These methods show that lossless compression is both feasible and useful, but their compression procedures can incur substantial computational overhead. For example, recomputing similar codebooks as if they were different distributions leaves an open question: Can we exploit all the statistical regularity available in floating-point weights?

To address this, we identify and empirically characterize two useful properties. First, exponent distributions vary among parameter blocks while forming similar groups, a property we study here as *the heterogeneity of the exponents*. Sharing precomputed codebooks across these groups can accelerate compression, but may increase the exponent storage ratio. To offset this cost, we show that grouping adjacent exponent values into new symbols can reveal local regularities, a property we call *local exponent redundancy*.

Using this, we propose NEURALZIP to take advantage of the two phenomena observed in the evaluated architectures. We combine both ideas in one algorithm: Jensen–Shannon clustering enables Huffman-code sharing while activating packed exponents. On top of that, we show that this setup is sharable across different model architectures. In summary, our contributions¹

¹We provide the code in the GitHub repository.

are:

1. We show evidence of different exponent distribution groups and local redundancy in floating-point model weights.
2. We propose a lossless compressor that combines shared codebooks with exponent packing to reduce repeated computation while retaining moderate compression ratios.
3. We propose a setup-transfer mechanism that enables compression of compatible target models without target-side codebook construction.

2 RELATED WORK

Model compression. Pruning (Zhu and Gupta, 2017), quantization (Gholami et al., 2021), and distillation (Gou et al., 2021) reduce model cost by changing parameters or architecture. Lossless compression instead preserves the chosen weight representation bit for bit. Whereas general-purpose compressors such as ZLIB and ZSTD (Deutsch and Gailly, 1996, Collet and Kucherawy, 2018) combine dictionary matching with entropy coding, weight-aware methods expose floating-point structure explicitly. ZIPNN (Hershcovitch et al., 2025) reorders bits and bytes before local Huffman coding. LMC (Waddington and Constantinescu, 2025) combines byte grouping with block-adaptive parallel Huffman coding for snapshots and checkpoint deltas. Both adapt codes to input blocks, motivating the question of when code construction can be shared rather than repeated.

Codebook sharing. Shannonic (Ibrahim et al., 2026) also prepares reusable coding tables, using range-partitioned tANS for communication of eight-bit quantized tensors in federated learning. Its evaluated representation differs from our bit-exact floating-point weights. Thus, precomputed tables are an established idea. The distinction here is how sharing groups are discovered. Sharing marginal distributions does not itself exploit dependencies between adjacent exponents. MM-RePair (Ferragina et al., 2022) exploits repeated patterns through grammars and supports matrix–vector multiplication over the compressed representation. Rather than constructing a recursive grammar, NEURALZIP adds frequent packed exponent symbols to a shared Huffman alphabet alongside singletons. This combines distribution sharing with local redundancy while retaining exact reconstruction.

Compressed Inference. Compressed execution poses a complementary problem: reconstructing weights quickly enough to make memory savings useful. NeuZip (Hao et al., 2024) uses ANS-coded

BF16 exponents for lossless training, with a separate lossy mantissa variant. DFLOAT11 (Zhang et al., 2025) makes BF16 Huffman reconstruction practical on GPUs through lookup and restart structures. ECF8 (Yang et al., 2026) couples exponent coding with tensor management for weights already in FP8. Huff-LLM (Yubeaton et al., 2025) integrates Huffman decompressors into custom accelerators. These works establish exponent compression and on-demand reconstruction, on which our GPU inference builds.

Compressor	Coding mechanism	Primary objective
ZIPNN (Hershcovitch et al., 2025)	Local Huffman codes with raw fallback	Model storage and transfer
LMC (Waddington and Constantinescu, 2025)	Parallel Huffman coding	High-throughput checkpointing
SHANNONIC (Ibrahim et al., 2026)	Range-partitioned tANS for eight-bit tensors	Federated and edge-cloud communication
NEUZIP (Hao et al., 2024)	ANS-coded BF16 exponents	Memory-efficient training and inference
DFLOAT11 (Zhang et al., 2025)	BF16 exponent Huffman coding with GPU lookup structures	GPU inference
ECF8 (Yang et al., 2026)	Entropy-coded exponents of FP8 weights	Lossless FP8 inference
HUFF-LLM (Yubeaton et al., 2025)	Huffman decompressors placed near compute units	Accelerator inference
MM-REPAIR (Ferragina et al., 2022)	RePAIR grammar over a matrix representation	Matrix-vector multiplication over compressed matrices

Table 1: Lossless Model Compression comparison.

3 PRELIMINARIES

We now show the property that allows lossless compressors such as ZIPNN and DFLOAT11 to work, and we introduce the idea of exponent skewing. For a distribution p on a finite alphabet $\mathcal{A}$, let us define the entropy $H(p) = -\sum_{a \in \mathcal{A}} p(a) \log p(a)$, where logarithms are base 2. Entropy measures the expected amount of information needed to describe the state of a variable (Navarro, 2016).

Skewed Exponent field. We measure the entropy of the sign, exponent, and mantissa fields of the weights of BF16 models shown in Figure 1. The exponent entropy is 2.691-3.345 bits, while the sign and mantissa entropies remain near 1 and 6.97 bits. For BF16, we use 1 bit for the sign field, 8 bits for the exponent, and 7 bits for the mantissa. Therefore, the sign and the mantissa fully utilize the bits, but the exponent, on average, uses only 2.7-3.4 out of 8 bits. Thus, entropy-based compressors, such as Huffman codes, can take

advantage of this property.

Exponent concentration is an empirical observation in the models studied here, our hypothesis is that it is a property caused by the optimizer. In Appendix B.1, we measure how exponent entropy changes during early training under several optimizer configurations.

One could take a linear projection of all the exponents of the model weights and compress them using a single Huffman code, but that might not be the most efficient solution. For any non-empty finite-alphabet sequence S , define $\hat{p}_S(a) = |\{i : S_i = a\}|/|S|$ and the normalized entropy $H_0(S) = H(\hat{p}_S)$. The exponent alphabet is $\Sigma_E = \{0, \dots, 2^E - 1\}$, where $E \geq 1$ is an integer. For a partition $\mathcal{P}$ into non-empty ordered subsequences, the ideal zero-order coding cost in bits is:

$$C_0(\mathcal{P}) = \sum_{S \in \mathcal{P}} |S| H_0(S).$$

Lemma 1 (Cost monotonicity under refinement). *If $\mathcal{P}_C$ refines $\mathcal{P}$ by splitting its sequence into chunks, preserving their order, and omitting empty chunks, then $C_0(\mathcal{P}_C) \leq C_0(\mathcal{P})$.*

Proof. For each sequence S split into $S_1, \dots, S_k$, let $\lambda_i = |S_i|/|S|$. Symbol counts give $\hat{p}_S = \sum_i \lambda_i \hat{p}_{S_i}$, so the concavity of entropy (Cover and Thomas, 2006) yields $|S| H_0(S) \geq \sum_i |S_i| H_0(S_i)$. Summing over $S \in \mathcal{P}$ proves the claim. $\square$

Methods such as ZIPNN exploit this property by dividing tensors into small chunks of exponents and compressing each chunk using Huffman coding. This allows the codebooks to reflect local exponent distributions rather than relying on a single global codebook. In Appendix B.2, we explore how much we save if we vary the refinement of these partitions. The problem with this approach is that it must create a codebook for each chunk, ignoring statistical structures that may arise in tensors and could save the recomputation of equivalent codebooks. Next, we introduce these additional properties.

Heterogeneity of the exponents. For the fraction u with exponent values of N_u , let $p_u(a) = \frac{1}{N_u} \sum_i 1(e_i = a)$ be its normalized histogram, where $1(x)$ is the indicator function, which equals 1 if the condition x is true and 0 otherwise. We measure histogram dissimilarity using the square root of Jensen–Shannon divergence (Lin, 1991):

$$D_{JS}(p, q) = \sqrt{\frac{1}{2} D_{KL}(p \| m) + \frac{1}{2} D_{KL}(q \| m)}, \quad (1)$$

where $m = \frac{1}{2}(p + q)$,

From the 12 largest tensors in each model, we randomly choose 48 chunks of size 256 KiB among six

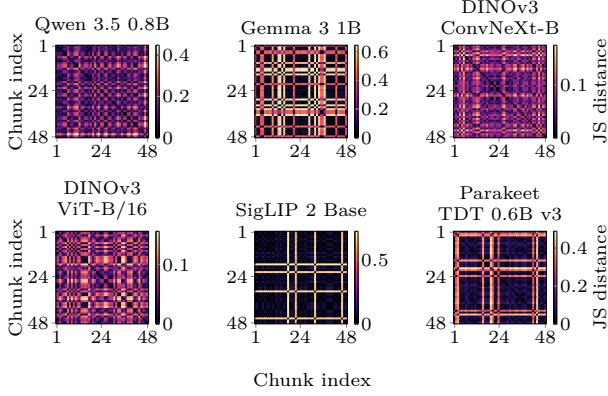


Figure 2: Jensen–Shannon distances between exponent histograms of 48 sampled chunks per model.

different architectures (see Figure 2). 14.3–49.5% of the comparisons fall below a distance threshold of 0.05. We observe both near-identical and widely separated histograms. Lemma 1 shows that splitting tensors into chunks does not increase entropy.

To measure actual gains, we employ greedy clustering with a threshold τ on the Jensen–Shannon distance between a chunk’s exponent histogram and compatible cluster centroids, assigning the chunk to the nearest centroid if $D_{JS} \leq \tau$. Sharing codebooks can increase the exponent storage ratio but enables faster compression with precomputed tables (see Table 2). Therefore, we examine another property that will help reduce storage while retaining precomputed shared codebooks.

Local exponent redundancy. For the longest prefix whose length is divisible by n , we can represent non-overlapping tuples of n consecutive exponent symbols as compound symbols. By packing two and four values, we lower the empirical entropy by 0.007 – 0.235 and 0.016 – 0.429 bits per exponent, respectively (Figure 3).

Fix an integer $n \geq 1$ and assume that every sequence length is divisible by n . For $S = (x_1, \dots, x_t)$, let $G_n(S)$ contain the t/n non-overlapping tuples $(x_{(j-1)n+1}, \dots, x_{jn})$, $1 \leq j \leq t/n$. A bijective integer representation of these tuples leaves their entropy unchanged. Define $H_0^{(n)}(S) = H_0(G_n(S))$ and write the packed coding cost as:

$$C_0^{(n)}(\mathcal{P}) = \sum_{S \in \mathcal{P}} \frac{|S|}{n} H_0^{(n)}(S).$$

Lemma 2 (Cost monotonicity under packing). *For every integer $n \geq 1$ that divides the length of each $S \in \mathcal{P}$, $C_0^{(n)}(\mathcal{P}) \leq C_0(\mathcal{P})$.*

Proof. Draw a tuple uniformly from $G_n(S)$, and let X_b be its b -th component with marginal distribution p_b .

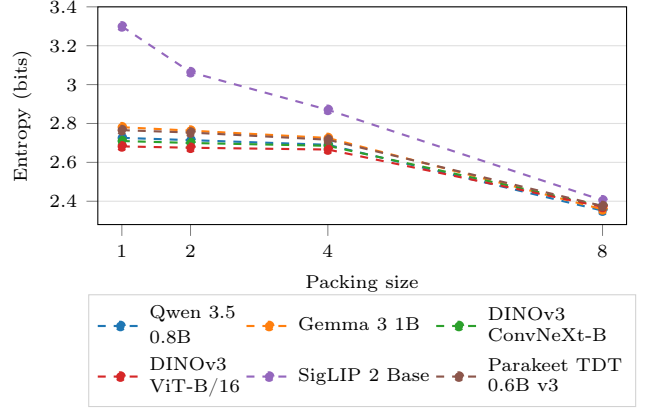


Figure 3: Local exponent redundancy entropy.

The joint law is the empirical tuple distribution, while $\hat{p}_S = n^{-1} \sum_{b=1}^n p_b$. By joint-entropy subadditivity and concavity, the cost of each sequence satisfies

$$\begin{aligned} \frac{|S|}{n} H_0^{(n)}(S) &\leq \frac{|S|}{n} \sum_{b=1}^n H(p_b) \\ &\leq |S| H_0(S). \end{aligned}$$

We sum over $S \in \mathcal{P}$ to obtain the stated bound. $\square$

For the non-overlapping construction above, we keep any remaining symbols as a raw tail. The next theorem combines both lemmas into a single ideal bound for refined tensors and packed exponents.

Theorem 1 (Ideal bound). *Let $\mathcal{P}_C$ refine $\mathcal{P}$ by splitting sequences into chunks. If every refined sequence has a length divisible by an integer $n \geq 1$, then $C_0^{(n)}(\mathcal{P}_C) \leq C_0(\mathcal{P})$.*

Proof. By the assumption of divisibility, Lemmas 2 and 1 yield $C_0^{(n)}(\mathcal{P}_C) \leq C_0(\mathcal{P}_C) \leq C_0(\mathcal{P})$. $\square$

The bound excludes raw tails, escapes, integer code lengths, headers and metadata, local-Huffman and raw fallbacks, and clustering costs. We must therefore measure the practical advantages of size and time.

4 OUR METHOD: NEURALZIP

4.1 A reusable setup

The setup builds and freezes codebooks before compression. It clusters chunks and packs adjacent exponents. For transfer, it also builds a bank of source-only codebooks to handle changes in exponent distributions. Appendix B.5 reports the setup costs and computational complexity analysis.

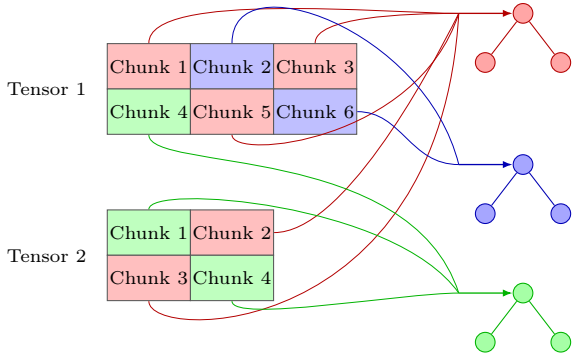


Figure 4: Sharing codebook example.

Codebook sharing. We divide the tensors into chunks of at most $b = 256$ KiB of the source weights. We assign each chunk to the nearest compatible centroid using its normalized exponent histogram when $D_{JS} \leq \tau = 0.05$. Otherwise, we start a cluster (we show this threshold selection in Appendix B.4). We weight centroids by the number of values. Compatibility requires the same data type and exponent layout. Therefore, different chunks within a tensor can use different codebooks, while chunks from different tensors can share one codebook (See Figure 4).

Packed Exponents. For each cluster vocabulary V , we select up to 254 frequent packed symbols, each formed from two adjacent exponents, counting all positions without crossing chunk boundaries. We augment the singleton alphabet Σ_E with packed symbols. We remove a packed symbol when its code is longer than the two singleton codes, and recompute token counts and the table until no further packed symbols need removal. For a chunk $S = (e_1, \dots, e_t)$, we start parsing at $i = 1$. If $i < t$ and $(e_i, e_{i+1}) \in V$, we emit the corresponding packed symbol and advance by two. Otherwise, we emit the singleton e_i and advance by one. Packed alignment can change after a singleton. We also compress any final unmatched exponent individually (See Figure 5).

Codebook preparation. We sample up to $M = 8$ MiB of exponents per cluster, keeping chunk boundaries. The adaptive scan counts tokens, with pseudo-count one for each singleton and selected packed symbol. Up to four chunks spread across the source cluster estimate payload and fragment-record bytes, including raw fallback. We scale this estimate to the cluster and add codebook and vocabulary bytes. We keep the pruned mixed table only if its estimated archive is smaller than the singleton alternative. Otherwise, we use singleton coding or raw storage if no usable table exists. Sample timings do not affect this choice. We then freeze the

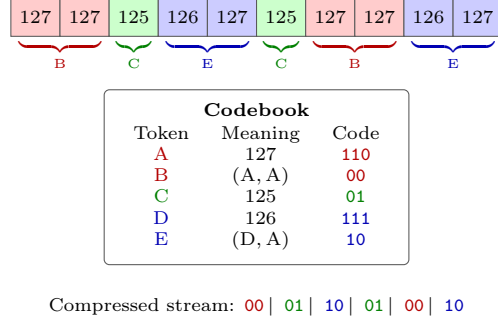


Figure 5: Packed exponents example.

tables and vocabulary.

For transfer, we build a codebook bank from up to eight of the largest source JS clusters. Source mantissas let us estimate the exponent changes caused by scaling by 2^f , where $f \in \{0, 1/8, \dots, 7/8\}$. We combine these with integer exponent shifts from -8 to 8 . The bank stores distinct packed tables and their singleton fallbacks. Before building mixed tables, we add 1% of the calibrated singleton counts to the token counts. We use only source data and do not change the source weights.

4.2 Compression and exact decompression

During compression, we read current weights, reversibly extract their exponents, and preserve sign and mantissa bits verbatim. The adaptive scan encodes both packed and singleton symbols using the chunk’s assigned shared Huffman table.

We can compress chunks in parallel using immutable tables. We store unmapped chunks raw. We also store a mapped chunk raw if its compressed exponent payload plus fragment record is not below $\rho = 0.95$ times the raw exponent size, without building a local table. We record raw flags, lengths, codebook IDs, and tensor layouts in the archive, including each used codebook and packed vocabulary once.

During decompression, we read raw chunks or their prefix-free Huffman streams. We restore one exponent from each singleton and two from each packed symbol. Stored exponent counts and frame lengths delimit chunks. We recombine exponents with the preserved bits to restore the original floating-point bit patterns.

4.3 GPU Inference

For the GPU path, we keep coded exponents, verbatim sign/mantissa bits, and lookup/restart metadata on the GPU. Before each transformer block, we launch

a batched PyTorch CUDA decompressor through a hook. We use prefix lookups to recover exponents and code lengths, and restart offsets to support parallel decompression. We reconstruct the exact weights in a reused workspace across blocks and pass them to standard matrix multiplications. We leave unselected parameters uncompressed and pay the decompression cost on each forward pass.

4.4 Setup transfer

We reuse the source’s tensor and global codebooks, but not its chunk assignments. Before each CPU compression call, we test these default tables on 16 short windows spread across the model’s parameters. Each window contains up to 256 exponents, parsed with the same greedy rule used for compression. If the average estimated cost exceeds $\gamma = 3$ bits per exponent, we choose codebooks from the bank for each chunk. We sample about 1024 exponents per chunk to rank the tables, then compare up to four packed candidates with a singleton fallback. We choose the one with the lowest estimated cost. The measured compression time includes both this test and codebook selection. Target samples only choose among frozen codebooks. They do not build new tables or vocabularies. Raw fallback remains available. Compression can worsen as exponent distributions change, but reconstruction remains bit-wise exact.

5 EXPERIMENTS

We evaluate four research questions:

1. *Can we accelerate exact compression with a reusable setup while preserving the compression rate?*
2. *When can we reduce the representation size through exponent packing?*
3. *Can we reuse a setup across related models or evolving weights?*
4. *Can we obtain a favorable memory–latency trade-off with compressed GPU inference?*

We provide complete measurements, including unfavorable outcomes, in the appendices.

5.1 Experimental setup

We pass models in memory to each compressor, use the same pinned CPU cores, and exclude loading, disk I/O, and bit-wise verification from timing. The model compression experiment was evaluated on a cluster with two 16-core EPYC 7343 CPUs (32 physical cores, 64 threads, and two NUMA nodes) and 1 TiB of RAM.

We use 12 CPU threads for compression unless otherwise specified. GPU benchmarks were evaluated on four ASUS Ascent GX10 desktop supercomputers configured with a 20-core Arm processor (comprising 10 Cortex-X925 and 10 Cortex-A725 cores) and an integrated NVIDIA Blackwell GPU, using 128 GB of coherent unified LPDDR5x system memory at 273 GB/s bandwidth. We report medians after warm-up runs: 20 CPU measurements for Table 2 and ablations, 9 for Table 3, and 5 GPU trials. Setup is measured separately once.

We also report the *exponent ratio*

$$R_E = 100 \frac{B_{\text{symbols}} + B_{\text{raw}} + B_{\text{metadata}}}{B_{\text{original exponents}}}, \quad (2)$$

where smaller is better. We include raw fallback and decompression metadata and exclude verbatim sign and mantissa bits. We compute the speedup as the reference time divided by NEURALZIP time.

5.2 Model compression

The results in Tables 2 and 3 are consistent. Compression is 1.81–21.33 $\times$ faster than the fastest baseline when the setup is already available, while reductions in the exponent storage ratio range from -0.22 to 1.49 percentage points. We see higher speedups in convolutional models, at 12.24–21.33 $\times$, followed by MoE models. These results indicate that the benefits of reusing codebooks vary across architectures, there is no universal pattern that allows for obtaining the same speedups every time. Instead, the results will depend on the extent of exponent heterogeneity and local exponent redundancy in the networks.

5.3 Reusing setups

Compression speedups require a precomputed setup, whose cost increases as models scale. In a model-storage setting, setups can be built once and shared with compatible targets. Using a precomputed setup from a similar model provides compression-time gains of between 1.77 and 16.65 $\times$ for a 0.01–4.90 percentage-point increase in the exponent storage ratio. When a compatible frozen setup is already available, the target avoids setup construction. The source construction cost has still been incurred, and target codebook selection is included in compression time. Table 3 also shows cases where setup transfer worsens compression efficiency: the exponent ratio increases by up to 4.90 percentage points. Choosing a compatible source setup therefore remains important for a model hub.

Table 2: Model compression and setup reuse.

Model	Compressor	Setup (s) ↓	Compression (s) ↓	Exponent ratio (%) ↓	Total memory (GB) ↓	GPU memory (GiB) ↓	Inference (ms) ↓
Qwen 3.5 0.8B (Qwen Team, 2026)	BF16	–	–	100.000	1.747	1.625	110.58
	ZIPNN	–	1.889	33.256	1.164	–	–
	SHARING ONLY	15.732	0.399	34.494	1.175	1.295	115.53
	PACKING ONLY	42.415	0.457	33.700	1.168	1.383	118.74
	NEURALZIP (own)	17.976	0.440	32.985	1.162	1.297	120.82
	NEURALZIP (from Qwen 3.5 2B)	–	0.292	33.498	1.166	1.302	118.80
	DFLOAT11	–	276.628	35.997	1.188	1.327	118.21
Gemma 3 1B (Gemma Team, 2025)	BF16	–	–	100.000	2.000	1.920	106.92
	ZIPNN	–	1.500	32.972	1.330	–	–
	SHARING ONLY	14.141	0.282	34.565	1.346	1.517	104.22
	PACKING ONLY	46.717	0.351	33.441	1.334	1.620	108.01
	NEURALZIP (own)	15.067	0.330	32.724	1.327	1.518	105.59
	NEURALZIP (from Gemma 3 4B)	–	0.335	35.504	1.355	1.537	104.97
	DFLOAT11	–	313.147	35.531	1.355	1.532	117.61
DINOv3 ConvNeXt-B (Siméoni et al., 2025)	BF16	–	–	100.000	0.175	0.172	23.28
	ZIPNN	–	0.408	33.943	0.117	–	–
	SHARING ONLY	2.432	0.029	35.505	0.119	0.138	15.97
	PACKING ONLY	4.215	0.035	34.294	0.118	0.151	17.78
	NEURALZIP (own)	2.898	0.033	33.687	0.117	0.139	16.80
	NEURALZIP (from DINOv3 ConvNeXt-L)	–	0.035	33.844	0.117	0.140	16.67
	DFLOAT11	–	29.020	36.909	0.120	0.137	16.36
DINOv3 ViT-B/16 (Siméoni et al., 2025)	BF16	–	–	100.000	0.171	0.176	20.32
	ZIPNN	–	0.305	33.704	0.115	–	–
	SHARING ONLY	1.315	0.026	35.415	0.116	0.134	18.87
	PACKING ONLY	4.050	0.034	34.196	0.115	0.146	19.72
	NEURALZIP (own)	1.768	0.031	33.452	0.114	0.134	17.80
	NEURALZIP (from DINOv3 ViT-L/16)	–	0.033	34.158	0.115	0.135	19.46
	DFLOAT11	–	27.755	36.559	0.117	0.132	18.30
SigLIP 2 Base (Tschannen et al., 2025)	BF16	–	–	100.000	0.750	0.723	41.48
	ZIPNN	–	0.779	36.870	0.514	–	–
	SHARING ONLY	5.782	0.091	38.032	0.518	0.619	31.16
	PACKING ONLY	17.697	0.122	36.139	0.511	0.646	32.65
	NEURALZIP (own)	7.307	0.111	35.383	0.508	0.621	32.69
	NEURALZIP (from SigLIP 2 Large)	–	0.114	35.866	0.510	0.623	33.71
	DFLOAT11	–	134.630	40.135	0.526	0.617	32.95
Parakeet TDT 0.6B v3 (Sekoyan et al., 2025)	BF16	–	–	100.000	1.254	1.177	96.83
	ZIPNN	–	1.796	33.477	0.837	–	–
	SHARING ONLY	18.539	0.149	34.826	0.846	0.907	103.24
	PACKING ONLY	29.336	0.197	33.902	0.840	0.986	104.46
	NEURALZIP (own)	20.224	0.183	33.213	0.835	0.909	102.31
	NEURALZIP (from Parakeet TDT 0.6B v2)	–	0.188	33.873	0.840	0.916	104.41
	DFLOAT11	–	226.298	36.215	0.854	0.938	104.92

5.4 Sharing and packing contribution

We also evaluate the two mechanisms of NEURALZIP in isolation. SHARING ONLY uses clustering and pre-computed codebooks without packing, while PACKING ONLY precomputes packed codebooks for every chunk. SHARING ONLY usually compresses faster than NEURALZIP, but has a higher exponent storage ratio. PACKING ONLY improves on SHARING ONLY’s ratio but requires more setup and compression time. Among the evaluated variants, combining both mechanisms in NEURALZIP gives the lowest exponent storage ratio, but does not always minimize running time. Appendix B.3 shows that PACKING ONLY has substantial metadata

costs, which sharing codebooks reduces. The mechanisms therefore complement one another: packing reduces payload size, while sharing reduces codebook overhead.

5.5 Compressed GPU inference

Tables 2 and 3 report GPU runs: five-trial medians of fifty synchronized forwards after twenty warm-ups. We verify weights and outputs bit-by-bit against BF16. The runs reduce live memory up to 27.5% with their own setups. Own inference ranges from 11.8% faster to 8.3% slower than DFLOAT11. Therefore, fast decompression allows NEURALZIP to achieve competitive

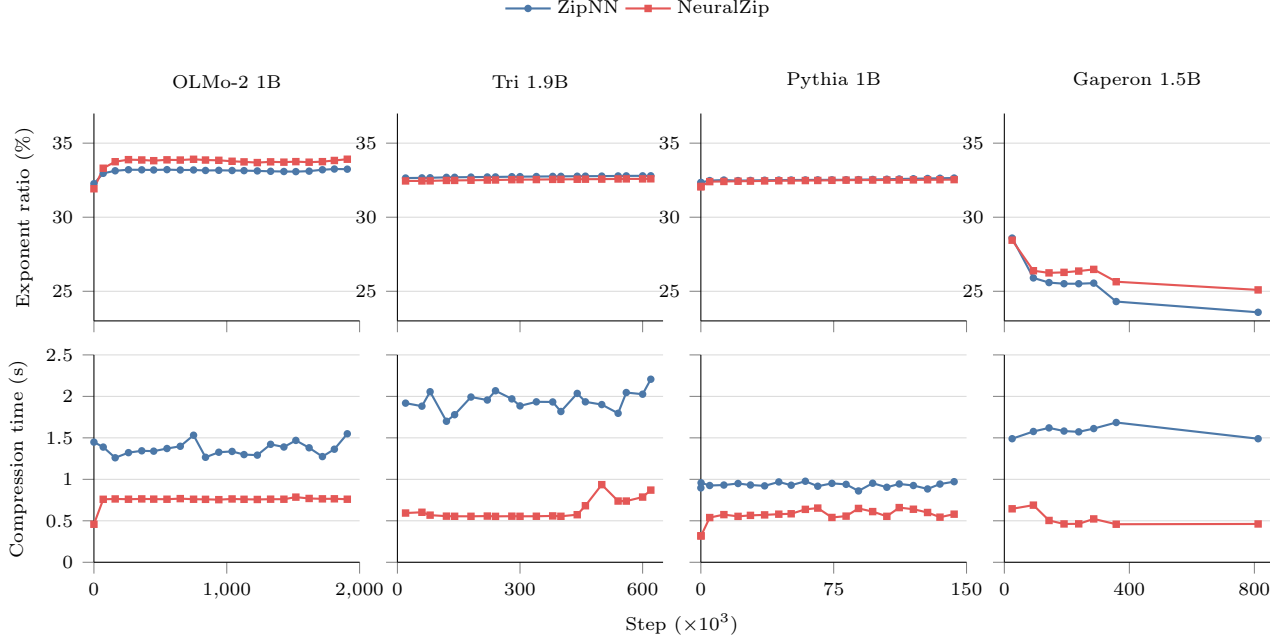


Figure 6: **Compression across training checkpoints.** We keep each family’s earliest setup frozen.

inference latency while maintaining fast compression.

5.6 Training checkpoints storage

Setup transfer offers another possible use case: storing training checkpoints. Successive checkpoints may retain sufficiently similar exponent statistics for a setup to remain reusable. We compress public intermediate training checkpoints from OLMo-2 1B (Team OLMo et al., 2024), Tri 1.9B (Trillion Labs, 2025), Pythia 1B (Biderman et al., 2023), and Gaperon 1.5B (Godey et al., 2025) (See Figure 6). We construct the setup of NEURALZIP from each family’s earliest available checkpoint and keep it frozen for subsequent checkpoints. NEURALZIP compresses $1.33\text{--}3.74\times$ faster than ZIPNN while maintaining similar exponent storage ratios. At later checkpoints, ratios can worsen as exponent distributions drift. Periodically refreshing the setup may help in long training runs, but these experiments do not establish a refresh schedule.

6 DISCUSSION AND CONCLUSION

We show that reusable statistical preparation can accelerate exact compression at a similar representation size. The heterogeneity of exponents motivates sharing codebooks, while local exponent redundancy offers size improvements. These observations may motivate further work on reusable statistical structures for lossless compression. Deployment must account for setup construction and assess whether a precomputed setup is

statistically compatible with the target weights during training and transfer.

Although our work focuses on faster compression, exponent skew has already been extensively exploited in prior work. Future work could examine source setup selection and refresh criteria while preserving bit-wise exact reconstruction.

AI use statement

In this work, we used generative AI tools for method implementation. We have not used generative AI tools for synthetic-data generation, and qualitative analysis of human-subject data is not applicable to this work. Additionally, we used generative AI tools for drafting and editing text, preparing figures and tables, and organizing reproducibility materials. We have reviewed all AI-assisted work. AI-assisted code was checked using lossless round-trip tests, bit-wise weight and output comparisons, input and setup integrity checks, and validation of recorded measurements. We take responsibility for the final content of this work, including text, claims, or artifacts produced with the aid of generative AI.

Acknowledgements

This work was supported by the National Center for Artificial Intelligence, CENIA FB210017, Basal ANID.

References

- Abdin, M., Aneja, J., Behl, H., et al. (2024). Phi-4 technical report. *arXiv preprint arXiv:2412.08905*.
- Biderman, S., Schoelkopf, H., Anthony, Q. G., et al. (2023). Pythia: A suite for analyzing large language models across training and scaling. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202, pages 2397–2430.
- Bommasani, R., Hudson, D. A., Adeli, E., Altman, R., Arora, S., von Arx, S., Bernstein, M. S., Bohg, J., Bosselut, A., Brunskill, E., et al. (2021). On the opportunities and risks of foundation models. *arXiv preprint arXiv:2108.07258*.
- Bottou, L. (2010). Large-scale machine learning with stochastic gradient descent. In *Proceedings of COMPSTAT 2010*, pages 177–187. Springer.
- Chen, M., Tworek, J., Jun, H., Yuan, Q., Pinto, H. P. d. O., Kaplan, J., Edwards, H., Burda, Y., Joseph, N., Brockman, G., et al. (2021). Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*.
- Collet, Y. and Kucherawy, M. S. (2018). Zstandard compression and the application/zstd media type. RFC 8478, RFC Editor. Obsoleted by RFC 8878.
- Cover, T. M. and Thomas, J. A. (2006). *Elements of Information Theory*. Wiley, 2 edition.
- Dai, D., Deng, C., Zhao, C., et al. (2024). DeepSeek-MoE: Towards ultimate expert specialization in mixture-of-experts language models. *arXiv preprint arXiv:2401.06066*.
- Deutsch, P. and Gailly, J.-L. (1996). ZLIB compressed data format specification version 3.3. RFC 1950, RFC Editor.
- Devlin, J., Chang, M.-W., Lee, K., and Toutanova, K. (2019). Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 conference of the North American chapter of the association for computational linguistics: human language technologies, volume 1 (long and short papers)*, pages 4171–4186.
- Dosovitskiy, A., Beyer, L., Kolesnikov, A., Weissenborn, D., Zhai, X., Unterthiner, T., Dehghani, M., Minderer, M., Heigold, G., Gelly, S., et al. (2021). An image is worth 16x16 words: Transformers for image recognition at scale. In *International Conference on Learning Representations*.
- Ferragina, P., Manzini, G., Gagie, T., Köppl, D., Navarro, G., Striani, M., and Tosoni, F. (2022). Improving matrix-vector multiplication via lossless grammar-compressed matrices. *Proceedings of the VLDB Endowment*, 15(10):2175–2187.
- Gemma Team (2025). Gemma 3. <https://goo.gle/Gemma3Report>.
- Gholami, A., Kim, S., Dong, Z., Yao, Z., Mahoney, M. W., and Keutzer, K. (2021). A survey of quantization methods for efficient neural network inference. *arXiv preprint arXiv:2103.13630*.
- Godey, N., Antoun, W., Touchent, R., Bawden, R., de la Clergerie, É., Sagot, B., and Seddah, D. (2025). Gaperon: A peppered english-french generative language model suite. *arXiv preprint arXiv:2510.25771*.
- Gou, J., Yu, B., Maybank, S. J., and Tao, D. (2021). Knowledge distillation: A survey. *International Journal of Computer Vision*, 129(6):1789–1819.
- Gray, R. M. (1984). Vector quantization. *IEEE ASSP Magazine*, 1(2):4–29.
- Guo, D., Yang, D., Zhang, H., et al. (2025). DeepSeek-R1: Incentivizing reasoning capability in LLMs via reinforcement learning. *arXiv preprint arXiv:2501.12948*.
- Hao, Y., Cao, Y., and Mou, L. (2024). NeuZip: Memory-efficient training and inference with dynamic compression of neural networks. *arXiv preprint arXiv:2410.20650*.
- He, K., Zhang, X., Ren, S., and Sun, J. (2016). Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778.
- Herscovitch, M., Wood, A., Choshen, L., Girmonsky, G., Leibovitz, R., Ozeri, O., Ennmouri, I., Malka, M., Chin, P., Sundararaman, S., et al. (2025). Zipnn: Lossless compression for ai models. In *2025 IEEE 18th International Conference on Cloud Computing (CLOUD)*, pages 186–198. IEEE.
- Ibrahim, K., Maheronnaghsh, M., and Moshovos, A. (2026). Shannonic: Efficient entropy-optimal compression for ML workloads. In *Proceedings of Machine Learning and Systems*, volume 8.
- Jordan, K. (2024). Muon: An optimizer for hidden layers in neural networks. <https://kellerjordan.github.io/posts/muon/>.
- Karpathy, A. (2015). Tiny Shakespeare dataset. <https://github.com/karpathy/char-rnn/tree/master/data/tinyshakespeare>.
- Kasneci, E., Sessler, K., Küchemann, S., Bannert, M., Dementieva, D., Fischer, F., Gasser, U., Groh, G., Günnemann, S., Hüllermeier, E., et al. (2023). ChatGPT for good? on opportunities and challenges of large language models for education. *Learning and Individual Differences*, 103:102274.
- Kingma, D. P. and Ba, J. (2015). Adam: A method for stochastic optimization. In *International Conference on Learning Representations*.

- Krizhevsky, A. (2009). Learning multiple layers of features from tiny images. Technical report, University of Toronto.
- LeCun, Y., Bottou, L., Bengio, Y., and Haffner, P. (1998). Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324.
- LeCun, Y., Denker, J. S., and Solla, S. A. (1989). Optimal brain damage. In *Advances in Neural Information Processing Systems*, pages 598–605.
- Lin, J. (1991). Divergence measures based on the shannon entropy. *IEEE Transactions on Information Theory*, 37(1):145–151.
- Liu, Z., Mao, H., Wu, C.-Y., Feichtenhofer, C., Darrell, T., and Xie, S. (2022). A convnet for the 2020s. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 11976–11986.
- Loshchilov, I. and Hutter, F. (2019). Decoupled weight decay regularization. In *International Conference on Learning Representations*.
- Ma, X., Qin, M., Sun, F., Hou, Z., Yuan, K., Xu, Y., Wang, Y., Chen, Y.-K., Jin, R., and Xie, Y. (2022). Effective model sparsification by scheduled grow-and-prune methods. In *International Conference on Learning Representations*.
- Meta (2024). Llama 3.2 model card. <https://huggingface.co/meta-llama/Llama-3.2-3B>.
- Navarro, G. (2016). *Compact data structures: A practical approach*. Cambridge University Press.
- NVIDIA (2025). Llama-3.1-Nemotron-Nano-8B-v1 model card. <https://huggingface.co/nvidia/Llama-3.1-Nemotron-Nano-8B-v1>.
- OpenAI (2023). GPT-4 technical report. *arXiv preprint arXiv:2303.08774*.
- Patterson, D., Gonzalez, J., Le, Q., Liang, C., Munguia, L.-M., Rothchild, D., So, D., Texier, M., and Dean, J. (2021). Carbon emissions and large neural network training.
- Podell, D., English, Z., Lacey, K., Blattmann, A., Dockhorn, T., Müller, J., Penna, J., and Rombach, R. (2023). SDXL: Improving latent diffusion models for high-resolution image synthesis. *arXiv preprint arXiv:2307.01952*.
- Qwen Team (2026). Qwen3.5: Towards native multimodal agents. <https://qwen.ai/blog?id=qwen3.5>.
- Radford, A., Kim, J. W., Xu, T., Brockman, G., McLeavey, C., and Sutskever, I. (2023). Robust speech recognition via large-scale weak supervision. In *Proceedings of the 40th International Conference on Machine Learning*, volume 202, pages 28492–28518.
- Radford, A., Wu, J., Child, R., Luan, D., Amodei, D., and Sutskever, I. (2019). Language models are unsupervised multitask learners. Technical report, OpenAI.
- Rombach, R., Blattmann, A., Lorenz, D., Esser, P., and Ommer, B. (2022). High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10684–10695.
- RZ412 (2025). Qwen2.5-7B-Instruct-S1K-DeepSeek-Distilled model card. <https://huggingface.co/RZ412/Qwen2.5-7B-Instruct-S1K-DeepSeek-Distilled>.
- Saha, R., Sagan, N., Srivastava, V., Goldsmith, A., and Pilanci, M. (2024). Compressing large language models using low rank and low precision decomposition. *arXiv preprint arXiv:2405.18886*.
- Sekoyan, M., Koluguri, N. R., Tadevosyan, N., Zelasko, P., Bartley, T., Karpov, N., Balam, J., and Ginsburg, B. (2025). Canary-1B-v2 & Parakeet-TDT-0.6B-v3: Efficient and high-performance models for multilingual ASR and AST. *arXiv preprint arXiv:2509.14128*.
- Siméoni, O., Vo, H. V., Seitzer, M., et al. (2025). DI-NOv3. *arXiv preprint arXiv:2508.10104*.
- Singhal, K., Azizi, S., Tu, T., Mahdavi, S. S., Wei, J., Chung, H. W., Scales, N., Tanwani, A., Cole-Lewis, H., Pfohl, S., et al. (2023). Large language models encode clinical knowledge. *Nature*, 620:172–180.
- Sundrani, S., Tudisco, F., and Minervini, P. (2025). Low-rank compression of language models via differentiable rank selection. *arXiv preprint arXiv:2512.13733*.
- Tan, M. and Le, Q. (2019). EfficientNet: Rethinking model scaling for convolutional neural networks. In *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 6105–6114. PMLR.
- Team OLMo, Walsh, P., Soldaini, L., Groeneveld, D., Lo, K., Arora, S., Bhagia, A., Gu, Y., Huang, S., Jordan, M., Lambert, N., Schwenk, D., Tafjord, O., Anderson, T., Atkinson, D., Brahman, F., Clark, C., Dasigi, P., Dziri, N., Ettinger, A., Guerquin, M., Heineman, D., Ivison, H., Koh, P. W., Liu, J., Malik, S., Merrill, W., Miranda, L. J. V., Morrison, J., Murray, T., Nam, C., Poznanski, J., Pyatkin, V., Rangapur, A., Schmitz, M., Skjonsberg, S., Wadden, D., Wilhelm, C., Wilson, M., Zettlemoyer, L., Farhadi, A., Smith, N. A., and Hajishirzi, H. (2024). 2 OLMo 2 furious. *arXiv preprint arXiv:2501.00656*.

- Trillion Labs (2025). Tri 1.9B intermediate training checkpoints. <https://huggingface.co/trillionlabs/1.9B-Intermediate-Checkpoints>.
- Tschannen, M. et al. (2025). SigLIP 2: Multilingual vision-language encoders with improved semantic understanding, localization, and dense features. *arXiv preprint arXiv:2502.14786*.
- Waddington, D. G. and Constantinescu, C. (2025). Lossless compression for llm tensor incremental snapshots. *arXiv preprint arXiv:2505.09810*.
- Yakefu, A., Apolinário, and Solaiman, I. (2026). State of open models: Summer 2026 observations. Hugging Face Blog.
- Yang, A., Li, A., Yang, B., et al. (2025). Qwen3 technical report. *arXiv preprint arXiv:2505.09388*.
- Yang, A., Yang, B., Zhang, B., Hui, B., Zheng, B., Yu, B., Li, C., Liu, D., Huang, F., Wei, H., Lin, H., Yang, J., Tu, J., Zhang, J., Yang, J., Yang, J., Zhou, J., Lin, J., Dang, K., Lu, K., Bao, K., Yang, K., Yu, L., Li, M., Xue, M., Zhang, P., Zhu, Q., Men, R., Lin, R., Li, T., Tang, T., Xia, T., Ren, X., Ren, X., Fan, Y., Su, Y., Zhang, Y., Wan, Y., Liu, Y., Cui, Z., Zhang, Z., and Qiu, Z. (2024). Qwen2.5 technical report. *arXiv preprint arXiv:2412.15115*.
- Yang, Z., Zhang, T., Xie, J., Li, C., Xu, Z., and Shrivastava, A. (2026). To compress or not? pushing the frontier of lossless GenAI model weights compression with exponent concentration. In *International Conference on Learning Representations*.
- Yubeaton, P., Mahmoud, T., Naga, S., Taheri, P., Xia, T., George, A., Khalil, Y., Zhang, S. Q., Joshi, S., Hegde, C., et al. (2025). Huff-llm: End-to-end lossless compression for efficient llm inference. *arXiv preprint arXiv:2502.00922*.
- Zhang, T., Hariri, M., Zhong, S. H., Chaudhary, V., Sui, Y., Hu, X., and Shrivastava, A. (2025). 70% size, 100% accuracy: Lossless llm compression for efficient gpu inference via dynamic-length float (dfloat11). In *Advances in Neural Information Processing Systems*.
- Zhu, M. H. and Gupta, S. (2017). To prune, or not to prune: Exploring the efficacy of pruning for model compression. *arXiv preprint arXiv:1710.01878*.

NeuralZip: Reusable Setup for Fast Lossless Compression

Supplementary Materials

A ADDITIONAL EXPERIMENTS

We extend the comparison to 18 models covering vision, language, audio, diffusion, and mixture-of-experts architectures. With the setup already available, NEURALZIP compresses faster than its baselines across the reported models, generally with similar or lower exponent storage. Setup transfer avoids rebuilding codebooks on the target, but its compression ratio depends on the source model. We report each transfer source explicitly and retain cases where transfer increases storage.

Table 3: **Model compression and setup reuse.**

Model	Compressor	Setup Compression		Exponent ratio (%) ↓	Total memory (GB) ↓	GPU memory (GiB) ↓	Inference (ms) ↓
		(s) ↓	(s) ↓				
ResNet-101 (He et al., 2016)	BF16	–	–	100.000	0.089	0.093	14.73
	ZIPNN	–	0.445	34.193	0.060	–	–
	NEURALZIP (own)	3.449	0.026	33.776	0.060	0.071	16.47
	NEURALZIP (from ResNet-152)	–	0.027	34.129	0.060	0.073	16.37
	DFLOAT11	–	19.216	37.809	0.062	0.070	15.78
ConvNeXt-Base (Liu et al., 2022)	BF16	–	–	100.000	0.177	0.174	23.43
	ZIPNN	–	0.554	33.045	0.118	–	–
	NEURALZIP (own)	2.880	0.039	32.821	0.118	0.132	16.08
	NEURALZIP (from ConvNeXt-Large)	–	0.038	32.965	0.118	0.134	16.22
	DFLOAT11	–	31.030	35.919	0.120	0.130	15.51
EfficientNet-B3 (Tan and Le, 2019)	BF16	–	–	100.000	0.025	0.031	4.74
	ZIPNN	–	0.308	33.321	0.016	–	–
	NEURALZIP (own)	2.212	0.014	33.543	0.017	0.028	6.47
	NEURALZIP (from EfficientNet-B7)	–	0.084	34.723	0.017	0.029	6.60
	DFLOAT11	–	4.632	39.305	0.017	0.027	5.98
GPT-2 (Radford et al., 2019)	BF16	–	–	100.000	0.249	0.247	10.72
	ZIPNN	–	0.294	33.174	0.166	–	–
	NEURALZIP (own)	2.281	0.044	32.891	0.165	0.206	9.94
	NEURALZIP (from GPT-2 Medium)	–	0.050	34.311	0.167	0.207	9.97
	DFLOAT11	–	39.547	35.869	0.169	0.205	9.71
BERT Base (Devlin et al., 2019)	BF16	–	–	100.000	0.220	0.221	20.77
	ZIPNN	–	0.349	32.598	0.146	–	–
	NEURALZIP (own)	1.883	0.040	32.353	0.146	0.178	16.89
	NEURALZIP (from BERT Large)	–	0.042	32.937	0.146	0.179	15.04
	DFLOAT11	–	36.998	35.336	0.149	0.176	16.97
Qwen 2.5 7B (Yang et al., 2024)	BF16	–	–	100.000	15.231	14.236	423.24
	ZIPNN	–	4.686	33.347	10.153	–	–
	NEURALZIP (own)	267.972	2.568	32.965	10.127	11.130	579.56
	NEURALZIP (from Qwen 2.5 14B)	–	2.592	34.946	10.278	11.252	544.17
	DFLOAT11	–	2405.024	36.069	10.362	11.012	537.46
Qwen 3.5 2B (Qwen Team, 2026)	BF16	–	–	100.000	4.548	4.130	168.51
	ZIPNN	–	2.712	33.160	3.028	–	–
	NEURALZIP (own)	38.970	0.698	32.906	3.023	3.259	195.74
	NEURALZIP (from Qwen 3.5 27B)	–	0.711	33.369	3.033	3.272	192.51
	DFLOAT11	–	720.987	35.777	3.088	3.303	189.06
OLMo-2-7B (Team OLMo et al., 2024)	BF16	–	–	100.000	14.597	13.603	395.83
	ZIPNN	–	5.925	33.619	9.753	–	–
	NEURALZIP (own)	1151.162	2.409	33.021	9.710	10.455	531.33
	NEURALZIP (from OLMo-2 13B)	–	2.393	35.156	9.866	10.684	515.14
	DFLOAT11	–	2304.563	37.201	10.014	10.462	519.05
Llama 3.2 3B (Meta, 2024)	BF16	–	–	100.000	6.425	5.993	214.55
	ZIPNN	–	3.139	32.907	4.270	–	–
	NEURALZIP (own)	46.482	1.046	32.645	4.262	4.543	265.93
	NEURALZIP (from Llama 3.2 1B)	–	1.509	33.243	4.281	4.540	262.73
	DFLOAT11	–	1005.953	35.499	4.353	4.500	256.91

Continued on next page

Table 3 (continued)

Model	Compressor	Setup (s) ↓	Compression (s) ↓	Exponent ratio (%) ↓	Total memory (GB) ↓	GPU memory (GiB) ↓	Inference (ms) ↓
Phi-4 14B (Abdin et al., 2024)	BF16	–	–	100.000	29.319	27.392	659.60
	ZIPNN	–	8.792	32.618	19.442	–	–
	NEURALZIP (own)	207.349	4.868	32.348	19.403	20.013	945.63
	NEURALZIP (from Qwen 2.5 7B)	–	4.393	34.236	19.680	20.086	867.96
	DFLOAT11	–	4997.372	35.217	19.822	19.785	888.47
Gemma 3 4B (Gemma Team, 2025)	BF16	–	–	100.000	8.600	8.029	259.32
	ZIPNN	–	5.966	32.953	5.717	–	–
	NEURALZIP (own)	128.738	1.875	32.687	5.706	6.096	314.46
	NEURALZIP (from Gemma 3 12B)	–	2.230	33.742	5.752	6.140	311.54
	DFLOAT11	–	1373.542	35.545	5.829	6.149	309.45
Stable Diffusion v1.5 UNet (Rombach et al., 2022) (Podell et al., 2023)	BF16	–	–	100.000	1.719	1.623	177.13
	ZIPNN	–	1.542	33.292	1.146	–	–
	NEURALZIP (own)	25.691	0.288	32.969	1.143	1.207	195.88
	NEURALZIP (from SDXL Base UNet)	–	0.270	37.865	1.185	1.249	194.34
	DFLOAT11	–	276.392	35.932	1.168	1.209	191.49
Qwen3-30B-A3B (Yang et al., 2025)	BF16	–	–	100.000	61.064	56.879	2047.27
	ZIPNN	–	73.374	32.685	40.514	–	–
	NEURALZIP (own)	948.117	11.621	32.399	40.430	56.758	2065.53
	NEURALZIP (from Qwen3-30B-A3B Base)	–	15.836	32.410	40.434	56.761	2062.21
	DFLOAT11	–	9672.456	35.225	41.287	56.734	2081.14
DeepSeekMoE-16B (Dai et al., 2024)	BF16	–	–	100.000	32.751	30.591	1799.15
	ZIPNN	–	30.102	32.609	21.717	–	–
	NEURALZIP (own)	182.730	5.569	32.319	21.671	22.171	2118.82
	NEURALZIP (from DeepSeekMoE-16B Chat)	–	8.624	32.351	21.676	22.272	2113.50
	DFLOAT11	–	5103.629	35.169	22.135	21.893	2067.32
DeepSeek-R1-Distill-Llama 8B (Guo et al., 2025) (NVIDIA, 2025)	BF16	–	–	100.000	16.061	14.965	451.71
	ZIPNN	–	6.647	32.724	10.659	–	–
	NEURALZIP (own)	142.823	2.690	32.452	10.637	11.572	602.54
	NEURALZIP (from Llama 3.1 Nemotron Nano 8B)	–	3.747	32.633	10.652	11.587	576.20
	DFLOAT11	–	2558.282	35.297	10.865	11.448	569.47
Qwen 2.5 7B Instruct Distilled (RZ412, 2025) (Yang et al., 2024)	BF16	–	–	100.000	15.231	14.236	408.47
	ZIPNN	–	12.079	33.344	10.153	–	–
	NEURALZIP (own)	299.476	3.627	32.958	10.127	11.129	537.95
	NEURALZIP (from Qwen 2.5 7B)	–	2.591	33.078	10.136	11.133	527.77
	DFLOAT11	–	2411.115	36.067	10.362	11.012	530.82
SigLIP 2 So400m (Tschannen et al., 2025)	BF16	–	–	100.000	2.272	2.148	162.92
	ZIPNN	–	2.207	34.983	1.534	–	–
	NEURALZIP (own)	40.917	0.370	34.078	1.523	1.672	155.37
	NEURALZIP (from SigLIP 2 Giant)	–	0.579	34.456	1.528	1.679	153.67
	DFLOAT11	–	375.631	37.946	1.567	1.690	176.16
Whisper v3 Turbo (Radford et al., 2023)	BF16	–	–	100.000	1.618	1.517	327.48
	ZIPNN	–	1.649	33.861	1.083	–	–
	NEURALZIP (own)	45.678	0.265	33.525	1.080	1.154	333.65
	NEURALZIP (from Whisper large-v3)	–	0.255	34.514	1.088	1.159	333.78
	DFLOAT11	–	261.572	36.665	1.105	1.153	337.13

B ABLATION STUDY

B.1 Optimizers entropy.

We track exponent entropy on BF16 copies of all unique trainable parameters over 1,000 updates of an MLP, ResNet-18 (He et al., 2016), ViT-Base (Dosovitskiy et al., 2021), and GPT-2 (Radford et al., 2019), using SGD (Bottou, 2010), Adam (Kingma and Ba, 2015), AdamW (Loshchilov and Hutter, 2019), and Muon (Jordan, 2024). Curves show three-seed means. Adam increases entropy more in the MLP and transformer experiments, while AdamW and Muon remain relatively stable.

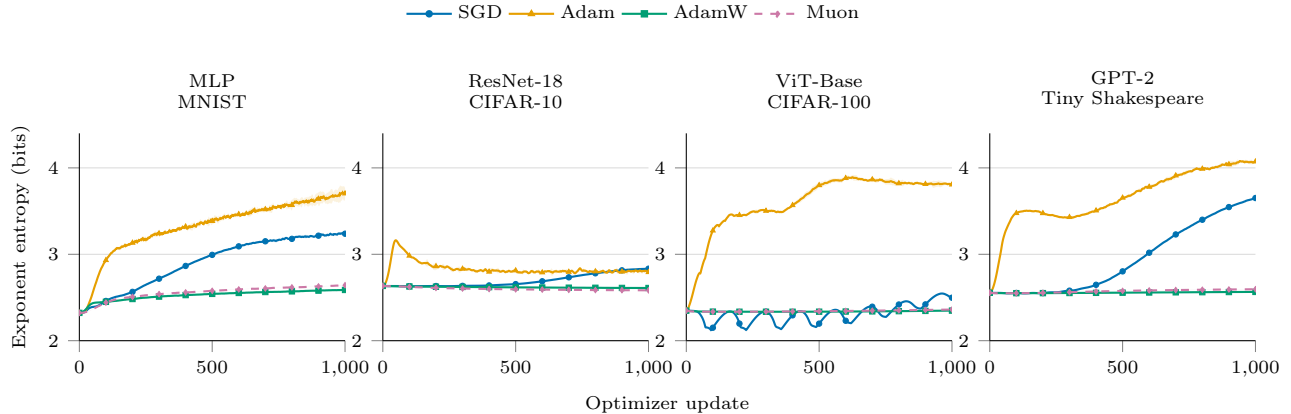


Figure 7: **BF16 exponent entropy during early training.** Lines and shaded bands show the mean ± 1 sample standard deviation across three seeds. Models are trained from scratch on MNIST (LeCun et al., 1998), CIFAR-10 (Krizhevsky, 2009), CIFAR-100 (Krizhevsky, 2009), and Tiny Shakespeare (Karpathy, 2015), respectively, with matched initialization and minibatches across optimizers. Training uses random initialization and matched minibatch order (seeds 17, 29, 43). Effective batches are 128 (images) and 32 (GPT-2, 128 tokens), with ViT/GPT-2 microbatches 8/4. SGD rates are 0.05 (images)/0.1 (GPT-2), Adam/AdamW/Muon rates are 10^{-3} (MLP/ResNet-18)/ 3×10^{-4} (ViT/GPT-2). We use a 50-update linear warm-up, norm-1 clipping, and a weight decay of 0.01 for matrix/convolution weights, zero otherwise. Images use official train/test splits, fixed channel standardization, no augmentation, and 224×224 bilinear ViT resizing, Tiny Shakespeare uses GPT-2 BPE and a contiguous 90%/10% train/hold-out split. Full optimizer parameters, preprocessing constants, architecture adjustments, and evaluation settings are specified in the anonymized repository.

B.2 Level selection.

We compare global, per-tensor, per-chunk, and JS-based grouping. Global grouping has a low setup cost but provides the highest exponent ratio in these experiments. Per-chunk grouping prepares many tables and requires substantially more setup time, without achieving the smallest archive. JS-based grouping reaches ratios close to, or slightly better than, per-tensor grouping while preparing fewer tables. This supports grouping chunks by their exponent distributions instead of assigning a separate codebook to every tensor or chunk.

Table 4: Grouping-level selection.

Model	Grouping	Exponent ratio (%) $\downarrow$	Compression (s) $\downarrow$	Setup (s) $\downarrow$	Stored codebooks $\downarrow$
Qwen 3.5 0.8B	Global	35.810	0.283	4.482	1
	Per tensor	33.111	0.280	10.356	428
	Per chunk	33.700	0.457	42.415	6908
	JS ($\tau = 0.05$)	32.985	0.440	17.976	242
Gemma 3 1B	Global	36.197	0.281	4.975	1
	Per tensor	32.734	0.276	10.074	340
	Per chunk	33.441	0.351	46.717	7843
	JS ($\tau = 0.05$)	32.724	0.330	15.067	205

Table 4 (continued)

Model	Grouping	Exponent ratio (%) ↓	Compression (s) ↓	Setup (s) ↓	Stored codebooks ↓
DINOv3 ConvNeXt-B	Global	34.088	0.032	0.407	1
	Per tensor	33.666	0.033	2.060	337
	Per chunk	34.294	0.035	4.215	930
	JS ($\tau = 0.05$)	33.687	0.033	2.898	256
DINOv3 ViT-B/16	Global	34.589	0.029	0.415	1
	Per tensor	33.520	0.031	1.944	187
	Per chunk	34.196	0.034	4.050	815
	JS ($\tau = 0.05$)	33.452	0.031	1.768	138
SigLIP 2 Base	Global	42.574	0.114	1.740	1
	Per tensor	35.644	0.113	4.958	400
	Per chunk	36.139	0.122	17.697	3165
	JS ($\tau = 0.05$)	35.383	0.111	7.307	281
Parakeet TDT 0.6B v3	Global	35.965	0.183	2.820	1
	Per tensor	33.282	0.185	9.976	665
	Per chunk	33.902	0.197	29.336	5209
	JS ($\tau = 0.05$)	33.213	0.183	20.224	417

B.3 SHARING ONLY vs PACKING ONLY trade-off.

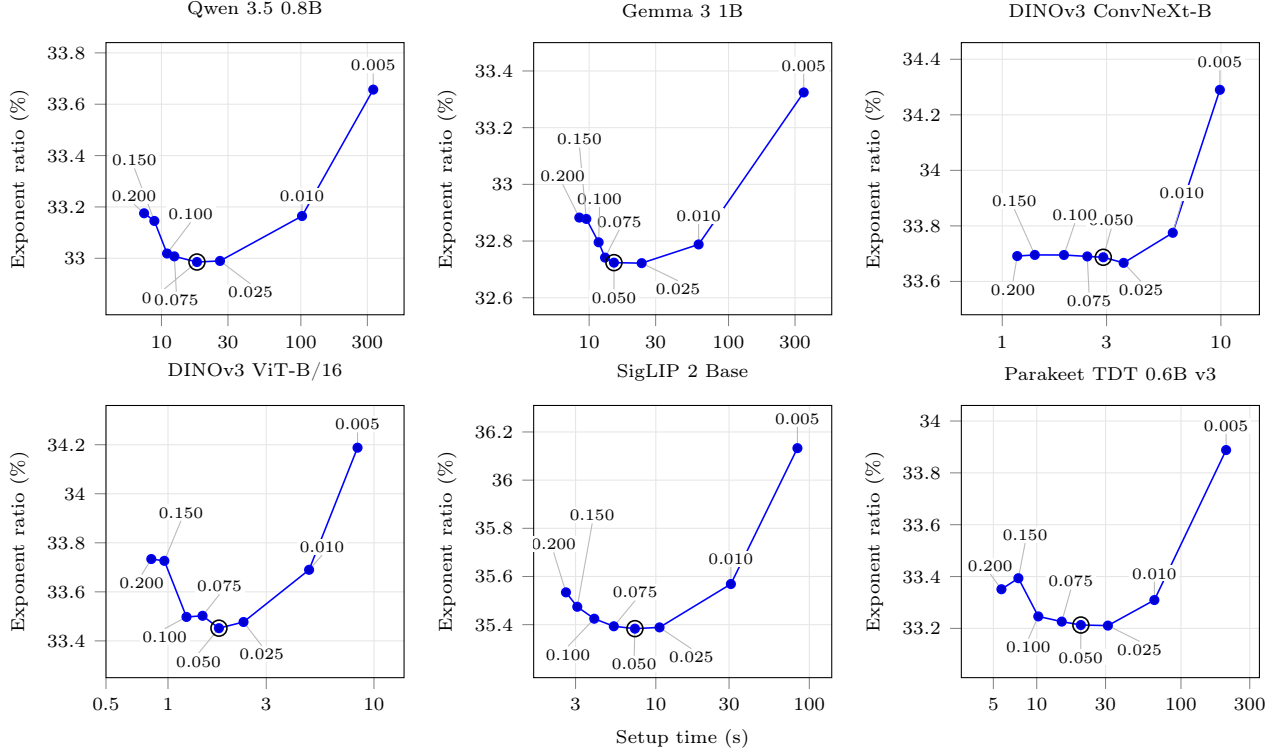
We isolate codebook sharing and exponent packing to measure their contributions. SHARING ONLY gives the shortest compression time, but its exponent ratio is higher. PACKING ONLY improves the ratio relative to SHARING ONLY, at the cost of more setup work and larger codebook metadata. Combining both mechanisms gives the lowest exponent ratio across all six models. For Qwen 3.5 0.8B, sharing reduces the stored codebook size from approximately 6,283 KiB in PACKING ONLY to 82 KiB in NEURALZIP. Sharing therefore reduces the metadata cost of using packed codebooks.

Table 5: Sharing and packing trade-off.

Model	Variant	Exponent ratio (%) ↓	Compression (s) ↓	Setup (s) ↓	Stored codebooks ↓	Codebook storage (KiB) ↓
Qwen 3.5 0.8B	SHARING ONLY	34.494	0.399	15.732	228	20.078
	PACKING ONLY	33.700	0.457	42.415	6908	6282.674
	NEURALZIP	32.985	0.440	17.976	242	81.729
Gemma 3 1B	SHARING ONLY	34.565	0.282	14.141	196	17.190
	PACKING ONLY	33.441	0.351	46.717	7843	7174.744
	NEURALZIP	32.724	0.330	15.067	205	63.169
DINOv3 ConvNeXt-B	SHARING ONLY	35.505	0.029	2.432	256	23.710
	PACKING ONLY	34.294	0.035	4.215	930	679.353
	NEURALZIP	33.687	0.033	2.898	256	41.435
DINOv3 ViT-B/16	SHARING ONLY	35.415	0.026	1.315	137	12.020
	PACKING ONLY	34.196	0.034	4.050	815	656.237
	NEURALZIP	33.452	0.031	1.768	138	37.351
SigLIP 2 Base	SHARING ONLY	38.032	0.091	5.782	276	24.145
	PACKING ONLY	36.139	0.122	17.697	3165	2876.626
	NEURALZIP	35.383	0.111	7.307	281	80.115
Parakeet TDT 0.6B v3	SHARING ONLY	34.826	0.149	18.539	412	38.993
	PACKING ONLY	33.902	0.197	29.336	5209	4553.405
	NEURALZIP	33.213	0.183	20.224	417	97.723

B.4 Threshold sweep.

We vary the JS threshold τ from 0.005 to 0.200 to examine the trade-off between setup time and exponent storage. We did not see changes in compression time, so we do not report it. Very small thresholds require much more setup time and do not necessarily improve the final ratio. Larger thresholds shorten setup, although compression can worsen as less similar chunks share codebooks. The default threshold of 0.05 is close to the best observed ratio for every tested model while avoiding the high setup cost of stricter thresholds.


 Figure 8: **Own-setup JS-threshold sweep.** Circles mark the default $\tau = 0.05$.

B.5 Setup costs.

We separate setup time into exponent extraction, histogram computation, grouping, packed-vocabulary preparation, and codebook construction. JS search and group creation are the largest components for all six models, accounting for approximately 49–77% of setup time. Huffman construction and refitting take a much smaller fraction. The main setup cost is therefore finding compatible groups rather than constructing the final codebooks. Reusing a frozen setup avoids repeating this work for subsequent compression calls.

 Table 6: **Setup costs.**

Phase	Qwen 3.5 0.8B (s)	Gemma 3 1B (s)	DINOv3 ConvNeXt-B (s)	DINOv3 ViT-B/16 (s)	SigLIP 2 Base (s)	Parakeet TDT 0.6B v3 (s)
Exponent extraction	3.998	2.070	0.107	0.119	0.966	1.036
Chunk histograms	3.352	2.984	0.244	0.282	1.130	1.827
JS search and group creation	8.782	8.564	2.053	0.869	3.773	15.555
Centroids and source sampling	0.101	0.089	0.017	0.017	0.056	0.077
Packed vocabulary and pruning	0.405	0.330	0.115	0.098	0.276	0.358
Token counting	0.325	0.260	0.061	0.067	0.207	0.259
Huffman construction/refit	0.133	0.098	0.114	0.065	0.136	0.203
Other setup work	0.880	0.672	0.187	0.251	0.763	0.909
Total	17.976	15.067	2.898	1.768	7.307	20.224

Let N denote the number of weights, C the number of chunks, and K the number of resulting clusters. Exponent extraction and histogram computation take $O(N)$ time. Greedy codebook sharing compares each chunk with existing centroids, costing $O(CK)$ for a fixed exponent alphabet. This can become $O(C^2)$ when every chunk forms a separate cluster. For each cluster, counting packed exponents takes $O(m)$ time on a sample of $m \leq M$ exponents, while constructing a Huffman table costs $O(S \log S)$ for S symbols. Vocabulary pruning repeats the sample scan and table construction, giving $O(I(m + S \log S))$ per cluster, where both the vocabulary size and the number of pruning rounds I are bounded. Source-bank preparation adds a fixed number of source scans and bounded-sample table constructions.