

MemFLoRA: Memory-Floor LoRA for CNN Adaptation at the Edge

Mehmet Emre Akbulut
Technical University of Munich
Munich, Germany
mehmet.akbulut@tum.de

Johannes Geier
Technical University of Munich
Munich, Germany
johannes.geier@tum.de

Ulf Schlichtmann
Technical University of Munich
Munich, Germany
ulf.schlichtmann@tum.de

Abstract

On-device learning is necessary when the model encounters user-, sensor-, or environment-specific shifts after deployment. Although parameter-efficient fine-tuning (PEFT) methods, particularly Low-Rank Adaptation (LoRA) variants, enable efficient adaptation at the edge, the limiting resource for Convolutional Neural Network (CNN) adaptation is often not the number of trainable parameters but the activation state that must be retained until the backward pass. This paper introduces Memory-Floor LoRA (MemFLoRA), a low-rank CNN adapter built around a memory-first design principle rather than a direct application of transformer-oriented LoRA. Instead of merely reducing trainable weights, we define an activation-memory-floor criterion: trainable backward computations must not depend on full-width layer inputs. The resulting adapter freezes the down-projection, trains a scale-matched up-projection, and combines eval-mode backbone normalization with activation-minimal backward rules, reducing saved state to the low-rank branch.

Evaluated on three Human Activity Recognition (HAR) datasets and two CNN backbones under subject, body-location, and sensor-placement shifts, MemFLoRA reduces saved-activation memory by 98.5-98.7% and peak training-state memory by 94.9-97.3% relative to full fine-tuning, while matching or exceeding CNN PEFT baselines.

CCS Concepts

• Computing methodologies → Neural networks.

Keywords

LoRA, On-Device Learning, Edge AI, CNN

ACM Reference Format:

Mehmet Emre Akbulut, Johannes Geier, and Ulf Schlichtmann. 2027. MemFLoRA: Memory-Floor LoRA for CNN Adaptation at the Edge. In *32nd Asia and South Pacific Design Automation Conference (ASPDAC '27)*, January 25–28, 2027, Tokyo, Japan. ACM, New York, NY, USA, 8 pages. <https://doi.org/10.1145/3840404.3848401>

1 Introduction

Artificial Intelligence (AI) at the edge has become increasingly important as intelligent sensing devices become deeply embedded in everyday life. Smartphones, wearables, and Internet of Things (IoT) platforms interact with their environments and generate large amounts of domain-specific data. This trend pushes AI computation

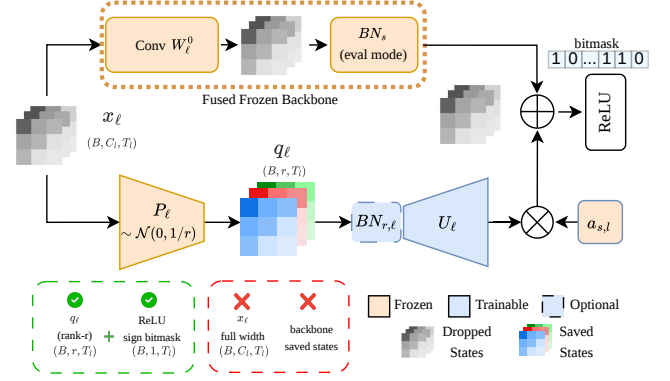


Figure 1: Brief overview of MemFLoRA computation and saved-state graph, reducing persistent saved state from $O(BC_l T_l)$ to $O(Br T_l)$ plus a bit-packed ReLU mask.

closer to the data source, enabling lower latency, reduced communication costs, and improved privacy compared with sending all data to cloud servers [26].

However, a fixed pretrained model may fail to provide robust predictions after deployment. For example, in sensor-based HAR, the target stream can differ from the source data due to subject-dependent motion patterns, sensor-placement deviations, device heterogeneity, and evolving user behavior [16, 21]. These changes can lead to distribution shifts or concept drifts and degrade the out-of-distribution performance of fixed pretrained models. Since the corrective data are generated locally and may be privacy-sensitive, adapting the model on-device is preferable to repeated cloud-side retraining. However, full fine-tuning updates all model parameters and incurs substantial memory, compute, and energy overhead, which can exceed the resources of embedded systems and motivate more selective adaptation strategies.

Since its introduction [9], LoRA has become a widely used adaptation method for Large Language Models (LLMs), but its role in CNNs and extreme-edge learning scenarios remains much less explored. The standard reading of PEFT is that reducing the number of trainable parameters reduces the training-memory footprint. This assumption is often reasonable in LLMs, where optimizer state and trainable weight gradients dominate. However, for edge CNNs, memory is often dominated by the activation tensors that automatic differentiation retains for backward propagation, not by the optimizer state or the trainable parameter set [4].

This mismatch indicates that parameter-efficient methods may still be memory-expensive, motivating MemFLoRA¹: a LoRA-style CNN adapter with an activation-memory floor. The design rule is

¹Code is available at <https://github.com/mehmetemreakbulut/MemFLoRA>.



This work is licensed under a Creative Commons Attribution 4.0 International License. *ASPDAC '27, Tokyo, Japan*

© 2027 Copyright held by the owner/author(s).

ACM ISBN 979-8-4007-2923-2/2027/01

<https://doi.org/10.1145/3840404.3848401>

that no trainable backward computation should require the full-width activation tensor. The adapter satisfies this rule through a frozen down-projection, a trainable up-projection scale-matched to the frozen backbone, and eval-mode backbone normalization. This restricts the saved state to the low-rank branch while preserving adaptation capacity. In summary, our main contributions are:

- By decomposing the saved-tensor cost into three pillars, we define an activation-memory-floor criterion requiring that no persistent full-precision activation tensor used by trainable backward computations scales with layer width, and show that MemFLoRA satisfies it with rank- r saved state. Enforcing this floor reduces saved-activation memory by 98.5-98.7% and total peak training-state memory by 94.9-97.3% relative to full fine-tuning.
- We introduce a memory-floor CNN adapter that combines a frozen down-projection, a scale-matched trainable up-projection, eval-mode backbone normalization, and activation-minimal backward rules, together with a streaming-gradient (SG) variant that recovers the exact projection gradient without persistently saving the full-width activation.
- Across three HAR datasets spanning subject, location, and sensor-placement shifts and two CNN backbones, we match or exceed all evaluated rank-dependent PEFT methods in mean Macro-F1 across ranks and backbones.

2 Background and Related Work

Prior work on efficient adaptation has followed two complementary directions. LoRA-style PEFT methods restrict updates to low-rank branches, reducing trainable parameters and optimizer-state costs while remaining easy to integrate into pretrained models and, in many cases, mergeable into the backbone for inference. On-device training methods instead prioritize the dominant training-memory cost by reducing saved activations through selective updates and freezing. Our work bridges these directions by co-designing the adapter architecture and training graph around this activation-memory constraint, rather than treating activation reduction and adaptation as independent problems.

2.1 Low-Rank Adaptation

LoRA introduced low-rank adaptation by injecting trainable low-rank updates into frozen pretrained weights, reducing trainable parameters while preserving accuracy [9]. Most low-rank adaptation research focuses on transformer-based models and the adapter architecture. Work on CNNs is sparser and largely adopts the same parameter-centric perspective as its transformer-based counterparts [8, 11, 15] rather than reconsidering the activation state retained during training. ConvLoRA [1] combines LoRA with AdaBN [12] for medical-image domain adaptation, whereas Convolution Meets LoRA [24] integrates lightweight convolutions into LoRA experts without fine-tuning the convolution itself. LoRA-C [8] performs low-rank decomposition at the convolutional-layer level rather than the kernel level, targeting parameter-efficient adaptation for IoT devices. More recently, LoRA-Edge [11] targets on-device CNN fine-tuning for human activity recognition under domain shift, using a tensor-train structure to reduce trainable parameters and improve convergence. Across this body of work, the

shared objective is parameter efficiency, leaving the CNN setting’s dominant saved-activation cost largely unaddressed.

LoRA-FA [23] freezes the down-projection and trains only the up-projection. Theoretical work on asymmetric low-rank adapters further explains that freezing the input-side projection constrains updates to a projected subspace, while leaving the output-side factor trainable can remain expressive in high-dimensional regimes [25]. MemFLoRA inherits this asymmetric-trainability principle but extends it to CNN adaptation, where BatchNorm, activation backward, and convolutional execution introduce saved-state constraints absent from the transformer setting. Asymmetric trainability alone removes the full-width input saved for the trainable down-projection. In CNNs, however, full-width state can also be retained by train-mode BatchNorm, activation backward, and the frozen convolutional branch.

2.2 On-Device Training and Activation-Memory

Several prior systems reduce training memory for on-device learning through quantization, sparse updates, rematerialization, or activation compression. TinyTL [4] showed that activations dominate on-device training memory. Building on this perspective, MCUNetV3 [13] combines quantization-aware scaling, sparse updates, and a tiny training engine to enable learning under extremely small memory budgets. POET [18] formulates rematerialization and paging schedules for training, while gradient checkpointing [7] reduces activation storage by recomputing intermediate activations during the backward pass. Activation-compression methods such as ActNN [6], GACT [14], and Few-bit Backward [17] reduce the cost of storing activations by compressing or quantizing them.

Checkpointing, rematerialization, and activation compression are orthogonal execution-level techniques: they reduce or reconstruct the state required by a given adapter but do not change its intrinsic backward dependencies. Our floor instead concerns adapter design, before such techniques are applied. MemFLoRA attains this floor without recomputation or compression, and these techniques can be applied on top of it for further savings.

MemFLoRA combines asymmetric low-rank adaptation with the activation-centric perspective of on-device training. Unlike the execution-level techniques discussed above, it modifies the adapter’s intrinsic backward dependencies so that the persistent state required by trainable computations is bounded by the rank- r branch. To the best of our knowledge, MemFLoRA is the first LoRA-style CNN adapter explicitly designed around an activation-memory-floor criterion. The novelty lies in enforcing a graph-level activation-memory constraint across the frozen projection, adapter branch, backbone normalization, activation backward, adapter placement, convolutional geometry, and optionally, projection-gradient recovery.

3 Method

We introduce a family of LoRA-style adapters for activation-memory-efficient CNN adaptation as illustrated in Figure 1. In transformers, LoRA is naturally applied to linear projections, where the main design variable is the rank of the injected update. In CNNs, however, the adapter interacts with convolutional kernel geometry, BatchNorm mode and statistics, activation functions, and fused

Conv–BN–ReLU execution. Consequently, directly factorizing convolutional weights may reduce trainable parameters while still retaining full-width feature maps for the backward pass. We instead require that no trainable backward formula should require the full-width activation tensor. In the remainder of this section, we define the memory floor, derive the adapter form and placement from it, and show how each component follows from this constraint rather than being an independent design choice.

3.1 The Activation-Memory Floor Criterion

Total training memory decomposes as

$$M_{\text{train}} = M_{\text{weights}} + M_{\text{grad}} + M_{\text{optim}} + M_{\text{saved}} + M_{\text{buf}}, \quad (1)$$

where the terms denote model weights, gradients, optimizer states, tensors saved during the forward pass for backward reuse, and temporary buffers, respectively. Among these, M_{saved} can dominate for edge CNNs (Figure 2). Parameter-efficient fine-tuning reduces M_{grad} and M_{optim} but leaves M_{saved} essentially unchanged, which is why parameter efficiency does not imply memory efficiency.

For input $x_\ell \in \mathbb{R}^{B \times C_\ell \times T_\ell}$, M_{saved} decomposes into three *pillars*, each retained by a distinct part of the backward graph: (i) *activation/ReLU state*: although ReLU backward requires only the activation sign, standard automatic differentiation typically retains a full-width tensor, $O(B C_\ell T_\ell)$; (ii) *BatchNorm state*: train-mode BatchNorm’s backward requires the normalized input, so full-width BN input is saved, $O(B C_\ell T_\ell)$; (iii) *frozen-branch convolution state*: the input of every convolution is saved, including the input of the adapter and the input of the frozen backbone. A standard low-rank convolutional adapter trains both factors and therefore its saved adapter input remains full-width, $O(B C_\ell T_\ell)$, matching the asymptotic activation width of full fine-tuning.

We define the activation-memory floor for single-pass LoRA-style CNN adapters as persistent saved state of $O(B r T_\ell)$ for trainable backward computations, independent of C_ℓ . The ReLU gate is accounted for separately as a bit-packed mask, which is the minimal direct state for exact ReLU backward without recomputation. MemFLoRA satisfies this by replacing the dense saved state of the three pillars with the rank- r bottleneck and a bit-packed ReLU gate. **Eval-mode BatchNorm** removes Pillar (ii): During adaptation, the BatchNorm statistics (μ_ℓ, σ_ℓ^2) are frozen to target-calibrated values, and the affine parameters ($\gamma_{s,\ell}, \beta_{s,\ell}$) are the fixed backbone scale and shift. BatchNorm then reduces to a per-channel affine map

$$\text{BN}_s^{\text{eval}}(z) = a_{s,\ell} \odot z + b_{s,\ell}; \quad a_{s,\ell} = \frac{\gamma_{s,\ell}}{\sqrt{\sigma_{s,\ell}^2 + \epsilon}}; \quad b_{s,\ell} = \beta_{s,\ell} - a_{s,\ell} \odot \mu_{s,\ell} \quad (2)$$

Because (2) is a fixed affine transform, its backward pass saves no activation. Eval-mode BatchNorm is therefore a precondition for the floor rather than an optional choice.

Bit-packed sign mask reduces Pillar (i): the backward pass of a fused Conv–BN–ReLU operator stores the ReLU sign at one bit per element rather than a full-precision tensor.

Frozen down-projection removes Pillar (iii): We adapt each convolution with a frozen down-projection P_ℓ and a trainable up-projection U_ℓ . If P_ℓ were trainable, its gradient has the outer-product form $\nabla P_\ell \propto g_\ell x_\ell^\top$ which would require retaining the full-width input x_ℓ , of size $O(B C_\ell T_\ell)$, violating the floor. After freezing P_ℓ ,

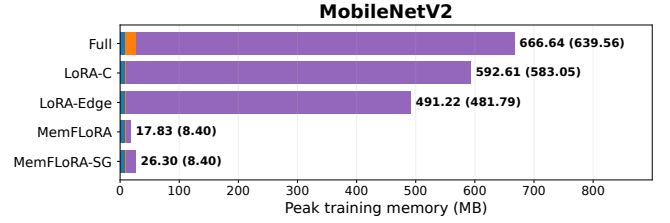


Figure 2: Peak training-state memory decomposition of MobileNetV2 at rank-2 on Opportunity with a batch size of 64. Labels report total peak memory, with saved-activation memory in parentheses.

U_ℓ requires only the bottleneck activation $q_\ell = P_\ell x_\ell \in \mathbb{R}^{B \times r \times T_\ell}$ reducing the saved adapter state to $O(B r T_\ell)$. At $r = 1$, this becomes $O(B T_\ell)$ and is independent of C_ℓ . Frozen-projection asymmetry is thus a requirement of the floor, not a stylistic choice.

3.2 Adapter Form and Placement

We adapt each convolution with a branch consisting of a frozen down-projection P_ℓ and a trainable up-projection U_ℓ :

$$\Delta_\ell = U_\ell(P_\ell x_\ell) = U_\ell(q_\ell), \quad (3)$$

As shown in Section 3.1, freezing P_ℓ places this branch at the memory-floor: the gradient of U_ℓ depends only on the rank- r bottleneck q_ℓ , never on the full-width input x_ℓ .

To preserve the activation-memory floor, we implement each Conv–BN–ReLU site as a single activation-minimal operator rather than exposing the convolution output, BN output, and ReLU preactivation as separate saved tensors. Under this memory constraint, the adapter branch is added to the fused Conv–BN output:

$$y_\ell = \varphi\left(\text{BN}_s^{\text{eval}}(W_\ell^0 x_\ell) + \Delta_\ell\right) \quad (4)$$

Here, W_ℓ^0 is the frozen source convolution, φ is the activation function, and Δ_ℓ is the low-rank adapter update.

Because eval-mode BatchNorm is affine (Equation (2)), injecting the adapter before normalization is algebraically equivalent to

$$\varphi\left(\text{BN}_s^{\text{eval}}(W_\ell^0 x_\ell + \Delta_\ell)\right) = \varphi\left(\text{BN}_s^{\text{eval}}(W_\ell^0 x_\ell) + a_{s,\ell} \odot \Delta_\ell\right). \quad (5)$$

3.3 Scale-Matching the Adapter Branch

The forward rule in (4) adds the adapter output Δ_ℓ to the normalized backbone output $\text{BN}_s^{\text{eval}}(W_\ell^0 x_\ell)$. The backbone term is scaled per channel by $a_{s,\ell}$ per (2); the adapter term, at raw scale, is not. This subsection shows that matching the per-channel scale of the two branches is critical under the evaluated initialization and optimization protocol, examines the two ways to supply it, and derives our choice. Writing the pre-activation as

$$z_\ell = a_{s,\ell} \odot (W_\ell^0 x_\ell) + b_{s,\ell} + U_\ell(q_\ell), \quad (6)$$

the bottleneck $q_\ell = P_\ell x_\ell$ is a frozen random projection of the layer input; its per-channel magnitudes are uncontrolled and are not on the scale of the normalized backbone term. When the two branches are mismatched in scale, the adapter updates are poorly conditioned across channels, the adapter output rapidly grows out of scale with the normalized backbone term, and the ReLU gate destabilizes.

Empirically, a raw-scale memory-floor adapter fails to adapt at all (Section 4, Table 4). The adapter branch, therefore, requires per-channel *scale-matching* to the backbone before summation.

Option A: trainable bottleneck normalization. One way to supply the missing scale is to normalize the bottleneck before U_ℓ with a trainable BatchNorm $\text{BN}_{r,\ell}$ over the r bottleneck channels,

$$\Delta_\ell^{\text{BN}_r} = U_\ell \left(\gamma_{r,\ell} \odot \frac{q_\ell - \mu_{r,\ell}}{\sqrt{\sigma_{r,\ell}^2 + \varepsilon}} + \beta_{r,\ell} \right), \quad (7)$$

with batch statistics $(\mu_{r,\ell}, \sigma_{r,\ell}^2)$ and trainable affine $(\gamma_{r,\ell}, \beta_{r,\ell})$. This normalization places every bottleneck channel at unit scale and prevents the collapse of (6). Batch-dependent statistics add variation under small adaptation batches and discard the per-channel bottleneck magnitudes used by the trainable spatial kernel.

Option B: inherited scale. The equivalence in (5) identifies a *natural* per-channel scale directly: it is the eval-mode BatchNorm output scale $a_{s,\ell}$, the same constant that the fused block already applies to the backbone branch. Scaling the adapter output by $a_{s,\ell}$ yields

$$y_\ell = \phi \left(\text{BN}_s^{\text{eval}}(W_\ell^0 x_\ell) + a_{s,\ell} \odot U_\ell(q_\ell) \right) \quad (8)$$

Unlike $\text{BN}_{r,\ell}$, the factor $a_{s,\ell}$ is a fixed, precomputed, per-channel constant, so it introduces no batch-statistic noise and no additional saved state, and it leaves the bottleneck magnitudes intact for U_ℓ .

Choice. Under the matched initialization and geometry presented in Section 3.4, the fixed scale $a_{s,\ell}$ outperforms the trainable normalization $\text{BN}_{r,\ell}$ (Table 4): both prevent the collapse, but $a_{s,\ell}$ avoids the statistical noise caused by $\text{BN}_{r,\ell}$ and preserves the bottleneck signal. Although $\text{BN}_{r,\ell}$ is initialization-agnostic and mitigates the effect of projection, we adopt (8) and use no bottleneck normalization.

3.4 Convolutional Geometry

The adapter is defined by a frozen down-projection P_ℓ and a trainable up-projection U_ℓ , but it does not yet specify *which factor carries the spatial kernel*. For a linear layer, this question does not arise; for a convolution, it is a design choice determining whether the adapter can re-learn temporal or spatial filters for the target domain. Two parameterizations are on the memory floor, since both keep the bottleneck q_ℓ at rank r .

Frozen-kernel parameterization. The down-projection P_ℓ carries the k -tap spatial kernel and is frozen; the trainable U_ℓ is a pointwise (1×1) channel mixer:

$$P_\ell \in \mathbb{R}^{r \times C_\ell \times k}, \quad U_\ell \in \mathbb{R}^{C_{\text{out}} \times r \times 1}, \quad \#(U_\ell) = r C_{\text{out}}. \quad (9)$$

Here, the spatial filters are fixed, so the adapter can only re-mix a fixed set of filter responses; it cannot form new temporal filters.

Trainable-kernel parameterization. The down-projection is a frozen pointwise projection and the trainable up-projection carries the full k -tap spatial kernel:

$$P_\ell \in \mathbb{R}^{r \times C_\ell \times 1}, \quad U_\ell \in \mathbb{R}^{C_{\text{out}} \times r \times k}, \quad \#(U_\ell) = r C_{\text{out}} k. \quad (10)$$

The trainable spatial kernel operates directly on the bottleneck magnitudes q_ℓ , which are the same magnitudes that Section 3.3 showed must be preserved rather than normalized away.

Parameter cost and the floor. The trainable-kernel parameterization costs a factor of k in trainable parameters, $r C_{\text{out}} k$ versus $r C_{\text{out}}$. This cost falls on the optimizer state M_{optim} , not on the activation floor: the saved adapter state is $O(B r T_\ell)$ in both parameterizations, since $q_\ell = P_\ell x_\ell$ is rank- r regardless of where the kernel sits. For edge CNNs, where $M_{\text{saved}} \gg M_{\text{optim}}$ (see Figure 2), the $k \times$ parameter increase is a subdominant cost paid to recover adaptation capacity at the same activation floor.

Initialization. Because P_ℓ is frozen, its initialization fixes the subspace in which the adapter operates and the per-channel scale of the bottleneck. We initialize $P_\ell \sim \mathcal{N}(0, 1/r)$, for which

$$\mathbb{E}[\text{Var}(q_{\ell,j})] = \frac{1}{r} \text{tr}(\Sigma_{x_\ell}). \quad (11)$$

This expected variance is identical across the r bottleneck channels, where $\Sigma_{x_\ell} = \text{Cov}(x_\ell)$. This produces a variance-balanced bottleneck compatible with the scale-matched adapter in (8). The trainable up-projection is zero-initialized, $U_\ell = 0$, so the adapter is inactive at initialization and adaptation starts exactly from the source model. The scale mismatch of Section 3.3 therefore acts on the gradient rather than the forward pass. We examine sensitivity to this initialization in Section 4.

3.5 Projection-Gradient Recovery

MemFLORA freezes P_ℓ to preserve the memory floor, but this restricts adaptation to a fixed projected subspace. As an optional extension, MemFLORA-SG uses rematerialization, an execution-level technique orthogonal to the adapter design, to update P_ℓ without persistently retaining the full-width input x_ℓ . Let $g_\ell = \partial \mathcal{L} / \partial q_\ell$, where $q_\ell = P_\ell x_\ell$. Then

$$\frac{\partial \mathcal{L}}{\partial P_\ell} = \sum_{b,t} g_{\ell,b,t} x_{\ell,b,t}^\top. \quad (12)$$

Standard backpropagation retains x_ℓ until this outer product is formed. MemFLORA-SG stores only the rank- r gradient g_ℓ , replays the current adapted network under `no_grad`, and immediately contracts each rematerialized x_ℓ with g_ℓ [7]. The input is released immediately after its layerwise contraction, so full-width activations do not accumulate across layers and only one such buffer is live at a time. MemFLORA-SG therefore preserves rank-bounded persistent backward state, $O(B r T_\ell)$, at the cost of one additional forward pass and a layer-local full-width temporary buffer included in the reported peak-memory accounting.

4 Experimental Results

We follow the experimental protocol and application scope established by LoRA-Edge [11], the most directly related on-device CNN adaptation baseline, while extending the evaluation across three ranks and 20 independent seeds, with detailed training-state memory accounting and additional rank-independent baselines. We evaluate T-ResNet [19] and MobileNetV2 [20] on the three HAR benchmarks summarized in Table 2, spanning complementary deployment shifts. Opportunity uses Leave-One-Subject-Out (LOSO), with one subject as target and the others as source; RealWorld uses Leave-One-Location-Out (LOLO), with one sensor location as target; and RealDisp uses ideal placement as source and self placement as target. Target data are divided into 80% adaptation

Table 1: Headline Macro-F1 comparison at 50 adaptation steps. Mean $\pm$ sample standard deviations across 20 seeds are reported.

Dataset	Backbone	Zero Shot	Full FT	Bias-Tuning	BN-Tuning	r	LoRA-C	LoRA-Edge	MemFLoRA	MemFLoRA-SG
Opportunity	MobileNetV2	0.585 ± 0.088	0.820 ± 0.025	0.632 ± 0.054	0.668 ± 0.043	2	0.698 ± 0.037	0.730 ± 0.032	0.747 ± 0.025	0.758 ± 0.028
						4	0.728 ± 0.032	0.760 ± 0.027	0.764 ± 0.028	0.774 ± 0.024
						8	0.756 ± 0.028	0.789 ± 0.025	0.771 ± 0.028	0.785 ± 0.023
	T-ResNet	0.511 ± 0.087	0.847 ± 0.026	0.655 ± 0.054	0.684 ± 0.052	2	0.746 ± 0.044	0.710 ± 0.052	0.768 ± 0.046	0.773 ± 0.040
						4	0.773 ± 0.039	0.746 ± 0.046	0.793 ± 0.034	0.797 ± 0.035
						8	0.801 ± 0.030	0.774 ± 0.038	0.812 ± 0.033	0.815 ± 0.031
RealDisp	MobileNetV2	0.791 ± 0.000	0.894 ± 0.013	0.835 ± 0.003	0.865 ± 0.005	2	0.882 ± 0.005	0.892 ± 0.004	0.891 ± 0.004	0.896 ± 0.004
						4	0.890 ± 0.005	0.898 ± 0.004	0.888 ± 0.010	0.897 ± 0.006
						8	0.897 ± 0.003	0.903 ± 0.006	0.885 ± 0.010	0.895 ± 0.007
	T-ResNet	0.526 ± 0.000	0.891 ± 0.009	0.599 ± 0.005	0.620 ± 0.005	2	0.738 ± 0.009	0.631 ± 0.005	0.742 ± 0.017	0.768 ± 0.015
						4	0.787 ± 0.010	0.686 ± 0.004	0.787 ± 0.010	0.815 ± 0.009
						8	0.827 ± 0.010	0.742 ± 0.006	0.828 ± 0.011	0.847 ± 0.011
RealWorld	MobileNetV2	0.610 ± 0.087	0.911 ± 0.026	0.751 ± 0.067	0.825 ± 0.049	2	0.802 ± 0.044	0.817 ± 0.046	0.874 ± 0.038	0.882 ± 0.035
						4	0.846 ± 0.037	0.866 ± 0.035	0.886 ± 0.035	0.892 ± 0.034
						8	0.880 ± 0.032	0.889 ± 0.034	0.896 ± 0.034	0.901 ± 0.032
	T-ResNet	0.449 ± 0.124	0.903 ± 0.028	0.554 ± 0.134	0.631 ± 0.125	2	0.689 ± 0.096	0.632 ± 0.108	0.826 ± 0.065	0.847 ± 0.052
						4	0.779 ± 0.067	0.717 ± 0.085	0.859 ± 0.047	0.871 ± 0.044
						8	0.847 ± 0.043	0.799 ± 0.056	0.875 ± 0.045	0.883 ± 0.040

Table 2: Datasets, domain shifts, and preprocessing settings.

Dataset	Shift	Subj.	Act.	Hz	Win./Str.
Opportunity [5]	Subject	4	17	30	60/30
RealWorld [22]	Body location	15	8	50	500/250
RealDisp [2]	Sensor placement	17	33	50	250/125

and 20% held-out test data, with no test data used for adaptation or AdaBN calibration.

All methods use Adam [10] with a learning rate of 0.001, a batch size of 64, and 50 adaptation steps to match the evaluation protocol of LoRA-Edge [11]. We adapt all convolutional layers in T-ResNet and the pointwise convolutions in MobileNetV2, and evaluate ranks $r \in \{2, 4, 8\}$. We report macro-F1 over 20 seeds. For each random seed, the source model is independently pretrained for 20 epochs; all adaptation runs use a weight decay of 0.0005 and no learning-rate scheduler. MemFLoRA-SG replay uses the same mini-batch and unchanged parameters and completes before the optimizer step.

We compare against both rank-independent and rank-dependent adaptation baselines. The rank-independent baselines are **Zero-shot**, which performs no target adaptation, **Full Fine-Tuning (Full FT)** which updates the entire model, **Bias-tuning** [3] and **BN-tuning**. The rank-dependent baselines are **LoRA-C** [8] and **LoRA-Edge** [11], two CNN-oriented LoRA baselines for edge adaptation.

4.1 Comparative Memory Analysis

Table 3 reports training-memory scaling at $r = 2$ across batch sizes for T-ResNet and MobileNetV2, while Figure 2 visualizes the $B = 64$ peak-memory decomposition. Although the other methods reduce the number of trainable parameters, their memory remains dominated by saved activations. At $B = 64$, MemFLoRA reduces saved-activation memory relative to Full FT by 98.5% on T-ResNet and 98.7% on MobileNetV2, with corresponding peak training-state reductions of 94.9% and 97.3%. MemFLoRA-SG retains rank-bounded persistent state but incurs a replay buffer, yielding peak-memory

Table 3: For T-ResNet and MobileNetV2, batch-size entries report peak/saved-activation memory [MB]; optimizer-state memory is reported separately.

	Method	B_1	B_8	B_{32}	B_{64}	Opt. [MB]
T-ResNet	Full FT	9.02/0.90	13.84/7.09	35.08/28.33	63.40/56.65	4.49
	LoRA-C	5.51/3.10	11.53/9.12	32.20/29.79	59.76/57.35	0.10
	LoRA-Edge	2.93/0.60	7.05/4.72	21.19/18.86	40.04/37.71	0.02
	MemFLoRA	2.44/0.02	2.50/0.11	2.81/0.42	3.23/0.83	0.08
	MemFLoRA-SG	2.50/0.02	2.78/0.11	3.74/0.42	5.01/0.83	0.10
MobileNetV2	Full FT	43.20/16.12	109.00/81.91	346.93/319.85	666.64/639.56	17.97
	LoRA-C	27.17/17.61	90.00/80.44	305.40/295.84	592.61/583.05	0.30
	LoRA-Edge	17.09/7.66	69.77/60.34	250.39/240.96	491.22/481.79	0.16
	MemFLoRA	9.63/0.20	10.54/1.11	13.66/4.23	17.83/8.40	0.16
	MemFLoRA-SG	9.91/0.20	11.73/1.11	17.97/4.23	26.30/8.40	0.16

reductions of 92.1% and 96.1%, respectively. For fairness, all rank-dependent methods use activation-aware implementations that retain only tensors required by their adapter gradients. The batch-size sweep further shows that MemFLoRA’s saved-state advantage persists as activation memory grows. Notably, its peak memory at $B = 64$, 3.23 MB on T-ResNet and 17.83 MB on MobileNetV2, is comparable to LoRA-Edge at $B = 1$, with 2.93 MB and 17.09 MB, respectively. Thus, under a similar memory budget, MemFLoRA supports a 64 $\times$ larger adaptation batch.

4.2 Results Across Adaptation Budgets

Table 1 reports macro-F1 under a tight 50-step adaptation budget across six dataset–backbone settings and three ranks. Among the single-pass rank-dependent methods, MemFLoRA reaches an average of 0.827, compared with 0.798 for LoRA-C and 0.777 for LoRA-Edge. Thus, its substantial memory reduction does not come at the cost of adaptation quality. MemFLoRA-SG provides an accuracy-oriented operating point by increasing the average macro-F1 to 0.839, while retaining a substantially smaller memory footprint than conventional CNN LoRA methods.

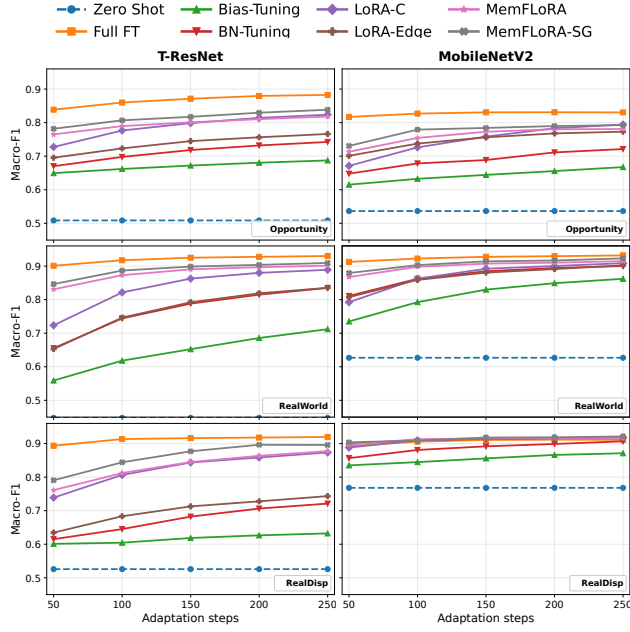


Figure 3: Adaptation performance at rank = 2 across adaptation steps for T-ResNet (left) and MobileNetV2 (right).

We next examine convergence across adaptation budgets. Figure 3 shows the rank-2 adaptation trajectories, which are qualitatively consistent across datasets and backbones. MemFLoRA narrows the gap to Full FT as adaptation proceeds while remaining competitive at convergence. MemFLoRA-SG generally provides the strongest performance through projection-gradient recovery.

4.3 Design Ablations and Training Cost

Table 4 summarizes three design choices. First, Gaussian initialization consistently outperforms the orthogonalized projection across the three evaluated ranks. We therefore use Gaussian initialization in the remaining experiments. Second, placing the spatial kernel in the trainable factor improves macro-F1 while preserving the same rank-bounded saved-state. Finally, the scale-normalization ablation shows that adding an unnormalized adapter to the normalized backbone output causes performance to collapse. Either bottleneck normalization or the frozen source-BN scale restores a usable adapter scale, but the source-BN scale alone gives the best average result. Following prior on-device adaptation protocols, we calibrate AdaBN using one batch of target data, showing that it has a negligible effect. Entries in the table report mean macro-F1 over all target subjects from an independent ablation sweep; differences from Table 1 are within seed-level variation.

Table 5 summarizes the training-side cost at rank 2 on Opportunity. MemFLoRA closely matches the computational cost of LoRA-Edge: 222.5 versus 218.6 million MACs for T-ResNet and 286.0 versus 283.2 million MACs for MobileNetV2. These correspond to only 70% and 71% of the Full Fine-Tuning cost, respectively. MemFLoRA uses more trainable parameters than LoRA-Edge on T-ResNet (10.6K versus 2.3K) and the same number on MobileNetV2

Table 4: Ablations on Opportunity with T-ResNet at 50 adaptation steps.

Factor	Variant	$r = 2$	$r = 4$	$r = 8$
Init.	Normal P	0.759	0.777	0.802
	Orthogonal P	0.673	0.709	0.751
Geom.	1×1 down, $k \times k$ up	0.760	0.777	0.802
	$k \times k$ down, 1×1 up	0.731	0.755	0.773
Scale	None	0.200	0.197	0.187
	BN_r	0.728	0.772	0.805
	a_s	0.764	0.792	0.808
AdaBN	Off	0.753	0.779	0.804
	On	0.762	0.783	0.801

Table 5: Training-performance summary at rank 2. Total adaptation Multiply-Accumulates (MACs) are reported as AdaBN calibration MACs plus 50 adaptation steps.

Backbone	Method	Par. [10 ³]	MACs [10 ⁶]	Relative cost [%]	Steps to 85% [n]
T-ResNet	Full FT	560.9	320.0	—	—
	LoRA-C	12.8	320.2	100	22
	LoRA-Edge	2.3	218.6	68	24
	MemFLoRA	10.6	222.5	70	19
	MemFLoRA-SG	10.6	331.7	104	15
MobileNetV2	Full FT	2250	403.0	—	—
	LoRA-C	37.1	390.9	97	32
	LoRA-Edge	19.8	283.2	70	24
	MemFLoRA	19.8	286.0	71	24
	MemFLoRA-SG	19.8	426.0	106	23

(19.8K). This is a deliberate geometry-level trade-off: the trainable parameter footprint remains small, while the adapter directly reduces the activations saved for backward, which dominate CNN training memory. MemFLoRA therefore provides comparable or better adaptation quality and nearly identical computational cost to LoRA-Edge, while substantially reducing peak training-state memory. MemFLoRA-SG retains the same number of trainable parameters but requires 104% and 106% of the Full Fine-Tuning MACs because of its additional forward replay. It therefore offers higher adaptation accuracy in exchange for additional computation, while remaining in the same low-memory regime as MemFLoRA. To isolate the convergence behavior during adaptation, we measure the adaptation steps until each method first reaches 85% of the final Full FT macro-F1 at the adaptation checkpoints shown in Figure 3. MemFLoRA and MemFLoRA-SG reach the threshold fastest on T-ResNet and are comparable to LoRA-Edge on MobileNetV2.

MemFLoRA also outperforms non-LoRA activation-minimal approaches, such as TinyTL [4]. Since TinyTL is not a plug-and-play LoRA adapter, its implementation requires architecture-specific design choices; we therefore evaluate both an activation-minimal frozen-block variant with eval-mode BN and a train-BN variant that preserves BN adaptation at higher memory cost. On Opportunity, these variants reach 0.682 and 0.737 macro-F1 with 150.47 MB and 518.83 MB peak training-state memory, respectively. In contrast, rank-2 MemFLoRA reaches 0.747 macro-F1 with only 17.83 MB, showing that our low-rank memory-floor design provides a simpler adapter-style alternative with substantially lower training memory.

Table 6: Training-state memory measured at rank $r = 2$ and batch size $B = 64$. Entries report peak concurrent training-state storage / saved-backward state [MB].

Method	T-ResNet	MobileNetV2
Full FT	54.52 / 47.77	666.72 / 639.55
LoRA-C	52.37 / 49.96	592.61 / 583.04
LoRA-Edge	35.12 / 32.79	491.21 / 481.78
MemFLoRA	3.22 / 0.83	17.83 / 8.39

Table 7: Peak requested CUDA memory at $r = 2$, $B = 64$ [MB], from the same runs as Table 6. Values include inputs, temporaries, and workspaces in addition to training state.

Method	T-ResNet	MobileNetV2
Full FT	66.20	673.39
LoRA-C	64.08	601.45
LoRA-Edge	44.80	503.32
MemFLoRA	19.43	95.43


4.4 Jetson Orin Deployment Validation

We validate training-state memory on an NVIDIA Jetson Orin Nano (8 GB) using both backbones and all methods at $r = 2$ and $B = 64$. We measure one complete update after two warm-up updates using Opportunity-shaped inputs. The device profiler tracks allocations associated with model parameters and buffers, materialized optimizer state, gradients, saved-backward state, and total training state. Peak memory denotes the maximum concurrent storage of these tracked training-state components, whereas saved-backward state is measured separately at the end of the forward pass. Pre-existing inputs and labels, checkpoint copies, general intermediates and workspaces, and allocator cache are outside this metric.

At $B = 64$, MemFLoRA reduces saved-backward storage relative to Full FT by 98.3% and 98.7% on T-ResNet and MobileNetV2, respectively, with corresponding peak training-state reductions of 94.1% and 97.3%. These measurements closely follow the memory reduction trend estimated in Table 3, where the corresponding reductions were 98.5%/98.7% for saved state and 94.9%/97.3% for peak training state. Nevertheless, the deployment measurements preserve the large training-state memory advantage of MemFLoRA.

Table 7 reports the peak requested CUDA memory from the same runs. This footprint includes training state, input batches, transient tensors, and workspaces, but excludes unused allocator cache and allocation rounding. These additional runtime allocations lie outside the training-state memory floor of Section 3.1.

Figure 4 traces the requested memory through the forward and backward passes of one MobileNetV2 update at $B = 64$, recorded in a separate Full FT and MemFLoRA run; the optimizer step adds no peak and is omitted. Full FT peaks at the start of the backward pass, when 639.2 MB of saved activations are still held. MemFLoRA instead peaks early in the forward pass. The first, high-resolution layers produce the largest feature maps, and their transient intermediates occupy 82.7 of MemFLoRA’s 95.4 MB peak, while only 1.5 MB is saved for backward. These buffers are released after each layer

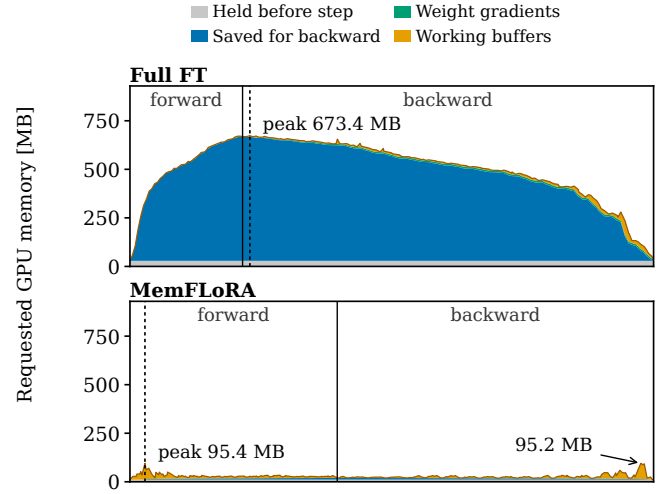**Figure 4: Requested GPU memory during one MobileNetV2 update at $r = 2$, $B = 64$ on Jetson Orin Nano.**

instead of accumulating. A second, nearly equal spike (95.2 MB) occurs at the end of the backward pass, when backpropagation reaches the same early layers and their full-width activation gradients are formed. Full FT shows the same late spike in working buffers, but by then most of its saved activations have been released. MemFLoRA’s peak is therefore set by the transient working set of the largest layers, not by retained state.

5 Conclusion

MemFLoRA shows that efficient edge CNN adaptation depends not only on trainable parameters but also on activations retained for backpropagation. It reduces saved-activation memory by 98.5–98.7% and peak training-state memory by 94.9–97.3% relative to full fine-tuning. By defining an activation-memory-floor criterion, deriving the design constraints it imposes, and showing that adaptation quality can be preserved while satisfying it, this work reframes LoRA for on-device CNN adaptation as a saved-state design problem rather than merely a parameter-count problem, providing a foundation for future edge adaptation research.

Acknowledgments

This work has been developed in the project DI-EDAI funded by the German Federal Ministry of Research, Technology and Space (BMFTR) under contract No. 16ME0991.

References

- [1] Sidra Aleem, Julia Dietlmeier, Eric Arazo, and Suzanne Little. 2024. ConvLoRA and AdaBN Based Domain Adaptation via Self-Training. In *2024 IEEE International Symposium on Biomedical Imaging (ISBI)*. 1–5. doi:10.1109/ISBI56570.2024.10635661
- [2] Oresti Banos, Mate Attila Toth, Miguel Damas, Hector Pomares, and Ignacio Rojas. 2014. Dealing with the Effects of Sensor Displacement in Wearable Activity Recognition. *Sensors* 14, 6 (2014), 9995–10023. doi:10.3390/s140609995
- [3] Elad Ben Zaken, Yoav Goldberg, and Shauli Ravfogel. 2022. BitFit: Simple Parameter-efficient Fine-tuning for Transformer-based Masked Language-models. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, Smaranda Muresan, Preslav Nakov, and Aline Villavicencio (Eds.). Association for Computational Linguistics, Dublin, Ireland, 1–9. doi:10.18653/v1/2022.acl-short.1
- [4] Han Cai, Chuang Gan, Ligeng Zhu, and Song Han. 2020. TinyTL: Reduce Memory, Not Parameters for Efficient On-Device Learning. In *Advances in Neural Information Processing Systems*, H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (Eds.), Vol. 33. Curran Associates, Inc., 11285–11297.
- [5] Ricardo Chavarriaga, Hesam Sagha, Alberto Calatroni, Sundara Tejaswi Digu-marti, Gerhard Tröster, José del R. Millán, and Daniel Roggen. 2013. The Opportunity challenge: A benchmark database for on-body sensor-based activity recognition. *Pattern Recognition Letters* 34, 15 (2013), 2033–2042. doi:10.1016/j.patrec.2012.12.014 Smart Approaches for Human Action Recognition.
- [6] Jianfei Chen, Lianmin Zheng, Zhewei Yao, Dequan Wang, Ion Stoica, Michael Mahoney, and Joseph Gonzalez. 2021. ActNN: Reducing Training Memory Footprint via 2-Bit Activation Compressed Training. In *Proceedings of the 38th International Conference on Machine Learning (Proceedings of Machine Learning Research, Vol. 139)*, Marina Meila and Tong Zhang (Eds.). PMLR, 1803–1813.
- [7] Tianqi Chen, Bing Xu, Chiyuan Zhang, and Carlos Guestrin. 2016. Training Deep Nets with Sublinear Memory Cost. *ArXiv abs/1604.06174* (2016).
- [8] Chuntao Ding, Xu Cao, Jianhang Xie, Linlin Fan, Shangguang Wang, and Zhichao Lu. 2024. LoRA-C: Parameter-Efficient Fine-Tuning of Robust CNN for IoT Devices. *ArXiv abs/2410.16954* (2024).
- [9] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2022. LoRA: Low-Rank Adaptation of Large Language Models. In *International Conference on Learning Representations*.
- [10] Diederik P. Kingma and Jimmy Ba. 2014. Adam: A Method for Stochastic Optimization. *CoRR abs/1412.6980* (2014).
- [11] Hyunseok Kwak, Kyeongwon Lee, Jae-Jin Lee, and Woojoo Lee. 2026. LoRA-Edge: Tensor-Train-Assisted LoRA for Practical CNN Fine-Tuning on Edge Devices. In *2026 Design, Automation & Test in Europe Conference (DATE)*. 1–7. doi:10.23919/DATE69613.2026.11539617
- [12] Yanghao Li, Naiyan Wang, Jianping Shi, Xiaodi Hou, and Jiaying Liu. 2018. Adaptive Batch Normalization for practical domain adaptation. *Pattern Recognition* 80 (2018), 109–117. doi:10.1016/j.patcog.2018.03.005
- [13] Ji Lin, Ligeng Zhu, Wei-Ming Chen, Wei-Chen Wang, Chuang Gan, and Song Han. 2022. On-Device Training Under 256KB Memory. In *Advances in Neural Information Processing Systems*, S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (Eds.), Vol. 35. Curran Associates, Inc., 22941–22954.
- [14] Xiaoxuan Liu, Lianmin Zheng, Dequan Wang, Yukuo Cen, Weize Chen, Xu Han, Jianfei Chen, Zhiyuan Liu, Jie Tang, Joey Gonzalez, Michael W. Mahoney, and Alvin Cheung. 2022. GACT: Activation Compressed Training for Generic Network Architectures. In *International Conference on Machine Learning*.
- [15] Hiroki Matsutani, Masaaki Kondo, Kazuki Sunaga, and Radu Marculescu. 2025. Skip2-LoRA: A Lightweight On-device DNN Fine-tuning Method for Low-cost Edge Devices. In *Proceedings of the 30th Asia and South Pacific Design Automation Conference (Tokyo, Japan) (ASPDAC '25)*. Association for Computing Machinery, New York, NY, USA, 51–57. doi:10.1145/3658617.3697589
- [16] Davide Nadalini, Manuele Rusci, Luca Benini, and Francesco Conti. 2023. Reduced precision floating-point optimization for Deep Neural Network On-Device Learning on microcontrollers. *Future Generation Computer Systems* 149 (2023), 212–226. doi:10.1016/j.future.2023.07.020
- [17] Georgii Sergeevich Novikov, Daniel Bershtatsky, Julia Gusak, Alex Shonenkov, Denis Valerievich Dimitrov, and Ivan Oseledets. 2023. Few-bit Backward: Quantized Gradients of Activation Functions for Memory Footprint Reduction. In *Proceedings of the 40th International Conference on Machine Learning (Proceedings of Machine Learning Research, Vol. 202)*, Andreas Krause, Emma Brunskill, Kyunghyun Cho, Barbara Engelhardt, Sivan Sabato, and Jonathan Scarlett (Eds.). PMLR, 26363–26381.
- [18] Shishir G. Patil, Paras Jain, Prabal Dutta, Ion Stoica, and Joseph Gonzalez. 2022. POET: Training Neural Networks on Tiny Devices with Integrated Rematerialization and Paging. In *Proceedings of the 39th International Conference on Machine Learning (Proceedings of Machine Learning Research, Vol. 162)*, Kamalika Chaudhuri, Stefanie Jegelka, Le Song, Csaba Szepesvari, Gang Niu, and Sivan Sabato (Eds.). PMLR, 17573–17583.
- [19] Tal Ridnik, Hussam Lawen, Asaf Noy, Emanuel Ben Baruch, Gilad Sharir, and Itamar Friedman. 2021. TResNet: High Performance GPU-Dedicated Architecture. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*. 1400–1409.
- [20] Mark Sandler, Andrew Howard, Menglong Zhu, Andrey Zhmoginov, and Liang-Chieh Chen. 2018. MobileNetV2: Inverted Residuals and Linear Bottlenecks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*.
- [21] Kazuki Sunaga, Masaaki Kondo, and Hiroki Matsutani. 2023. Addressing the Gap Between Training Data and Deployed Environment by On-Device Learning. *IEEE Micro* 43, 6 (2023), 66–73. doi:10.1109/MM.2023.3314711
- [22] Timo Sztyler and Heiner Stuckenschmidt. 2016. On-body localization of wearable devices: An investigation of position-aware activity recognition. In *2016 IEEE International Conference on Pervasive Computing and Communications (PerCom)*. 1–9. doi:10.1109/PERCOM.2016.7456521
- [23] Longteng Zhang, Lin Zhang, Shaohuai Shi, Xiaowen Chu, and Bo Li. 2023. LoRA-FA: Memory-Efficient Low-Rank Adaptation for Large Language Models Fine-Tuning. *arXiv preprint arXiv:2308.03303* (2023).
- [24] Zihan Zhong, Zhiqiang Tang, Tong He, Haoyang Fang, and Chun Yuan. 2024. Convolution Meets LoRA: Parameter Efficient Finetuning for Segment Anything Model. *ArXiv abs/2401.17868* (2024).
- [25] Jiacheng Zhu, Kristjan Greenewald, Kimia Nadjahi, Haitz Sáez De Ocariz Borde, Rickard Brühl Gabriellsson, Leshem Choshen, Marzyeh Ghassemi, Mikhail Yurochkin, and Justin Solomon. 2024. Asymmetry in low-rank adapters of foundation models. In *Proceedings of the 41st International Conference on Machine Learning (Vienna, Austria) (ICML '24)*. JMLR.org, Article 2581, 17 pages.
- [26] Ligeng Zhu, Lanxiang Hu, Ji Lin, Wei-Ming Chen, Wei-Chen Wang, Chuang Gan, and Song Han. 2023. PockEngine: Sparse and Efficient Fine-tuning in a Pocket. In *Proceedings of the 56th Annual IEEE/ACM International Symposium on Microarchitecture (Toronto, ON, Canada) (MICRO '23)*. Association for Computing Machinery, New York, NY, USA, 1381–1394. doi:10.1145/3613424.3614307