

WOVEN: Weaving Visual World Modeling into Multimodal LLMs

Zheyu Fan¹, Yue Zhang³, Mingkai Deng², Kangrui Wang¹, Qineng Wang¹, Canyu Chen¹,
 Jie Hao⁴, Xing Fan⁴, Chenlei Guo⁴, Eric P. Xing², Mohit Bansal³, Manling Li¹

¹Northwestern University ²Carnegie Mellon University ³UNC Chapel Hill ⁴Amazon

[Website](#) [Code](#) [Dataset](#)

Multimodal large language models (MLLMs) struggle with spatial, embodied, physical, and temporal reasoning. We hypothesize that these failures reflect a shared deficit in **visual transition reasoning**, and test whether this capability can serve as a **shared training primitive** (one that different models can learn from different supervision sources and reuse across different tasks), and seek a systematic training recipe that benefits diverse downstream tasks. Existing benchmarks document these deficits separately but do not support controlled comparisons across scenes, actions, and reasoning operations. To enable such comparisons, we introduce **WOVEN**, a training source and benchmark for visual transition reasoning that organizes transition supervision by scene, action, and reasoning type, using diverse, realistic rollouts from video-pretrained generative models. It comprises 36,076 examples across 20 scene types (e.g., kitchen, park), 5 action types (e.g., object manipulation, camera motion), and 8 reasoning types (e.g., forward dynamics, counterfactual substitution). Using WOVEN, we first evaluate 38 frontier MLLMs (e.g., GPT-5.4 and Qwen3-VL-235B-A22B) and find a substantial and systematic deficit: even the strongest models fall far below humans, and the failures recur across model families and persist with scale. We then train MLLMs at multiple scales on WOVEN and find that they learn a shared capability that transfers broadly: training subsets of only about 2,000 items each collectively improve 22 of 26 external benchmarks by up to 27.3 percentage points, and WOVEN data can even replace 30–50% of a task’s own training data with comparable accuracy. More importantly, controlled comparisons reveal what supervision transfers best and yield a **training recipe** for visual world modeling, validated prospectively on held-out benchmarks: supervision should be selected by the reasoning operation it teaches rather than by the actions, scenes, or domains it shows, and larger changes to the visual state during training bring greater robustness. Our work establishes visual transition reasoning as a reusable foundation for improving diverse downstream capabilities, paving the way for systematic visual world-model training in MLLMs.

1. Introduction

Multimodal large language models (MLLMs) perform well on visual recognition and language-conditioned reasoning (Bai et al., 2025b), yet remain unreliable on tasks involving visual change, including spatial, physical, embodied, and temporal reasoning (Chow et al., 2025; Huang et al., 2026; Ma et al., 2026; Wang et al., 2026a). For example, they may misjudge camera rotation, predict outcomes that violate physical constraints, recommend actions that conflict with the

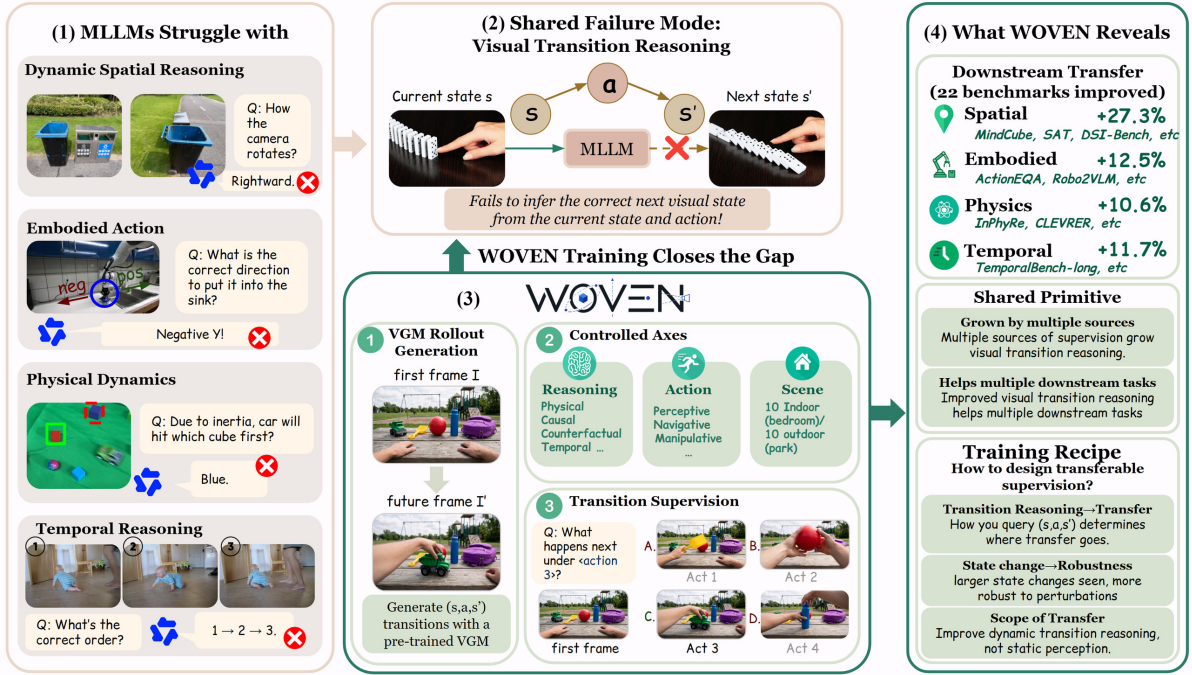


Figure 1 | **Overview.** (1) MLLMs fail across spatial, embodied, physical, and temporal tasks. (2) These failures share a weakness: reasoning about how visual states, actions, and outcomes relate. (3) WOVEN generates (s, a, s') transitions with a video generation model, organizes them along controlled axes of reasoning, action, and scene, and turns them into error-typed multiple-choice supervision. (4) Training on WOVEN improves 22 of 26 external benchmarks; the gains come from a shared primitive that different sources build and different tasks use; and controlled comparisons yield a training recipe: the reasoning operation decides where transfer goes, larger state changes give robustness, and transfer covers transition tasks rather than static perception.

task goal, or misorder video frames (Fig. 1(1)). Despite their different goals, many of these tasks share a common structure: an action a links an initial visual state s to a resulting state s' (Fig. 1(2)). Predicting outcomes, inferring actions from observed changes, and reasoning about alternative actions are different inferences over the same (s, a, s') triplet. We hypothesize that a shared deficit in *action-conditioned visual transition reasoning* underlies failures across these tasks.

This hypothesis motivates exploring a shared training primitive for otherwise distinct downstream capabilities: rather than improving each capability separately, we ask whether and how visual transition reasoning can serve as a common training target across models and benefit diverse downstream tasks. In this paper, we pursue this goal through four key questions. First, do failures in visual transition reasoning exhibit consistent patterns across model families, and how pronounced are these deficits? Second, can it be learned through transition supervision, and do the benefits extend beyond the training tasks? Third, do these gains arise from separate training components helping separate tasks, or from learning visual transition reasoning that different models can reuse across different tasks? Fourth, and more fundamentally, what governs the downstream transfer and should therefore guide a systematic training recipe: similarities in actions, scenes, or application domains, or the reasoning operation applied to the transition (s, a, s') ?

Answering these questions calls for controlled comparisons that allow us to examine the roles of individual components of the (s, a, s') triplet. Existing task-specific benchmarks document important deficits, but do not readily support such comparisons (Cai et al., 2024; Chow et al.,

2025; Foss et al., 2025; Huang et al., 2026; Ma et al., 2026; Wang et al., 2026a). We therefore introduce **WOVEN** (**W**orld modeling via controllable **V**ideo **g**ENERation), a diagnostic and training source that draws on the transition priors of video-pretrained generative models (Wan et al., 2025). Generated rollouts provide known actions and endpoints for forward and inverse supervision, outcomes under alternative actions for counterfactual supervision, and temporally coherent intermediate states for temporal supervision. Organizing this supervision along scene, action, and reasoning dimensions enables controlled studies of learning and transfer (Fig. 1(3)). The collection comprises 36,076 examples spanning 20 scene types (e.g., kitchen, park, and living room), five action types (e.g., passive physical events, camera motion, and object manipulation), and eight reasoning types across four families (e.g., causal dynamics, temporal coherence, and counterfactual reasoning). We also provide diagnostic splits which cover in-distribution evaluation, held-out scenes, and state perturbations, with error-typed distractors supporting fine-grained analysis of the effects of training (§2).

To examine visual transition reasoning as a common training target, we first ask whether its deficits recur across model families and whether learning it yields gains beyond the training tasks. Through fine-grained evaluation of 38 frontier MLLMs (e.g., GPT-5.4 (OpenAI, 2026), Qwen3-VL-235B-A22B (Bai et al., 2025a), and Llama-4-Maverick (Meta AI, 2025)), we identify recurring failure patterns across model families. These deficits are substantial: even the strongest model achieves only 65.8% accuracy against a 92.3% human baseline. These recurring deficits identify visual transition reasoning as a common target for improving current MLLMs, establishing a training need that extends beyond the weaknesses of any individual model (§3.1). We then ask whether this capability can be learned and whether the resulting gains extend beyond the training tasks. Crucially, our empirical results from post-training MLLMs at multiple scales (§3.3) demonstrate substantial gains: training on the full WOVEN training set raises the in-distribution accuracy of Qwen2.5-VL-3B (Bai et al., 2025b) from 26.4% to 89.3%, with 88.2% on held-out scenes (§3.2). The benefits extend to 12 of 26 external benchmarks across multiple domains. Controlled subsets containing approximately 2,000 examples each collectively expand this coverage to 22 of 26 benchmarks, with gains of up to 27.3 percentage points (Fig. 1(4)).

However, broad transfer alone does not establish visual transition reasoning as a shared training primitive that different models can reuse from different sources in learning different tasks, as the downstream gains could arise from separate parts of the training source, each helping only its own tasks. To serve as a shared training primitive, visual transition reasoning must be a common capability that models acquire from different sources, and the gains on downstream tasks must result from this common capability. We therefore first test whether different sources improve the same capability, and find that every controlled subset improves WOVEN accuracy, including on the action types it does not train on (§3.2), meeting the first requirement. We then examine whether the downstream gains result from this common capability, by checking whether subsets that improve it more also transfer more. Results show that the more a subset improves WOVEN accuracy, the larger its average gain on the external benchmarks ($r=0.86$), and that the gains come from visual transition reasoning itself rather than from a generally stronger model or the answer format (§4). We further test causality by intervening on the training data: replacing 30–50% of task-specific examples with WOVEN under a fixed training budget preserves comparable accuracy (Fig. 3; §4), showing that transition supervision can take over part of the training normally supplied by task-specific data. Together with transfer across model scales (§3.3), these results establish visual transition reasoning as a shared training primitive.

More importantly, our controlled comparisons yield a training recipe for visual world modeling, validated prospectively on held-out benchmarks (§5). **(1) Select supervision by reasoning operation.** Surprisingly, supervision that teaches the same reasoning operation produces similar

Table 1 | Eight reasoning operations considered in this work. The same operation can be applied to different actions and scenes (§2). Notation: a_{alt} , an alternative action from the same initial state; a_{exo} , a passive event; a_q , a_{exo} with a cue naming the physical principle; $\mathbf{s} = (s_0, \dots, s_L)$, sampled states in time order with $s_0 = s$ and $s_L = s'$; $\tilde{\mathbf{s}}$, the same states shuffled; s_-, s_+ , the neighbors in time of a reference state s_{ref} . In the physical and temporal families the action description is optional.

Family	Reasoning operation	Distribution	Reasoning operation	Distribution
Causal	Forward dynamics	$P(s' s, a)$	Inverse dynamics	$P(a s, s')$
Counterfactual	Counterfactual removal	$P(s a, s')$	Counterfactual substitution	$P(s'_{a_{\text{alt}}} a, s', a_{\text{alt}})$
Physical	Outcome prediction	$P(s' s, a_{\text{exo}})$	Cued prediction	$P(s' s, a_q)$
Temporal	Temporal ordering	$P(\mathbf{s} \tilde{\mathbf{s}}, a)$	Temporal adjacency	$P(s_-, s_+ s_{\text{ref}}, \tilde{\mathbf{s}}, a)$

patterns of downstream gains even when the actions differ, whereas supervision that shares only an action type does not (Fig. 1(4)). The reasoning operation therefore provides a basis for selecting supervision with relevant downstream benefits. Once the operation is selected, **(2) choose supervision with larger changes to the visual state for robustness.** Supervision whose actions change more of the scene, such as object manipulation, yields larger robustness gains than supervision that only moves the camera. **(3) Supervise temporal and agent-driven tasks directly.** Transfer does not cross the boundary between the temporal family and the other three reasoning families, nor the boundary between passive physical events and agent-driven actions. **(4) Keep dedicated supervision for capabilities beyond state transitions.** Transition supervision improves diverse tasks that involve state transitions, but does not necessarily generalize to capabilities such as static perception, which therefore need their own supervision (§5). Taken together, our study establishes visual transition reasoning as a shared, trainable primitive and provides a systematic recipe for training it, offering a controlled framework for advancing visual world modeling in MLLMs.

2. WOVEN

We present WOVEN, a training source and benchmark for visual transition reasoning, designed for controlled comparisons of supervision. We first formalize visual transition reasoning in §2.1 as the theoretical foundation. Then, we define our taxonomy in §2.2, which labels every item along three axes, scene, action, and reasoning type, so that supervision can be varied independently along each axis. As real video offers neither controlled actions nor alternative outcomes from the same initial state, and simulators are limited in realism and in scene and object diversity, we generate the transitions specified by our taxonomy with a *video generation model*, which produces rollouts from specified initial states and actions, and alternative rollouts from the same state under different actions (§2.3). Finally, we turn the rollouts into multiple-choice items with error-typed distractors and split them into a training set and three test sets (§2.4).

2.1. Visual Transition Reasoning

Given a transition (s, a, s') , where s and s' are the visual states of a scene before and after an action a , which may be agent-driven or passive, *visual transition reasoning* is the process of inferring unobserved component(s) of the transition from its known or observed parts. Different choices of which parts are given or to be inferred define different reasoning operations, each written as a conditional distribution such as $P(s' | s, a)$ (shorthand for $P(S' = s' | S = s, A = a)$). This work considers eight operations in four families (Table 1). Appendix A.1 gives the semantics of each operation.

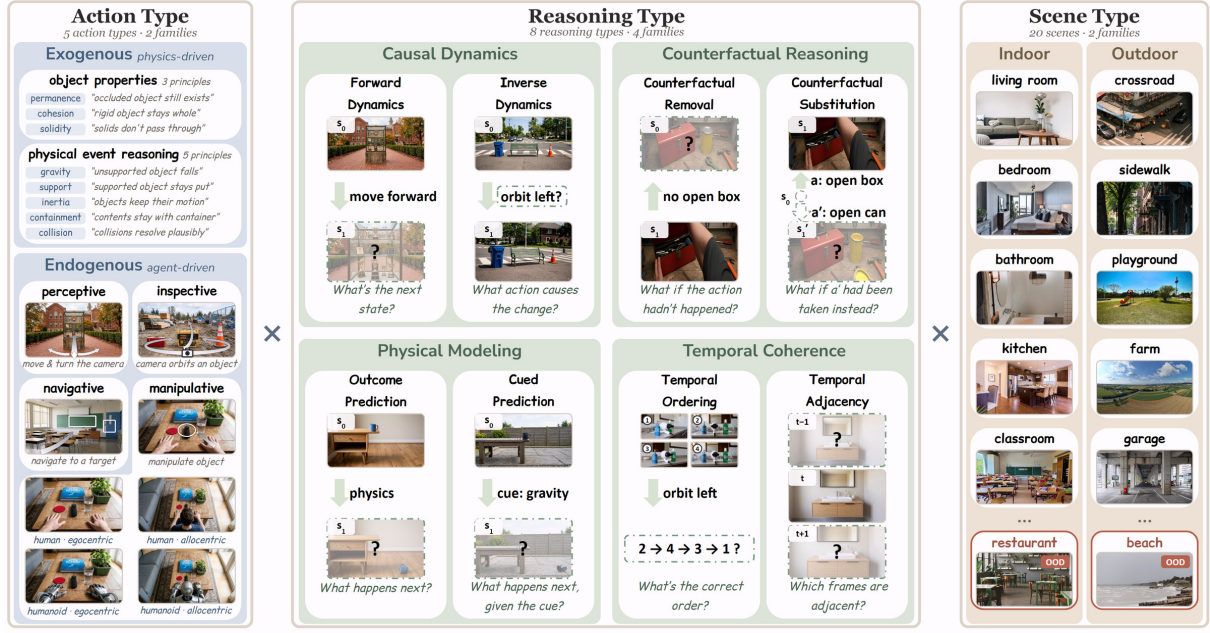


Figure 2 | **The WOVEN taxonomy.** Every item is labeled along the three axes shown from left to right (§2.2). Left: the exogenous action type with its eight principles, and the four endogenous types, where manipulative actions combine subject (human, humanoid) and view (egocentric, allocentric). Middle: the eight reasoning types in four families; in each schematic, the dashed box marks the element of (s, a, s') that the question asks for. Right: example scenes; restaurant and beach are held out for the scene-OOD test.

2.2. Controlled Axes

We define the **taxonomy** along three axes and categorize each item accordingly: (1) the *scene* in which its transition occurs, (2) the *action* producing the change, and (3) the *reasoning operation* applied to the transition (Fig. 2). *Scene type* has 20 categories, evenly divided between indoor and outdoor environments (e.g., kitchen, living room, park, and beach). *Action type* has 5 categories: one exogenous type, passive physical events (Exo), divided into 8 principles from cognitive science (3 object properties and 5 physical events), and four endogenous, agent-driven types: perceptive, that is, camera motion (Perc), inspective, that is, object inspection (Insp), navigative, that is, navigation (Navi), and manipulative, that is, object manipulation (Mani) (Fig. 2). *Reasoning type* instantiates the eight operations of Table 1, grouped in pairs into four families: forward dynamics (Fwd) and inverse dynamics (Inv) in causal dynamics, counterfactual removal (Rmv) and counterfactual substitution (Sub) in counterfactual reasoning, outcome prediction (Otm) and cued prediction (Cue) in physical modeling, and temporal ordering (Ord) and temporal adjacency (Adj) in temporal coherence. The tables use these abbreviations. Within compatible combinations, each axis can be varied while the other two are held fixed. Category definitions and cognitive motivation are in Appendices B.3–B.6.

2.3. Controlled Rollout Generation

We use Wan2.2-I2V-A14B (Wan et al., 2025) to generate rollouts from initial frames and action descriptions, following two construction principles. **(P1) World-model isolation.** Resulting and intermediate states are produced by the rollout rather than prescribed in the conditioning prompt, so supervision draws on learned transition dynamics. **(P2) Counterfactual rollouts.**

Table 2 | **Visual transition reasoning in frontier MLLMs against the human baseline.** Accuracy (%) on the in-distribution test set, overall and by action type and by reasoning type, and on the state-perturbation test set under geometric and appearance changes. Human accuracy is the mean of three annotators. Results for all 38 models are in Appendix E, with the corresponding analyses in Appendix F.

	Overall	Action type						Reasoning type							Perturbation	
		Exo	Perc	Insp	Navi	Mani	Fwd	Inv	Rmv	Sub	Otm	Cue	Ord	Adj	Geo	App
Human	92.3	92.8	92.8	92.6	90.6	92.8	92.8	92.8	91.1	92.2	93.3	91.1	92.8	91.7	97.3	98.7
GPT-5.4	65.8	62.4	61.2	58.3	68.8	81.2	83.8	81.7	64.5	76.0	81.9	85.8	57.1	27.0	62.7	95.5
Intern-S1-Pro	63.2	56.2	52.8	53.7	70.1	87.1	77.6	77.5	66.7	73.3	61.5	69.1	63.4	26.5	33.3	79.2
Qwen2.5-VL-72B	58.9	53.7	47.7	47.8	66.4	83.4	74.7	74.7	54.8	72.0	59.4	76.0	49.4	28.0	38.5	83.0
Gemma-4-31B	57.8	50.8	49.4	53.1	61.2	74.3	76.3	76.6	63.6	64.5	64.9	70.5	30.8	25.3	59.0	95.5

From the same initial state, we generate several independent rollouts under different actions, so that alternative outcomes of the same scene are available. Generation, frame extraction, and quality-control details are provided in Appendix B.2.

2.4. Supervision Construction and Dataset Splits

We build multiple-choice questions from the rollouts, each referred to as an item and is defined on all three axes: its scene and action types are those of the transition it is built from, and its reasoning type (Table 1) determines which parts of the transition are given and which part is asked for. Each question is phrased with one of 30 templates drawn at random to ensure linguistic diversity. The three distractor options are usually drawn from other rollouts sharing the same initial state, each wrong in a specific way (e.g., the outcome of a different action) and labeled with its error type (e.g., “reversed direction” or “violating gravity”), enabling fine-grained error analysis and statistical attribution beyond overall accuracy. For physical-modeling items, the distractors are produced by an image editor, so the correct option is also passed through the same editor with an instruction to change nothing; a control experiment shows that editing artifacts do not reveal the answer. See Appendices B.9 and D for details.

WOVEN has one training set (22,728), one validation set (2,508), and three test sets, totaling 36,076 four-option multiple-choice items (Appendix B.7). Each test set differs from the training set in one respect. The *in-distribution* test set (6,228) contains new transitions from the same 18 scenes as the training set. The *scene-OOD* test set (3,496) contains transitions from two held-out scenes, restaurant and beach, following held-out-environment evaluation in embodied AI (Cheng et al., 2025; Majumdar et al., 2024). The *state-perturbation* test set (1,116) measures robustness to controlled changes in the initial state: following the logic of contrast sets (Gardner et al., 2020), each item perturbs one condition of an in-distribution item’s initial state, either its spatial configuration or its appearance, while keeping the action and the multiple-choice question fixed, testing whether a model actually models the state rather than the typical effect of the action (Appendix B.10).

3. Is Visual Transition Reasoning Learnable and Transferable?

Using WOVEN as an error-typed and shortcut-resistant diagnostic and training source, we ask how far current MLLMs fall short in visual transition reasoning (§3.1), whether it can be learned from transition supervision (§3.2), and whether the learned reasoning transfers beyond the training tasks (§3.3). Throughout, training is carried out in two complementary ways:

Table 3 | **WOVEN test accuracy (%) of Qwen2.5-VL-3B-Instruct after training on the full training set, and gains (percentage points over the base model) after training on each controlled subset.** In-distribution results are reported overall, by action type, and on temporal adjacency; bold marks the action type a subset trains on. Results after SFT alone and by every reasoning type are in Appendix G.17.

Training	ID test							OOD scenes test	Perturbation test		
	Overall	Exo	Perc	Insp	Navi	Mani	Adj	Overall	Overall	Geo	App
Base	26.4	23.8	27.0	23.5	30.0	28.8	25.7	27.8	21.1	22.6	19.7
Full training set	89.3	79.4	90.7	90.5	90.0	95.3	69.7	88.2	38.3	35.0	41.6
<i>Gain over the base model after training on one subset</i>											
perc_causal	+22.9	+5.1	+33.0	+13.4	+26.9	+39.8	+0.2	+20.0	+1.7	+0.9	+2.5
perc_temporal	+6.6	+8.4	+10.9	+4.9	+8.0	+1.3	+29.9	+2.9	+4.1	+5.6	+2.7
insp_causal	+25.3	+6.8	+8.9	+39.9	+27.2	+37.7	+0.9	+20.8	+3.0	+1.1	+4.8
insp_cf	+25.1	+6.6	+7.3	+38.5	+24.8	+42.7	+1.3	+24.7	+3.2	+3.2	+3.2
insp_temporal	+6.1	+9.2	+6.4	+3.4	+11.2	+1.2	+33.1	-2.0	+5.2	+2.5	+7.9
navi_causal	+21.6	+7.6	+10.1	+12.7	+30.0	+50.9	+4.9	+20.7	+13.6	+16.0	+11.3
navi_temporal	+6.9	+8.1	+12.2	+4.0	+8.6	+2.9	+32.0	+5.7	+6.8	+6.8	+6.8
mani_causal	+19.9	+8.2	+3.9	+5.7	+26.2	+61.4	+2.3	+25.2	+23.2	+13.1	+33.3
mani_cf	+21.3	+10.6	+5.2	+5.5	+27.2	+64.2	+2.9	+23.6	+20.2	+14.0	+26.4
exo_physical	+9.4	+27.4	-1.2	+5.7	+6.7	+9.6	-1.5	+11.1	+29.9	+15.4	+44.4
exo_temporal	+6.6	+8.4	+7.1	+5.5	+10.1	+2.3	+30.6	+5.5	+6.9	+5.6	+8.2

on the full WOVEN training set, and on controlled subsets, each containing only items of a specified action type and reasoning family and named after the two (perc_causal, for example, holds camera-motion items of the causal family, and insp_cf object-inspection items of the counterfactual family); WOVEN’s training set consists of 11 such subsets, each of about 2,000 items. The full training set is trained with supervised fine-tuning, and each subset with supervised fine-tuning followed by GRPO (Shao et al., 2024) (Appendix G.1), on MLLMs of multiple scales (Appendix G.15). Evaluation uses the three WOVEN test sets and, zero-shot, 26 external benchmarks: 22 that involve visual transitions, spanning spatial, embodied, physical, temporal reasoning, etc., and 4 benchmarks of static perception and general video QA. A benchmark counts as improved when the gain over the base model exceeds 2 percentage points.

3.1. Current MLLMs Show a Systematic Deficit

To establish the need for training, we first quantify the size and distribution of the deficit in visual transition reasoning by evaluating 38 frontier MLLMs on the in-distribution and state-perturbation test sets; Table 2 reports the four strongest against the human baseline. The best model, GPT-5.4, reaches 65.8% in-distribution accuracy against 92.3% for humans (the mean of three annotators), and the next three fall between 57.8% and 63.2%, a gap that persists across model scales and cannot be closed by scaling alone (Appendix F.2). The gap also has a consistent structure across model families: for every model, temporal adjacency is harder than ordering (25.3%–28.0% versus 30.8%–63.4%), counterfactual removal is harder than substitution (54.8%–66.7% versus 64.5%–76.0%), and accuracy drops more under geometric than under appearance changes (33.3%–62.7% versus 79.2%–95.5%), suggesting a systematic deficit in visual transition reasoning rather than an idiosyncrasy of any particular family or training recipe. These results provide a fine-grained baseline for the training study that follows. The model inventory, human protocol, and detailed results are in Table 15 and Appendices C.2, E, and F; complementary evaluations of a VGM, V-JEPA 2 (Assran et al., 2025), and an IGM are in Appendix B.1.

Table 4 | **Zero-shot transfer after training on the complete WOVEN training set.** Accuracy (%) on the 12 improved benchmarks; Δ is the larger of the SFT and GRPO gains. AEQA: ActionEQA; TB-L: TemporalBench-L; WM-AB: WM-ABench; WPred: WorldPrediction; BSwan: BlackSwan; SpViz: SpatialViz. References, results for all 26 benchmarks, and category breakdowns are in Appendix G.13.

	SAT	InPhyRe	MindCube	AEQA	TB-L	WM-AB	WPred	TOMATO	BSwan	ERQA	SpViz	CV-Bench
Base	37.3	22.0	37.2	43.4	16.6	31.0	34.8	31.6	61.8	33.8	27.7	69.3
WOVEN SFT	55.3	24.6	37.8	49.5	11.5	37.1	39.6	31.5	55.9	37.5	28.8	72.0
WOVEN GRPO	61.3	34.9	48.6	54.4	26.8	39.8	41.5	36.1	65.6	34.5	31.1	72.4
Δ	+24.0	+13.0	+11.3	+11.0	+10.3	+8.9	+6.7	+4.5	+3.8	+3.8	+3.4	+3.0

Table 5 | **Broad transfer from controlled training subsets.** Results on 8 of the 22 improved benchmarks and, in the last four columns, on the 4 benchmarks of static perception and general video QA; each column uses the best-performing subset for that benchmark, named in the last row (for the last four, its selected checkpoint). Abbreviations as in Table 4; R2VLM: Robo2VLM; DSI: DSI-Bench; 3DSR: 3DSRBench; CoreCog: CoreCognition; PercTest: PerceptionTest; EgoTQA: EgoTaskQA. Results for all 22 benchmarks are in Appendix G.13 (Table 50).

	SAT	AEQA	TB-L	InPhyRe	R2VLM	WPred	DSI	MindCube	3DSR	CoreCog	PercTest	EgoTQA
Base	37.3	43.4	16.6	22.0	33.5	34.8	34.9	37.2	51.2	59.8	62.9	81.5
Subset SFT	63.3	47.5	22.0	32.3	40.5	40.1	40.3	40.0	52.6	58.8	63.7	82.6
Subset GRPO	64.7	55.9	28.2	32.6	42.4	42.9	40.9	43.1	52.6	58.8	63.7	82.6
Δ	+27.3	+12.5	+11.7	+10.6	+8.9	+8.1	+6.0	+5.9	+1.4	-1.0	+0.8	+1.1
Subset	perc causal	perc causal	mani cf	insp cf	insp cf	mani causal	perc causal	perc temporal	navi causal	exo physical	perc causal	exo physical

3.2. Visual Transition Reasoning Is Learnable

As shown in Table 3, supervised fine-tuning of Qwen2.5-VL-3B-Instruct on the full training set raises in-distribution accuracy from 26.4% to 89.3%, with 88.2% on held-out scenes. The gains also hold on models of larger scales and different families (Appendices G.15 and I.2). Each controlled subset also raises WOVEN accuracy on its own, by 6.1 to 25.3 percentage points in distribution, and also on action types it does not train on (Table 3), so different kinds of supervision improve the same capability rather than only the action they were specifically trained on. The deficit is therefore learnable as a whole from transition supervision, and the learning generalizes across scenes. The learning is also data-efficient: with about 7 hours of generated video, WOVEN post-training yields a larger gain on a spatial-reasoning benchmark than Orca (Wang et al., 2026c), which mid-trains the same backbone on 125,000 hours of video (Appendix G.16).

3.3. Learned Transition Reasoning Transfers Broadly

We then examine whether the learned reasoning transfers to other tasks. The full training set improves as many as 12 of the 26 external benchmarks, with gains of up to 24.0 percentage points on SAT (Table 4). The controlled subsets transfer effectively as well, despite holding only about 2,000 items each: with the best subset chosen for each benchmark, the coverage rises to a remarkable 22 of 26, that is, every benchmark that involves visual transitions, and gains reach up to 27.3 percentage points (Table 5; selection and seed checks in Appendix I.1). The transfer also holds at scale (Appendix G.15) and across model families (Appendix I.2). The 4 benchmarks of static perception and general video QA do not improve under any training (Table 5), so

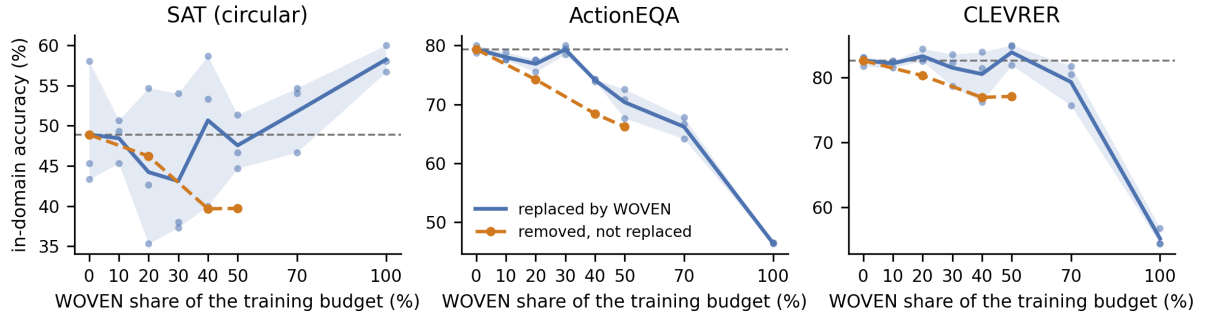


Figure 3 | **WOVEN supervision substitutes for in-domain training data.** Each panel retrains one external benchmark on a fixed 2,000-item budget in which a share p of the benchmark’s own training data is replaced by items from a selected WOVEN subset (blue dots: 3 seeds; blue line: seed mean; band: seed range; gray dashed: $p=0$ mean; orange dashed: deletion control). Replacing 30–50% of task-specific supervision preserves comparable accuracy; on SAT, training exclusively on WOVEN yields the highest accuracy in the sweep. The protocol, full per-seed tables, and trend statistics for each benchmark are in Appendix G.14.

the gains are not due to an overall stronger model or to better multiple-choice answering (Appendix H.2). Full scores and evaluation procedures are in Appendices G.13 and D.

4. Does Visual Transition Reasoning Serve as a Shared Primitive?

The gains so far could still be a sum of separate effects, with each subset helping only the downstream tasks closest to its own content. For visual transition reasoning to serve as a shared training primitive, two requirements must hold:

(a) Different sources improve the same capability. Every subset improves WOVEN accuracy on the action types it does not train on (§3.2, Table 3); the capability also spans reasoning operations, as training on forward prediction alone raises counterfactual substitution and removal by 48 and 25 percentage points (Appendices G.8 and I.3), and it is not a shortcut (Table 94; Appendix H.3).

(b) The downstream gains result from that capability. If so, all subsets should improve largely the same benchmarks, and subsets that improve the capability more should transfer more. Results show that the transfer profiles of the 11 subsets are all positively correlated (Fig. 4, left), so the subsets improve largely the same benchmarks (detailed analysis in Appendix G.13). Moreover, the more a subset improves WOVEN accuracy, the larger its average gain on the external benchmarks ($r=0.86$; Appendix G.13), as expected, and the same WOVEN format with permuted or mirrored transitions does not reproduce the downstream gains (Appendix H.1). Together with the specificity shown in §3.3, the downstream gains therefore come from the learned capability rather than from the individual subsets. We further test causality by intervention on the training data. With the training set fixed at 2,000 items, we replace a growing share of task-specific items with a WOVEN subset on three benchmarks (SAT (Ray et al., 2025), ActionEQA (Bao et al., 2026), and CLEVRER (Yi et al., 2020)) from three different domains, and average results over three seeds. Results show that substituting up to 30–50% (depending on the benchmark) of the task-specific items leaves accuracy comparable to training on these items alone, and above a control that simply deletes the replaced items (Fig. 3; Appendix G.14). Transition supervision thus supplies part of what these tasks would otherwise learn from their own data, supporting the conclusion that the downstream gains result from the learned capability.

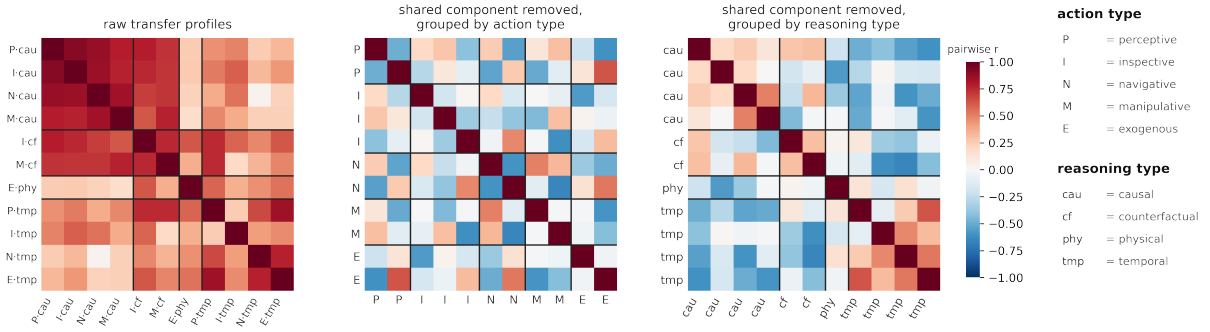


Figure 4 | **Correlation of transfer profiles under the two candidate groupings.** Pairwise Pearson correlation of the 11 subsets’ 26-benchmark transfer profiles. Left: raw profiles, all pairs positive (the common component of §4). Middle and right: the same residual matrix after the per-benchmark z -score, ordered by action type and by reasoning family; only the latter produces diagonal blocks.

Together, these results establish visual transition reasoning as a shared training primitive; how its transfer is organized beyond this common component is the subject of §5.

5. Is There a Systematic Recipe for Training Visual World Modeling?

Sections 3 and 4 establish visual transition reasoning as a shared, trainable primitive. From the transfer profiles, error-typed analyses, and perturbation robustness of the controlled subsets, we distill a training recipe for visual world modeling in MLLMs (Fig. 1(4)): (1) to improve a downstream task, select supervision that teaches the reasoning operation the task requires, not supervision that matches its actions, scenes, or domains; (2) for robustness, prefer supervision with large state changes, such as object manipulation over camera motion; (3) supervise temporal and agent-driven tasks directly: transfer does not cross the boundary between the temporal family and the other three, nor the boundary between passive physical events and agent-driven actions; and (4) for downstream tasks that involve no transition, such as static perception, transition supervision does not help. The following subsections give the evidence behind each item; §5.4 tests the recipe prospectively on held-out benchmarks.

5.1. What Determines Where Supervision Transfers?

Similarity in scenes, actions, or application domains offers an intuitive basis for selecting transferable supervision. To test whether such similarity predicts downstream benefit, we compare subsets that share only an action type with those that share only a reasoning family. All transfer profiles contain the common component of §4, so we remove it by standardizing the gains within each benchmark, which leaves each subset’s relative pattern of benefit, and correlate these residual profiles pairwise (Fig. 4).

Surprisingly, results show that subsets teaching the same reasoning family have similar residual profiles, with a mean pairwise correlation of +0.32, whereas subsets sharing only an action type are no more similar than subsets sharing neither (−0.22 versus −0.23), so the action shown in a transition does not predict where its supervision transfers. Moreover, the same ordering holds under three other normalizations of the gains (Fig. 4; Appendix G.13). Together with the transfer to held-out scenes (§3.2) and to external domains (§3.3), the reasoning operation a source of supervision teaches, not the actions or scenes it shows, decides which downstream

tasks it helps. **Recipe (1).** To improve a downstream task, select supervision that teaches the reasoning operation the task requires, not supervision that matches its actions, scenes, or domains; Table 5 and Appendix G.13 list the best-transferring subset for each benchmark.

5.2. What Makes the Learned Capability Robust?

Recipe (1) leaves the extent of state change open. We examine whether larger state changes improve robustness by comparing subsets that differ in the actions that transform the scene. Among the causal subsets, robustness gains increase from camera motion (+1.7) and object inspection (+3.0) to navigation (+13.6) and object manipulation (+23.2), and passive physical events give the largest gain of all subsets (+29.9; Table 3; Appendix G.17). **Recipe (2).** For robustness, prefer supervision with large state changes, such as object manipulation over camera motion.

5.3. Where Does Transfer Break?

Although supervision on one reasoning operation often teaches others, as forward-dynamics supervision alone raises counterfactual substitution and removal by 48 and 25 percentage points (§4), two kinds of transition reasoning are not learned this way, nor are capabilities beyond state transitions. (a) Temporal localization is learned only from temporal supervision: the four temporal subsets raise temporal-adjacency accuracy from 25.7% to 55.6–58.7%, whereas the seven other subsets leave it near the baseline, and supervision on temporal adjacency and on temporal ordering do not transfer to each other (Table 3; Appendix G.9). (b) Endogenous (agent-driven) transitions are not learned from exogenous supervision: the subset of passive physical events contains no agent action to learn from, and it lowers accuracy on the two benchmarks built on an agent’s action and its outcome, WorldPrediction (−10.2) and ActionEQA (−1.7; Table 6; Appendix G.13). **Recipe (3).** Supervise temporal and agent-driven tasks directly: transfer does not cross the boundary between the temporal family and the other three reasoning families, nor the boundary between passive physical events and agent-driven actions. (c) Capabilities beyond state transitions are not learned from transition supervision: the 4 benchmarks of static perception and general video QA do not improve under any training (Table 5). **Recipe (4).** For downstream tasks that involve no transition, transition supervision does not help.

Table 6 | **Gains on the two agent-action benchmarks by non-temporal subset** (percentage points over the base model; base accuracy: WorldPrediction 34.8, ActionEQA 43.4). Temporal subsets are covered by (a).

Subset	World Prediction	Action EQA
perc_causal	+2.4	+12.5
insp_causal	+5.1	+10.9
navi_causal	+4.1	+4.4
mani_causal	+8.1	+11.6
insp_cf	−5.1	+12.5
mani_cf	+7.7	+9.8
exo_physical	−10.2	−1.7

5.4. Can the Recipe Predict Transfer on Held-Out Benchmarks?

To test the generality of our recipe, we use it to select training supervision before any training and evaluate the resulting models on external benchmarks that played no part in its derivation. For questions about agent actions and their outcomes, we compose a training mixture of WOVEN items by the recipe (Recipe) and compare it with mixtures of the same size composed in other ways: by matching the action (Camera-heavy), by a different reasoning operation (Temporal-heavy), by passive physical events (Exogenous-heavy), or with no selection (Uniform). We train Qwen2.5-VL-3B-Instruct on each mixture with 8 seeds and evaluate the models on questions from MMSI-Bench (Yang et al., 2026), VLM4D (Zhou et al., 2025b), PhysBench (Chow et al., 2025),

Table 7 | **Prospective test of the recipe on held-out benchmarks.** Accuracy (%), mean over 8 models; Δ = Recipe – comparison mixture; Item = recipe item tested; Base = untrained model on the same questions; Set A: agent-action questions, Set B: passive-physics questions, Set C: camera-motion questions.

Comparison mixture	Item	Questions	Base	Recipe	Comp.	Δ	95% CI	p
Temporal-heavy	(1)	Set A	31.1	37.9	34.4	+3.5	[+2.03, +4.92]	0.0002
Uniform	(1)	Set A	31.1	37.9	36.4	+1.5	[+0.18, +2.81]	0.03
Camera-heavy	(1)	Set C	54.1	58.4	57.8	+0.6	[+0.02, +1.14]	0.04
Exogenous-heavy	(3)	Set A	31.1	37.9	33.2	+4.7	[+3.19, +6.17]	0.0002
Exogenous-heavy	(3)	Set B	70.3	71.0	71.5	-0.5	[-1.05, -0.02]	0.04

SPAR-Bench (Zhang et al., 2026a), MVBench (Li et al., 2024), IntPhys 2 (Bordes et al., 2025), and CameraBench (Lin et al., 2025) (Appendix J). Results show that all five comparisons come out as the recipe predicts (Table 7). On agent-action questions, the Recipe mixture exceeds the others by 1.5 to 4.7 percentage points ($p \leq 0.03$), and on camera-motion questions it also outperforms the mixture matched to the camera actions (+0.6, $p = 0.04$), so selecting supervision by the reasoning operation matters more than matching the action. On passive-physics questions, the Exogenous-heavy mixture is ahead instead (-0.5, $p = 0.04$), as item (3) predicts. Our recipe therefore generalizes to new benchmarks.

6. Related Work

World models and video priors. World models predict how a scene evolves, either in a latent space (Assran et al., 2025; Hafner et al., 2025) or by generating video (Ball et al., 2025; Brooks et al., 2024; NVIDIA, 2025; Wan et al., 2025), and video models increasingly serve as simulators for planning (Du et al., 2023; Zhou et al., 2024) and as sources of training data for downstream learning (Jang et al., 2025). Transition-level supervision has also been used directly: state transition pretraining teaches GUI agents the forward and inverse dynamics of interface states (Liu et al., 2026), and intervention-based world-state data support controlled generation, action prediction, and policy transfer (Cai et al., 2026). WOVEN uses video-pretrained transition priors for a different purpose, as a source of controlled supervision for studying which transition reasoning MLLMs learn and reuse, which complements evaluations of rollout quality (Huang et al., 2024; NVIDIA, 2025) and of world models on planning and interaction tasks (Chen et al., 2025a; Warrier et al., 2026).

Benchmarks and supervision for multimodal reasoning. A large body of benchmarks tests MLLMs on one facet of visual change at a time: spatial reasoning under viewpoint change (Li et al., 2025a; Wang et al., 2026a,b; Yang et al., 2026), physical and intuitive-physics reasoning (Bordes et al., 2025; Chow et al., 2025; Sreekumar and Boddeti, 2026; Yi et al., 2020), counterfactual reasoning about videos (Chinchure et al., 2025; Foss et al., 2025; Li et al., 2025c; Patel et al., 2022), temporal ordering and localization (Cai et al., 2024; Liu et al., 2024; Shangguan et al., 2024), and embodied and robotic question answering (Bao et al., 2026; Chen et al., 2025b; Majumdar et al., 2024), with recent suites targeting world modeling as a whole (Chen et al., 2025a; Gao et al., 2025). On the supervision side, synthetic data has been used to teach MLLMs spatial reasoning (Ray et al., 2025) and transferable reasoning through rule-based games (Xie et al., 2025), and fully controlled scenes have been used to study what fine-tuning transfers to real images (Rizzoli et al., 2026). WOVEN relates these facets through a common (s, a, s') representation and controlled training comparisons, separating the reasoning operation of a task from its action and scene content, so that supervision built for one facet can be tested on every other facet and the resulting

gains compared on equal terms (Appendices A.6 and A.4).

7. Conclusion

We used a factorized experimental design to study how the content and reasoning demands of supervision shape the acquisition and transfer of visual transition reasoning. The rollout priors and conditional generation of video generation models supplied the controlled transitions for these comparisons. To the best of our knowledge, we are the first to establish visual transition reasoning as a shared training primitive in MLLMs across diverse task domains and derive a systematic training recipe from controlled comparisons of its downstream transfer. More broadly, our work paves the way for developing visual world modeling in MLLMs through reusable reasoning capabilities whose training supervision is designed by controlled experiments.

Acknowledgments

We thank Amazon for their support of this work.

References

- M. Assran, A. Bardes, D. Fan, Q. Garrido, R. Howes, M. Komeili, M. Muckley, A. Rizvi, C. Roberts, K. Sinha, A. Zholus, S. Arnaud, A. Gejji, A. Martin, F. R. Hogan, D. Dugas, P. Bojanowski, V. Khalidov, P. Labatut, F. Massa, M. Szafraniec, K. Krishnakumar, Y. Li, X. Ma, S. Chandar, F. Meier, Y. LeCun, M. Rabbat, and N. Ballas. V-JEPA 2: Self-supervised video models enable understanding, prediction and planning, 2025. URL <https://arxiv.org/abs/2506.09985>.
- S. Bai, Y. Cai, R. Chen, K. Chen, X. Chen, Z. Cheng, L. Deng, W. Ding, C. Gao, C. Ge, W. Ge, Z. Guo, Q. Huang, J. Huang, F. Huang, B. Hui, S. Jiang, Z. Li, M. Li, M. Li, K. Li, Z. Lin, J. Lin, X. Liu, J. Liu, C. Liu, Y. Liu, D. Liu, S. Liu, D. Lu, R. Luo, C. Lv, R. Men, L. Meng, X. Ren, X. Ren, S. Song, Y. Sun, J. Tang, J. Tu, J. Wan, P. Wang, P. Wang, Q. Wang, Y. Wang, T. Xie, Y. Xu, H. Xu, J. Xu, Z. Yang, M. Yang, J. Yang, A. Yang, B. Yu, F. Zhang, H. Zhang, X. Zhang, B. Zheng, H. Zhong, J. Zhou, F. Zhou, J. Zhou, Y. Zhu, and K. Zhu. Qwen3-VL technical report, 2025a. URL <https://arxiv.org/abs/2511.21631>.
- S. Bai, K. Chen, X. Liu, J. Wang, W. Ge, S. Song, K. Dang, P. Wang, S. Wang, J. Tang, H. Zhong, Y. Zhu, M. Yang, Z. Li, J. Wan, P. Wang, W. Ding, Z. Fu, Y. Xu, J. Ye, X. Zhang, T. Xie, Z. Cheng, H. Zhang, Z. Yang, H. Xu, and J. Lin. Qwen2.5-VL technical report, 2025b. URL <https://arxiv.org/abs/2502.13923>.
- R. Baillargeon. Object permanence in 3½- and 4½-month-old infants. *Developmental Psychology*, 23(5):655–664, Sept. 1987. doi: 10.1037/0012-1649.23.5.655.
- P. J. Ball, J. Bauer, F. Belletti, B. Brownfield, A. Ephrat, S. Fruchter, A. Gupta, K. Holsheimer, A. Holynski, J. Hron, C. Kaplanis, M. Limont, M. McGill, Y. Oliveira, J. Parker-Holder, F. Perbet, G. Scully, J. Shar, S. Spencer, O. Tov, R. Villegas, E. Wang, J. Yung, C. Baetu, J. Berbel, D. Bridson, J. Bruce, G. Buttimore, S. Chakera, B. Chandra, P. Collins, A. Cullum, B. Damoc, V. Dasagi, M. Gazeau, C. Gbadamosi, W. Han, E. Hirst, A. Kachra, L. Kerley, K. Kjems, E. Knoepfel, V. Koriakin, J. Lo, C. Lu, Z. Mehring, A. Moufarek, H. Nandwani, V. Oliveira, F. Pardo, J. Park, A. Pierson, B. Poole, H. Ran, T. Salimans, M. Sanchez, I. Saprykin, A. Shen, S. Sidhwani,

- D. Smith, J. Stanton, H. Tomlinson, D. Vijaykumar, L. Wang, P. Wingfield, N. Wong, K. Xu, C. Yew, N. Young, V. Zubov, D. Eck, D. Erhan, K. Kavukcuoglu, D. Hassabis, Z. Gharamani, R. Hadsell, A. van den Oord, I. Mosseri, A. Bolton, S. Singh, and T. Rocktäschel. Genie 3: A new frontier for world models. 2025.
- T. Bao, Q. Wang, K. Wang, M. Deng, G. Liu, J. Mao, L. Birnbaum, Z. Hu, E. P. Xing, Z. Wang, and M. Li. ActionEQA: Action interface for embodied question answering. *Transactions on Machine Learning Research*, 2026. ISSN 2835-8856. URL <https://openreview.net/forum?id=HY2ruqdMt4>.
- P. W. Battaglia, J. B. Hamrick, and J. B. Tenenbaum. Simulation as an engine of physical scene understanding. *Proceedings of the National Academy of Sciences*, 110(45):18327–18332, 2013. doi: 10.1073/pnas.1306572110. URL <https://www.pnas.org/doi/abs/10.1073/pnas.1306572110>.
- F. Bordes, Q. Garrido, J. T. Kao, A. Williams, M. Rabbat, and E. Dupoux. IntPhys 2: Benchmarking intuitive physics understanding in complex synthetic environments, 2025. URL <https://arxiv.org/abs/2506.09849>.
- T. Brooks, B. Peebles, C. Holmes, W. DePue, Y. Guo, L. Jing, D. Schnurr, J. Taylor, T. Luhman, E. Luhman, C. Ng, R. Wang, and A. Ramesh. Video generation models as world simulators. 2024. URL <https://openai.com/research/video-generation-models-as-world-simulators>.
- N. Burgess. Spatial memory: how egocentric and allocentric combine. *Trends in Cognitive Sciences*, 10(12):551–557, Dec. 2006. doi: 10.1016/j.tics.2006.10.005.
- M. Cai, R. Tan, J. Zhang, B. Zou, K. Zhang, F. Yao, F. Zhu, J. Gu, Y. Zhong, Y. Shang, Y. Dou, J. Park, J. Gao, Y. J. Lee, and J. Yang. TemporalBench: Benchmarking fine-grained temporal understanding for multimodal video models, 2024. URL <https://arxiv.org/abs/2410.10818>.
- R. Cai, J. Y. Zhang, P. Henzler, Z. Li, N. Snavely, and R. Martin-Brualla. Can generative video models help pose estimation? In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 16764–16773, June 2025.
- Y. Cai, F. Yu, M. Yu, Z. Shi, P. Yuan, and Y. Guo. CG-World: A large-scale world-state dataset and protocol for world models, 2026. URL <https://arxiv.org/abs/2607.26452>.
- D. Chen, W. Chung, Y. Bang, Z. Ji, and P. Fung. WorldPrediction: A benchmark for high-level world modeling and long-horizon procedural planning. *arXiv preprint arXiv:2506.04363*, 2025a.
- K. E. Chen, S. Xie, Z. Ma, P. Sanketi, and K. Goldberg. Robo2VLM: Improving visual question answering using large-scale robot manipulation data. In D. Belgrave, C. Zhang, H. Lin, R. Pascanu, P. Koniusz, M. Ghassemi, and N. Chen, editors, *Advances in Neural Information Processing Systems*, volume 38, Main Conference. Curran Associates, Inc., 2025b. doi: 10.52202/085713-0733. URL https://proceedings.neurips.cc/paper_files/paper/2025/file/1f467c3e37abf9f86c78f44c6a27ee7c-Paper-Datasets_and_Benchmarks_Track.pdf.
- S. Chen, T. Zhu, Z. Wang, J. Zhang, K. Wang, R. Zhou, S. Gao, T. Xiao, Y. W. Teh, J. He, and M. Li. Why do LLM agents fail in exploring new environments? a world-modeling perspective, 2026. URL <https://arxiv.org/abs/2510.15047>.

- Z. Cheng, Y. Tu, R. Li, S. Dai, J. Hu, S. Hu, J. Li, Y. Shi, T. Yu, W. Chen, L. Shi, and M. Sun. EmbodiedEval: Evaluate multimodal LLMs as embodied agents, 2025. URL <https://arxiv.org/abs/2501.11858>.
- A. Chinchure, S. Ravi, R. Ng, V. Shwartz, B. Li, and L. Sigal. Black swan: Abductive and defeasible video reasoning in unpredictable events. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 24201–24210, June 2025.
- W. Chow, J. Mao, B. Li, D. Seita, V. Guizilini, and Y. Wang. PhysBench: Benchmarking and enhancing vision-language models for physical world understanding. *arXiv preprint arXiv:2501.16411*, 2025.
- D. Cores, M. Dorkenwald, M. Mucientes, C. G. M. Snoek, and Y. M. Asano. Lost in time: A new temporal benchmark for VideoLLMs. In *36th British Machine Vision Conference 2025, BMVC 2025, Sheffield, UK, November 24-27, 2025*. BMVA, 2025. URL https://bmva-archive.org.uk/bmvc/2025/assets/papers/Paper_857/paper.pdf.
- R. Dang, Y. Yuan, W. Zhang, Y. Xin, B. Zhang, L. Li, L. Wang, Q. Zeng, X. Li, and L. Bing. ECBench: Can multi-modal foundation models understand the egocentric world? a holistic embodied cognition benchmark. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 24593–24602, June 2025.
- Y. Du, M. Yang, P. Florence, F. Xia, A. Wahid, B. Ichter, P. Sermanet, T. Yu, P. Abbeel, J. B. Tenenbaum, et al. Video language planning. *arXiv preprint arXiv:2310.10625*, 2023.
- R. A. Epstein, E. Z. Patai, J. B. Julian, and H. J. Spiers. The cognitive map in humans: spatial navigation and beyond. *Nature Neuroscience*, 20(11):1504–1513, Nov. 2017. doi: 10.1038/nn.4656.
- Z. Fan, J. Liu, Y. Zhang, Z. Wang, Y. R. Fung, M. Li, and H. Ji. EMCompress: Video-LLMs with endomorphic multimodal compression. In M. Liakata, V. P. Moreira, J. Zhang, and D. Jurgens, editors, *Findings of the Association for Computational Linguistics: ACL 2026*, pages 137–162, San Diego, California, United States, July 2026. Association for Computational Linguistics. ISBN 979-8-89176-395-1. doi: 10.18653/v1/2026.findings-acl.8. URL <https://aclanthology.org/2026.findings-acl.8/>.
- A. Foss, C. Evans, S. Mitts, K. Sinha, A. Rizvi, and J. T. Kao. CausalVQA: A physically grounded causal reasoning benchmark for video models, 2025. URL <https://arxiv.org/abs/2506.09943>.
- K. Friston. The free-energy principle: a unified brain theory? *Nature Reviews Neuroscience*, 11(2): 127–138, Jan. 2010. doi: 10.1038/nrn2787.
- X. Fu, Y. Hu, B. Li, Y. Feng, H. Wang, X. Lin, D. Roth, N. A. Smith, W.-C. Ma, and R. Krishna. BLINK: Multimodal large language models can see but not perceive. In A. Leonardis, E. Ricci, S. Roth, O. Russakovsky, T. Sattler, and G. Varol, editors, *Computer Vision – ECCV 2024*, pages 148–166, Cham, 2024. Springer Nature Switzerland. ISBN 978-3-031-73337-6.
- Q. Gao, X. Pi, K. Liu, J. Chen, R. Yang, X. Huang, X. Fang, L. Sun, G. Kishore, B. Ai, S. Tao, M. Liu, J. Yang, C.-J. Lai, C. Jin, J. Xiang, B. Huang, Z. Chen, D. Danks, H. Su, T. Shu, Z. Ma, L. Qin, and Z. Hu. Do vision-language models have internal world models? towards an atomic evaluation. In W. Che, J. Nabende, E. Shutova, and M. T. Pilehvar, editors, *Findings of the Association for Computational Linguistics: ACL 2025*, pages 26170–26195, Vienna, Austria, July

2025. Association for Computational Linguistics. ISBN 979-8-89176-256-5. doi: 10.18653/v1/2025.findings-acl.1342. URL <https://aclanthology.org/2025.findings-acl.1342/>.
- M. Gardner, Y. Artzi, V. Basmov, J. Berant, B. Bogin, S. Chen, P. Dasigi, D. Dua, Y. Elazar, A. Gottumukkala, N. Gupta, H. Hajishirzi, G. Ilharco, D. Khashabi, K. Lin, J. Liu, N. F. Liu, P. Mulcaire, Q. Ning, S. Singh, N. A. Smith, S. Subramanian, R. Tsarfaty, E. Wallace, A. Zhang, and B. Zhou. Evaluating models’ local decision boundaries via contrast sets. In T. Cohn, Y. He, and Y. Liu, editors, *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 1307–1323, Online, Nov. 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.findings-emnlp.117. URL <https://aclanthology.org/2020.findings-emnlp.117/>.
- J. J. Gibson. *The Ecological Approach to Visual Perception*. Houghton Mifflin, 1979.
- M. A. Goodale and A. Milner. Separate visual pathways for perception and action. *Trends in Neurosciences*, 15(1):20–25, 1992. ISSN 0166-2236. doi: [https://doi.org/10.1016/0166-2236\(92\)90344-8](https://doi.org/10.1016/0166-2236(92)90344-8). URL <https://www.sciencedirect.com/science/article/pii/0166223692903448>.
- Google DeepMind. Nano banana 2 (Gemini 3.1 Flash Image). <https://deepmind.google/models/gemini-image/flash/>, 2026. Image generation and editing model.
- D. Hafner, J. Pasukonis, J. Ba, and T. Lillicrap. Mastering diverse control tasks through world models. *Nature*, 640(8059):647–653, Apr. 2025. doi: 10.1038/s41586-025-08744-2.
- P. Haggard. Human volition: towards a neuroscience of will. *Nature Reviews Neuroscience*, 9(12): 934–946, Dec. 2008. doi: 10.1038/nrn2497.
- T. Huang, Z. Zhang, and H. Tang. 3D-R1: Enhancing reasoning in 3D VLMs for unified scene understanding, 2025. URL <https://arxiv.org/abs/2507.23478>.
- Y. Huang, K. Wen, R. Gao, D. Liu, Y. Lou, J. Wu, J. Xu, J. Zhang, Z. Yang, Y. Lin, C. Li, P. Pan, J. Lu, J. Jiang, X. Ding, Y. Huang, and Z. Wang. Thinking in dynamics: How multimodal large language models perceive, track, and reason dynamics in physical 4D world, 2026. URL <https://arxiv.org/abs/2603.12746>.
- Z. Huang, Y. He, J. Yu, F. Zhang, C. Si, Y. Jiang, Y. Zhang, T. Wu, Q. Jin, N. Chanpaisit, Y. Wang, X. Chen, L. Wang, D. Lin, Y. Qiao, and Z. Liu. VBench: Comprehensive benchmark suite for video generative models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 21807–21818, June 2024.
- J. Jang, S. Ye, Z. Lin, J. Xiang, J. Bjorck, Y. Fang, F. Hu, S. Huang, K. Kundalia, Y.-C. Lin, L. Magne, A. Mandlekar, A. Narayan, Y. L. Tan, G. Wang, J. Wang, Q. Wang, Y. Xu, X. Zeng, K. Zheng, R. Zheng, M.-Y. Liu, L. Zettlemoyer, D. Fox, J. Kautz, S. Reed, Y. Zhu, and L. Fan. DreamGen: Unlocking generalization in robot learning through video world models, 2025. URL <https://arxiv.org/abs/2505.12705>.
- B. Jia, T. Lei, S.-C. Zhu, and S. Huang. EgoTaskQA: Understanding human tasks in egocentric videos. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh, editors, *Advances in Neural Information Processing Systems*, volume 35, pages 3343–3360. Curran Associates, Inc., 2022. doi: 10.52202/068431-0242. URL https://proceedings.neurips.cc/paper_files/paper/2022/file/161c94a58ca25bafcaf47893e8233deb-Paper-Datasets_and_Benchmarks.pdf.

- K. Kessler and L. A. Thomson. The embodied nature of spatial perspective taking: Embodied transformation versus sensorimotor interference. *Cognition*, 114(1):72–88, 2010. ISSN 0010-0277. doi: <https://doi.org/10.1016/j.cognition.2009.08.015>. URL <https://www.sciencedirect.com/science/article/pii/S0010027709002133>.
- N. Khalighinejad, A. Schurger, A. Desantis, L. Zmigrod, and P. Haggard. Precursor processes of human self-initiated action. *NeuroImage*, 165:35–47, 2018. ISSN 1053-8119. doi: <https://doi.org/10.1016/j.neuroimage.2017.09.057>. URL <https://www.sciencedirect.com/science/article/pii/S1053811917308054>.
- W. Kong, Q. Tian, Z. Zhang, R. Min, Z. Dai, J. Zhou, J. Xiong, X. Li, B. Wu, J. Zhang, K. Wu, Q. Lin, J. Yuan, Y. Long, A. Wang, A. Wang, C. Li, D. Huang, F. Yang, H. Tan, H. Wang, J. Song, J. Bai, J. Wu, J. Xue, J. Wang, K. Wang, M. Liu, P. Li, S. Li, W. Wang, W. Yu, X. Deng, Y. Li, Y. Chen, Y. Cui, Y. Peng, Z. Yu, Z. He, Z. Xu, Z. Zhou, Z. Xu, Y. Tao, Q. Lu, S. Liu, D. Zhou, H. Wang, Y. Yang, D. Wang, Y. Liu, J. Jiang, and C. Zhong. HunyuanVideo: A systematic framework for large video generative models, 2025. URL <https://arxiv.org/abs/2412.03603>.
- B. Krojer, M. Komeili, C. Ross, Q. Garrido, K. Sinha, N. Ballas, and M. Assran. A shortcut-aware video-QA benchmark for physical understanding via minimal video pairs. *Transactions on Machine Learning Research*, 2025. ISSN 2835-8856. URL <https://openreview.net/forum?id=gvFgNJcSw1>.
- D. Lewis. *Counterfactuals*. Harvard University Press, 1973.
- D. Li, H. Li, Z. Wang, Y. Yan, H. Zhang, S. Chen, G. Hou, S. Jiang, W. Zhang, Y. Shen, W. Lu, and Y. Zhuang. ViewSpatial-Bench: Evaluating multi-perspective spatial localization in vision-language models, 2025a. URL <https://arxiv.org/abs/2505.21500>.
- K. Li, Y. Wang, Y. He, Y. Li, Y. Wang, Y. Liu, Z. Wang, J. Xu, G. Chen, P. Luo, L. Wang, and Y. Qiao. MVBench: A comprehensive multi-modal video understanding benchmark, 2024. URL <https://arxiv.org/abs/2311.17005>.
- Y. Li, Q. Gao, T. Zhao, B. Wang, H. Sun, H. Lyu, R. D. Hawkins, N. Vasconcelos, T. Golan, D. Luo, and H. Deng. Core knowledge deficits in multi-modal language models. In A. Singh, M. Fazel, D. Hsu, S. Lacoste-Julien, F. Berkenkamp, T. Maharaj, K. Wagstaff, and J. Zhu, editors, *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 34379–34409. PMLR, 13–19 Jul 2025b. URL <https://proceedings.mlr.press/v267/li25p.html>.
- Z. Li, H. Wang, D. Liu, C. Zhang, A. Ma, J. Long, and W. Cai. Multimodal causal reasoning benchmark: Challenging multimodal large language models to discern causal links across modalities. In W. Che, J. Nabende, E. Shutova, and M. T. Pilehvar, editors, *Findings of the Association for Computational Linguistics: ACL 2025*, pages 5509–5533, Vienna, Austria, July 2025c. Association for Computational Linguistics. ISBN 979-8-89176-256-5. doi: 10.18653/v1/2025.findings-acl.288. URL <https://aclanthology.org/2025.findings-acl.288/>.
- Z. Lin, S. Cen, D. Jiang, J. Karhade, H. Wang, C. Mitra, Y. T. T. Ling, Y. Huang, R. Zawar, X. Bai, Y. Du, C. Gan, and D. Ramanan. Towards understanding camera motions in any video. In D. Belgrave, C. Zhang, H. Lin, R. Pascanu, P. Koniusz, M. Ghassemi, and N. Chen, editors, *Advances in Neural Information Processing Systems*, volume 38, Main Conference. Curran Associates, Inc., 2025. doi: 10.52202/085713-4477. URL https://proceedings.neurips.cc/paper_files/paper/2025/file/c2d7b739f61ffbea729dad2cf9ec8c60-Paper-Datasets_and_Benchmarks_Track.pdf.

- X. Ling, C. Zhu, M. Wu, H. Li, X. Feng, C. Yang, A. Hao, J. Zhu, J. Wu, and X. Chu. VMBench: A benchmark for perception-aligned video motion generation, 2025. URL <https://arxiv.org/abs/2503.10076>.
- X. Liu, K. Li, H. Wang, B. Wu, M. Fang, L. Dou, C. Du, M. Q. Shieh, and T. Pang. Scaling GUI agents with visual state transitions, 2026. URL <https://arxiv.org/abs/2607.24112>.
- Y. Liu, S. Li, Y. Liu, Y. Wang, S. Ren, L. Li, S. Chen, X. Sun, and L. Hou. TempCompass: Do video LLMs really understand videos? In L.-W. Ku, A. Martins, and V. Srikumar, editors, *Findings of the Association for Computational Linguistics: ACL 2024*, pages 8731–8772, Bangkok, Thailand, Aug. 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.findings-acl.517. URL <https://aclanthology.org/2024.findings-acl.517/>.
- Y. Luo, C.-K. Fan, M. Dong, J. Shi, X. Mi, M. Zhao, B.-W. Zhang, C. Chi, J. Liu, G. Dai, R. Zhang, R. An, K. Wu, Z. Che, S. Xie, G. Yao, Z. Zhao, P. Wang, G. Liu, Z. Wang, T. Huang, and S. Zhang. Robobench: A comprehensive evaluation benchmark for multimodal large language models as embodied brain, 2026. URL <https://arxiv.org/abs/2510.17801>.
- W. Ma, H. Chen, G. Zhang, Y.-C. Chou, J. Chen, C. de Melo, and A. Yuille. 3DSRBench: A comprehensive 3D spatial reasoning benchmark. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 6924–6934, October 2025.
- W. Ma, C. Wang, R. Yuan, H. Chen, N. Dai, S. K. Zhou, Y. Yang, A. Yuille, and J. Chen. CausalSpatial: A benchmark for object-centric causal spatial reasoning, 2026. URL <https://arxiv.org/abs/2601.13304>.
- A. Majumdar, A. Ajay, X. Zhang, P. Putta, S. Yenamandra, M. Henaff, S. Silwal, P. Mcvay, O. Maksymets, S. Arnaud, K. Yadav, Q. Li, B. Newman, M. Sharma, V. Berges, S. Zhang, P. Agrawal, Y. Bisk, D. Batra, M. Kalakrishnan, F. Meier, C. Paxton, A. Sax, and A. Rajeswaran. OpenEQA: Embodied question answering in the era of foundation models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 16488–16498, June 2024.
- Meta AI. The Llama 4 herd: The beginning of a new era of natively multimodal AI innovation. <https://ai.meta.com/blog/llama-4-multimodal-intelligence/>, 2025. Blog post; April 2025.
- A. D. Milner and M. A. Goodale. *The Visual Brain in Action*. Oxford University Press, 1995.
- NVIDIA. Cosmos-Predict2: World simulation model for physical AI. <https://github.com/nvidia-cosmos/cosmos-predict2>, 2025. GitHub repository.
- NVIDIA. PBench: A physical AI benchmark for world models, 2025. URL <https://huggingface.co/datasets/nvidia/PBench>.
- NVIDIA, :, A. Azzolini, J. Bai, H. Brandon, J. Cao, P. Chattopadhyay, H. Chen, J. Chu, Y. Cui, J. Diamond, Y. Ding, L. Feng, F. Ferroni, R. Govindaraju, J. Gu, S. Gururani, I. E. Hanafi, Z. Hao, J. Huffman, J. Jin, B. Johnson, R. Khan, G. Kurian, E. Lantz, N. Lee, Z. Li, X. Li, M. Liao, T.-Y. Lin, Y.-C. Lin, M.-Y. Liu, X. Lu, A. Luo, A. Mathau, Y. Ni, L. Pavao, W. Ping, D. W. Romero, M. Smelyanskiy, S. Song, L. Tchapmi, A. Z. Wang, B. Wang, H. Wang, F. Wei, J. Xu, Y. Xu, D. Yang, X. Yang, Z. Yang, J. Zhang, X. Zeng, and Z. Zhang. Cosmos-reason1: From physical common sense to embodied reasoning, 2025. URL <https://arxiv.org/abs/2503.15558>.

- OpenAI. Introducing GPT-5.4. <https://openai.com/index/introducing-gpt-5-4/>, Mar. 2026. Model release; March 5, 2026.
- R. E. Passingham, S. L. Bengtsson, and H. C. Lau. Medial frontal cortex: from self-generated action to reflection on one’s own performance. *Trends in Cognitive Sciences*, 14(1):16–21, Jan. 2010. doi: 10.1016/j.tics.2009.11.001.
- M. Patel, T. Gokhale, C. Baral, and Y. Yang. CRIPP-VQA: Counterfactual reasoning about implicit physical properties via video question answering, 2022. URL <https://arxiv.org/abs/2211.03779>.
- V. Patraucean, L. Smaira, A. Gupta, A. Recasens, L. Markeeva, D. Banarse, S. Koppula, j. heyward, M. Malinowski, Y. Yang, C. Doersch, T. Matejovicova, Y. Sulsky, A. Miech, A. Fréchette, H. Klimczak, R. Koster, J. Zhang, S. Winkler, Y. Aytar, S. Osindero, D. Damen, A. Zisserman, and J. Carreira. Perception test: A diagnostic benchmark for multimodal video models. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 42748–42761. Curran Associates, Inc., 2023. doi: 10.52202/075280-1852. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/8540fba4abdc7f9f7a7b1cc6cd60e409-Paper-Datasets_and_Benchmarks.pdf.
- J. Pearl. *Causality: Models, Reasoning, and Inference*. Cambridge University Press, Sept. 2009. doi: 10.1017/cbo9780511803161.
- P. Pezeshkpour and E. Hruschka. Large language models sensitivity to the order of options in multiple-choice questions, 2023. URL <https://arxiv.org/abs/2308.11483>.
- Y. Qi, H. Zhao, Z. Guo, S. Ma, Z. Chen, Y. Han, R. Zhang, Z. Lin, Y. Zhu, S. Xin, Y. Huang, B. Hu, K. Cheng, P. Wang, J. Liu, J. Zhang, Y. Zhu, W. Wang, Y. Qin, H. Huang, and L. L. S. Wong. Dissecting embodied abilities in multimodal language models through skill-level evaluation and diagnosis, 2026. URL <https://arxiv.org/abs/2510.08759>.
- A. Ray, J. Duan, E. Brown, R. Tan, D. Bashkurova, R. Hendrix, K. Ehsani, A. Kembhavi, B. A. Plummer, R. Krishna, K.-H. Zeng, and K. Saenko. SAT: Dynamic spatial aptitude training for multimodal language models, 2025. URL <https://arxiv.org/abs/2412.07755>.
- G. Rizzolatti, L. Fogassi, and V. Gallese. Neurophysiological mechanisms underlying the understanding and imitation of action. *Nature Reviews Neuroscience*, 2(9):661–670, Sept. 2001. doi: 10.1038/35090060.
- M. Rizzoli, S. Alghisi, S. M. Mousavi, and G. Riccardi. Synthetic stimuli, real gains: Rethinking VLM fine-tuning through fully controlled data generation, 2026. URL <https://arxiv.org/abs/2511.11440>.
- N. J. Roese. Counterfactual thinking. *Psychological Bulletin*, 121(1):133–148, 1997. doi: 10.1037/0033-2909.121.1.133.
- D. Schwenk, A. Khandelwal, C. Clark, K. Marino, and R. Mottaghi. A-OKVQA: A benchmark for visual question answering using world knowledge. In S. Avidan, G. Brostow, M. Cissé, G. M. Farinella, and T. Hassner, editors, *Computer Vision – ECCV 2022*, pages 146–162, Cham, 2022. Springer Nature Switzerland. ISBN 978-3-031-20074-8.
- Z. Shangguan, C. Li, Y. Ding, Y. Zheng, Y. Zhao, T. Fitzgerald, and A. Cohan. TOMATO: Assessing visual temporal reasoning capabilities in multimodal foundation models, 2024. URL <https://arxiv.org/abs/2410.23266>.

- Z. Shao, P. Wang, Q. Zhu, R. Xu, J. Song, X. Bi, H. Zhang, M. Zhang, Y. K. Li, Y. Wu, and D. Guo. DeepSeekMath: Pushing the limits of mathematical reasoning in open language models, 2024. URL <https://arxiv.org/abs/2402.03300>.
- G. Sheng, C. Zhang, Z. Ye, X. Wu, W. Zhang, R. Zhang, Y. Peng, H. Lin, and C. Wu. HybridFlow: A flexible and efficient RLHF framework. In *Proceedings of the Twentieth European Conference on Computer Systems*, EuroSys '25, page 1279–1297. ACM, Mar. 2025. doi: 10.1145/3689031.3696075. URL <http://dx.doi.org/10.1145/3689031.3696075>.
- E. S. Spelke. *What Babies Know: Core Knowledge and Composition Volume 1*. Oxford University Press, 11 2022. ISBN 9780190618247. doi: 10.1093/oso/9780190618247.001.0001. URL <https://doi.org/10.1093/oso/9780190618247.001.0001>.
- E. S. Spelke and K. D. Kinzler. Core knowledge. *Developmental Science*, 10(1):89–96, 2007. doi: <https://doi.org/10.1111/j.1467-7687.2007.00569.x>. URL <https://onlinelibrary.wiley.com/doi/abs/10.1111/j.1467-7687.2007.00569.x>.
- G. Sreekumar and V. N. Boddeti. InPhyRe discovers: Large multimodal models struggle in inductive physical reasoning, 2026. URL <https://arxiv.org/abs/2509.12263>.
- G. Team, A. Kamath, J. Ferret, S. Pathak, N. Vieillard, R. Merhej, S. Perrin, T. Matejovicova, A. Ramé, M. Rivière, L. Rouillard, T. Mesnard, G. Cideron, J. bastien Grill, S. Ramos, E. Yvinec, M. Casbon, E. Pot, I. Penchev, G. Liu, F. Visin, K. Kenealy, L. Beyer, X. Zhai, A. Tsitsulin, R. Busa-Fekete, A. Feng, N. Sachdeva, B. Coleman, Y. Gao, B. Mustafa, I. Barr, E. Parisotto, D. Tian, M. Eyal, C. Cherry, J.-T. Peter, D. Sinopalnikov, S. Bhupatiraju, R. Agarwal, M. Kazemi, D. Malkin, R. Kumar, D. Vilar, I. Brusilovsky, J. Luo, A. Steiner, A. Friesen, A. Sharma, A. Sharma, A. M. Gilady, A. Goedeckemeyer, A. Saade, A. Feng, A. Kolesnikov, A. Bendebury, A. Abdagic, A. Vadi, A. György, A. S. Pinto, A. Das, A. Bapna, A. Miech, A. Yang, A. Paterson, A. Shenoy, A. Chakrabarti, B. Piot, B. Wu, B. Shahriari, B. Petrini, C. Chen, C. L. Lan, C. A. Choquette-Choo, C. Carey, C. Brick, D. Deutsch, D. Eisenbud, D. Cattle, D. Cheng, D. Paparas, D. S. Sreepathihalli, D. Reid, D. Tran, D. Zelle, E. Noland, E. Huizenga, E. Kharitonov, F. Liu, G. Amirkhanyan, G. Cameron, H. Hashemi, H. Klimczak-Plucińska, H. Singh, H. Mehta, H. T. Lehri, H. Hazimeh, I. Ballantyne, I. Szpektor, I. Nardini, J. Pouget-Abadie, J. Chan, J. Stanton, J. Wieting, J. Lai, J. Orbay, J. Fernandez, J. Newlan, J. yeong Ji, J. Singh, K. Black, K. Yu, K. Hui, K. Vodrahalli, K. Greff, L. Qiu, M. Valentine, M. Coelho, M. Ritter, M. Hoffman, M. Watson, M. Chaturvedi, M. Moynihan, M. Ma, N. Babar, N. Noy, N. Byrd, N. Roy, N. Momchev, N. Chauhan, N. Sachdeva, O. Bunyan, P. Botarda, P. Caron, P. K. Rubenstein, P. Culliton, P. Schmid, P. G. Sessa, P. Xu, P. Stanczyk, P. Tafti, R. Shivanna, R. Wu, R. Pan, R. Rokni, R. Willoughby, R. Vallu, R. Mullins, S. Jerome, S. Smoot, S. Girgin, S. Iqbal, S. Reddy, S. Sheth, S. Pöder, S. Bhatnagar, S. R. Panyam, S. Eiger, S. Zhang, T. Liu, T. Yacovone, T. Liechty, U. Kalra, U. Evci, V. Misra, V. Roseberry, V. Feinberg, V. Kolesnikov, W. Han, W. Kwon, X. Chen, Y. Chow, Y. Zhu, Z. Wei, Z. Egyed, V. Cotruta, M. Giang, P. Kirk, A. Rao, K. Black, N. Babar, J. Lo, E. Moreira, L. G. Martins, O. Sanseviero, L. Gonzalez, Z. Gleicher, T. Warkentin, V. Mirrokni, E. Senter, E. Collins, J. Barral, Z. Ghahramani, R. Hadsell, Y. Matias, D. Sculley, S. Petrov, N. Fiedel, N. Shazeer, O. Vinyals, J. Dean, D. Hassabis, K. Kavukcuoglu, C. Farabet, E. Buchatskaya, J.-B. Alayrac, R. Anil, Dmitry, Lepikhin, S. Borgeaud, O. Bachem, A. Joulin, A. Andreev, C. Hardin, R. Dadashi, and L. Hussenot. Gemma 3 technical report, 2025a. URL <https://arxiv.org/abs/2503.19786>.
- G. R. Team, S. Abeyruwan, J. Ainslie, J.-B. Alayrac, M. G. Arenas, T. Armstrong, A. Balakrishna, R. Baruch, M. Bauza, M. Blokzijl, S. Bohez, K. Bousmalis, A. Brohan, T. Buschmann,

- A. Byravan, S. Cabi, K. Caluwaerts, F. Casarini, O. Chang, J. E. Chen, X. Chen, H.-T. L. Chiang, K. Choromanski, D. D’Ambrosio, S. Dasari, T. Davchev, C. Devin, N. D. Palo, T. Ding, A. Dostmohamed, D. Driess, Y. Du, D. Dwibedi, M. Elabd, C. Fantacci, C. Fong, E. Frey, C. Fu, M. Giustina, K. Gopalakrishnan, L. Graesser, L. Hasenclever, N. Heess, B. Hernaez, A. Herzog, R. A. Hofer, J. Humprik, A. Iscen, M. G. Jacob, D. Jain, R. Julian, D. Kalashnikov, M. E. Karagozler, S. Karp, C. Kew, J. Kirkland, S. Kirmani, Y. Kuang, T. Lampe, A. Laurens, I. Leal, A. X. Lee, T.-W. E. Lee, J. Liang, Y. Lin, S. Maddineni, A. Majumdar, A. H. Michael, R. Moreno, M. Neunert, F. Nori, C. Parada, E. Parisotto, P. Pastor, A. Pooley, K. Rao, K. Reymann, D. Sadigh, S. Saliceti, P. Sanketi, P. Sermanet, D. Shah, M. Sharma, K. Shea, C. Shu, V. Sindhvani, S. Singh, R. Soricut, J. T. Springenberg, R. Sterneck, R. Surdulescu, J. Tan, J. Tompson, V. Vanhoucke, J. Varley, G. Vesom, G. Vezzani, O. Vinyals, A. Wahid, S. Welker, P. Wohlhart, F. Xia, T. Xiao, A. Xie, J. Xie, P. Xu, S. Xu, Y. Xu, Z. Xu, Y. Yang, R. Yao, S. Yaroshenko, W. Yu, W. Yuan, J. Zhang, T. Zhang, A. Zhou, and Y. Zhou. Gemini robotics: Bringing AI into the physical world, 2025b. URL <https://arxiv.org/abs/2503.20020>.
- S. Tong, E. Brown, P. Wu, S. Woo, M. Middepogu, S. C. Akula, J. Yang, S. Yang, A. Iyer, X. Pan, A. Wang, R. Fergus, Y. LeCun, and S. Xie. Cambrian-1: A fully open, vision-centric exploration of multimodal LLMs. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang, editors, *Advances in Neural Information Processing Systems*, volume 37, pages 87310–87356. Curran Associates, Inc., 2024. doi: 10.52202/079017-2771. URL https://proceedings.neurips.cc/paper_files/paper/2024/file/9ee3a664ccfeabc0da16ac6f1f1cfe59-Paper-Conference.pdf.
- L. G. Ungerleider and M. Mishkin. Two cortical visual systems. In D. J. Ingle, M. A. Goodale, and R. J. W. Mansfield, editors, *Analysis of Visual Behavior*, pages 549–586. MIT Press, Cambridge, MA, 1982.
- T. Wan, A. Wang, B. Ai, B. Wen, C. Mao, C.-W. Xie, D. Chen, F. Yu, H. Zhao, J. Yang, J. Zeng, J. Wang, J. Zhang, J. Zhou, J. Wang, J. Chen, K. Zhu, K. Zhao, K. Yan, L. Huang, M. Feng, N. Zhang, P. Li, P. Wu, R. Chu, R. Feng, S. Zhang, S. Sun, T. Fang, T. Wang, T. Gui, T. Weng, T. Shen, W. Lin, W. Wang, W. Wang, W. Zhou, W. Wang, W. Shen, W. Yu, X. Shi, X. Huang, X. Xu, Y. Kou, Y. Lv, Y. Li, Y. Liu, Y. Wang, Y. Zhang, Y. Huang, Y. Li, Y. Wu, Y. Liu, Y. Pan, Y. Zheng, Y. Hong, Y. Shi, Y. Feng, Z. Jiang, Z. Han, Z.-F. Wu, and Z. Liu. Wan: Open and advanced large-scale video generative models, 2025. URL <https://arxiv.org/abs/2503.20314>.
- Q. Wang, Z. Zhang, B. Xie, X. Jin, Y. Wang, S. Wang, L. Zheng, X. Yang, and W. Zeng. Disentangled world models: Learning to transfer semantic knowledge from distracting videos for reinforcement learning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 2599–2608, October 2025.
- Q. Wang, B. Yin, P. Zhang, J. Zhang, K. Wang, Z. Wang, J. Zhang, K. Chandrasegaran, H. Liu, R. Krishna, S. Xie, J. Wu, L. Fei-Fei, and M. Li. MindCube: Spatial mental modeling from limited views, 2026a. URL <https://arxiv.org/abs/2506.21458>.
- S. Wang, M. Pei, L. Sun, C. Deng, Y. Li, K. Shao, Z. Tian, H. Zhang, and J. Wang. SpatialViz-Bench: A cognitively-grounded benchmark for diagnosing spatial visualization in MLLMs, 2026b. URL <https://arxiv.org/abs/2507.07610>.
- Y. Wang, Y. Ji, M. Cao, Y. Shen, R. Xiao, H. Lyu, S. Xie, E. Liu, K. Tian, T. Long, Y. Zhang, Z. Cai, R. Chen, J. Zhao, R. Shi, Z. Tang, J. Lyu, W. Tan, N. Zhang, Y. Hu, Y. Gao, X. Chen, J. Zhao, C. Xu, B. Zhu, Z. Wang, Y. Feng, Q. Zhang, Y. Zhao, Y. Ao, S. Xie, Y. Liu, G. Yao, L. Zhang, X. Liu, Y. Zhang, Y. Jiao, X. Yang, J. Wei, X. Liu, T. Pan, S. Nie, C. Men, S. Cui, X. Jin, H. Li,

- J. Luo, Y. Mu, Y. Wei, J. Yan, H. Zhao, X. Zheng, J. Li, Y. Lin, T. Huang, Z. Wang, and P. Wang. Orca: The world is in your mind, 2026c. URL <https://arxiv.org/abs/2606.30534>.
- A. Warrier, D. Nguyen, M. Naim, M. Jain, Y. Liang, K. Schroeder, C. Yang, J. B. Tenenbaum, S. Vollmer, K. Ellis, and Z. Tavares. Benchmarking world-model learning with environment-level queries, 2026. URL <https://arxiv.org/abs/2510.19788>.
- D. M. Wolpert, Z. Ghahramani, and M. I. Jordan. An internal model for sensorimotor integration. *Science*, 269(5232):1880–1882, Sept. 1995. doi: 10.1126/science.7569931.
- X. Wu, D. Yu, Y. Huang, O. Russakovsky, and S. Arora. ConceptMix: A compositional image generation benchmark with controllable difficulty. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang, editors, *Advances in Neural Information Processing Systems*, volume 37, pages 86004–86047. Curran Associates, Inc., 2024. doi: 10.52202/079017-2731. URL https://proceedings.neurips.cc/paper_files/paper/2024/file/9c3563bb2ad7f3b3b8ed0fcd3b440f-Paper-Datasets_and_Benchmarks_Track.pdf.
- S. Xiao, Y. Wang, J. Zhou, H. Yuan, X. Xing, R. Yan, C. Li, S. Wang, T. Huang, and Z. Liu. OmniGen: Unified image generation, 2024. URL <https://arxiv.org/abs/2409.11340>.
- Y. Xie, Y. Ma, S. Lan, A. Yuille, J. Xiao, and C. Wei. Play to generalize: Learning to reason through game play. *arXiv preprint arXiv:2506.08011*, 2025.
- E. Xing, M. Deng, and J. Hou. Critique of world model, 2026. URL <https://arxiv.org/abs/2507.05169>.
- M. Xue, Z. Hu, L. Liu, K. Liao, S. Li, H. Han, M. Zhao, and C. Yin. Strengthened symbol binding makes large language models reliable multiple-choice selectors, 2024. URL <https://arxiv.org/abs/2406.01026>.
- J. Yang, S. Yang, A. W. Gupta, R. Han, L. Fei-Fei, and S. Xie. Thinking in space: How multimodal large language models see, remember, and recall spaces. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 10632–10643, June 2025a.
- R. Yang, H. Chen, J. Zhang, M. Zhao, C. Qian, K. Wang, Q. Wang, T. V. Koripella, M. Movahedi, M. Li, H. Ji, H. Zhang, and T. Zhang. EmbodiedBench: Comprehensive benchmarking multi-modal large language models for vision-driven embodied agents. In A. Singh, M. Fazel, D. Hsu, S. Lacoste-Julien, F. Berkenkamp, T. Maharaj, K. Wagstaff, and J. Zhu, editors, *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, pages 70576–70631. PMLR, 13–19 Jul 2025b. URL <https://proceedings.mlr.press/v267/yang25f.html>.
- S. Yang, J. C. Walker, J. Parker-Holder, Y. Du, J. Bruce, A. Barreto, P. Abbeel, and D. Schuurmans. Position: Video as the new language for real-world decision making. In R. Salakhutdinov, Z. Kolter, K. Heller, A. Weller, N. Oliver, J. Scarlett, and F. Berkenkamp, editors, *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 56465–56484. PMLR, 21–27 Jul 2024a. URL <https://proceedings.mlr.press/v235/yang24z.html>.
- S. Yang, R. Xu, Y. Xie, S. Yang, M. Li, J. Lin, C. Zhu, X. Chen, H. Duan, X. Yue, D. Lin, T. Wang, and J. Pang. MMSI-Bench: A benchmark for multi-image spatial intelligence, 2026. URL <https://arxiv.org/abs/2505.23764>.

- Y. Yang, J. Liu, Z. Zhang, S. Zhou, R. Tan, J. Yang, Y. Du, and C. Gan. MindJourney: Test-time scaling with world models for spatial reasoning, 2025c. URL <https://arxiv.org/abs/2507.12508>.
- Z. Yang, J. Teng, W. Zheng, M. Ding, S. Huang, J. Xu, Y. Yang, W. Hong, X. Zhang, G. Feng, et al. CogVideoX: Text-to-video diffusion models with an expert transformer. *arXiv preprint arXiv:2408.06072*, 2024b.
- K. Yi, C. Gan, Y. Li, P. Kohli, J. Wu, A. Torralba, and J. B. Tenenbaum. CLEVRER: collision events for video representation and reasoning. In *ICLR*, 2020.
- S. Yuan, J. Huang, Y. Xu, Y. Liu, S. Zhang, Y. Shi, R. Zhu, X. Cheng, J. Luo, and L. Yuan. ChronoMagic-Bench: A benchmark for metamorphic evaluation of text-to-time-lapse video generation. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang, editors, *Advances in Neural Information Processing Systems*, volume 37, pages 21236–21270. Curran Associates, Inc., 2024. doi: 10.52202/079017-0669. URL https://proceedings.neurips.cc/paper_files/paper/2024/file/25b9960c8a5bd887eb5476c951260403-Paper-Datasets_and_Benchmarks_Track.pdf.
- J. Zhang, Y. Chen, Y. Zhou, Y. Xu, Z. Huang, J. Mei, J. Chen, Y.-J. Yuan, X. Cai, G. Huang, X. Quan, H. Xu, and L. Zhang. From flatland to space: Teaching vision-language models to perceive and reason in 3D, 2026a. URL <https://arxiv.org/abs/2503.22976>.
- J. Zhang, M. Jiang, N. Dai, T. Lu, A. Uzunoglu, S. Zhang, Y. Wei, J. Wang, V. M. Patel, P. P. Liang, D. Khashabi, C. Peng, R. Chellappa, T. Shu, A. Yuille, Y. Du, and J. Chen. World-in-world: World models in a closed-loop world, 2026b. URL <https://arxiv.org/abs/2510.18135>.
- S. Zhang, J. Wang, Y. Zhang, K. Zhao, H. Yuan, Z. Qin, X. Wang, D. Zhao, and J. Zhou. I2VGen-XL: High-quality image-to-video synthesis via cascaded diffusion models, 2023. URL <https://arxiv.org/abs/2311.04145>.
- W. Zhang, Z. Zhou, X. Zeng, X. Liu, J. Fang, C. Gao, J. Cui, Y. Li, X. Chen, and X.-P. Zhang. Open3D-VQA: A benchmark for embodied spatial concept reasoning with multimodal large language model in open space. In *Proceedings of the 33rd ACM International Conference on Multimedia*, MM ’25, pages 12784–12791. ACM, Oct. 2025a. doi: 10.1145/3746027.3758219.
- Z. Zhang, F. Hu, J. Lee, F. Shi, P. Kordjamshidi, J. Chai, and Z. Ma. Do vision-language models represent space and how? evaluating spatial frame of reference under ambiguities. In *The Thirteenth International Conference on Learning Representations*, 2025b. URL <https://openreview.net/forum?id=84pDoCD41H>.
- Z. Zhang, Z. Wang, G. Zhang, W. Dai, Y. Xia, Z. Yan, M. Hong, and Z. Zhao. DSI-Bench: A benchmark for dynamic spatial intelligence, 2025c. URL <https://arxiv.org/abs/2510.18873>.
- C. Zheng, H. Zhou, F. Meng, J. Zhou, and M. Huang. Large language models are not robust multiple choice selectors. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=shr9PXz7T0>.
- F. Zhou, J. Huang, J. Li, D. Ramanan, and H. Shi. PAI-Bench: A comprehensive benchmark for physical AI, 2025a. URL <https://arxiv.org/abs/2512.01989>.

- S. Zhou, Y. Du, J. Chen, Y. Li, D.-Y. Yeung, and C. Gan. RoboDreamer: Learning compositional world models for robot imagination. In R. Salakhutdinov, Z. Kolter, K. Heller, A. Weller, N. Oliver, J. Scarlett, and F. Berkenkamp, editors, *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 61885–61896. PMLR, 21–27 Jul 2024. URL <https://proceedings.mlr.press/v235/zhou24f.html>.
- S. Zhou, A. Vilesov, X. He, Z. Wan, S. Zhang, A. Nagachandra, D. Chang, D. Chen, X. E. Wang, and A. Kadambi. VLM4D: Towards spatiotemporal awareness in vision language models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 8600–8612, October 2025b.

Appendix

Table of Contents

A	Background and motivation	27
A.1	World modeling as a cognitive primitive	27
A.2	The two axes as the intrinsic structure of the primitive	28
A.3	Failure-mode triangulation across external benchmarks	29
A.4	Cell-level prior-work coverage and downstream surfaces	30
A.5	Empirical correspondence between external failures and WOVEN cells	32
A.6	Extended related work	34
B	Benchmark construction details	35
B.1	Off-the-shelf video priors on WOVEN	35
B.2	Construction pipeline details	36
B.3	Why action type over motor command	37
B.4	Scene set	37
B.5	Cognitive Science support of Exogenous principles	37
B.6	Manipulative cross-factoring	40
B.7	Splits: stratification and pool sizes	41
B.8	Action type–reasoning type adjacency	42
B.9	Distractor design: scope of typed labeling	43
B.10	Perturbation probe: construction and scope	45
C	Evaluation cohort and human studies	46
C.1	Cohort: model inventory	46
C.2	Human baseline	47
C.3	Human audit of the test splits	47
D	Statistical methodology	49
D.1	Methodological choices	49
D.2	Per-finding statistical details	50
E	Per-cohort evaluation tables	51
F	Diagnostic results	51
F.1	Rotation deficit details	51
F.2	Geometric vs. appearance scaling dissociation	51
F.3	Capability–representation decoupling	54
F.4	Temporal ordering–adjacency dissociation	54
F.5	MoE active-parameter tax	54
F.6	Emergence ordering and gravity violation asymmetry	54
F.7	Counterfactual cost asymmetry	54
F.8	Manipulative pair-mate independence + view-axis dominance	55
F.9	Per-scene invariance within ID	55

F.10	Small-scale no-op prior	55
F.11	Family fingerprinting via principle vectors	55
G	Training recipes and finding details	55
G.1	Shared supervised fine-tuning protocol	55
G.2	Full-mix SFT calibration	56
G.3	Cross-benchmark transfer	56
G.4	Targeted training and diagnostic correspondence	56
G.5	Inverse-text per-cell own results	57
G.6	Narrow SFT data-scale margin	57
G.7	Cross-action-type forward transfer matrix	57
G.8	Within-action-type cross-reasoning-type	57
G.9	Temporal ordering and adjacency	57
G.10	Rotation chirality at 7B	58
G.11	Move chirality at 7B	58
G.12	Emergence ordering as curriculum	58
G.13	Downstream transfer: protocol, full results, and analyses	69
G.14	In-domain substitution sweep: protocol and full tables	72
G.15	Transfer at scale: 7B and 32B	81
G.16	Same-backbone comparison with video-SSL mid-training	81
G.17	WOVEN results by supervision source and training stage	81
H	Controls for the transfer results	99
H.1	Content control: transition content versus training format	100
H.2	Letter-balance control: circular scoring	102
H.3	Shortcut control for cross-operation transfer: the unchanged-scene option	104
I	Robustness and consistency of the results	105
I.1	Selection and seed robustness of the best-subset gains	105
I.2	Generalization across model families	105
I.3	Consistency between forward and inverse dynamics	107
J	Prospective validation of the training recipe	108
K	Limitations	112

A. Background and motivation

A.1. World modeling as a cognitive primitive

This appendix unfolds the developmental, neuroscientific, and AI-program evidence that world modeling is a cognitive primitive with an intrinsic structure, established independently of any benchmark, summarized in §1. The point of assembling this evidence is not decorative: it is what licenses treating the two axes of §2.2 as the primitive’s own structure rather than a decomposition we impose, and it is why the scattered external failures noted in §1 can be read as manifestations of that structure.

Interpretation of the query formulation. The formulation in §2.1 connects forward and inverse internal models (Wolpert et al., 1995) with physical simulation (Battaglia et al., 2013) and counterfactual reasoning (Pearl, 2009). A shared trajectory mechanism makes the episode conditions explicit:

$$\tau_a = \mathcal{G}(s, a, u), \quad \text{start}(\tau_a) = s, \quad \text{end}(\tau_a) = s', \quad (1)$$

Here u collects the episode’s remaining background conditions; evaluating an alternative action in $\mathcal{G}$ preserves the same initial state and background conditions. This notation describes the transition structure underlying the query distributions.

Forward, inverse, and removal recover the resulting state, action, and initial state, respectively; removal asks what the scene would look like had the action not occurred, so its target is the initial state. Substitution retains the factual action and observed endpoint as evidence for the alternative outcome; its input does not include the initial state. Outcome and cued prediction share a physical prediction target but differ in the supplied principle information, such as containment. Ordering and adjacency recover global and local temporal relations within the same transition, with adjacency defined among the sampled frames. In the physical and temporal families, the action description enters the condition only when it is given.

Developmental psychology. Predicting the visual consequence of an action and inferring the action behind a state change is documented in infants from the first months of life. Spelke’s core-knowledge programme identifies object permanence, cohesion, and solidity as innate primitives (Spelke, 2022; Spelke and Kinzler, 2007), with violation-of-expectation paradigms (e.g., Baillargeon 1987) demonstrating sensitivity to physical events long before language acquisition. Counterfactual thought is a classical topic in cognitive science (Lewis, 1973; Roese, 1997) formalized in causal inference (Pearl, 2009). The temporal structure of a single action is represented within the forward model itself: forward models predict the time course of a movement, not only its endpoint, and this trajectory representation underlies online prediction and correction (Wolpert et al., 1995). Mental simulation of physical outcomes admits computational analogues in noisy-simulation accounts (Battaglia et al., 2013).

Cognitive neuroscience. Action-conditioned prediction maps onto the predictive-coding and forward-model accounts of motor and perception (Friston, 2010; Wolpert et al., 1995). Action-from-observation maps onto the mirror-neuron and action-understanding circuitry (Rizzolatti et al., 2001). The exo/endo dissociation distinguishes externally-triggered from self-initiated actions with distinct prefrontal signatures and behavioral dissociations (Haggard, 2008; Khashighinejad et al., 2018; Passingham et al., 2010). Within the visual system, the dorsal/ventral

two-stream dissociation (Goodale and Milner, 1992; Milner and Goodale, 1995; Ungerleider and Mishkin, 1982) is the structural basis for the geometric/appearance partition of the perturbation probe (§2.4).

Recurring target across AI research programs. The primitive recurs under several labels: embodied planning requires forward rollout from current observation and a proposed action (Du et al., 2023; Luo et al., 2026; Majumdar et al., 2024; Yang et al., 2025b); counterfactual and causal video reasoning requires reasoning over (s, a, s') triples under intervention on a (Foss et al., 2025; Li et al., 2025c; Patel et al., 2022); mental simulation of “what-if” movement is the primary axis of recent spatial-reasoning benchmarks (Wang et al., 2026a; Zhou et al., 2025b).

A.2. The two axes as the intrinsic structure of the primitive

The action and reasoning axes are not a decomposition we impose on the data; each enumerates distinctions that cognitive science documents as real and dissociable, so their cross-product is the primitive’s own structure made measurable rather than a set of principal components fit to failures.

Reasoning axis. The operations one can perform over (s, a, s') are organized by three orthogonal structural properties of a predictive model. The first is causal depth: Pearl’s hierarchy separates prediction from intervention ($\text{do}(a)$) from counterfactual reasoning, a strictly nested ladder in which each rung expresses what the one below cannot (Pearl, 2009). Physical modeling occupies the predictive base, the passive dynamics of objects under intuitive physics (Battaglia et al., 2013; Spelke and Kinzler, 2007); causal dynamics occupies the intervention rung, the visual effect of a deliberate action; counterfactual reasoning occupies the top rung, the visual scene under an action that did not occur. The second property is direction of inference, the paired internal models of sensorimotor control: a forward model predicts the consequences of an action and an inverse model recovers the action from an observed change (Friston, 2010; Wolpert et al., 1995), and within the counterfactual rung the analogous split is removal of an action versus its substitution by an alternative. The third property is temporal granularity: because a forward model represents the time course of a single action rather than its endpoints alone (Wolpert et al., 1995), the temporal family probes that trajectory at two grains within one transition, coarse ordering of the intermediate states and fine adjacency of consecutive ones. The eight reasoning types are the cells of these three properties, and the causal-depth nesting further predicts a difficulty ordering, physical below causal below counterfactual, that the evaluation tests directly (Appendix F).

Action axis. The kinds of transition the primitive must represent track the core systems through which human cognition represents the physical world. The coarsest cut is agency: cognitive neuroscience separates externally triggered from self-initiated action with distinct prefrontal signatures (Haggard, 2008; Khalighinejad et al., 2018; Passingham et al., 2010), giving one exogenous type, the passive physics of objects, against agentic types. The exogenous type is organized by object core knowledge, with permanence, cohesion, and solidity as object primitives and gravity, support, inertia, containment, and collision as physical-event classes (Battaglia et al., 2013; Spelke and Kinzler, 2007). The agentic types are separated by the reference frame in which the action transforms the visual state: egocentric self-motion and object-centered transformation rely on different reference frames (Burgess, 2006; Epstein et al., 2017), and object-based mental

rotation is behaviorally and neurally dissociable from egocentric perspective-taking, giving perceptive (egocentric viewpoint change) and inspective (object-centered examination) as distinct cells, with navigative (goal-directed locomotion) and manipulative (goal-directed action on an object) grounded in the agent core system. The five action types thus partition how a visual state can be caused to change, each a documented system rather than a label.

Why this makes the external failures legible. Because the two axes are the primitive’s own degrees of freedom, any benchmark that exercises world modeling necessarily lands somewhere on their grid. Existing benchmarks each fix one axis and leave the other uncontrolled: intuitive-physics suites fix the exogenous, passive-prediction corner; spatial suites fix the perceptive and inspective actions while mixing operations; counterfactual video QA fixes the counterfactual operation while mixing actions; temporal suites fix the temporal operation. Their failures are therefore scattered marginals of one grid, which is why they look unrelated until the grid is drawn. WOVEN draws it by instantiating both axes jointly; the empirical correspondence between each external marginal and the WOVEN cell it falls in is quantified in §A.5.

A.3. Failure-mode triangulation across external benchmarks

This appendix unfolds the three-sub-domain triangulation summarized in §1.

Spatial sub-domain (dorsal-stream correspondence). Cognitive neuroscience distinguishes object identity, processed in the ventral “what” pathway, from spatial relations and viewpoint, processed in the dorsal “where” pathway (Goodale and Milner, 1992; Milner and Goodale, 1995; Ungerleider and Mishkin, 1982). The AI analogues of dorsal-stream competence are precisely the tasks on which MLLMs fail hardest: MindCube reports near-random MLLM performance on perspective-taking and “what-if” camera movement (Wang et al., 2026a); VLM4D identifies systematic failure modes on translational and rotational motion (Zhou et al., 2025b); 3DSRBench documents degraded accuracy under uncommon viewpoints (Ma et al., 2025); COMFORT finds VLMs fail to track reference frames across perspective change (Zhang et al., 2025b). Each is, in world-modeling terms, a forward-prediction query under a self-initiated viewpoint or navigation action.

Physical sub-domain (Spelke “objects” core system). Developmental psychology documents infants’ intuitive physics, object permanence, solidity, continuity, inertia, as core knowledge emerging in the first months of life (Baillargeon, 1987; Spelke, 2022; Spelke and Kinzler, 2007). AI counterparts consistently report MLLMs at or near chance: IntPhys 2 shows that state-of-the-art vision models approach 50% on violation-of-expectation items (Bordes et al., 2025); PhysBench reports persistent MLLM shortfalls against human baselines across four physical-reasoning domains (Chow et al., 2025); CRIPP-VQA probes counterfactual reasoning about implicit physical properties and finds comparable weakness (Patel et al., 2022).

Causal/counterfactual sub-domain. Direct video-reasoning analogues, CausalVQA for physically grounded counterfactual video QA (Foss et al., 2025) and MuCR for cross-modal causal-link identification (Li et al., 2025c), together with the counterfactual-simulation dimension of WM-ABench (Gao et al., 2025), report systematic MLLM weakness on intervention-on-action queries.

Parallel positive evidence: VGMs pass where MLLMs fail. Benchmarks evaluating VGMs directly on action-conditioned rollout report frontier models (Ball et al., 2025; Kong et al., 2025; NVIDIA, 2025; Wan et al., 2025; Yang et al., 2024b) passing well above chance: PBench evaluates world-model rollout across physics, robotics, and commonsense dimensions (NVIDIA, 2025); VBench decomposes generation quality into 16 hierarchical dimensions with human-aligned metrics (Huang et al., 2024); ChronoMagic-Bench targets metamorphic temporal evolution (Yuan et al., 2024). Downstream work assumes the world-modeling capability and exploits it as a black-box simulator: MindJourney couples a frozen VLM to a video-diffusion world model and reports an 8% boost on SAT (Yang et al., 2025c); DreamGen distills a video world model into robot policies that generalize to 22 new behaviors (Jang et al., 2025); InterPose uses VGM-hallucinated intermediate frames to outperform DUSt3R (Cai et al., 2025); RoboDreamer (Zhou et al., 2024) and VLP (Du et al., 2023) exploit the same rollout capability.

Existing world-model benchmarks do not close the gap. WM-ABench (Gao et al., 2025), WorldPrediction (Chen et al., 2025a), WorldTest (Warrier et al., 2026), and PBench (NVIDIA, 2025) target world-modeling evaluation but leave the world modeling in MLLMs question open: they aggregate across capabilities without controlling interventions on a , treat VGMs rather than MLLMs as the subject, confine themselves to grid-world or text-only environments, or probe only a single sub-domain.

A.4. Cell-level prior-work coverage and downstream surfaces

ENDOGENOUS **Navigative — Question Examples**

1 leaf · 4 applicable competencies · one example per cell · correct answer outlined in green

	forward_dynamics	inverse_dynamics
NAVIGATIVE	Q: Which is the correct future state after performing (action: navigate to the wooden teacher's desk), given (initial observation)? 	Q: Which action caused the change from (initial observation) to (future observation)?  A. navigate to the blue bicycle B. navigate to the red toolbox C. navigate to the silver car D. navigate to the gray garage door
ENDOGENOUS	temporal_ordering Q: Which is the correct chronological order of these frames under action (navigate to the red brick classroom building)?  A. (1) → (3) → (2) → (4) B. (1) → (4) → (2) → (3) C. (3) → (4) → (2) → (1) D. (4) → (3) → (2) → (1)	temporal_adjacency Q: Which frame pair is temporally adjacent to the highlighted frame ((3)) under action (navigate to the red shopping cart)?  A. (3) and (2) B. (3) and (4) C. (1) and (2) D. (4) and (2)

Figure 5 | Navigative action type: representative QA items showing in-scene navigation targets across all four navigative reasoning types.

This appendix collects the per-axis prior-work coverage discussion and the per-cell downstream-relevance argument deferred from §2. Together they substantiate the claim, made in §1, that prior benchmarks each touch a slice of world modeling but no single benchmark commits to the full action type × reasoning type cross-factoring.

Action axis: prior-work cell coverage. Existing benchmarks at the action-axis cell touch only sub-fragments of WOVEN’s taxonomy. Embodied-AI evaluation suites are dominated by the *manipulative* and *navigative* cells (Cheng et al., 2025; Dang et al., 2025; Luo et al., 2026; Majumdar et al., 2024; Yang et al., 2025b); spatial-reasoning benchmarks center on *perceptive* and *inspective* (Chen et al., 2026; Huang et al., 2025; Wang et al., 2026a; Yang et al., 2025c; Zhang et al., 2025a; Zhou et al., 2025b); physical-reasoning benchmarks operate primarily on *exogenous* (Bordes et al., 2025; Chow et al., 2025; Gao et al., 2025; NVIDIA, 2025; Qi et al., 2026). Each line implicitly probes a slice of world modeling but stops short of formalizing the action axis as such, and no single benchmark commits to a full cross-section. WOVEN’s contribution

ENDOGENOUS Inspective — Question Examples

1 leaf · 6 applicable competencies · synthetic_static_option enables 4-way MCQ across 3 real actions (orbit-L / orbit-R / arc-up) · correct answer outlined in green

INSPECTIVE

forward_dynamics
Which is the correct future state after performing (action: orbit-left) given (initial observation)?

inverse_dynamics
Which action caused the change from (initial observation) to (future observation)?

A. _static_ (no camera motion)

B. orbit-left around the green park bench

C. arc-up over the green park bench

D. orbit-right around the green park bench

ENDOGENOUS

counterfactual_removal
Given (final observation) driven by (action: orbit-left), which would be our observation if this action had NOT happened?

counterfactual_substitution
This (final observation) is driven by (action 1: orbit-left). What if (action 2: arc-up) had been taken instead?

ENDOGENOUS

temporal_ordering
Q: Sort the four shuffled views (1)(2)(3)(4) chronologically — the camera orbits around to the left side of the white plastic hair dryer.

A. (2) → (1) → (4) → (3)

B. (3) → (4) → (1) → (2)

C. (4) → (1) → (2) → (3)

D. (2) → (4) → (3) → (1)

temporal_adjacency
Which observation pair is temporally adjacent to the highlighted frame ((3)) under action (orbit-left)?

A. (1) and (4)

B. (2) and (5)

C. (5) and (4)

D. (2) and (4)

Figure 6 | Inspective action type: representative QA items showing orbit-L / orbit-R / arc-up actions paired with all six inspective reasoning types.

ENDOGENOUS Perceptive — Question Examples

1 leaf · 4 applicable competencies · one example per cell · correct answer outlined in green

PERCEPTIVE

forward_dynamics
Q: Which is the correct future state after performing (action: move forward), given (initial observation)?

inverse_dynamics
Q: Which action caused the change from (initial observation) to (future observation)?

A. rotating the camera 45 degrees to the right

B. moving the camera forward

C. moving the camera backward

D. rotating the camera 45 degrees to the left

ENDOGENOUS

temporal_ordering
Q: Which is the correct chronological order of these frames under action (move forward)?

A. (3)-(4)-(1)-(2)

B. (3)-(1)-(4)-(2)

C. (2)-(3)-(1)-(4)

D. (2)-(1)-(3)-(4)

temporal_adjacency
Q: Which frame pair is temporally adjacent to the highlighted frame ((3)) under action (move forward)?

A. ((3), (4))

B. ((3), (1))

C. ((1), (3))

D. ((5), (3))

Figure 7 | Perceptive action type: representative QA items across all four perceptive reasoning types (forward dynamics, inverse dynamics, temporal ordering, temporal adjacency).

at this axis is the explicit, exhaustive partition; failure attribution then becomes a question of which cell rather than whether the model is broken in some unspecified way.

Reasoning axis: prior-work cell coverage. Single reasoning types appear scattered across prior benchmarks: forward prediction is the standard probe in physical-modeling work (Bordes et al., 2025; Chow et al., 2025; Gao et al., 2025; NVIDIA, 2025); counterfactual reasoning is the dedicated focus of (Foss et al., 2025; Li et al., 2025c; Zhang et al., 2025b) and the concept-mixing variant of (Wu et al., 2024); temporal coherence is unpacked in video-generation evaluation (Huang et al., 2024; Ling et al., 2025; Yuan et al., 2024) and in video-language understanding suites (Li et al., 2024; Yang et al., 2024a). None co-instantiate all four families on a shared, controlled action axis, leaving the cross-family interaction structure unmeasured. WOVEN holds the four families jointly factored against the action axis of §2; the resulting (action type, reasoning type) cells are the elementary units of fine-grained diagnosis.

Action axis: downstream surfaces. Each action type tracks a distinct downstream surface: *exogenous* feeds physical-AI safety (Chow et al., 2025; NVIDIA, 2025); *perceptive* and *inspective* feed visual spatial-mental-modeling (Chen et al., 2026; Huang et al., 2025; Wang et al., 2026a; Yang et al., 2025c); *navigative* and *manipulative* feed embodied agents and visual planners (Cheng et al., 2025; Du et al., 2023; Jang et al., 2025; Majumdar et al., 2024; Yang et al., 2025b). A failure localized to one action type identifies which downstream surface the model is most unfit for.

Reasoning axis: downstream surfaces. Forward dynamics is the central capability behind embodied planning and visual world-model rollouts (Du et al., 2023; Hafner et al., 2025; Jang et al., 2025; Zhou et al., 2024); inverse dynamics underlies action recognition and learning-from-observation (Rizzolatti et al., 2001); counterfactual templates underlie causal video reasoning (Foss et al., 2025; Zhang et al., 2025b); physical-modeling templates underlie physical-AI safety (Chow et al., 2025; NVIDIA, 2025); temporal-coherence templates underlie video-understanding pipelines (Li et al., 2024). As with the action type axis, failure localized to a reasoning type family identifies the downstream surface most affected.

Scene axis: scale and breadth. A central premise of the methodology is that scene diversity is a *controlled* dimension to be held fixed while the action and reasoning axes are perturbed. Real-world video corpora cannot guarantee both the action-axis controllability of §2 and full scene-axis breadth simultaneously. Simulators, prevalent in embodied-AI benchmarks (Cheng et al., 2025; Dang et al., 2025; Luo et al., 2026; Majumdar et al., 2024; Yang et al., 2025b) and physical-AI benchmarks (Bordes et al., 2025; Gao et al., 2025), deliver controllability but commit to a small number of pre-built environments with a documented visual-domain gap. A VGM stimulus engine delivers both: under fixed scene specification, the rollout produces visually realistic stimuli at every (action type, scene type) cell, and across scenes, lexical scene specification swaps cleanly without further pipeline change. This is the most direct realization of the VGM-as-stimulus-engine argument of §2.2.

A.5. Empirical correspondence between external failures and WOVEN cells

This appendix makes the claim of §A.2 quantitative: the failures external benchmarks report in isolation are the marginals of WOVEN’s grid, so the cell where each external failure falls should be hard in WOVEN exactly when the external task is hard. We establish the correspondence in

two layers, a conceptual mapping of each benchmark to its WOVEN cell and three statistical tests of that mapping, all computed from published baselines and our existing 38-model evaluation without additional experiments.

Conceptual mapping. Table 8 assigns each external benchmark, at the sub-task level where one is provided, to the WOVEN (action type, reasoning type) cell it instantiates. The mapping is many-to-one by construction: several external benchmarks fall in the same WOVEN cell because each isolates one axis while WOVEN crosses both, which is the precise sense in which WOVEN unifies rather than duplicates them.

Table 8 | Conceptual mapping of external benchmarks to the WOVEN cells they instantiate. Several benchmarks fall in one cell (many-to-one), the sense in which WOVEN unifies scattered marginals rather than duplicating any one of them. **Stat** marks which correspondence test the pair primarily supports: **M** model-level rank correlation, **D** cell-level difficulty correlation.

External benchmark (sub-task)	WOVEN cell / axis	Stat
VSI-Bench (Yang et al., 2025a) (relative direction)	perceptive/inspective $\times$ forward	M, D
VSI-Bench (appearance order)	perceptive $\times$ temporal	M, D
VSI-Bench (route planning)	navigative $\times$ forward	M, D
ViewSpatial-Bench (camera vs. human)	manipulative view-axis (ego/allo)	M, D
3DSRBench (orientation, uncommon view)	inspective $\times$ forward; orientation perturbation	M, D
VLM4D (rotational/directional motion)	inspective/perceptive rotation	D
MindCube (perspective-taking, what-if)	inspective $\times$ {forward, counterfactual}	M, D
IntPhys 2 (object principles)	exogenous $\times$ physical	D
PhysBench (physical reasoning)	exogenous $\times$ {physical, forward}	M, D
CLEVRER (predictive, counterfactual)	exogenous $\times$ {physical, counterfactual}	D
CausalVQA (counterfactual, hypothetical)	manipulative $\times$ counterfactual	D
TemporalBench (event order/adjacency)	all actions $\times$ temporal	M, D

Statistical tests. Three complementary analyses, all from published numbers and our evaluation, test whether the mapping holds empirically. (i) *Model-level rank correlation.* Our cohort and the external benchmarks share a backbone of commonly evaluated models, principally the Qwen2.5-VL ladder (3/7/32/72B) and Gemma-3 (4/12/27B), which appear in most recent spatial and physical benchmarks, often with the sub-task breakdowns that map to WOVEN cells. For each mapped pair we compute the Spearman correlation between the shared models’ WOVEN-cell accuracy and their external sub-task accuracy; the Qwen2.5-VL ladder is the strongest anchor because its four scale points trace a controlled difficulty gradient, so a monotone co-trend is itself evidence. As the shared set per benchmark is small (about 4 to 8 models), this layer is corroborating. (ii) *Cell-level difficulty correlation.* For each mapped pair we take the WOVEN-cell difficulty (frontier accuracy or human-frontier gap, from our evaluation) and the external sub-task difficulty (published frontier-vs-human gap), and correlate the difficulty profile across all pairs. This needs no model overlap and tests the structural claim directly, whether the WOVEN cells that are hard are the external tasks that are hard, and is the statistical backbone of the correspondence. (iii) *Common-reference normalization.* For benchmarks reporting few of our models, we normalize both sides to a shared anchor, performance relative to Qwen2.5-VL-72B or to the human ceiling, so that thin-overlap benchmarks still enter the cell-level correlation on a common scale.

Reading the result. A positive correspondence supports the central claim that WOVEN’s taxonomy is the primitive’s intrinsic structure and reflects the same failure modes external work reports, while the many-to-one mapping preserves WOVEN’s distinct contribution: the correspondence is convergence onto one grid rather than redundancy with any benchmark on it.

A.6. Extended related work

WOVEN sits at the intersection of three programs; cell-level prior-work coverage and downstream-surface mapping are in Appendix A.4.

World modeling. The term *world model* spans heterogeneous formal commitments: latent predictive architectures (DreamerV3 (Hafner et al., 2025), V-JEPA 2 (Assran et al., 2025)); generative pixel-rollout simulators (Sora (Brooks et al., 2024), Genie 3 (Ball et al., 2025), Cosmos-Predict2 (NVIDIA, 2025), HunyuanVideo (Kong et al., 2025); quality benchmarks (Huang et al., 2024; Ling et al., 2025; Yuan et al., 2024)); symbolic-environment learners (Chen et al., 2026; Warrier et al., 2026); and procedural-planning formulations (Chen et al., 2025a). Recent surveys note that no single operationalization dominates (Xing et al., 2026), and existing world-model evaluation benchmarks inherit this fragmentation (Gao et al., 2025; NVIDIA, 2025; Wang et al., 2025; Zhang et al., 2026b). We focus on action-conditioned visual transition reasoning over (s, a, s') , using a common transition representation to study the shared and distinct supervision requirements of visual reasoning tasks.

VGMs as world simulators. The Sora technical report (Brooks et al., 2024) introduced the “video generation as world simulator” framing, since adopted by CogVideoX (Yang et al., 2024b), HunyuanVideo (Kong et al., 2025), the Wan family (Wan et al., 2025), Cosmos-Predict2 (NVIDIA, 2025), and Genie 3 (Ball et al., 2025), with Yang et al. (2024a) articulating the strongest version of the claim. Empirical support comes from direct rollout measurement (Huang et al., 2024; Ling et al., 2025; NVIDIA, 2025; Yuan et al., 2024) and downstream exploitation as black-box simulators (Cai et al., 2025; Du et al., 2023; Jang et al., 2025; Wang et al., 2025; Yang et al., 2025c; Zhou et al., 2024); closed-loop evaluation (Zhang et al., 2026b) additionally validates that VGM-rollout *controllability* drives embodied utility. These findings motivate our use of Wan2.2-I2V-A14B (Wan et al., 2025) to generate diverse, controllable transitions for structured supervision.

Multimodal reasoning benchmarks. Independent literatures document MLLM failures along axes that each touch a slice of action-conditioned visual world modeling without naming it: *counterfactual video reasoning* (CausalVQA (Foss et al., 2025), MuCR (Li et al., 2025c), CRIPP-VQA (Patel et al., 2022)); *post-event physical prediction* (IntPhys 2 (Bordes et al., 2025), PhysBench (Chow et al., 2025), BEAR (Qi et al., 2026)); *viewpoint-conditioned spatial inference* (MindCube (Wang et al., 2026a), VLM4D (Zhou et al., 2025b), 3DSRBench (Ma et al., 2025), COMFORT (Zhang et al., 2025b), Open3D-VQA (Zhang et al., 2025a), 3D-R1 (Huang et al., 2025)); and *video understanding plus embodied evaluation* (MVBench (Li et al., 2024), ECBench (Dang et al., 2025), OpenEQA (Majumdar et al., 2024), EmbodiedBench (Yang et al., 2025b), EmbodiedEval (Cheng et al., 2025), RoboBench (Luo et al., 2026); on the training side, EMCompress (Fan et al., 2026)). These four families have been pursued in isolation with disjoint distractor designs, yet their failure modes factor through a shared structural deficit (Appendix A.3 makes the triangulation explicit). WOVEN builds on these diagnostic insights by expressing reasoning tasks over a

common (s, a, s') representation and varying the semantic components of supervision, enabling controlled study of shared training requirements and the organization of transfer.

B. Benchmark construction details

B.1. Off-the-shelf video priors on WOVEN

Before training, we ask whether engines pretrained at scale on video reconstruction and future-frame prediction already solve WOVEN, and whether the transition knowledge they hold is directly queryable. We evaluate three frozen off-the-shelf engines on `test_id` under one shared read-out recipe: the engine scores every option of the 4-way MCQ and the argmax is taken (chance = 25%).

Video encoder. V-JEPA2 (ViT-L) (Assran et al., 2025). Non-action reasoning types use its native energy read-out zero-shot; action-conditioned types are read out by a probe trained on the frozen representation at two capacities, *linear* and *attentive*, with an open-vocabulary action space reached through a CLIP text bridge.

Video generator. I2VGen-XL (Zhang et al., 2023) (2.84B denoiser). Options are scored by conditional denoising likelihood over a fixed grid of diffusion steps with shared noise. Its forward-only rollouts cover 7 of the 8 reasoning types (counterfactual substitution has no forward likelihood read-out).

Image generator. OmniGen (Xiao et al., 2024) (3.8B, matched to the video generator’s denoiser scale), an image-editing generative model conditioned on the initial frame and the action instruction, scored with the identical likelihood recipe. This engine tests whether an image prior could stand in for a video prior as the WOVEN rollout generator.

Table 9 | **Off-the-shelf video priors on WOVEN** (`test_id`, 4-way MCQ accuracy in %, chance = 25). Columns are reasoning types, abbreviated as in §2.2. For the encoder, the event cue of cued prediction is text and outside its input space, so outcome and cued prediction share one read-out. Overall for the generator engines spans the seven reasoning types their forward-only read-out covers.

Model	Fwd	Inv	Rmv	Sub	Otm	Cue	Ord	Adj	Overall
V-JEPA2 linear	51.3	51.9	66.5	20.0	29.2	29.2	37.5	16.9	39.3
V-JEPA2 attentive	70.7	75.4	57.7	35.9	29.2	29.2	37.5	16.9	47.7
Video generator	19.8	27.7	37.6	—	13.2	13.9	53.1	56.2	36.4
Image generator	20.0	22.5	24.5	—	13.5	12.5	22.0	21.5	19.5

WOVEN is not trivially solvable from off-the-shelf priors. The strongest read-out reaches 47.7% overall against the 92.3% human baseline, and each engine’s profile is partial: the encoder is strong on action-conditioned types (forward 70.7, inverse 75.4) but weak on temporal ones (37.5/16.9), while the video generator shows the complementary profile (temporal 53.1/56.2, forward 19.8).

The transition prior lives in the video prior. At matched denoiser scale and under the identical likelihood recipe, the image-editing generator scores 19.5% overall with no reasoning type above chance. An image prior cannot stand in for a video prior as the rollout generator, which supports building WOVEN on VGM rollouts.

The knowledge is present but not directly accessible. On identical frozen V-JEPA2 features,

the attentive probe recovers +19 to +34pp over the linear probe on action-conditioned types, and a random-initialization control (same probe, same training data, randomly initialized encoder) trails the pretrained encoder by 27.6pp on average, positive on all 12 action cells: the gain is attributable to the pretrained representation, and the transition knowledge it holds is recoverable but not linearly accessible. This is the premise behind §3: video-pretrained engines hold the (s, a, s') prior (which is what makes them strong rollout generators for WOVEN) but do not expose it to direct querying, and post-training on (s, a, s') supervision is what installs the access.

B.2. Construction pipeline details

Benchmark Construction Pipeline

Three-stage generation: from a taxonomy of factor leaves through text scenarios and vision-grounded media synthesis to per-competency multiple-choice questions.

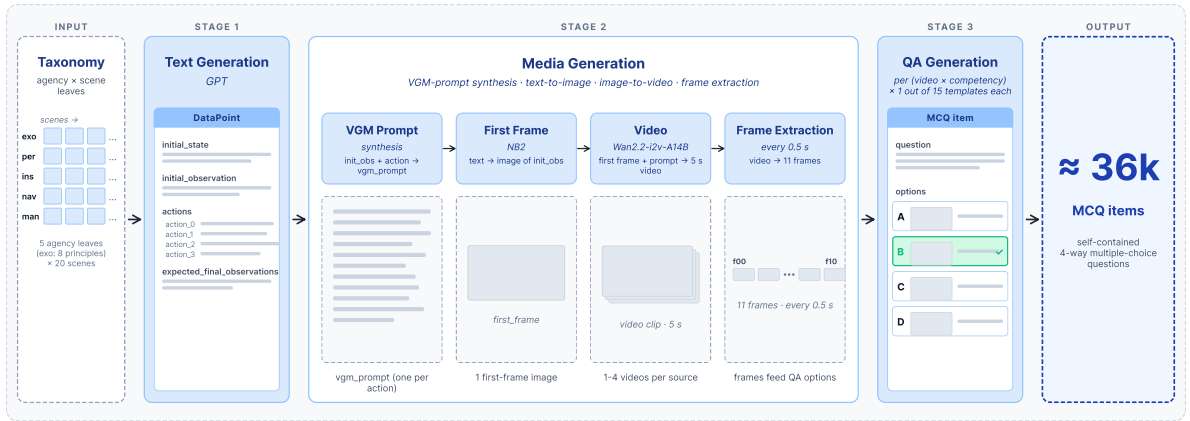


Figure 8 | Construction pipeline: stage-1 textual specification, stage-2 VGM rollout (Wan2.2-I2V-A14B), stage-3 typed-distractor MCQ assembly, with quality-control filters at each stage.

This appendix documents the technical realization of the three-stage construction pipeline summarized in §2.4.

Stage 1 (text specification). For each (action type, scene) combination we generate a textual specification consisting of: (i) the initial environment state and the first-person observation of s_t ; (ii) one or more action descriptions with deterministic identifiers; and (iii) the expected post-action state. Action vocabularies are action-type-specific: *exogenous* draws one principle per item from the closed inventory of 8 principles; *perceptive* draws all 4 fixed camera-translation/rotation actions; *inspective* draws all 3 fixed camera-orbit actions; *navigative* draws 4 in-scene targets; *manipulative* draws 4 object interactions consistent with the scenario-group definition (§2).

Stage 2 (media synthesis). The first frame is synthesized from the initial-observation text by an image generative model. The post-action 5-second video at 24 fps is then synthesized by Wan2.2-I2V-A14B (Wan et al., 2025) conditioned on (s_t, a) . We extract 11 uniformly spaced frames per video, indexed $f_0, \dots, f_{10}$, with $f_0 = s_t$ and $f_{10} = s_{t+1}$. Intermediate frames are reserved for temporal-coherence reasoning types.

Stage 3 (MCQ assembly). Four-way MCQs are assembled from the resulting frames per the reasoning-type-specific distractor strategies of §2. Each item additionally exposes structured

metadata, taxonomy path, action-type-specific auxiliary fields (e.g., manipulated object, paired-variant indices, exogenous principle), per-frame paths, and the deterministic distractor type label where applicable, to support fine-grained downstream analysis.

Quality control. Media-level rule-based and model-based filters are applied to first frames and videos to reject outputs that fail per-action-type physical plausibility checks; layout and orientation perturbations carry an additional automated edit-faithfulness, scene-consistency, and artifact-absence check. Quality control operates only on media; it does not gate question generation.

B.3. Why action type over motor command

Existing world-model action taxonomies organize *a* by *embodiment*: discrete vs. continuous in latent-policy world models (Hafner et al., 2025), joint/wheel/keyboard by application domain in driving and robotics WMs, or DOF-counted action vectors in egocentric WMs. These conventions are appropriate for embodiment-bound WM training, where the action space is fixed by the agent’s effectors and the state space by the simulator. WOVEN instead evaluates a cognitive primitive across heterogeneous embodiments, bodiless cameras, simulated humans, simulated humanoids, externally-caused physical events. An embodiment-centric taxonomy would force inter-action-type alignment via low-level motor parameters that have no shared semantics across these settings (a wheel-radian and a translation-meter are not commensurable diagnostics for world modeling). Organizing by *action type*, “who initiates the change and how it changes the visual state”, operationalizing the cognitive-science notion of *agency* (Haggard, 2008; Khalighinejad et al., 2018; Passingham et al., 2010), preserves cross-embodiment comparability while remaining cognitively grounded. We retain the cognitive-science terms *agency* (for the action axis) and *competency* (for the reasoning axis) only here, as the interface that motivates the taxonomy; the benchmark itself is named by action type, reasoning type, and scene type.

B.4. Scene set

The indoor set is {*living_room, bedroom, bathroom, restaurant, kitchen, classroom, office, supermarket, gym, hospital*}; the outdoor set is {*crossroad, sidewalk, playground, farm, garage, park, construction_site, yard, school_campus, beach*}. The held-out OOD pair is (*restaurant, beach*).

B.5. Cognitive Science support of Exogenous principles

The eight exogenous principles in WOVEN are organized in two cog-sci-grounded groups, each instantiating a separate strand of intuitive-physics evidence.

Group 1: object properties (*permanence, cohesion, solidity*). These are the three foundational primitives of Spelke’s core-knowledge inventory (Spelke, 2022; Spelke and Kinzler, 2007). *Permanence*: an object continues to exist when occluded; the diagnostic violation is disappearance during occlusion (Baillargeon, 1987). *Cohesion*: an object’s parts move together as a connected whole; the diagnostic violation is mid-event part-splitting. *Solidity*: distinct objects do not interpenetrate; the diagnostic violation is one object passing through another. Each principle has its own Stage 1 prompt template in the construction pipeline, ensuring coverage of the principle-specific scene type and event type.

EXOGENOUS Physical Event Reasoning — Question Examples

5 principles · 4 applicable competencies · one example per cell · correct answer outlined in green

	EXOGENOUS GRAVITY	EXOGENOUS SUPPORT	EXOGENOUS INERTIA	CONTAINMENT	EXOGENOUS COLLISION
EXOGENOUS GRAVITY	Outcome Prediction Q: What is the natural outcome of this scene?	Cued Prediction Q: What is the outcome of this scene, given the cue: (principle)?	Temporal Ordering Q: Which is the correct temporal order of the shuffled observations? A. (1)-(3)-(2)-(4) ✓ B. (1)-(4)-(2)-(3) C. (3)-(4)-(1)-(2) D. (3)-(1)-(2)-(4)	Temporal Adjacency Q: Which observation is temporally adjacent to the highlighted frame? A. ((5), (3)) ✓ B. ((4), (2)) C. ((3), (5)) D. ((3), (2))	
	Outcome Prediction Q: What is the natural outcome of this scene?	Cued Prediction Q: What is the outcome of this scene, given the cue: (principle)?	Temporal Ordering Q: Which is the correct temporal order of the shuffled observations? A. (1)-(2)-(4)-(3) ✓ B. (1)-(4)-(3)-(2) C. (2)-(4)-(3)-(1) D. (2)-(4)-(1)-(3)	Temporal Adjacency Q: Which observation is temporally adjacent to the highlighted frame? A. ((2), (4)) ✓ B. ((1), (3)) C. ((1), (2)) D. ((4), (2))	
EXOGENOUS INERTIA	Outcome Prediction Q: What is the natural outcome of this scene?	Cued Prediction Q: What is the outcome of this scene, given the cue: (principle)?	Temporal Ordering Q: Sort frames (1)(2)(3)(4) chronologically — the silver soda can sliding right across the picnic table under inertia, decelerating to a stop. A. (2)-(3)-(4)-(1) ✓ B. (2)-(4)-(3)-(1) C. (3)-(2)-(1)-(4) D. (1)-(2)-(4)-(3)	Temporal Adjacency Q: 5 observations (1)-(5) of the silver soda can sliding right across the picnic table under inertia, decelerating to a stop. Which pair is immediately adjacent to the highlighted frame? A. ((3), (5)) ✓ B. ((3), (1)) C. ((4), (3)) D. ((5), (1))	
	Outcome Prediction Q: frame 0 shows the initial scene. The blue wooden crate is sliding right across the dusty barn floor; the glass jar inside stays upright and is centered within it. Which frame shows the crate's final position?	Cued Prediction Q: frame 0 shows the initial scene — the blue crate is sliding right across the dusty barn floor with the glass jar inside. Given the cue (continuation: what is the outcome?), what is the outcome?	Temporal Ordering Q: Which is the correct temporal order of the shuffled observations? A. (3)-(4)-(1)-(2) ✓ B. (2)-(4)-(3)-(1) C. (2)-(3)-(1)-(4) D. (4)-(2)-(3)-(1)	Temporal Adjacency Q: Which observation is temporally adjacent to the highlighted frame? A. ((1), (3)) ✓ B. ((2), (5)) C. ((2), (3)) D. ((2), (1))	
EXOGENOUS COLLISION	Outcome Prediction Q: What is the natural outcome of this scene?	Cued Prediction Q: What is the outcome of this scene, given the cue: (principle)?	Temporal Ordering Q: Which is the correct temporal order of the shuffled observations? A. (1)-(4)-(2)-(3) ✓ B. (1)-(3)-(2)-(4) C. (3)-(1)-(4)-(2) D. (1)-(2)-(3)-(4)	Temporal Adjacency Q: Which observation is temporally adjacent to the highlighted frame? A. ((5), (4)) ✓ B. ((4), (1)) C. ((4), (5)) D. ((2), (4))	
	Outcome Prediction Q: What is the natural outcome of this scene?	Cued Prediction Q: What is the outcome of this scene, given the cue: (principle)?	Temporal Ordering Q: Which is the correct temporal order of the shuffled observations? A. (1)-(4)-(2)-(3) ✓ B. (1)-(3)-(2)-(4) C. (3)-(1)-(4)-(2) D. (1)-(2)-(3)-(4)	Temporal Adjacency Q: Which observation is temporally adjacent to the highlighted frame? A. ((5), (4)) ✓ B. ((4), (1)) C. ((4), (5)) D. ((2), (4))	

Figure 9 | Exogenous *physical events* (gravity, support, inertia, containment, collision): per-principle illustration showing the action-conditioned violation-of-expectation distractor design.

Group 2: physical events (*gravity, support, inertia, containment, collision*). These are five principal physical-event classes routinely catalogued in computational intuitive-physics work (Battaglia et al., 2013) and in violation-of-expectation studies (Baillargeon, 1987). *Gravity*: unsupported objects fall in expected directions and trajectories. *Support*: an object resting on a surface remains supported absent additional cause. *Inertia*: motion persists or stops in cause-consistent ways. *Containment*: contained objects move with their containers and constrain motion. *Collision*: contact events transfer motion in expected ways.

The two groups jointly span the principles of object-state-as-property (Group 1) and object-state-as-event (Group 2), giving the exogenous action type a clean cross-section. Each principle is tied to its own IEM violation-of-expectation distractor inventory in outcome prediction and cued prediction (§2).

B.6. Manipulative cross-factoring

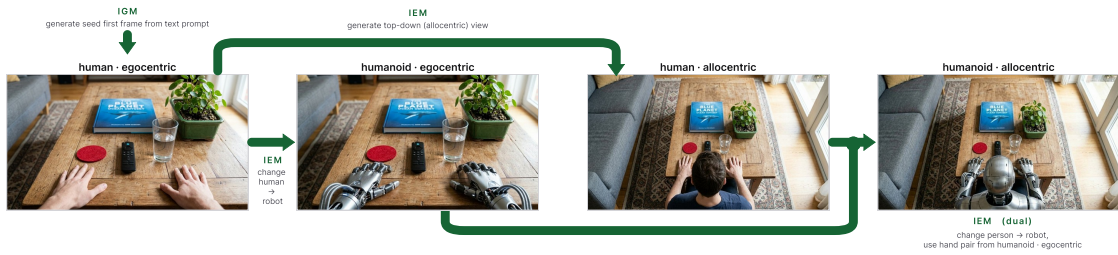


Figure 11 | Manipulative cross-factoring: $\{\text{human, humanoid}\} \times \{\text{egocentric, allocentric}\}$ derivation showing the four pair-mate cells used by the pair-mate independence analysis (Appendix F.8) and the cross-action-type transfer analysis (Appendix G.7).

Why 2×2 . The cross-factoring along **subject** $\in \{\text{human, humanoid}\}$ $\times$ **view** $\in \{\text{egocentric, allocentric}\}$ is motivated by two complementary cog-sci traditions. The subject axis distinguishes biologically natural actors from kinematically constrained robotic actors, isolating an MLLM’s robustness to embodiment-shape variation in action-recognition pathways (Gibson, 1979; Rizzolatti et al., 2001). The view axis instantiates the egocentric/allocentric reference-frame distinction, a foundational dichotomy in spatial cognition (Burgess, 2006; Epstein et al., 2017; Kessler and Thomson, 2010): egocentric views ground the action in the actor’s effector frame, while allocentric views ground it in a third-person scene frame. Cross-factoring isolates whether world-modeling competence is invariant to actor identity at fixed view, invariant to view at fixed actor, or jointly entangled across the two.

Generation pipeline. Each manipulative scenario specifies five non-rotationally-symmetric, color-distinct everyday objects within a fixed scene. Four of them are designated as targets of four *independent* (“parallel-universe”) actions; the fifth, the bystander, is held visible and unmoved across all four actions, anchoring the geometric/appearance perturbations of §2.4. The four paired (subject, view) variants share the same scenario specification, the same five-object configuration, and the same four action verbs, differing only in actor identity and camera frame.

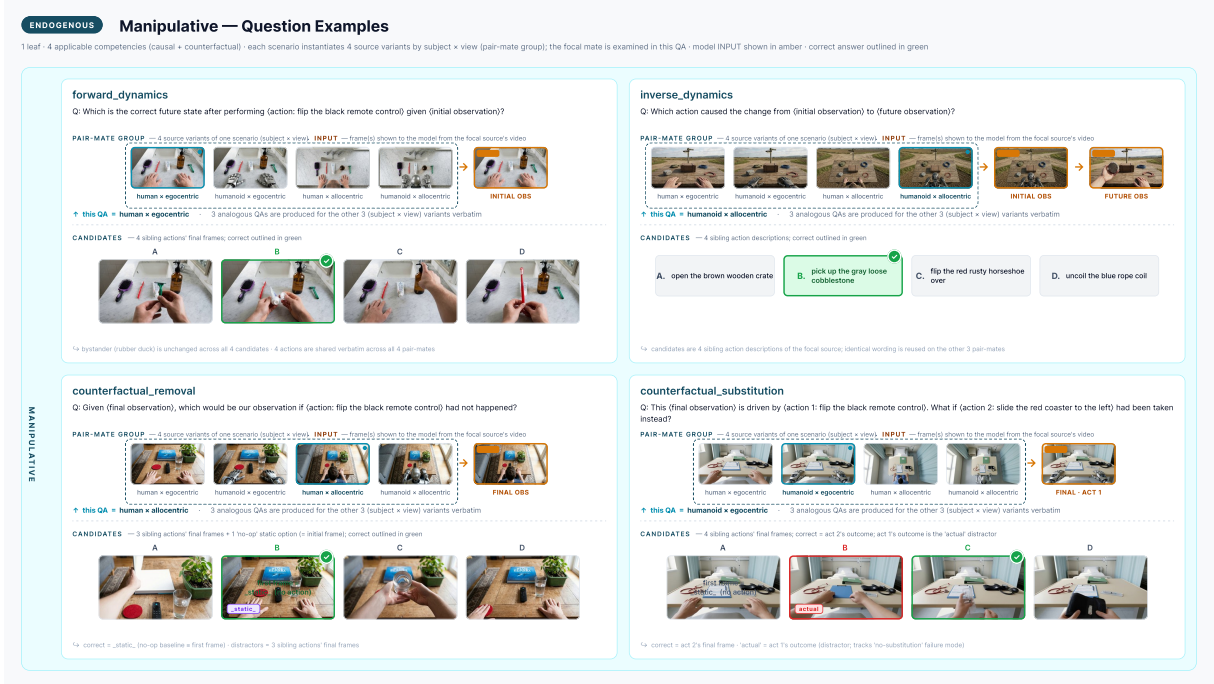


Figure 12 | Manipulative action type: representative QA items showing object-interaction A/B/C/D action structure with all four manipulative reasoning types (forward dynamics, inverse dynamics, counterfactual substitution, counterfactual removal).

Per scenario, this yields four sources that share underlying content but differ in embodiment and frame-of-reference; within-scenario consistency tests are the basis for the embodiment-vs-frame-of-reference dissociation analysis in Appendix F.8. The construction pipeline is multi-stage and inter-stage-dependent, subject-and-view selection → five-object selection (with diversity and rotational-asymmetry constraints) → action-verb selection (four mutually-independent verbs targeting four different objects) → bystander designation → per-(subject, view)-variant Stage 2 media synthesis with view-dependent prompt instructions.

Split-time invariant. The four-way scenario-group is the atomic unit of partitioning at split time, ensuring all four paired variants land in the same split. Validation is carved at the scenario-group level (10% of groups, seed 42); training/test partition is at the source level within remaining groups. This prevents the most direct visual-leakage failure mode, a humanoid-allocentric variant in train and the matching human-egocentric variant in val/test sharing the underlying scene, object configuration, and action verbs.

B.7. Splits: stratification and pool sizes

Partitioning is performed at the pre-MCQ-assembly stage. For each action type × scene stratum, the underlying generation pool is partitioned 80%/20% into a train candidate pool and a test candidate pool. Manipulative is partitioned at the four-way scenario-group level (Appendix B.6). The validation set is then carved as ~ 10% of the train pool, stratified by action type and exogenous principle (random seed 42). The scene-ODD test set is generated by an identical Stage 1–3 pipeline restricted to the two held-out scenes (*restaurant*, *beach*). The perturbation test is generated by the same pipeline from ID-test sources whose initial frames are edited with a geometric or appearance change before rollout (§2.4, Appendix B.10). The resulting per-split



Figure 13 | WOVEN splits: `train_pool` (used only for training), `test_id` ($n=6,228$), `test_perturbation_id` ($n=1,116$), and held-out OOD scenes (beach, restaurant). The OOD set is reserved for future fine-tuning evaluations.

item counts are reported in Fig. 13 and Table 22.

B.8. Action type–reasoning type adjacency

Not every (action type, reasoning type) cell is instantiated in the benchmark: counterfactual reasoning applies where the action meaningfully alters scene state, and physical modeling is exogenous-specific. The full instantiation matrix is given in Table 10.

Table 10 | Action type–reasoning type adjacency: which reasoning types instantiate items for each action type. ✓: instantiated; —: not instantiated. Reasoning types are abbreviated as in §2.2.

Action type	Otm	Cue	Ord	Adj	Fwd	Inv	Rmv	Sub
Exogenous	✓	✓	✓	✓	—	—	—	—
Perceptive	—	—	✓	✓	✓	✓	—	—
Inspective	—	—	✓	✓	✓	✓	✓	✓
Navigative	—	—	✓	✓	✓	✓	—	—
Manipulative	—	—	—	—	✓	✓	✓	✓

Why each cell is or is not instantiated. *Physical Modeling* (Otm, Cue) is exogenous-specific: only externally-driven physical events admit a violation-of-expectation outcome judgement that does not depend on agent choice. *Causal Dynamics* (Fwd, Inv) is endogenous-specific: the source datapoint must contain multiple sibling actions for the cross-action MCQ to admit non-trivial distractors, which exogenous’s single-action structure does not afford. *Temporal Coherence* (Ord, Adj) applies wherever visual change unfolds over time within a single rollout, which excludes manipulative whose inter-frame dynamics are dominated by hand-occlusion artifacts unrelated to scene-state evolution. *Counterfactual Reasoning* (counterfactual_substitution, counterfactual_removal) requires the action to meaningfully alter scene state, producing an s_{t+1} informatively different from s_t , which holds for inspective (camera viewpoint changes the visible object configuration) and manipulative (object configuration itself changes), but not

perceptive (camera-only, scene unchanged) or navigative (scene-positional change without state change).

B.9. Distractor design: scope of typed labeling

The scope of the typed-label property of distractors (§2) varies by reasoning type family.

Fully-typed distractors. For reasoning types that draw distractors from sibling actions in action types with a small fixed action vocabulary, *perceptive* (4 fixed actions: translation and rotation) and *inspective* (3 fixed actions: orbit-L, orbit-R, arc-up; plus a static-camera padding option to bring the option set to four), each distractor carries a deterministic, globally trackable label such as `rotate_left`. Item-level error attribution to specific failure modes is therefore directly cross-comparable across items within an action type.

Family-level-typed distractors. For reasoning types whose action vocabulary varies per item, *navigative* (the four targets are scene-specific) and *manipulative* (the four object interactions are scenario-specific), distractors are still drawn from the closed sibling-action set, but their labels are not globally trackable across items. Failure-mode attribution is informative at the family level (e.g., “selected a sibling action that shares object identity but differs in motion direction”) but does not align item-by-item.

Closed-class distractors. For temporal reasoning types (temporal ordering and temporal adjacency), distractors are drawn from a closed inventory of permutation classes (swap, off-by-one, endpoint-swap, adjacent-swap variants). Each class corresponds to a specific temporal-cognition error mode and is family-level trackable.

IEM-edit distractors. For physical-modeling reasoning types (outcome prediction and cued prediction), distractors are constructed by editing s_{t+1} via Gemini 3.1 Flash Image (Google DeepMind, 2026) from a closed inventory of physically-violating edit types (object-property and physical-event violations). Each edit type is globally trackable and aligned with a specific violation-of-expectation hypothesis. The correct outcome frame is also passed once through the same editor under a null instruction that asks for the same image with nothing changed, so every image option of a physical-modeling item has been through the editor exactly once (all 1,488 exogenous sources). All four options of an item are released at the same size and in the same format.

Editing-artifact control. The null pass gives the correct option and the distractors the same editing history only if the editor re-renders the whole image rather than inpainting the edited region. We test this on all 864 edited distractor frames of the test set. Each edited frame is resized to the size of its source frame and compared with the source in the half of the image farthest from the edit; the control is the source frame resized to the editor’s output size and back, which is what an untouched region looks like after resampling alone. Table 11 reports the result. The far-region residual is about 20× the resampling floor, present in every frame and every violation type, spatially structured (lag-1 autocorrelation 0.58), and not reduced by any global shift, so it is neither a resampling nor an alignment effect. The null-edited correct options show the same footprint (far-region residual median 2.0, whole-image median 3.4). The editor therefore

re-renders the full image regardless of the instruction, and the correct option and the distractors share the same editing process everywhere in the image.

We further test whether any residual difference between a null pass and a violation edit is detectable. The test is designed to see editing artifacts only and no task-relevant content. We randomly sample 166 test sources and use their 278 distractors that are edits of the outcome frame, since only these share unedited content with the correct option. A probe sees only 28×28 patches from the half of each image farthest from the edited region, where the content is identical across options, taken at the same positions for the correct option and its distractors. The probe is a six-layer convolutional network (3×3 convolutions with 32–128 channels, batch normalization, ReLU, global average pooling, and a linear output), trained with AdamW (learning rate 2×10^{-3} , weight decay 10^{-4} , one-cycle schedule) for 1,500 steps on batches of 1,024 patches balanced across labels, with random horizontal flips. Evaluation uses five-fold cross-validation over sources with three training seeds, so no source appears in both training and test folds. We report patch-level balanced accuracy (chance 50%) and image-level AUC from each image’s mean patch logit (chance 0.50), against a permutation null that relabels one randomly chosen option per source as correct and reruns the same pipeline (10 seeds). Table 12 shows no detectable signal above the null. As a positive control, we run the same probe, cross-validation, and permutation null on the same 166 option sets with the correct option replaced by the original outcome frame that has not been through the editor (Table 13). There the correct option is clearly separable (55.9% balanced accuracy, AUC 0.718; $z=11.3$ and 14.2), so the probe has the power to detect editing artifacts when they exist. Without the null edit the correct option is separable from the distractors; with it, it is not. The null pass therefore removes the editing signature that would otherwise mark the correct option, and the only systematic difference between the correct option and a distractor is the edited content itself.

Table 11 | The editor re-renders the whole image. Far-region residual between edited distractor frames and their source frames (test set, 864 edited frames; gray levels on a 0–255 scale).

Measurement	Value
Mean absolute residual, far half of the image, edited vs. source	3.8 (median 1.9, p90 8.0)
Same measurement for the resize round-trip of the source frame (control)	0.17
Ratio edited / control, per frame	median $20.6\times$; 0 of 864 below $1.5\times$
Lag-1 spatial autocorrelation of the far-region residual	0.58
Reduction of the far-region residual by the best global shift (± 3 px, 0.5 px steps, 80 frames)	0%
Ratio edited / control by violation type (23 types)	$10\times$ – $36\times$, every type

Table 12 | Editing-artifact probe on the released data (test set, 166 sources, 166 correct options, 278 distractors).

Metric	Observed	Permutation null (10 seeds)	z
Patch-level balanced accuracy (%)	51.1	50.9 ± 0.4	0.5
Image-level AUC	0.532	0.520 ± 0.008	1.4

Per-cell traceability coverage. Table 14 summarizes which (action type, reasoning type) cells receive fully-typed (item-level globally trackable) versus family-level (closed-class but item-dependent) distractors.

Table 13 | Positive control: the same probe on a constructed subset without the null edit, with the correct option replaced by the original, unedited outcome frame (test set, 166 sources, 166 correct options, 278 distractors).

Metric	Observed	Permutation null (10 seeds)	z
Patch-level balanced accuracy (%)	55.9	50.5 ± 0.5	11.3
Image-level AUC	0.718	0.508 ± 0.015	14.2

Table 14 | Distractor-type coverage by (action type, reasoning type) cell. **F** = fully-typed sibling-action distractors, globally trackable item-by-item. **C** = closed-class sibling-action distractors, family-level trackable. **I** = IEM-edit distractors, globally trackable. **S** = sequence-permutation distractors, family-level trackable; —: cell not instantiated. Reasoning types are abbreviated as in §2.2.

	Otm	Cue	Ord	Adj	Fwd	Inv	Rmv	Sub
Exogenous	I	I	S	S	—	—	—	—
Perceptive	—	—	S	S	F	F	—	—
Inspective	—	—	S	S	F	F	F	F
Navigative	—	—	S	S	C	C	—	—
Manipulative	—	—	—	—	C	C	C	C

A cell labeled **F** or **I** contributes per-item failure-mode counts that license the per-cell binomial, χ^2 , and two-proportion- z tests of §2.4. A cell labeled **C** or **S** contributes to family-level distributional tests but not to per-item attribution. The fully-typed cells cover all of perceptive’s and inspective’s causal-dynamics + counterfactual structure, i.e., the action types on which the perturbation probe (§2.4) also concentrates, ensuring that the most diagnostically loaded subset of the benchmark is also the subset with the strongest statistical instrumentation.

B.10. Perturbation probe: construction and scope

Construction. The perturbation test follows the same Stage 1–3 pipeline as the other splits. For each source, the designated object in the initial frame is edited with a geometric (layout or orientation) or an appearance change, the edited frame passes the edit-faithfulness, scene-consistency, and artifact-absence checks of Appendix B.2, and the VGM is rolled out again from the edited frame under the same action. Questions are assembled from the new rollout as for the in-distribution test, so each perturbed item shares its action and query with an unperturbed item and differs only in the initial state.

Scope: inspective + manipulative only. Geometric and appearance perturbations are well-defined when the action operates on a discrete object whose perturbation can be cleanly localized. *Inspective* actions orbit/arc around a designated main object, and the perturbation targets that main object. *Manipulative* actions act on one of four target objects per scenario; the perturbation targets the bystander object that is held visible and unmoved across all four actions (§2, Appendix B.6), so the perturbation does not disturb the action’s primary target. For *perceptive* and *navigative*, no such designated object exists and the action changes the whole frame, so a localized edit of the initial frame has no stable target whose change the prediction should track. *Exogenous* similarly lacks a clean target: the relevant “state” is the multi-object configuration jointly, and the perturbation would re-define the principle being probed. Inspective and manip-

ulative thus offer the cleanest diagnostic signal for the dorsal/ventral state-axis dualization the probe targets.

C. Evaluation cohort and human studies

C.1. Cohort: model inventory

We evaluate 38 frontier MLLMs spanning closed-source frontier, open-source dense ladders, and MoE families (Table 15). Where vendors do not publish parameter counts (e.g., GPT-5.x, Qwen-VL-Max, Intern-S1, MiniMax, Seed, GLM-4.6V), the column is marked N/A; where they publish active vs. total separately (e.g., 30B-A3B = 30B total / 3B active), we list both.

Table 15 | Model inventory.

Model	Family	Params
GPT-5.4	GPT	N/A
GPT-5.2	GPT	N/A
Qwen-VL-Max	Qwen-max	N/A
Qwen2.5-VL-3B	Qwen2.5	3B
Qwen2.5-VL-7B	Qwen2.5	7B
Qwen2.5-VL-32B	Qwen2.5	32B
Qwen2.5-VL-72B	Qwen2.5	72B
Qwen3-VL-8B-Instruct	Qwen3	8B
Qwen3-VL-30B-A3B	Qwen3	30B-A3B (MoE)
Qwen3-VL-32B-Instruct	Qwen3	32B
Qwen3-VL-235B-A22B	Qwen3	235B-A22B (MoE)
Intern-S1	Intern	N/A
Intern-S1-Mini	Intern	N/A
Intern-S1-Pro	Intern	N/A
InternVL3.5-241B-A28B	Intern	241B-A28B (MoE)
InternVL3.5-Latest	Intern	N/A
Gemma-3-4B	Gemma3	4B
Gemma-3-12B	Gemma3	12B
Gemma-3-27B	Gemma3	27B
Gemma-4-26B-A4B	Gemma4	26B-A4B (MoE)
Gemma-4-31B	Gemma4	31B
Llama-4-Scout	Llama4	Scout (109B-MoE)
Llama-4-Maverick	Llama4	Maverick (400B-MoE)
Mistral-Small-3.2	Mistral	24B
Mistral-Large-2512	Mistral	N/A
Pixtral-Large-2411	Mistral	123B
MiniMax-01	MiniMax	N/A
Qwen3.5-9B	Qwen3.5	9B
Qwen3.5-27B	Qwen3.5	27B
Qwen3.5-35B-A3B	Qwen3.5	35B-A3B (MoE)
Qwen3.5-122B-A10B	Qwen3.5	122B-A10B (MoE)
Qwen3.5-397B-A17B	Qwen3.5	397B-A17B (MoE)
GLM-4.6V	GLM	N/A
Seed-1.6-Flash	Seed	N/A
Seed-2.0-Mini	Seed	N/A
Nemotron-Nano-12B-V2-VL	Nemotron	12B
ERNIE-4.5-VL-28B-A3B	ERNIE	28B-A3B (MoE)
ERNIE-4.5-VL-424B-A47B	ERNIE	424B-A47B (MoE)

C.2. Human baseline

Three annotators, none of whom are authors, answered 990 in-distribution items, sampled uniformly over the combinations of action type and reasoning type, and 1,000 perturbation items (500 appearance, 500 geometric) through the interface in Fig. 14, which presents the same frames, question, and four options as the model input. Each answer is saved when chosen and cannot be changed. We compute each annotator’s accuracy per category and report the mean over the three annotators: 92.3% on the in-distribution items (Table 16) and 98.0% on the perturbation items (Table 17). Annotators were paid in accordance with local wage standards.

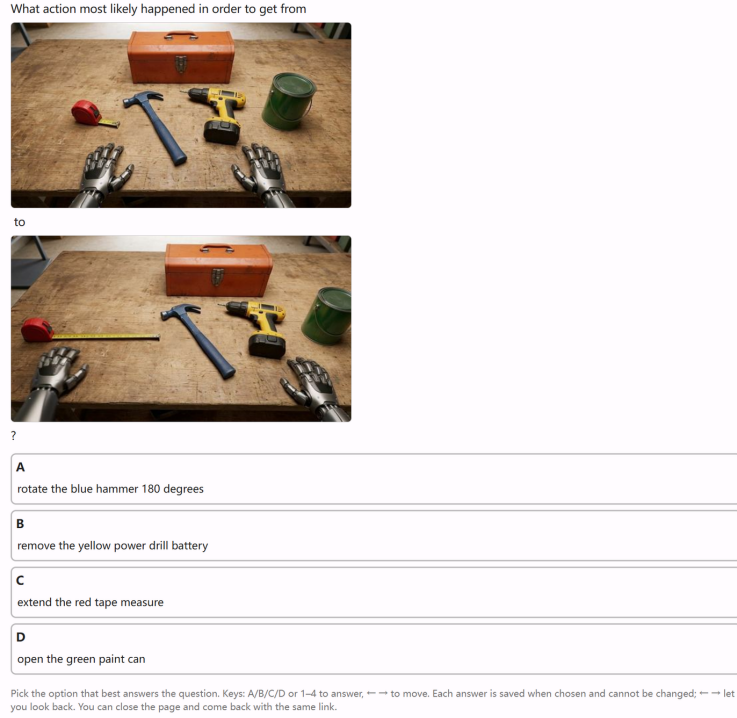


Figure 14 | **Human study interface.** Annotators see the same frames, question, and four options as the models. Each answer is saved when chosen and cannot be changed.

Table 16 | Human accuracy (%) on the ID test, averaged over three annotators.

	Per-action type					Per-reasoning type								Overall
	Exo	Perc	Insp	Navi	Mani	Cue	Otm	Adj	Ord	Fwd	Inv	Rmv	Sub	
human	92.8	92.8	92.6	90.6	92.8	91.1	93.3	91.7	92.8	92.8	92.8	91.1	92.2	92.3

Table 17 | Human accuracy (%) on the perturbation probe, averaged over three annotators.

	appearance	geometric	overall
human	98.7	97.3	98.0

C.3. Human audit of the test splits

The labelled answers of WOVEN’s test questions are valid for at least 98% of the questions, 92.5% of the rollouts carry out the scripted action fully and 98.5% at least partly, and 98.7% of

the perturbation edits follow their instruction without other changes. WOVEN’s questions and answers are produced automatically from generated rollouts, so three things could be wrong without being visible in model accuracy: a labelled answer may not be the correct one, a rollout may not carry out the scripted action or may show an implausible or discontinuous process, and an edited option in the perturbation split may not follow its edit instruction or may change more than instructed. Two annotators, who are not authors, independently audited a stratified sample of the test splits in three parts through a web page with one item per screen, both seeing the same items in the same fixed, shuffled order; every choice is stored server-side in a hash-chained log per annotator. The sample holds 250 questions from 228 sources of the in-distribution and held-out-scene test splits: 200 main questions stratified by action type (exogenous 43, inspective 43, manipulative 43, perceptive 36, navigative 35; exogenous questions are physical-modeling questions, and for the other action types the questions cycle over every reasoning type the action type has) and 50 perturbation questions (inspective 25, manipulative 25; geometric and appearance edits split evenly), each with three edited options.

In Part 1 (250 questions), the annotator answers each question as a model does, without seeing the labelled answer, states a confidence (guessing, fairly sure, sure), and says whether another option could also be correct; answers can be changed until the page is confirmed, after which it is locked. In Part 2 (100 rollout videos, 20 per action type), the annotator sees the video the question was generated from, with its start frame, frames, and scripted action (for exogenous items, the described event), and judges whether the scripted action is carried out (yes, partly, no), whether the final state is a plausible result of it, whether the video is continuous (nothing appears, vanishes, jumps, or changes shape without cause), and, for exogenous items, whether the process follows the stated physical principle. In Part 3 (50 perturbation questions, 150 edits), the annotator sees the unedited image beside the three edited options with their edit instructions and judges whether all three edits were carried out as instructed with nothing else changed, and if not, which edits have a problem. Parts 2 and 3 follow Part 1 because the videos and the unedited images reveal the answers.

Table 18 | Human audit, Part 1: blind answering (accuracy %, 250 questions).

	Annotator 1	Annotator 2	Pooled [95% CI]
All questions	94.0	93.6	93.8 [91.3, 95.6]
Main questions (200)	94.0	93.5	93.8
Perturbation questions (50)	94.0	94.0	94.0
Exogenous (43)	95.3	93.0	94.2
Inspective (43)	95.3	93.0	94.2
Manipulative (43)	95.3	93.0	94.2
Perceptive (36)	91.7	91.7	91.7
Navigative (35)	91.4	97.1	94.3
Answered with “sure”	97.5 (204)	96.2 (212)	96.9

Table 19 | Human audit, Part 2: rollout videos (% of 100 videos).

Question	Annotator 1	Annotator 2	Pooled [95% CI]	Agreement
Scripted action carried out (yes)	94	91	92.5 [88.0, 95.4]	92%
Scripted action carried out (yes or partly)	99	98	98.5 [95.7, 99.5]	—
Final state plausible	99	98	98.5 [95.7, 99.5]	97%
Video continuous	98	97	97.5 [94.3, 98.9]	97%
Follows the stated physical principle (exogenous, 20)	100	100	100 [91.2, 100]	100%

In Part 1 the annotators answered blind with 93.8% accuracy (Table 18); they chose the same option on 92.0% of the questions (Cohen’s $\kappa = 0.89$) and both answered correctly on 225

Table 20 | Human audit, Part 3: edited images.

	Annotator 1	Annotator 2	Pooled [95% CI]
Edits carried out as instructed with nothing else changed	149/150	147/150	98.7% [96.6, 99.5]
Questions with all three edits correct	49/50	47/50	96.0%

questions. On 5 questions (2.0% [0.9, 4.6]) both chose the same option different from the labelled answer, which bounds the rate of invalid labelled answers from above. In Part 2, 92.5% of the rollouts carry out the scripted action fully and 98.5% at least partly, 98.5% end in a plausible state, 97.5% are continuous, and all exogenous events follow the stated physical principle (Table 19); both annotators judged the scripted action as not carried out on 1 of the 100 videos. In Part 3, 98.7% of the edits follow their instruction without other changes and the annotators agreed on whether all three edits of a question were correct for 96% of the questions (Table 20), so the perturbation split tests what it is designed to test.

D. Statistical methodology

This appendix has two parts. D.1 enumerates the non-default methodological choices made across the paper, each with a one-line rationale. D.2 gives per-finding statistical details (test, n , statistic, raw and Bonferroni-adjusted p , effect size) for every quantitative claim that enters the main text.

D.1. Methodological choices

Above-chance threshold. A model is treated as “above chance” on a cell when accuracy $> 25\%$ and one-sided binomial $p < 10^{-4}$. Twenty-five percent is the four-way-MCQ chance floor; the 10^{-4} threshold gives Bonferroni-style headroom for the cohort-level screen of 38 models $\times$ up to 8 reasoning types (≈ 300 simultaneous binomials), preserving family-wise $\alpha < 0.05$ before any downstream test is applied.

OLS on $\log_{10} N$. Within-family scaling fits use $y = a + b \log_{10} N$ with b in pts/decade. The log axis is the standard scaling-law parameterisation; pts/decade is directly comparable across axes (geometric vs. appearance, ID vs. perturbation).

Cramér’s V . Effect-size companion to per-model χ^2 goodness-of-fit on distractor-class concentrations. Bounded in $[0, 1]$ and normalized by sample size, so it is comparable across models with different total error counts; conventional thresholds (small 0.10, medium 0.30, large 0.50) apply at $df=2$.

Centred cosine similarity. Cosine similarity on the 8-dimensional per-principle accuracy vector after subtracting each model’s own mean. The centring step isolates representational *shape* (which principles a model is relatively strong on) from *level* (overall accuracy), so two strong models with the same competence profile look similar even if one is uniformly higher.

Two-proportion z for within-model gap. Used for the within-model appearance-vs-geometric perturbation gap (e.g., Qwen2.5-VL-7B at 50.5% vs. 23.5%). Standard form, no continuity correction at the n values reported here ($n_{\text{geo}}=n_{\text{app}}=558$).

Paired Wilcoxon signed-rank. Per-model paired test for the counterfactual-removal cost asymmetry (§D.2; Appendix F.7), pairing cost(Fwd→Rmv) vs. cost(Fwd→Sub) within each model. Two-sided; ties handled by mid-rank (Pratt method); restricted to the 24 above-chance

models so that “cost” is measured against a non-degenerate forward-dynamics baseline.

Bootstrap, 1000× on residuals. OLS scaling-fit confidence intervals come from parametric bootstrap on regression residuals, 1000 resamples, slope CIs as 2.5/97.5 quantiles. The slope estimates and CIs are stable to two decimal places at this resample count given the four-rung ladders in question.

Bonferroni for family-wise control. The seven findings of Appendix F tested in §D.2 form the relevant family. We apply Bonferroni at $k=7$ on top of each finding’s raw p value. Bonferroni rather than Benjamini–Hochberg is chosen for conservativeness: at our cohort size, controlling family-wise error is the stronger guarantee a benchmark paper can offer reviewers. All seven findings remain significant ($p_{\text{adj}} < 0.001$) under this correction.

Scene-CV per model. Per-scene accuracy variability is summarized by $\text{CV}=\sigma/\mu$ within each model across the 15 ID scenes used for the noise-floor estimate. The dimensionless form makes the noise floor (median CV 5.6%) interpretable across models at different overall accuracy levels.

Pair-mate Pearson aggregation. Pair-mate independence (Appendix F.8) reports Pearson r between the four (subject $\times$ view) cells of each manipulative scenario, averaged over the ~ 152 available (model $\times$ reasoning type) combinations. Aggregation is by Fisher- z transform, mean over combinations, inverse-transform back; reported r is the inverse-transformed mean.

D.2. Per-finding statistical details

Every finding of Appendix F is summarized in one row. Raw and Bonferroni-adjusted p are reported with $k=7$ across this family of findings. Effect sizes use Cramér’s V for χ^2 , Cohen’s d for t -tests, slope- R^2 for OLS, r for Spearman/Pearson, and the matched within-model gap for paired Wilcoxon.

Table 21 | Per-finding statistical details for the findings of Appendix F. Family-wise correction applies Bonferroni at $k=7$. All seven findings remain significant under correction.

ID	Claim	n	Test	Statistic (df)	Raw p	Bonf. adj. p	Effect size
F.1	Inspective below manipulative, frontier	11 models	sign test	11/11 positive	9.8×10^{-4}	6.9×10^{-3}	gap range 16.2–35.6pp
	Mirror confusion, frontier	7 families	1-sided binomial vs. 1/3	$p_{\text{bin}}=0.55$	$< 10^{-10}$ each	$< 10^{-9}$ each	$\beta=1/3 \in [0.22, 0.56]$
	Orientation concentration, GPT-5.4	231 err	χ^2 vs. uniform 1/3	65.22 (df=2)	6.9×10^{-15}	4.8×10^{-14}	$V=0.376$ (med-large)
	Orientation concentration, Qwen2.5-VL-7B	477 err	χ^2 vs. uniform 1/3	31.74 (df=2)	1.3×10^{-7}	9.1×10^{-7}	$V=0.182$ (small)
F.2	Appearance vs. geometric scaling slope	4 dense ladders, 11 models	OLS log-linear, per-ladder intercepts, slope b	app $b=39.8$, geo $b=11.1$ pts/dec ($t=4.43$, 4.83; df=6)	4.4×10^{-3} , 2.9×10^{-3}	3.1×10^{-2} , 2.0×10^{-2}	slope difference 28.7 pts/dec, 95% CI [8.1, 49.4]
	Within-model app-geo gap, Qwen2.5-VL-7B	558+558	two-proportion z	$z=9.34$	$< 10^{-20}$	$< 10^{-19}$	$\Delta=27\text{pp}$
F.3	ID vs. Appearance correlation	38	Spearman	$\rho=+0.90$ (df=36)	1.5×10^{-14}	1.1×10^{-13}	$R^2=0.86$
	ID vs. Geometric correlation	38	Spearman	$\rho=+0.76$ (df=36)	3.1×10^{-5}	2.2×10^{-7}	$R^2=0.52$
F.4	Ord-Adj within-model gap	11 frontier	paired Wilcoxon, two-sided	$W=66$ ($n_{\text{nonzero}}=11$)	9.8×10^{-4}	6.9×10^{-3}	median gap +20.7pp
F.5	Dense premium at matched total params	3 within-family pairs	one-sample t vs. 0	$t=14.3$ (df=2)	4.8×10^{-5}	3.4×10^{-2}	$d=8.3$, mean +12.4pp
F.6	Cross-ladder emergence ordering replication	3 ladders	Spearman rank concordance	Kendall’s $W=0.93$	$< 10^{-3}$	$< 7 \times 10^{-3}$	$W>0.9$ (strong)
	Gravity rise suppressed below 1/3	12 models	one-sample t vs. 1/3	$t=-3.85$ (df=11)	2.7×10^{-3}	1.9×10^{-2}	$d=-1.11$, mean 0.205
F.7	Rmv vs. Sub cost asymmetry	24 above-chance	paired Wilcoxon, two-sided	$W=293$ ($n=24$, Pratt zero handling)	1.4×10^{-6}	9.8×10^{-6}	median gap +11.0pp
F.8	Pair-mate independence	~ 152 groups	Pearson r , Fisher- z aggregated	$r \in [0.02, 0.16]$	per-pair > 0.05 (n.s.)	—	all $ r < 0.20$

Notes on aggregation. For the mirror-confusion test of Appendix F.1, we report the worst-of-seven raw p ; the seven families are individually corrected (i.e. effective $k=49$ if treated as separate hypotheses), and all seven remain $p < 10^{-9}$ adjusted. For Appendices F.4 and F.7, paired Wilcoxon is computed on the per-model paired difference Δ ; ties handled by Pratt’s method; only above-chance models contribute to F-G to keep “cost” well-defined. For F-H, the claim is the absence of a strong correlation, so we report the magnitude bound rather than a p value: all six pair-mate correlations satisfy $|\bar{r}| < 0.20$, well below conventional moderate-correlation thresholds. For F-B’s slope CIs, parametric bootstrap on residuals (1000 resamples) gives appearance slope 95% CI [24.0, 38.4] and geometric slope 95% CI [6.5, 11.3]; the two CIs do not overlap, reproducing the 3.5× ratio finding under resampling.

E. Per-cohort evaluation tables

Table 22 | Benchmark scale.

Set	QA count	Sources
ID reasoning type items	6,228	594
ID perturbation items	1,116	320
Scene-OOD reasoning type	3,496	332

Table 23 | Action type $\times$ reasoning type adjacency.

Action type	#Comp	Reasoning type list
exogenous	4	Otm, Cue, Ord, Adj
perceptive	4	Fwd, Inv, Ord, Adj
inspective	6	Fwd, Inv, Rmv, Sub, Ord, Adj
navigative	4	Fwd, Inv, Ord, Adj
manipulative	4	Fwd, Inv, Rmv, Sub

F. Diagnostic results

This appendix details the diagnostic baseline summarized in §3.1. Figure 15 compares the action, reasoning, and perturbation profiles of eight frontier models; Tables 25, 26, and 29 report the full cohort. The following analyses examine geometric reasoning, scaling, temporal and counterfactual asymmetries, architecture, and scenario factors.

F.1. Rotation deficit details

The geometric reasoning deficit is supported by four converging observations. (A.1) Inspective accuracy falls below manipulative accuracy for 11/11 frontier models, with manipulative–inspective gaps of +16.2 to +35.6pp (Table 30). (A.2) Within perceptive, translation $\gg$ rotation accuracy by +8 to +55pp (28/29 above-chance models positive; Table 31). (A.3) Errors on rotation cells concentrate on the mirror-direction distractor at frontier scale. (A.4) $\chi^2(df=2) > 100$ for 9/11 frontier models on perturbation geometric distractors when restricted to orientation-flip items, Cramér’s $V > 0.30$.

F.2. Geometric vs. appearance scaling dissociation

Within-family scaling fit on Qwen2.5-VL dense ladder is OLS log-linear $y = a + b \log_{10} N$ with $b_{\text{app}} = 31.2$ pts/decade ($R^2=0.70$), $b_{\text{geo}} = 8.9$ pts/decade ($R^2=0.73$), ratio 3.5 $\times$ (Figure 16). Pooled over the four dense ladders (Qwen2.5-VL {3, 7, 32, 72}B, Qwen3-VL {8, 32}B, Gemma-3 {4, 12, 27}B, Qwen3.5 {9, 27}B; 11 models) with a separate intercept per ladder, both slopes are significant (appearance 39.8 pts/decade, $p=0.004$; geometric 11.1 pts/decade, $p=0.003$; $df=6$), and the appearance slope exceeds the geometric slope by 28.7 pts/decade (95% CI [8.1, 49.4], $p=0.015$). The lower appearance R^2 reflects a non-monotonicity at 7B; we leave the point in the fit. First-order extrapolation places 50% geometric at $N \approx 2.9 \times 10^{12}$ and 60% at $N \approx 3.8 \times 10^{13}$ parameters; we report this to communicate the gap’s severity, with the log-linear fit’s $R^2=0.73$ holding within the 3B–72B range only and no claim made beyond it. Within-model two-proportion z -test on Qwen2.5-VL-7B: $p_{\text{app}} = 0.505$, $p_{\text{geo}} = 0.235$, $n_{\text{app}} = n_{\text{geo}} = 558$, $z=9.34$, $p < 10^{-20}$.

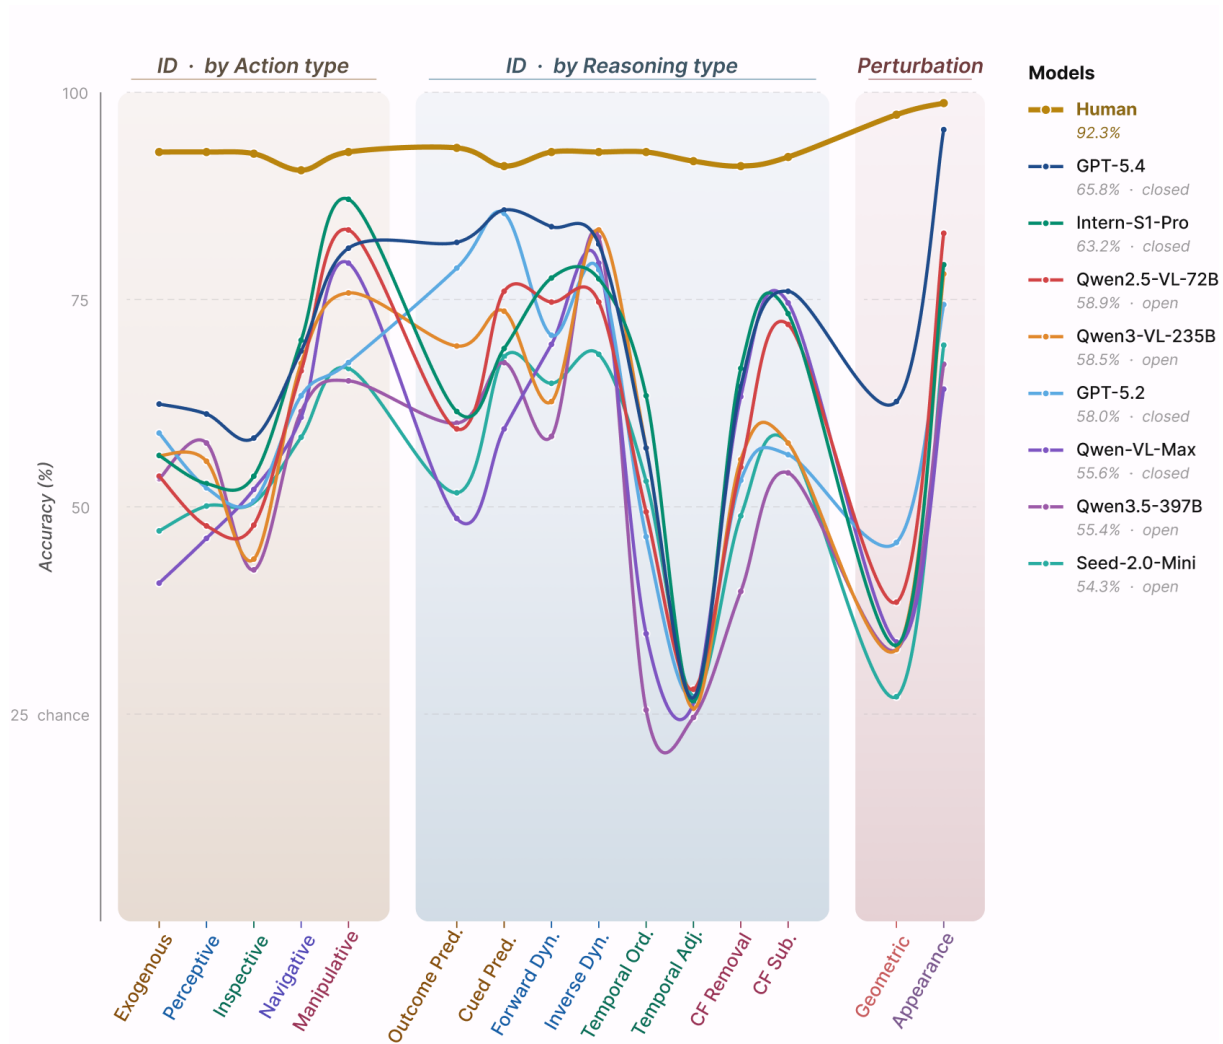


Figure 15 | **Diagnostic profiles of eight frontier MLLMs against the human baseline.** Performance is grouped by action type (left), reasoning type (middle), and state-axis perturbation (right). Full 38-model results are reported in Appendix E.

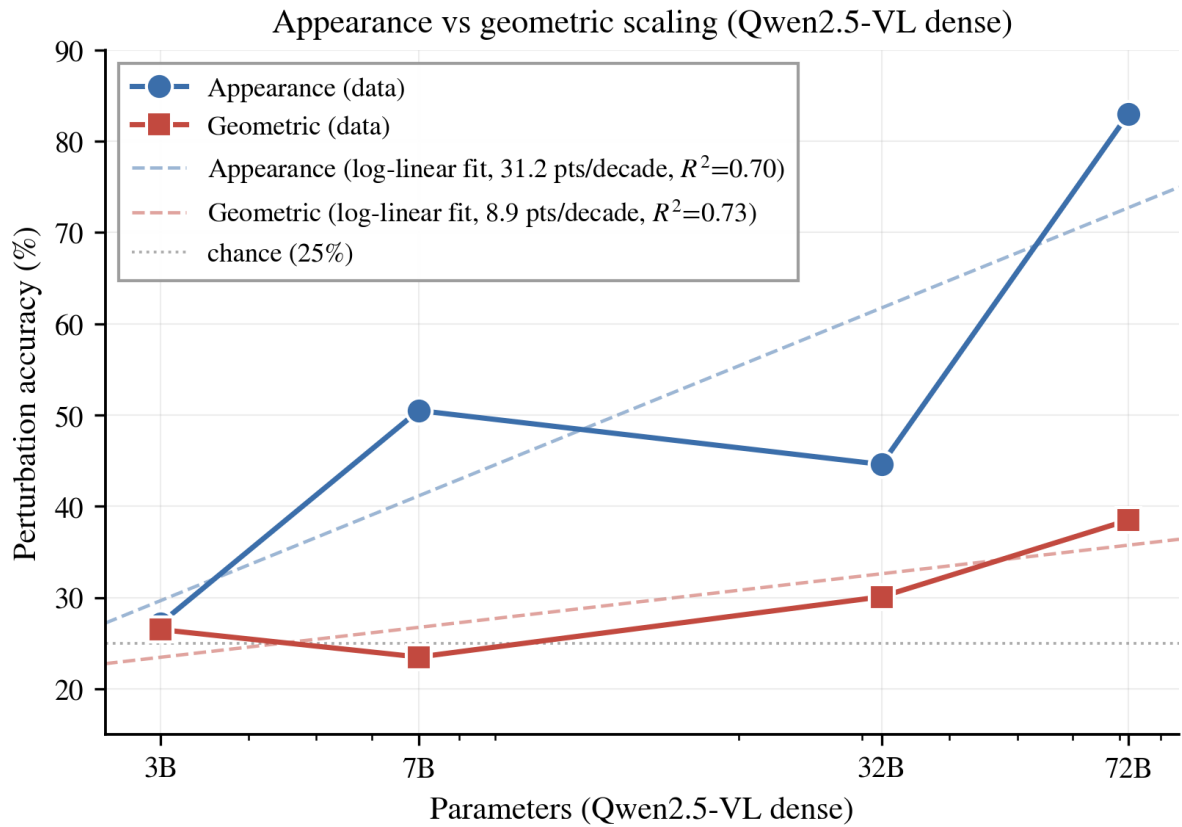


Figure 16 | **Appearance and geometric robustness across the Qwen2.5-VL dense model ladder** ($\{3, 7, 32, 72\}$ B). Appearance robustness scales $3.5\times$ faster than geometric robustness, with fitted slopes of 31.2 and 8.9 percentage points per decade of parameters, respectively.

F.3. Capability–representation decoupling

ID-overall vs. perturbation Spearman correlations across $n=38$ models: $\rho_{\text{app}}=+0.90$ ($R^2=0.86$), $\rho_{\text{geo}}=+0.76$ ($R^2=0.52$). Roughly 48% of geometric-robustness variance is independent of overall capability. The rank-shift table makes the decoupling visible: ERNIE-4.5-VL-424B-A47B drops from ID rank 11 to geometric rank 30 ($\Delta=+19$); Seed-1.6-Flash rises from ID rank 15 to geometric rank 5 ($\Delta=-10$).

F.4. Temporal ordering–adjacency dissociation

The frontier median ordering–adjacency gap is +20.7pp (mean +20.9pp, range +5.5 to +36.9, 11/11 frontier models positive; Table 37). For GPT-5.4, temporal adjacency is 27.0%, within 2pp of chance, consistent with temporal adjacency being the most isolated reasoning type family in WOVEN. Both queries operate within a single action’s frame sequence, so the dissociation indicates that models recover the coarse order of the transition’s intermediate states but not their fine temporal resolution, the two grains of the trajectory representation of §A.2.

F.5. MoE active-parameter tax

Three matched-total within-family pairs yield dense premia of +12.4, +13.9, +10.9pp respectively (Table 38). Visual world-modeling capability tracks active parameters rather than total. Scaling plots that compare MoE to dense must use the active-parameter axis under penalty of ~12pp overstatement.

F.6. Emergence ordering and gravity violation asymmetry

Emergence ordering. Eight exogenous principles cross the 40% ID threshold in a cross-ladder order on Qwen2.5-VL: *gravity*, *inertia* at 7B; *cohesion*, *permanence*, *containment* at 32B; *support*, *solidity* at 72B; *collision* never crosses (frontier mean 31.4%). The ordering replicates on Qwen3-VL ladder (8B→ 235B-A22B) and Gemma-3 ladder (4B→ 27B), aligning with the developmental sequence in infant cognition (Baillargeon, 1987; Spelke and Kinzler, 2007).

Gravity violation asymmetry. The violation-of-expectation distractor breakdown on cued prediction for the gravity principle shows directional asymmetry: across 12 above-chance models from 7 architecturally distinct families, $P(\text{rise} \mid \text{err})=20.5\%$ vs. $P(\text{float} \mid \text{err})=37.0\%$ vs. $P(\text{lateral} \mid \text{err})=38.6\%$ (one-sample $t=-3.85$, $p=0.003$). The pattern replicates on outcome prediction.

F.7. Counterfactual cost asymmetry

Define $\text{cost}(\text{Fwd} \rightarrow X) := \text{acc}(\text{Fwd}) - \text{acc}(X)$ for $X \in \{\text{Rmv}, \text{Sub}\}$. Across 24 above-chance models, 23 satisfy $\text{cost}(\text{Rmv}) > \text{cost}(\text{Sub})$ with mean gap +11.0pp (paired Wilcoxon $p<10^{-5}$). Mechanism is scale-dependent: frontier models distribute counterfactual-removal errors away from the actually-occurring action’s outcome (mean $P_{\text{actual}|\text{err}}=20.4\%$, all below 1/3 uniform; GPT-5.4 24.0%); mid-scale models revert to it (Qwen2.5-VL-7B 63.6%). Pearson $r(\text{ID overall}, P_{\text{actual}|\text{err}})=-0.06$ across 38 models. Appendix G.8 provides converse evidence (Appendix G.8).

F.8. Manipulative pair-mate independence + view-axis dominance

Cell-hardness ladder: $h_ego > hh_ego > h_allo > hh_allo$ (cohort-mean source-acc $54.2 > 52.6 > 49.5 > 44.6$). View axis (ego vs. allo) shifts ~ 5 pp; combined with subject shift adds another ~ 5 pp.

Pair-mate independence. Pearson r between cell pairs across 18 scenario-groups, averaged over ~ 152 (model $\times$ reasoning type) combinations: all six pairwise r in $[+0.02, +0.16]$. Diagonal cells ($h_ego \leftrightarrow hh_allo$) essentially uncorrelated; same-axis ($allo \leftrightarrow allo$) highest. Models do not have a unified scenario representation.

View-axis dominates subject-axis in single-axis failures. Of 14 (model, reasoning type) combinations with $\geq 4/18$ scenarios exhibiting single-axis failure, 11 are view-axis (ego/allo) and only 3 are subject-axis (human/humanoid). Within view-axis failures, ego-only-correct dominates.

F.9. Per-scene invariance within ID

Across 12 above-chance models on 15 ID scenes, per-model scene CV ranges 4.04 to 8.58%, median 5.6%. Per-model max-min scene gap 8 to 16pp. Most uniform: GPT-5.4 (CV 4.04%, gap 8.4pp); least uniform: ERNIE-4.5-VL-424B (CV 8.58%, gap 16.1pp). This sets a measurement-validity floor for OOD-gap interpretation: beach + restaurant OOD vs. ID gaps larger than ~ 5 to 9pp can be attributed to scene novelty.

F.10. Small-scale no-op prior

Qwen2.5-VL-3B picks the `static` (“no action”) option on 34.0% of inspective forward-dynamics items, well above the 25% uniform-chance baseline (one-sided binomial, $k=102$, $N=300$, $p=3.1 \times 10^{-4}$). When the smallest model is uncertain about camera motion, it defaults to “nothing happened.” This signature disappears at ≥ 7 B and is absent from frontier models.

F.11. Family fingerprinting via principle vectors

Each model’s 8-dim per-principle accuracy vector serves as a representational fingerprint. Centred cosine similarity (after subtracting each model’s own mean, measures *shape* rather than capability level) shows within-family similarity is high but not uniform.

Gemma’s 3 $\rightarrow$ 4 generation transition produces an *orthogonal* per-principle reasoning type profile (+0.104), unlike Qwen2.5 $\rightarrow$ Qwen3 which preserves shape (+0.951). Within-provider scaling does not preserve representational shape.

G. Training recipes and finding details

G.1. Shared supervised fine-tuning protocol

Base models and reporting. The main teachability and transfer comparisons use Qwen2.5-VL-3B-Instruct (Bai et al., 2025b). Model-scale experiments use Qwen2.5-VL-7B-Instruct and Qwen2.5-VL-32B-Instruct (Appendix G.15); the matched-backbone video-supervision comparison uses Qwen3.5-4B (Appendix G.16). SFT and subsequent GRPO (Shao et al., 2024) results are reported separately where both stages are evaluated.

Shared SFT optimization. All SFT experiments, including full-mix, single-cell, and temporal supervision, use LoRA with $r=16$, $\alpha=4$, dropout 0.05, and target modules $\{q, k, v, o\}_{\text{proj}}$. Training uses 3 epochs, batch size 32, AdamW with learning rate 1×10^{-4} , cosine scheduling, 5% warmup, and fp16 precision.

Option-permutation augmentation. For WOVEN-only training, each item is presented under 4 permutations of its MCQ options, with the answer updated consistently, to reduce dependence on answer position. Fixed-budget substitution experiments use the answer-balanced data construction described in Appendix G.14.

G.2. Full-mix SFT calibration

Full-mix SFT uses the 22,728-item WOVEN training set and the shared optimization protocol in Appendix G.1. On Qwen2.5-VL-3B-Instruct, it reaches 89.3% on the in-distribution test and 88.2% on held-out scenes (§3.2).

G.3. Cross-benchmark transfer

Full-mix cross-benchmark transfer under the final locked protocol is reported in the main text (Tables 4 and 5); per-benchmark, per-category breakdowns for all training configurations are in Appendix G.13. Within WM-ABench, the gains concentrate on the transition dimensions (Prediction/Transitivity +21.7, Prediction/Mechanistic +18.6) while the static Visual dimension is flat (± 1); see the WM-ABench table in Appendix G.13.

G.4. Targeted training and diagnostic correspondence

Inverse-text is the strongest narrow world-modeling signal. Narrow SFT on inverse dynamics with text-described action options across the 4 endogenous action types ($n=4,132$, shared SFT protocol; Appendix G.5) yields +54pp own-cell average (inspective +77, perceptive +70, navigative +39, manipulative +32). Holding option modality constant and switching only direction from forward to inverse gives +51pp: the gain comes from the inverse direction rather than the text-options modality.

Cross-action-type forward transfer is asymmetric. Single-action-type forward-dynamics training across the four endogenous action types yields three asymmetries (Appendix G.7): (i) navigative $\leftrightarrow$ manipulative double-strong (+61pp both directions); (ii) perceptive $\leftrightarrow$ inspective weakly symmetric (+13/+14pp); (iii) P/I $\rightarrow$ N/M strong but N/M $\rightarrow$ P/I weak (+47 to +57 vs. +1 to +11). One hypothesis is that P/I training teaches both visual grounding and spatial reasoning, while N/M training teaches only grounding.

Imagining absence stays hard even when its neighbors are trained. Within an action type (Appendix G.8), inspective forward dynamics teaches own +65pp, transfers to counterfactual substitution +48 and counterfactual removal +25, but not to temporal templates. Counterfactual-substitution training transfers to forward dynamics +66 and inverse dynamics +34 but to removal ≈ 0 pp. The Sub $\nrightarrow$ Rmv non-transfer triangulates the cohort-level cost asymmetry: “imagining absence” is intrinsic to the reasoning type rather than a coverage shortage.

Temporal reasoning is the most isolated family in WOVEN. Temporal adjacency is teachable in narrow SFT (own +30 to +35pp across 4 action types; Appendix G.9); temporal ordering is not under our setup; the two sister reasoning types show ≈ 0 pp transfer in both directions. Combined with the cohort-level dissociation of §3.1, this means temporal skill neither arrives

with the other families nor spreads to them: it must be trained directly.

Chirality is direction-asymmetric and capacity-dependent. Balanced rotation training teaches both directions (Appendix G.10, G.11) (+55 to +61pp own); single-direction teaches own-direction but cross-direction $\Delta \approx 0$ at 3B. At 7B, perceptive cross-direction becomes *negative* (model specialises harder than at 3B), and inspective single-direction breaks symmetry: orb_l $\rightarrow$ orb_r jumps +27pp but reverse stays at -4. Balanced mv_fwd+mv_bwd on 7B saturates own directions to 100% while cross-onto-rotation drops -25 to -27pp: move and rotation are treated as separate action classes.

The developmental emergence ordering works as a training curriculum. The exogenous emergence ordering of Appendix F.6 (Appendix G.12) (gravity, inertia $\rightarrow$ cohesion, permanence, containment $\rightarrow$ support, solidity) operationalizes as a curriculum: training the same data in emergence order vs. random shuffle gives +4.8pp own-bench at 1 epoch. Developmental ordering can be a useful prior on data scheduling.

Five of the seven evaluation findings of Appendix F replicate train-side. In detail: (i) the appearance/geometric scaling dissociation (Appendix F.2) replicates as +21.9 vs. +12.4pp on the perturbation probe after full-mix SFT, preserving the stronger improvement under appearance perturbations; (ii) temporal isolation appears in both the cohort and the training transfers (Appendix G.9); (iii) the counterfactual-removal cost asymmetry is intrinsic rather than a coverage shortage (F6); (iv) chirality blindness manifests train-side as direction-asymmetric, capacity-dependent transfer (Appendices G.10 and G.11); (v) the exogenous developmental ordering operationalizes as a curriculum prior with +4.8pp gain (Appendix G.12). The two non-replicated findings, the MoE active-parameter dependence (Appendix F.5) and scenario pair-mate independence (F-H), target base-model architecture and item-factor structure, axes outside the post-training intervention surface. The convergence of observation and intervention supports the cohort-side structural claims as representational rather than artifactual.

G.5. Inverse-text per-cell own results

The matched forward-text run (text options, the same SFT protocol and $n=4,132$) has own-cell mean 44.3%; switching only direction from forward to inverse yields +51pp, driven by inverse direction.

G.6. Narrow SFT data-scale margin

A 1 $\times$ -data run ($n=4132$) vs. a 2 $\times$ -data run ($n=8264$), all other config identical. Own-bench overall: 1 $\times$ 50.7%, 2 $\times$ 56.4%, $\Delta=+5.7$ pp on 2 $\times$ data. Sample efficiency exhibits diminishing marginal returns under narrow SFT.

G.7. Cross-action-type forward transfer matrix

G.8. Within-action-type cross-reasoning-type

G.9. Temporal ordering and adjacency

One run trains temporal ordering across 4 action types ($n=4,132$); a second trains temporal adjacency across 4 action types ($n=4,132$). Both use the shared SFT optimization protocol (Appendix G.1). Across 4 action types (averaged): the adjacency run gains +30 to +35pp on Adj (own) and ≈ 0 pp on Ord (cross); the ordering run gains ≈ 0 pp on Ord (own) and ≈ 0 pp on Adj

(cross). Conversely, the four temporal subsets leave every other reasoning type within 3.3 points of the base model under SFT (Table 84).

G.10. Rotation chirality at 7B

G.11. Move chirality at 7B

G.12. Emergence ordering as curriculum

Train data: 7 exogenous principles (cohesion, solidity, gravity, support, inertia, containment, permanence; collision excluded), 1,820 raw items $\times 4\times$ within-item permutation = 7,280 items. Both curriculum conditions use the shared SFT optimization protocol (Appendix G.1); Table 49 reports accuracy after the first epoch.

Order: gravity $\rightarrow$ inertia $\rightarrow$ cohesion $\rightarrow$ containment $\rightarrow$ permanence $\rightarrow$ support $\rightarrow$ solidity.

Table 24 | ID overall accuracy ($n=6,228$, sorted).

Model	Family	Params	ID acc
GPT-5.4	GPT	N/A	65.8%
Intern-S1-Pro	Intern	N/A	63.2%
Qwen2.5-VL-72B	Qwen2.5	72B	58.9%
Qwen3-VL-235B-A22B	Qwen3	235B-A22B (MoE)	58.5%
GPT-5.2	GPT	N/A	58.0%
Gemma-4-31B	Gemma4	31B	57.8%
Qwen-VL-Max	Qwen-max	N/A	55.6%
Qwen3.5-397B-A17B	Qwen3.5	397B-A17B (MoE)	55.4%
Qwen3-VL-32B-Instruct	Qwen3	32B	55.2%
Seed-2.0-Mini	Seed	N/A	54.3%
ERNIE-4.5-VL-424B-A47B	ERNIE	424B-A47B (MoE)	51.7%
Pixtral-Large-2411	Mistral	123B	48.4%
Qwen2.5-VL-32B	Qwen2.5	32B	47.7%
Gemma-3-27B	Gemma3	27B	47.0%
Seed-1.6-Flash	Seed	N/A	45.3%
ERNIE-4.5-VL-28B-A3B	ERNIE	28B-A3B (MoE)	44.9%
Gemma-4-26B-A4B	Gemma4	26B-A4B (MoE)	43.9%
Qwen3-VL-30B-A3B	Qwen3	30B-A3B (MoE)	42.8%
Mistral-Small-3.2	Mistral	24B	42.5%
Qwen2.5-VL-7B	Qwen2.5	7B	41.6%
Gemma-3-12B	Gemma3	12B	41.5%
Mistral-Large-2512	Mistral	N/A	40.4%
Qwen3.5-27B	Qwen3.5	27B	33.3%
Qwen3-VL-8B-Instruct	Qwen3	8B	33.1%
Llama-4-Scout	Llama4	Scout (109B-MoE)	32.6%
MiniMax-01	MiniMax	N/A	31.9%
Nemotron-Nano-12B-V2-VL	Nemotron	12B	31.5%
Qwen3.5-9B	Qwen3.5	9B	30.1%
Gemma-3-4B	Gemma3	4B	28.9%
Llama-4-Maverick	Llama4	Maverick (400B-MoE)	28.7%
Qwen3.5-122B-A10B	Qwen3.5	122B-A10B (MoE)	26.9%
Qwen2.5-VL-3B	Qwen2.5	3B	26.3%
InternVL3.5-Latest	Intern	N/A	25.1%
InternVL3.5-241B-A28B	Intern	241B-A28B (MoE)	25.1%
Intern-S1-Mini	Intern	N/A	24.4%
Intern-S1	Intern	N/A	24.2%
GLM-4.6V	GLM	N/A	22.6%
Qwen3.5-35B-A3B	Qwen3.5	35B-A3B (MoE)	22.5%

Table 25 | ID accuracy by reasoning type (% , all 38 models).

Model	Fwd	Inv	Rmv	Sub	Otm	Cue	Ord	Adj
GPT-5.4	83.8	81.7	64.5	76.0	81.9	85.8	57.1	27.0
GPT-5.2	70.7	78.6	53.2	56.3	78.8	85.4	46.4	27.1
Qwen-VL-Max	69.6	79.4	63.3	74.6	48.6	59.4	34.7	26.3
Qwen2.5-VL-3B	19.7	42.2	21.0	17.6	22.6	23.3	26.9	25.1
Qwen2.5-VL-7B	53.4	53.8	37.1	54.8	36.5	43.8	31.2	24.3
Qwen2.5-VL-32B	49.4	70.5	40.3	46.1	36.1	49.0	49.3	28.6
Qwen2.5-VL-72B	74.7	74.7	54.8	72.0	59.4	76.0	49.4	28.0
Qwen3-VL-8B-Instruct	24.8	69.4	24.9	19.2	24.0	25.3	28.8	24.8
Qwen3-VL-30B-A3B	40.2	76.2	36.7	36.2	32.3	41.0	38.5	24.6
Qwen3-VL-32B-Instruct	71.4	81.2	45.9	71.9	51.4	62.8	37.1	26.3
Qwen3-VL-235B-A22B	62.7	83.4	55.7	57.7	69.4	73.6	57.2	25.7
Intern-S1	24.8	24.1	23.3	25.8	23.6	22.2	23.8	24.6
Intern-S1-Mini	25.7	23.9	23.1	27.6	22.6	23.3	23.0	24.5
Intern-S1-Pro	77.6	77.5	66.7	73.3	61.5	69.1	63.4	26.5
InternVL3.5-241B-A28B	23.5	26.5	25.4	24.9	25.3	28.5	24.7	25.0
InternVL3.5-Latest	26.3	24.8	25.3	24.2	24.3	24.7	25.6	24.7
Gemma-3-4B	24.5	53.8	21.5	18.5	21.5	24.0	25.6	23.7
Gemma-3-12B	49.5	56.5	41.6	46.2	40.6	49.7	29.5	26.1
Gemma-3-27B	62.2	62.6	47.8	62.7	39.2	47.9	30.6	26.2
Gemma-4-26B-A4B	51.1	59.4	39.2	55.6	49.7	56.2	29.2	26.1
Gemma-4-31B	76.3	76.6	63.6	64.5	64.9	70.5	30.8	25.3
Llama-4-Scout	19.8	67.7	18.8	18.1	18.4	15.3	32.6	31.9
Llama-4-Maverick	14.9	59.2	12.5	13.6	15.6	17.4	49.1	23.9
Mistral-Small-3.2	49.8	53.0	39.4	44.8	38.9	45.1	27.1	24.6
Mistral-Large-2512	52.0	54.7	29.2	50.9	40.3	54.5	26.9	22.7
Pixtral-Large-2411	56.4	59.9	45.2	50.5	35.8	47.9	21.8	27.1
MiniMax-01	23.6	59.8	22.6	26.5	29.5	24.3	28.0	26.0
Qwen3.5-9B	16.5	67.5	19.5	15.2	22.6	13.5	29.8	24.5
Qwen3.5-27B	28.2	67.8	25.4	21.7	25.3	32.2	35.6	24.6
Qwen3.5-35B-A3B	12.2	67.0	14.6	12.9	4.2	5.9	26.2	25.4
Qwen3.5-122B-A10B	19.6	18.6	26.5	19.5	50.0	56.9	17.6	23.9
Qwen3.5-397B-A17B	75.0	67.7	47.7	53.4	53.5	68.4	25.5	24.6
GLM-4.6V	10.5	25.3	9.0	18.0	39.6	60.4	42.2	26.1
Seed-1.6-Flash	50.7	65.0	27.9	60.4	44.4	56.2	25.7	25.9
Seed-2.0-Mini	76.0	67.4	50.5	50.9	43.4	53.5	53.1	27.2
Nemotron-Nano-12B-V2-VL	35.0	49.0	27.6	37.5	25.2	27.2	27.5	25.9
ERNIE-4.5-VL-28B-A3B	53.7	67.7	37.7	56.3	41.5	53.8	43.9	23.0
ERNIE-4.5-VL-424B-A47B	64.6	64.4	33.5	62.4	47.9	58.4	47.3	27.9

Table 26 | ID accuracy by action type (% , all 38 models).

Model	Exo	Perc	Insp	Navi	Mani
GPT-5.4	62.4	61.2	58.3	68.8	81.2
GPT-5.2	58.9	52.3	50.7	63.4	67.4
Qwen-VL-Max	40.8	46.2	52.1	60.8	79.4
Qwen2.5-VL-3B	24.2	24.9	22.8	32.2	28.9
Qwen2.5-VL-7B	33.5	32.2	34.4	46.4	64.3
Qwen2.5-VL-32B	39.6	43.2	39.6	61.0	58.3
Qwen2.5-VL-72B	53.7	47.7	47.8	66.4	83.4
Qwen3-VL-8B-Instruct	28.1	29.0	29.5	42.3	38.2
Qwen3-VL-30B-A3B	33.0	42.1	38.0	51.2	51.4
Qwen3-VL-32B-Instruct	43.7	52.3	47.8	61.9	73.2
Qwen3-VL-235B-A22B	56.2	55.5	43.7	67.3	75.8
Intern-S1	24.5	22.9	26.2	23.9	22.9
Intern-S1-Mini	25.2	23.5	24.9	23.0	24.9
Intern-S1-Pro	56.2	52.8	53.7	70.1	87.1
InternVL3.5-241B-A28B	26.6	24.6	26.7	22.7	24.3
InternVL3.5-Latest	25.5	25.3	25.8	24.0	24.8
Gemma-3-4B	22.7	26.9	27.3	39.1	29.3
Gemma-3-12B	37.3	28.0	39.8	46.4	56.4
Gemma-3-27B	36.6	31.1	44.6	54.0	69.6
Gemma-4-26B-A4B	40.5	32.1	42.9	47.9	56.0
Gemma-4-31B	50.8	49.4	53.1	61.2	74.3
Llama-4-Scout	23.6	34.0	32.2	42.4	30.5
Llama-4-Maverick	20.9	27.7	26.8	42.5	26.3
Mistral-Small-3.2	34.1	27.5	44.4	64.6	44.1
Mistral-Large-2512	36.5	31.8	40.8	51.2	41.3
Pixtral-Large-2411	33.6	35.5	55.6	80.6	48.6
MiniMax-01	27.7	27.5	29.8	37.6	37.9
Qwen3.5-9B	22.5	28.3	27.0	40.1	33.9
Qwen3.5-27B	30.3	29.5	21.5	44.2	43.1
Qwen3.5-35B-A3B	10.3	29.3	15.3	27.6	30.0
Qwen3.5-122B-A10B	41.5	31.4	22.7	23.3	21.6
Qwen3.5-397B-A17B	53.4	57.7	42.4	61.5	65.2
GLM-4.6V	32.2	16.0	20.3	30.2	17.2
Seed-1.6-Flash	35.5	31.2	42.4	49.5	68.8
Seed-2.0-Mini	47.1	50.1	50.5	58.4	66.7
Nemotron-Nano-12B-V2-VL	26.0	24.4	31.9	34.6	40.7
ERNIE-4.5-VL-28B-A3B	36.6	34.2	40.8	51.4	63.0
ERNIE-4.5-VL-424B-A47B	40.1	40.5	48.7	66.6	63.4

Table 27 | Exogenous sub-principle accuracy (% , ID; capable models shown, full 38 in repo).

Model	permanence	cohesion	solidity	gravity	support	inertia	collision	containment
GPT-5.4	56.2	61.8	69.4	75.0	62.5	60.4	43.8	70.1
GPT-5.2	57.6	60.4	62.5	75.0	50.7	55.6	43.8	66.0
Qwen-VL-Max	29.9	44.4	38.9	56.9	41.7	47.2	18.8	48.6
Qwen2.5-VL-7B	37.5	37.5	28.5	47.2	34.0	41.0	21.5	20.8
Qwen2.5-VL-32B	41.0	42.3	36.4	44.2	37.6	41.6	32.4	41.8
Qwen2.5-VL-72B	54.2	51.4	45.8	76.4	58.3	59.0	32.6	52.1
Qwen3-VL-32B-Instruct	34.7	51.4	41.7	56.9	43.8	44.4	27.1	49.3
Qwen3-VL-235B-A22B	52.8	61.1	49.3	73.6	61.8	61.1	33.3	56.2
Intern-S1-Pro	45.8	41.7	61.8	77.8	68.8	61.1	36.8	56.2
Gemma-3-12B	37.5	44.4	35.4	61.8	38.2	33.3	25.7	22.2
Gemma-3-27B	34.7	38.9	31.9	61.8	34.0	47.2	27.8	16.7
Gemma-4-26B-A4B	34.0	47.1	46.5	56.4	42.6	44.2	22.9	30.4
Gemma-4-31B	55.5	54.2	48.5	49.6	58.6	58.1	23.7	58.9
Pixtral-Large-2411	39.3	31.2	31.2	50.7	26.3	26.8	25.4	37.3
Qwen3.5-397B-A17B	51.0	58.6	46.5	60.0	54.1	62.5	30.8	66.3
Seed-2.0-Mini	51.5	50.7	42.0	66.2	46.1	62.9	29.9	28.2
ERNIE-4.5-VL-424B-A47B	41.1	37.0	37.7	60.4	37.0	36.8	25.2	45.3

Table 28 | T07b Manipulative subject $\times$ view accuracy (%; ID; capable models).

Model	h/ego	h/allo	hh/ego	hh/allo
GPT-5.4	87.2	80.9	82.6	74.3
GPT-5.2	69.8	67.7	64.9	67.4
Qwen-VL-Max	85.1	79.2	81.2	72.2
Qwen2.5-VL-7B	68.8	65.6	66.7	56.2
Qwen2.5-VL-32B	66.7	59.0	60.8	46.9
Qwen2.5-VL-72B	91.3	84.4	85.8	72.2
Qwen3-VL-32B-Instruct	83.0	70.5	75.0	64.2
Qwen3-VL-235B-A22B	83.0	77.1	79.2	63.9
Intern-S1-Pro	89.6	87.5	89.6	81.6
Gemma-3-27B	76.7	67.4	75.0	59.4
Gemma-4-31B	78.1	74.7	77.8	66.7
Pixtral-Large-2411	60.8	40.6	56.6	36.5
Qwen3.5-397B-A17B	68.1	61.8	65.6	65.3
Seed-2.0-Mini	70.1	66.7	70.1	59.7
ERNIE-4.5-VL-424B-A47B	75.7	63.5	69.8	44.4

Table 29 | Perturbation accuracy (overall / geo / app, $n=1,116$, all 38).

Model	overall	geo	app
GPT-5.4	79.1	62.7	95.5
GPT-5.2	60.0	45.7	74.4
Qwen-VL-Max	48.9	33.7	64.2
Qwen2.5-VL-3B	21.1	22.6	19.7
Qwen2.5-VL-7B	37.0	23.5	50.5
Qwen2.5-VL-32B	37.4	30.1	44.6
Qwen2.5-VL-72B	60.8	38.5	83.0
Qwen3-VL-8B-Instruct	23.0	25.1	21.0
Qwen3-VL-30B-A3B	34.1	25.6	42.5
Qwen3-VL-32B-Instruct	50.4	32.4	68.5
Qwen3-VL-235B-A22B	55.5	32.8	78.1
Intern-S1	26.7	26.5	27.0
Intern-S1-Mini	26.4	26.4	26.4
Intern-S1-Pro	56.3	33.3	79.2
InternVL3.5-241B-A28B	26.7	26.3	27.1
InternVL3.5-Latest	26.8	26.0	27.6
Gemma-3-4B	24.4	24.6	24.2
Gemma-3-12B	40.3	32.6	48.0
Gemma-3-27B	49.5	36.4	62.5
Gemma-4-26B-A4B	34.1	25.4	42.8
Gemma-4-31B	77.2	59.0	95.5
Llama-4-Scout	15.2	17.0	13.4
Llama-4-Maverick	11.3	9.9	12.7
Mistral-Small-3.2	34.3	27.3	41.3
Mistral-Large-2512	31.7	27.1	36.4
Pixtral-Large-2411	50.1	35.1	65.1
MiniMax-01	25.0	26.3	23.7
Qwen3.5-9B	20.6	20.8	20.4
Qwen3.5-27B	36.8	31.2	42.5
Qwen3.5-35B-A3B	12.6	10.6	14.7
Qwen3.5-122B-A10B	25.8	24.4	27.2
Qwen3.5-397B-A17B	50.0	32.8	67.2
GLM-4.6V	7.2	5.4	9.0
Seed-1.6-Flash	54.9	38.4	71.5
Seed-2.0-Mini	48.3	27.1	69.5
Nemotron-Nano-12B-V2-VL	25.5	27.1	24.0
ERNIE-4.5-VL-28B-A3B	42.5	32.5	52.5
ERNIE-4.5-VL-424B-A47B	35.3	25.1	45.5

Table 30 | Manipulative–inspective accuracy gap (frontier).

Model	manipulative	inspective	gap
GPT-5.4	81.2	58.3	+23.0
GPT-5.2	67.4	50.7	+16.7
Qwen-VL-Max	79.4	52.1	+27.3
Qwen2.5-VL-7B	64.3	34.4	+29.9
Qwen2.5-VL-32B	58.3	39.6	+18.8
Qwen2.5-VL-72B	83.4	47.8	+35.6
Qwen3-VL-32B	73.2	47.8	+25.4
Qwen3-VL-235B-A22B	75.8	43.7	+32.1
Intern-S1-Pro	87.1	53.7	+33.4
Gemma-4-31B	74.3	53.1	+21.2
Seed-2.0-Mini	66.7	50.5	+16.2

Table 31 | Perceptive translation vs. rotation (frontier).

Model	translation	rotation	gap
GPT-5.4	92.4	74.0	+18.4
GPT-5.2	88.2	56.6	+31.6
Qwen-VL-Max	82.6	42.7	+39.9
Qwen2.5-VL-7B	56.6	17.0	+39.6
Qwen2.5-VL-32B	58.0	41.3	+16.7
Qwen2.5-VL-72B	77.1	42.7	+34.4
Qwen3-VL-32B	86.1	61.5	+24.7
Qwen3-VL-235B-A22B	88.2	60.1	+28.1
Intern-S1-Pro	76.7	57.6	+19.1
Gemma-4-31B	91.0	47.9	+43.1
Pixtral-Large-2411	67.4	12.2	+55.2
Seed-2.0-Mini	79.9	34.4	+45.5

Table 32 | Qwen2.5-VL dense scaling (%).

Model	Params	ID	overall	geo	app
Qwen2.5-VL-3B	3B	26.4	21.1	22.6	19.7
Qwen2.5-VL-7B	7B	41.6	37.0	23.5	50.5
Qwen2.5-VL-32B	32B	47.7	37.4	30.1	44.6
Qwen2.5-VL-72B	72B	58.9	60.8	38.5	83.0

Table 33 | Qwen3-VL family.

Model	Params	ID	overall	geo	app
Qwen3-VL-8B-Instruct	8B	33.1	23.0	25.1	21.0
Qwen3-VL-30B-A3B	30B-A3B (MoE)	42.8	34.1	25.6	42.5
Qwen3-VL-32B-Instruct	32B	55.2	50.4	32.4	68.5
Qwen3-VL-235B-A22B	235B-A22B (MoE)	58.5	55.5	32.8	78.1

Table 34 | Gemma-3/Gemma-4.

Model	Params	ID	overall	geo	app
Gemma-3-4B	4B	28.9	24.4	24.6	24.2
Gemma-3-12B	12B	41.5	40.3	32.6	48.0
Gemma-3-27B	27B	47.0	49.5	36.4	62.5
Gemma-4-26B-A4B	26B-A4B (MoE)	43.9	34.1	25.4	42.8
Gemma-4-31B	31B	57.8	77.2	59.0	95.5

Table 35 | Qwen3.5 family (reasoning disabled).

Model	Params	ID	overall	geo	app
Qwen3.5-9B	9B	30.1	20.6	20.8	20.4
Qwen3.5-27B	27B	33.3	36.8	31.2	42.5
Qwen3.5-35B-A3B	35B-A3B (MoE)	22.5	12.6	10.6	14.7
Qwen3.5-122B-A10B	122B-A10B (MoE)	26.9	25.8	24.4	27.2
Qwen3.5-397B-A17B	397B-A17B (MoE)	55.4	50.0	32.8	67.2

Table 36 | ID vs. perturbation-geometric rank shift (subset; positive Δ = relatively worse on geometric).

Model	ID acc	ID rank	Geo acc	Geo rank	Δ
ERNIE-4.5-VL-424B-A47B	51.7	11	25.1	30	+19
Qwen2.5-VL-7B	41.6	20	23.5	33	+13
Gemma-4-26B-A4B	43.9	17	25.4	28	+11
Llama-4-Scout	32.6	25	17.0	35	+10
Qwen3-VL-30B-A3B	42.8	18	25.6	27	+9
Seed-2.0-Mini	54.3	10	27.1	19	+9
Intern-S1-Pro	63.2	2	33.3	9	+7
GPT-5.4	65.8	1	62.7	1	0
GPT-5.2	58.0	5	45.7	3	-2
Gemma-4-31B	57.8	6	59.0	2	-4
Seed-1.6-Flash	45.3	15	38.4	5	-10
Intern-S1	24.2	36	26.5	22	-14

Table 37 | Temporal ordering-adjacency gap (frontier).

Model	Ord	Adj	Gap
GPT-5.4	57.1	27.0	+30.1
GPT-5.2	46.4	27.1	+19.3
Qwen-VL-Max	34.7	26.3	+8.4
Qwen2.5-VL-32B	49.3	28.6	+20.7
Qwen2.5-VL-72B	49.4	28.0	+21.4
Qwen3-VL-32B	37.1	26.3	+10.8
Qwen3-VL-235B-A22B	57.2	25.7	+31.5
Intern-S1-Pro	63.4	26.5	+36.9
Gemma-4-31B	30.8	25.3	+5.5
Seed-2.0-Mini	53.1	27.2	+25.9
ERNIE-4.5-VL-424B-A47B	47.3	27.9	+19.4

Table 38 | Dense vs. MoE comparisons (matched total).

Comparison	Dense acc	MoE acc	gap
Qwen3-VL-32B vs. 30B-A3B	55.2	42.8	+12.4
Gemma-4-31B vs. 26B-A4B	57.8	43.9	+13.9
Qwen3.5-27B vs. 35B-A3B	33.3	22.5	+10.9

Table 39 | F-Fingerprint: centered cosine similarity on 8-dim per-principle accuracy vectors.

Pair	centered cos
Qwen2.5-VL-72B ↔ Qwen3-VL-235B-A22B	+0.951
GPT-5.4 ↔ GPT-5.2	+0.895
Qwen3-VL-235B ↔ Qwen3-VL-32B	+0.895
ERNIE-424B ↔ GPT-5.4	+0.825
Qwen3-VL-235B ↔ GPT-5.4	+0.761
Qwen2.5-VL-72B ↔ GPT-5.4	+0.712
Seed-2.0-Mini ↔ GPT-5.4	+0.341
Gemma-4-31B ↔ Gemma-3-27B (same provider, gen step)	+0.104

Table 40 | **SFT accuracy on WOVEN’s own test sets (ID, scene-OOD, state-axis perturbation probe) (%)**. Full-mix SFT is on Qwen2.5-VL-3B; inverse-text is narrow SFT on inverse dynamics with text options (4 endogenous action types); mv-balanced is balanced mv_fwd+mv_bwd training on Qwen2.5-VL-7B. Downstream transfer is in Tables 4 and 5. Per-cell own deltas, the remaining narrow-run families, and full recipe details in the appendix.

Variant	ID	OOD	Perturbation probe		
			all	geo	app
Qwen2.5-VL-3B (base)	26.4	—	21.1	22.6	19.7
+full-mix SFT	89.3 (†62.9)	88.2	38.3 (†17.1)	35.0 (†12.4)	41.6 (†21.9)
+inverse-text SFT	95.5 [†] (†54)	—	—	—	—
Qwen2.5-VL-7B (base)	41.6	—	37.0	23.5	50.5
+mv-balanced SFT	50.1 (†8.5)	57.5	52.4 (†15.4)	38.4 (†14.9)	66.5 (†16.0)

† inverse-text own-cell mean over 4 endogenous action types: base 41%, post-SFT 95.5% (†54).

Table 41 | Inverse-text SFT per-cell own (Δ vs. base 3B). Columns are inverse-dynamics cells by action type; the last column is the mean over the four own cells.

	inspective	perceptive	navigative	manipulative	mean
base 3B	16	27	59	62	41
inverse-text SFT	93	97	98	94	95.5
Δ	+77	+70	+39	+32	+54

Table 42 | Cross-action-type forward transfer (4×4). $n \approx 1,020$ each, shared SFT protocol.

Source ↓ / Target →	Perc Fwd	Insp Fwd	Navi Fwd	Mani Fwd
Base 3B (acc, %)	28.1	28.1	30.9	21.9
perceptive ($n=1036$) Δ	+68.8 own	+13.8	+55.6	+50.0
inspective ($n=1020$) Δ	+12.9	+64.9 own	+57.3	+46.9
navigative ($n=1020$) Δ	+11.1	+10.0	+67.0 own	+61.4
manipulative ($n=1020$) Δ	+7.0	+1.5	+61.5	+74.6 own

Table 43 | (a) Within-action-type cross-comp transfer (inspective forward run).

	Fwd	Sub	Rmv	Inv	Adj	Ord
Base 3B (acc, %)	28.1	26.7	25.6	15.2	26.1	27.0
SFT Δ	+65 own	+48	+25	+19	0	-1

Table 44 | (b) Sub within-action-type cross-comp, per-action-type split.

	Fwd	Sub	Rmv	Inv
Base 3B Insp (acc, %)	28.1	26.7	25.6	15.2
Sub Δ Insp	+60	+66 own	-1	+48
Base 3B Mani (acc, %)	21.9	20.8	24.0	62.5
Sub Δ Mani	+71	+74 own	0	+20

Table 45 | Balanced rotation: 3B vs. 7B (arc_up interference reverses). Columns are inspective $\times$ forward cells by camera move.

	orb_l (own)	orb_r (own)	arc_up (orth)
base 3B (%)	30.0	20.0	31.1
3B Δ	+40.0	+45.6	-24.4
7B Δ	+50.0	+75.6	+43.3

Table 46 | Perceptive single-direction runs: 3B vs. 7B. Columns are perceptive cells by camera move.

	rot_l	rot_r
base 3B (%)	27.8	33.3
rot_l only (7B) Δ	+65.3 own	-15.2 cross
rot_r only (7B) Δ	-13.9 cross	+63.9 own

Table 47 | Inspective single-direction runs: 3B vs. 7B, asymmetric chirality sharing. Columns are inspective cells by camera move.

	orb_l	orb_r	arc_up
base 3B (%)	30.0	20.0	31.1
orb_l only (7B) Δ	+58.9 own	+26.7 cross	+36.7 cross
orb_r only (7B) Δ	-4.4 cross	+72.2 own	+37.8 cross

Table 48 | mv-balanced (7B) move chirality (perceptive forward). Columns are perceptive cells by camera move.

	mv_fwd (own)	mv_bwd (own)	rot_l (cross)	rot_r (cross)
base 3B (%)	20.8	19.4	27.8	33.3
mv-balanced 7B (%)	100.0	100.0	2.8	5.6
Δ	+79.2	+80.6	-25.0	-27.7

Table 49 | Curriculum vs. shuffled at 1 epoch (own_exo subset).

Variant	own_exo subset acc
V_1 (shuffled)	33.2%
V_2 (emergence-ordered)	38.0%
$\Delta (V_2 - V_1)$	+4.8pp

G.13. Downstream transfer: protocol, full results, and analyses

Benchmark suite. The downstream suite comprises 26 external benchmarks: 22 transition-relevant targets, SAT (Ray et al., 2025), MindCube (Wang et al., 2026a), ViewSpatial (Li et al., 2025a), SpatialViz (Wang et al., 2026b), DSI-Bench (Zhang et al., 2025c), WM-ABench (Gao et al., 2025), WorldPrediction (Chen et al., 2025a), TemporalBench (Cai et al., 2024), TOMATO (Shangguan et al., 2024), TempCompass (Liu et al., 2024), TVBench (Cores et al., 2025), BlackSwan (Chinchure et al., 2025), CLEVRER (Yi et al., 2020), InPhyRe (Sreekumar and Boddeti, 2026), MVP (Krojer et al., 2025), ActionEQA (Bao et al., 2026), Robo2VLM (Chen et al., 2025b), ERQA (Team et al., 2025b), Cosmos (NVIDIA et al., 2025), PaiBench (Zhou et al., 2025a), CV-Bench (Tong et al., 2024), and BLINK (Fu et al., 2024), plus 4 adjacent-capability probes (static perceptual grounding: 3DSRBench (Ma et al., 2025), CoreCognition (Li et al., 2025b); holistic video QA: PerceptionTest (Patraucean et al., 2023), EgoTaskQA (Jia et al., 2022)). Every benchmark is evaluated under its official full protocol and split: SAT uses circular evaluation (150 questions $\times$ 2 answer orders, both orders must be correct); TemporalBench uses dual-order binary accuracy (BA); MVP uses official paired accuracy; TVBench uses the official per-task macro average; DSI-Bench reports the official sample-wise aggregate over its four spatio-temporal flip variants; CLEVRER and ENACT use stratified samples (12,000 of 70,862 per-option rows; not used in the main tables). Answers are generated greedily with `max_new_tokens=8`; unparseable outputs count as incorrect. A gain is called *clear* above +2 points, roughly 5 $\times$ the observed run-to-run standard deviation of the full-mix RL configuration.

RL optimization. The RL stage uses Group Relative Policy Optimization (Shao et al., 2024), which estimates advantages by comparing each sampled response to a group of responses under the same prompt, with no separate value network. We run GRPO via verl (Sheng et al., 2025) + vLLM on Qwen2.5-VL-3B initialized from a world modeling SFT checkpoint. Shared config: KL-to-reference `kl_loss_coef` 0.005 (low-variance estimator), `lr` 1×10^{-6} , entropy coefficient 0, train batch 16 prompts $\times$ 8 rollouts (mini-batch 8), max prompt 1,536 tokens, max response 8 tokens (single-letter answers), 300 optimization steps with checkpoints every 50; the reported checkpoint is step 150 (validation accuracy saturates over steps 50–150).

RL reward. To mitigate answer-symbol bias in multiple-choice prediction (Pezeshkpour and Hruschka, 2023; Xue et al., 2024; Zheng et al., 2024), we combine answer correctness with an anti-bias penalty:

$$\text{reward}(\text{rollout}_i) = \text{letter_match}_i - \lambda \cdot \text{KL}(\hat{P}_i \parallel \text{uniform}),$$

where `letter_matchi` is 1 if the predicted answer letter matches the gold letter and 0 otherwise. The empirical distribution $\hat{P}_i$ is computed over the $W=64$ most recent predicted letters at the time rollout i is scored, including rollout i itself; uniform assigns probability 0.25 to each of A/B/C/D, and $\lambda=0.1$. The window is updated for each scored rollout, allowing the penalty to vary within a GRPO group. The uniform target reflects the answer-letter balance of the training data. All reported RL experiments use this reward.

Transfer-fingerprint normalizations. Table 51 reports the fingerprint analysis of §5 under four treatments of benchmark difficulty. The ordering (same reasoning family > same action type $\approx$ unrelated) is invariant.

Figure 4 visualizes the analysis as the full 11 $\times$ 11 correlation matrices. The left panel shows the raw profiles: every cell pair is positively correlated, including pairs sharing neither axis, which is the shared primitive in correlational form. The middle and right panels display the identical residual matrix (after the per-benchmark z-score) under the two candidate orderings. Ordered by action type, no coherent structure appears along the diagonal; reordered by rea-

Table 50 | **Best controlled-subset training for all 22 improved benchmarks.** Each subset is defined by action type and reasoning family and contains approximately 2,000 unique examples. Each column reports the subset with the largest gain on that benchmark, named in the last row; best SFT/GRPO accuracy is bold. Abbreviations as in Tables 4 and 5; ViewSp: ViewSpatial; TempComp: TempCompass. Benchmarks: SAT (Ray et al., 2025), ActionEQa (Bao et al., 2026), TemporalBench-long (Cai et al., 2024), InPhyRe (Sreekumar and Boddeti, 2026), Robo2VLM (Chen et al., 2025b), WorldPrediction (Chen et al., 2025a), DSI-Bench (Zhang et al., 2025c), MindCube (Wang et al., 2026a), CLEVRER (Yi et al., 2020), WM-ABench (Gao et al., 2025), MVP (Krojer et al., 2025), ERQA (Team et al., 2025b), SpatialViz (Wang et al., 2026b), ViewSpatial (Li et al., 2025a), PaiBench (Zhou et al., 2025a), CV-Bench (Tong et al., 2024), Cosmos (NVIDIA et al., 2025), BLINK (Fu et al., 2024), TOMATO (Shangquan et al., 2024), TVBench (Cores et al., 2025), BlackSwan (Chinchure et al., 2025), TempCompass (Liu et al., 2024). The four remaining benchmarks and all subset results are reported below.

	SAT	AEQA	TB-L	InPhyRe	R2VLM	WPrd	DSI	MindCube	CLEVRER	WM-AB	MVP	ERQA	SpViz	ViewSp	PaiBench	CV-Bench	Cosmos	BLINK	TOMATO	TVBench	BSwan	TempComp
Base	37.3	43.4	16.6	22.0	33.5	34.8	34.9	37.2	58.2	31.0	24.4	33.8	27.7	35.3	48.3	69.3	76.7	46.2	31.6	36.5	61.8	67.7
Subset SFT	63.3	47.5	22.0	32.3	40.5	40.1	40.3	40.0	62.7	35.6	28.1	37.5	32.2	37.9	51.5	72.4	80.0	48.9	34.2	38.6	63.8	69.9
Subset GRPO	64.7	55.9	28.2	32.6	42.4	42.9	40.9	43.1	63.3	35.4	29.0	38.3	31.8	39.6	51.8	72.9	79.5	49.5	34.7	39.4	64.3	70.2
Δ	+27.3	+12.5	+11.7	+10.6	+8.9	+8.1	+6.0	+5.9	+5.1	+4.6	+4.5	+4.5	+4.5	+4.3	+3.5	+3.5	+3.3	+3.3	+3.1	+2.8	+2.5	+2.4
Subset	perc	perc	mani	insp	insp	mani	perc	perc	insp	mani	perc	mani	navi	mani	insp	insp	insp	exo	insp	perc	mani	mani
	causal	causal	causal	cf	cf	causal	causal	temporal	cf	cf	causal	causal	temporal	cf	causal	causal	causal	physical	temporal	causal	causal	causal

Table 51 | Mean pairwise Pearson correlation of the 11 cells’ 26-dimensional transfer profiles, grouped by what the cell pair shares, under four normalizations of the per-benchmark gains.

Normalization	same reasoning family	same action type	neither
raw Δ (points)	+0.71	+0.53	+0.42
relative Δ /base	+0.65	+0.49	+0.42
headroom $\Delta/(100 - \text{base})$	+0.70	+0.46	+0.36
per-benchmark z-score	+0.32	−0.22	−0.23

soning family, the remaining positive correlation concentrates into the diagonal family blocks (causal, counterfactual, temporal). The structure is revealed purely by reordering, so the family organization resides in the data rather than in the display. The exogenous-physical cell is visible as its own singleton: within the causal-adjacent region it correlates weakly with the agentic causal cells, consistent with its negative transfer to endogenous transitions discussed below.

Common component and dose–response across subsets. Two analyses connect the transfer of the 11 controlled subsets to the capability they learn on WOVEN (§4). Both use the 22 benchmarks with per-configuration tables in this appendix (the 18 improved benchmarks reported there and the 4 static-perception and general video QA benchmarks) and the WOVEN in-distribution gains of Table 83. *Common component.* A subset’s transfer profile is its vector of gains over the base model across the benchmarks. All 55 pairwise Pearson correlations between the 11 profiles are positive (mean 0.56, range 0.11–0.92; Fig. 4, left). For an entrywise-positive correlation matrix, the Perron–Frobenius theorem guarantees a leading eigenvector whose components all share one sign, that is, a single factor on which every subset loads positively; here its eigenvalue is 6.7 of 11. Equivalently, the first principal component of the profile matrix explains 75% of the variance of the raw profiles (54% after centering each benchmark, 42% after standardizing each benchmark), and its scores correlate with the subsets’ WOVEN gains at $|r|=0.92\text{--}0.93$ under all three normalizations. The subsets therefore improve largely the same benchmarks, and the shared part of their transfer tracks how much each improves WOVEN. *Dose–response.* Across the 11 subsets, the WOVEN in-distribution gain after SFT predicts the mean external gain: Pearson $r=0.86$ ($p=0.0007$), Spearman $\rho=0.86$; $r=0.82$ with the post-GRPO WOVEN gain, 0.82 against the number of benchmarks improved by more than 2 points, 0.84–0.92 under leave-one-subset-out, and positive within the temporal (0.68, $n=4$) and non-temporal (0.79, $n=7$) subsets separately, so the relation is not driven by the difference between these two groups. Specificity complements the dose–response: the benchmarks that improve are exactly the transition-related ones, and none of the 4 static-perception and general video QA benchmarks gains more than 2 points under any subset or under the full training set.

Complementary reasoning operations. Two within-WOVEN cases show that supervision of one reasoning operation does not necessarily teach another. (i) Temporal adjacency training does not produce temporal ordering nor vice versa (Appendix G.9). (ii) The exogenous-physical cell, whose queries never condition on an agent’s action, attains the largest state-perturbation robustness gain of any cell (+29.9) yet transfers negatively to the two benchmarks built on endogenous, agent-driven transitions (WorldPrediction −10.2, ActionEQA −1.7): exogenous supervision does not teach endogenous transitions.

InPhyRe subset anomaly. A subset of InPhyRe (the “irregular” scenes) deliberately constructs fictional, real-world-violating physics (e.g. objects swap colors after collision) and marks the real-world-correct answer wrong; base models therefore score far below chance on these

subsets (0.0% on color_constancy). Post-training moves several subsets violently in both directions (color_constancy 0.0 $\rightarrow$ 84.2; off_the_wall_regular 91.0 $\rightarrow$ 0.3), so the aggregate InPhyRe gain of +13.0 nets over large opposing subset swings; the per-category table below gives the full picture, and we flag this benchmark’s aggregate as protocol-sensitive.

Per-benchmark, per-category results. The tables below give, for each suite benchmark, accuracy by official category for the base model and all 12 training configurations (columns: base; full-mix, the full training set; then the 11 controlled subsets). Each configuration column reports its selected checkpoint (§3); category rows come from the same checkpoint as that configuration’s overall score.

Table 52 | SAT (circular): accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	37.3	61.3	64.7	46.0	63.3	56.7	42.7	54.0	40.7	51.3	53.3	45.3	42.7
action_conseq	62.2	73.0	73.0	64.9	81.1	73.0	59.5	54.1	64.9	54.1	67.6	59.5	56.8
ego_movement	34.8	87.0	100.0	43.5	78.3	52.2	60.9	82.6	52.2	78.3	73.9	73.9	30.4
goal_aim	35.3	79.4	73.5	50.0	64.7	67.6	44.1	55.9	38.2	61.8	61.8	41.2	64.7
obj_movement	8.7	26.1	30.4	17.4	39.1	34.8	8.7	21.7	4.3	13.0	17.4	13.0	4.3
perspective	33.3	36.4	45.5	42.4	48.5	45.5	33.3	54.5	33.3	45.5	39.4	36.4	39.4

Table 53 | ActionEQA: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	43.4	54.4	55.9	51.4	54.3	55.9	45.2	47.8	51.4	55.0	53.2	41.7	47.4
bridge_high_forward	25.0	49.4	56.4	49.6	52.3	52.5	37.1	33.3	50.5	40.5	40.4	31.2	40.1
bridge_high_inverse	37.0	48.7	45.9	46.2	39.7	45.0	44.4	40.2	50.3	57.8	50.5	41.5	42.2
droid_high_forward	36.8	47.0	40.2	40.8	53.5	52.4	34.0	43.6	36.5	36.5	43.1	26.1	41.9
droid_high_inverse	64.9	68.0	61.2	66.9	62.9	66.0	62.0	62.9	62.3	64.0	65.7	61.8	60.3
rt1_high_forward	62.0	59.1	76.4	57.5	74.4	67.4	53.5	64.5	55.1	73.9	67.2	42.9	57.5
rt1_high_inverse	59.3	64.7	58.9	54.4	58.6	65.4	48.8	63.1	53.9	62.7	65.0	56.6	54.4

Table 54 | TemporalBench-long (BA): accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	16.6	26.8	17.7	25.7	15.5	20.3	11.8	14.9	24.9	19.5	28.2	22.2	22.3
ActivityNet	17.5	34.1	18.9	30.4	17.5	21.0	12.6	15.8	27.3	22.2	29.6	24.3	24.2
COIN	16.4	26.5	18.2	25.3	16.6	21.2	10.9	13.8	23.7	20.4	29.0	23.3	21.5
Charades	15.8	15.8	19.0	20.2	13.7	16.0	10.3	13.7	21.6	19.9	26.2	19.9	20.5
EgoExo4D	16.7	28.2	16.6	27.4	12.8	20.3	13.7	14.3	27.0	16.0	28.8	21.3	23.3
FineGym	14.9	19.3	14.9	14.6	19.3	21.8	8.0	21.8	19.3	21.8	21.8	17.9	19.3

G.14. In-domain substitution sweep: protocol and full tables

Protocol. Three external benchmarks with public training splits are paired with their best-matching WOVEN cell: SAT with insp_causal, ActionEQA with mani_causal, and CLEVRER with insp_cf. For each share $p \in \{0, 10, 20, 30, 40, 50, 70, 100\}\%$, the training set holds a fixed 2,000-item budget: $2,000 \cdot (1 - p)$ items drawn from the benchmark’s own training

Table 55 | InPhyRe: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	22.0	34.9	29.1	29.7	29.9	32.6	26.8	25.9	29.3	28.3	29.9	30.6	31.6
ang_mom_cons	29.2	73.2	37.4	45.3	51.7	57.8	39.2	32.0	46.5	15.2	40.5	62.1	49.3
color_constancy	0.0	84.2	3.7	5.3	30.1	3.0	5.5	3.9	18.4	0.2	10.7	16.1	20.2
color_lin_mom_cons	2.9	0.6	5.1	3.0	3.3	8.4	4.5	4.3	4.0	14.6	3.4	5.0	4.8
color_passthrough	2.9	0.8	4.8	2.9	3.2	9.7	4.0	4.0	4.2	14.6	3.5	5.3	5.0
lin_mom_cons	0.1	0.0	2.4	0.5	0.1	9.9	1.1	1.0	0.8	14.6	0.3	3.3	2.5
lin_mom_cons_regular	5.7	99.8	64.7	69.7	79.8	69.7	66.8	52.6	78.2	46.1	71.0	25.4	63.8
off_the_wall	8.9	23.2	1.6	34.7	45.9	41.6	45.5	20.2	41.2	2.4	26.7	25.9	52.2
off_the_wall_regular	91.0	0.2	96.8	63.0	25.1	38.0	45.0	68.7	42.1	97.5	63.9	72.8	43.9
size_bias	0.3	14.6	0.2	2.2	0.2	0.8	4.6	5.2	0.5	12.8	0.8	0.0	2.6
size_bias_regular	79.2	52.8	75.3	71.1	59.5	87.4	52.2	67.3	57.4	65.8	79.1	90.5	72.0

Table 56 | Robo2VLM: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	33.5	31.8	39.1	34.2	39.1	42.4	37.7	38.4	34.2	37.2	41.6	35.0	33.9
robo2vlm	33.5	31.8	39.1	34.2	39.1	42.4	37.7	38.4	34.2	37.2	41.6	35.0	33.9

Table 57 | WorldPrediction-WM: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	34.8	41.5	37.2	35.4	39.9	29.7	31.4	38.9	29.7	42.9	42.5	24.6	32.7
COIN	29.7	35.2	30.5	33.1	34.3	28.0	31.4	29.2	28.4	31.8	29.7	16.9	28.8
CrossTask	30.3	32.1	28.4	27.5	33.0	24.8	25.7	35.8	25.7	33.0	34.9	21.1	24.8
EPIC-KITCHENS-100	48.2	57.0	54.4	49.7	55.4	37.3	39.9	55.4	37.8	59.6	65.3	33.2	44.6
EgoExo4D	36.7	43.8	32.0	34.4	39.8	30.5	32.0	40.6	31.2	52.3	40.6	23.4	33.6
IKEAASM	27.7	36.5	36.5	27.7	34.0	25.8	24.5	34.0	23.3	38.4	40.9	28.9	28.9

Table 58 | DSI-Bench: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	34.9	35.2	40.9	36.7	34.0	38.9	36.5	39.5	32.2	38.4	39.0	37.8	33.9
cate0	34.7	35.5	47.3	40.0	36.9	45.9	41.4	48.8	35.7	45.9	47.0	44.1	39.1
cate1	39.3	31.7	44.3	43.3	33.0	46.3	43.3	46.0	35.5	44.7	45.9	42.1	37.4
cate2	26.3	40.9	33.5	23.8	32.2	30.1	20.2	25.2	25.3	25.4	27.1	24.9	26.4
cate3	32.4	29.4	36.6	32.4	28.1	35.7	33.3	34.8	26.7	32.8	33.8	34.1	28.6
cate4	48.0	65.9	53.8	51.6	62.1	34.8	47.5	50.7	47.5	52.2	48.2	53.6	50.9
cate5	22.9	31.2	30.0	23.8	32.4	25.6	26.5	25.9	30.9	27.9	25.0	28.2	25.9

Table 59 | DSI-Bench: accuracy (%) by spatio-temporal variant. Columns: training configurations; rows: variants.

Variant	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	34.9	35.2	40.9	36.7	34.0	38.9	36.5	39.5	32.2	38.4	39.0	37.8	33.9
std	42.3	31.1	42.0	48.0	42.6	49.6	42.4	46.5	39.1	48.3	49.1	50.0	41.0
hflip	41.8	30.9	41.6	46.9	42.3	49.9	41.5	46.5	38.3	48.3	49.0	48.7	40.3
reverse	28.0	39.2	39.5	25.6	25.7	27.9	31.0	32.3	25.6	28.3	28.7	26.5	27.4
reverse_hflip	27.4	39.6	40.4	26.5	25.5	28.4	31.1	32.9	25.8	28.7	29.2	26.2	27.0

Table 60 | MindCube: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	37.2	48.6	31.4	43.1	38.3	41.4	35.7	32.2	40.4	33.8	39.0	41.4	41.0
linear/O-O/mw/self	51.5	75.7	40.4	65.4	42.6	53.7	52.9	41.2	55.1	50.0	47.1	60.3	52.9
linear/P-O/mw/level2	55.6	44.4	55.6	55.6	55.6	66.7	44.4	11.1	77.8	11.1	55.6	55.6	55.6
linear/P-P/mw/self	41.0	58.1	33.3	41.9	49.5	45.7	33.3	32.4	49.5	33.3	48.6	46.7	48.6
perp/O-O/mw/level2	33.3	33.3	33.3	27.8	38.9	27.8	38.9	27.8	33.3	33.3	38.9	27.8	44.4
perp/O-O/mw/self	21.7	27.4	21.7	21.7	29.7	25.1	22.3	24.6	20.0	20.6	21.7	21.7	24.0
perp/P-O/mw/level1	50.0	75.0	75.0	75.0	50.0	75.0	50.0	50.0	50.0	50.0	100.0	50.0	50.0
perp/P-O/mw/level2	25.0	75.0	25.0	75.0	25.0	50.0	25.0	75.0	50.0	50.0	75.0	50.0	25.0
perp/P-O/mw/self	18.2	18.2	19.5	18.2	19.5	22.1	26.0	16.9	20.8	15.6	23.4	24.7	27.3
perp/P-O/rot/self	33.0	29.5	32.5	34.0	34.0	30.5	33.5	35.0	34.5	32.5	29.5	35.5	35.5
perp/P-O/seq/self	50.3	87.6	41.8	71.2	48.4	58.8	50.3	32.7	55.6	48.4	54.9	55.6	50.3
perp/P-P/mw/self	40.8	44.4	25.4	44.4	40.2	50.9	30.2	36.1	44.4	32.0	45.6	45.6	47.3

Table 61 | CLEVRER: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	58.2	56.8	62.0	61.7	58.9	63.3	58.8	57.8	58.7	55.2	58.7	56.7	62.6
counterfactual	52.3	51.1	53.6	52.8	52.3	56.0	52.4	51.0	51.4	50.1	54.9	50.6	54.1
explanatory	49.5	51.2	50.6	54.7	51.5	56.1	52.3	47.9	51.4	45.7	51.8	49.8	56.8
predictive	72.8	68.2	81.7	77.5	73.0	77.7	71.6	74.5	73.3	69.8	69.3	69.7	76.8

Table 62 | WM-ABench: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	31.0	39.8	34.2	33.3	33.7	34.2	30.9	34.0	30.3	34.6	35.6	32.3	30.2
Perc/Motion/MotDir_maniskill_subtask	22.0	46.0	24.0	20.0	37.0	24.0	18.0	21.0	21.0	20.0	26.0	28.0	22.0
Perc/Motion/MotDir_maniskill_towards	23.0	11.0	13.0	16.0	30.0	16.0	8.0	26.0	13.0	32.0	24.0	19.0	11.0
Perc/Motion/MotDir_tdw	28.0	42.0	30.0	25.0	35.0	30.0	19.0	38.0	25.0	34.0	37.0	24.0	22.0
Perc/Motion/MotDir_tdw_subtask	12.0	31.0	21.0	16.0	23.0	19.0	10.0	23.0	12.0	23.0	25.0	22.0	11.0
Perc/Motion/MotSpd_maniskill	26.0	29.0	20.0	25.0	25.0	25.0	24.0	27.0	24.0	26.0	25.0	23.0	27.0
Perc/Motion/MotSpd_tdw	35.0	36.0	37.0	43.0	42.0	34.0	33.0	35.0	39.0	49.0	36.0	41.0	36.0
Perc/Motion/MotTraj_maniskill_path_choices	10.6	12.5	8.1	8.8	14.4	8.1	10.6	10.6	13.1	10.6	11.2	11.9	12.5
Perc/Motion/MotTraj_path_choices	13.8	15.1	27.7	18.2	18.2	17.6	17.0	25.8	15.7	17.6	23.9	15.7	15.7
Perc/Motion/speed_tdw	31.0	19.0	39.0	30.0	29.0	34.0	31.0	33.0	31.0	29.0	31.0	28.0	32.0
Perc/Quantity/DiscreteCounting_tdw_top	22.0	31.0	31.0	28.0	31.0	32.0	23.0	26.0	23.0	31.0	34.0	28.0	21.0
Perc/Quantity/QuantityContinuous_tdw_continuous	1.0	62.0	38.0	45.0	21.0	37.0	17.0	50.0	9.0	33.0	28.0	26.0	19.0
Perc/Quantity/RelativeCounting_maniskill	50.0	42.0	49.0	48.0	49.0	46.0	47.0	43.0	47.0	44.0	44.0	44.0	47.0
Perc/Quantity/RelativeCounting_tdw_color_letter	51.0	50.0	57.0	59.0	54.0	53.0	55.0	51.0	57.0	56.0	57.0	60.0	54.0
Perc/Spatial/Multiview_maniskill	35.0	65.0	24.0	38.0	17.0	25.0	22.0	36.0	28.0	38.0	48.0	22.0	25.0
Perc/Spatial/Multiview_tdw	42.0	51.0	34.0	37.0	33.0	35.0	27.0	29.0	33.0	20.0	31.0	23.0	33.0
Perc/Spatial/RelPos_front_top	30.0	29.0	32.0	29.0	33.0	32.0	30.0	31.0	30.0	31.0	34.0	29.0	31.0
Perc/Spatial/RelPos_front_top_tdw	24.0	24.0	28.0	23.0	28.0	24.0	25.0	28.0	25.0	22.0	25.0	22.0	20.0
Perc/Spatial/SpatialOccupancy_maniskill	63.0	58.0	58.0	53.0	61.0	58.0	62.0	55.0	59.0	69.0	67.0	71.0	54.0
Perc/Spatial/SpatialOccupancy_occupancy_fitting_tdw_top	53.0	51.0	56.0	54.0	60.0	63.0	52.0	52.0	49.0	47.0	54.0	55.0	50.0
Perc/Spatial/SpatialOccupancy_occupancy_size_tdw_front_large	50.0	49.0	43.0	39.0	48.0	43.0	41.0	47.0	44.0	52.0	48.0	49.0	42.0
Perc/Spatial/SpatialOccupancy_volume_object_only_unfloat_top	48.0	52.0	58.0	85.0	49.0	68.0	55.0	52.0	52.0	54.0	59.0	64.0	58.0
Perc/Temporal/TemporalExtension_temporal_yjx_01_05	35.0	42.0	35.0	30.0	39.0	34.0	31.0	42.0	28.0	33.0	35.0	43.0	28.0
Perc/Temporal/TemporalPositioning_maniskill	43.0	41.0	47.0	38.0	44.0	44.0	45.0	42.0	40.0	48.0	42.0	40.0	43.0
Perc/Visual/VisualAttribute_color	51.0	52.0	52.0	51.0	45.0	51.0	51.0	51.0	52.0	52.0	52.0	52.0	51.0
Perc/Visual/VisualAttribute_color_tdw	40.0	43.0	39.0	40.0	38.0	39.0	40.0	37.0	42.0	42.0	40.0	42.0	43.0
Perc/Visual/VisualAttribute_material_diff_tdw	52.0	52.0	52.0	53.0	52.0	52.0	53.0	52.0	53.0	52.0	52.0	52.0	52.0
Perc/Visual/VisualAttribute_shape_tdw	43.0	36.0	38.0	31.0	27.0	40.0	35.0	29.0	38.0	41.0	37.0	42.0	39.0
Pred/Compositionality/Compositionality_maniskill_lift	47.0	20.0	52.0	49.0	33.0	42.0	38.0	35.0	48.0	35.0	40.0	35.0	39.0
Pred/Compositionality/Compositionality_maniskill_push	53.0	41.0	35.0	53.0	33.0	40.0	58.0	41.0	46.0	48.0	48.0	27.0	48.0
Pred/Compositionality/Compositionality_maniskill_rotate	20.0	20.0	37.0	33.0	27.0	28.0	29.0	17.0	25.0	15.0	7.0	32.0	23.0
Pred/Compositionality/Compositionality_tdw_two_sphere_2_14	43.0	58.0	60.0	35.0	51.0	37.0	45.0	57.0	38.0	46.0	58.0	30.0	40.0
Pred/Mechanistic/MechanisticKnowledge_maniskill_drop	86.0	66.0	89.0	90.0	85.0	83.0	87.0	92.0	85.0	79.0	58.0	45.0	88.0
Pred/Mechanistic/MechanisticKnowledge_maniskill_lift	62.0	29.0	60.0	60.0	44.0	51.0	49.0	36.0	61.0	45.0	67.0	40.0	51.0
Pred/Mechanistic/MechanisticKnowledge_maniskill_push	14.0	32.0	22.0	19.0	39.0	41.0	21.0	33.0	22.0	28.0	27.0	18.0	22.0
Pred/Mechanistic/MechanisticKnowledge_maniskill_rotate	12.0	45.0	11.0	19.0	29.0	32.0	24.0	32.0	20.0	34.0	29.0	19.0	16.0
Pred/Mechanistic/MechanisticKnowledge_physion_type_collision_v2	23.0	45.0	11.0	16.0	4.0	10.0	16.0	28.0	9.0	33.0	33.0	16.0	16.0
Pred/Mechanistic/MechanisticKnowledge_physion_type_drop	7.0	74.0	14.0	12.0	11.0	17.0	14.0	30.0	3.0	40.0	43.0	15.0	7.0
Pred/Mechanistic/MechanisticKnowledge_physion_type_slide	24.0	61.0	13.0	31.0	17.0	20.0	30.0	48.0	19.0	46.0	32.0	12.0	28.0
Pred/Mechanistic/PredNextState_carla_next_state_prediction_02_08	34.0	85.0	69.0	45.0	40.0	48.0	37.0	40.0	23.0	40.0	40.0	25.0	20.0
Pred/Mechanistic/Transitivity_habitat_lab_trans_ver_2_noback	10.0	20.0	12.0	13.7	24.0	21.0	15.0	16.0	15.3	17.0	18.7	25.3	14.7
Pred/Transitivity/Transitivity_carla_transitivity_yjx_0218	34.0	67.0	44.0	41.0	46.0	35.0	37.0	21.0	33.0	29.0	31.0	30.0	36.0
Pred/Transitivity/Transitivity_habitat_lab_seq_ver_3_noback	6.0	34.0	17.4	8.2	21.3	23.4	8.5	13.1	8.5	14.2	21.3	34.8	9.2
Pred/Transitivity/Transitivity_maniskill_pick_rotate	10.7	53.6	21.4	32.1	17.9	28.6	17.9	46.4	17.9	57.1	39.3	25.0	14.3
Pred/Transitivity/Transitivity_maniskill_push_pick	38.5	15.4	29.5	30.8	29.5	30.8	33.3	17.9	35.9	21.8	30.8	42.3	34.6

Table 63 | MVP: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	24.4	26.2	28.9	21.6	27.1	24.8	22.8	25.7	22.1	28.4	26.0	25.7	20.4
human_object_interactions	22.6	25.6	25.7	19.1	24.5	22.2	21.2	24.1	19.9	26.2	25.3	23.3	20.9
intuitive_physics	17.0	14.7	18.4	16.4	16.3	18.1	16.5	17.5	14.3	16.8	16.4	15.1	16.5
robot_object_interactions	25.8	29.6	32.4	19.8	33.3	28.7	22.2	28.2	23.4	34.4	27.3	28.4	13.7
temporal_reasoning	32.2	35.1	39.3	30.9	34.2	30.2	31.4	33.0	30.8	36.1	35.1	35.9	30.7

Table 64 | ERQA: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	33.8	37.5	35.8	35.2	37.0	34.8	35.5	34.5	37.5	38.2	34.8	36.2	32.8
Action Reasoning	40.3	38.9	37.5	41.7	37.5	34.7	40.3	34.7	34.7	45.8	40.3	40.3	34.7
Multi-view Reasoning	27.0	13.5	32.4	29.7	24.3	21.6	18.9	24.3	29.7	18.9	18.9	35.1	16.2
Other	14.3	35.7	28.6	14.3	35.7	28.6	28.6	28.6	28.6	28.6	35.7	14.3	7.1
Pointing	35.3	38.2	35.3	38.2	38.2	29.4	41.2	47.1	44.1	44.1	29.4	35.3	38.2
Spatial Reasoning	29.8	36.9	33.3	38.1	44.0	35.7	32.1	28.6	34.5	35.7	25.0	34.5	32.1
State Estimation	40.0	50.9	36.4	40.0	40.0	40.0	43.6	45.5	49.1	34.5	43.6	47.3	49.1
Task Reasoning	42.1	47.4	50.0	26.3	42.1	47.4	42.1	44.7	42.1	52.6	52.6	39.5	31.6
Trajectory Reasoning	28.8	33.3	31.8	31.8	28.8	33.3	31.8	27.3	34.8	37.9	34.8	28.8	30.3

Table 65 | SpatialViz: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	27.7	31.1	29.0	30.0	30.3	28.6	30.8	30.7	32.2	31.6	28.6	30.8	31.6
MentalAnimation/ArrowMoving	21.2	33.8	30.0	23.8	21.2	23.8	36.2	27.5	30.0	33.8	33.8	22.5	28.8
MentalAnimation/BlockMoving	43.8	31.2	45.0	40.0	38.8	30.0	38.8	41.2	40.0	38.8	32.5	36.2	38.8
MentalAnimation/MechanicalSystem	52.5	32.5	61.2	45.0	50.0	53.8	46.2	56.2	51.2	48.8	38.8	50.0	53.8
MentalFolding/CubeReconstruction	32.5	30.8	23.3	21.7	32.5	24.2	31.7	25.0	30.8	30.0	25.8	26.7	23.3
MentalFolding/CubeUnfolding	28.3	25.0	24.2	31.7	25.0	25.0	27.5	30.0	30.8	29.2	28.3	30.8	32.5
MentalFolding/PaperFolding	20.8	29.2	22.5	27.5	22.5	26.7	19.2	36.7	30.0	35.8	30.0	30.8	23.3
MentalRotation/2DRotation	20.0	25.0	27.5	28.8	33.8	32.5	31.2	25.0	25.0	26.2	30.0	25.0	31.2
MentalRotation/3DRotation	8.8	33.8	7.5	33.8	35.0	8.8	37.5	13.8	35.0	17.5	1.2	36.2	42.5
MentalRotation/3ViewProjection	22.0	29.0	30.0	30.0	26.0	32.0	34.0	32.0	35.0	39.0	30.0	28.0	33.0
VisualPenetration/CrossSection	7.5	16.7	6.7	11.7	6.7	8.3	10.0	5.8	7.5	7.5	8.3	9.2	6.7
VisualPenetration/CubeAssembly	50.0	46.2	50.0	46.2	57.5	45.0	41.2	51.2	50.0	42.5	51.2	48.8	47.5
VisualPenetration/CubeCounting	34.2	45.0	35.8	32.5	31.7	41.7	32.5	34.2	34.2	37.5	38.3	36.7	35.8

Table 66 | ViewSpatial: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	35.3	34.1	38.1	38.3	37.2	37.2	32.7	36.6	31.6	37.0	39.6	37.4	35.8
Camera perspective - Object View Orientation	29.7	28.1	34.6	30.5	29.4	27.9	28.2	28.0	30.2	28.0	26.2	31.2	25.8
Camera perspective - Relative Direction	42.9	43.3	43.8	43.2	44.1	41.4	40.7	44.2	41.3	43.1	44.9	44.6	40.7
Person perspective - Object View Orientation	42.4	35.4	50.6	49.2	47.5	54.1	36.8	48.6	29.8	50.9	59.1	45.8	47.0
Person perspective - Relative Direction	28.6	28.3	30.3	34.2	28.7	34.0	27.2	28.3	25.4	32.1	34.6	30.3	33.8
Person perspective - Scene Simulation Relative Direction	26.8	28.1	26.7	30.5	30.1	26.1	24.4	27.7	23.6	26.6	29.4	29.5	28.5

Table 67 | PaiBench: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	48.3	50.2	50.3	50.2	51.8	49.6	50.2	48.7	49.8	49.5	48.5	48.0	50.1
Common Sense/Physical world	43.4	47.3	42.0	46.0	46.0	41.6	49.6	43.4	48.2	43.4	39.4	42.5	50.0
Common Sense/Space: Affordance	18.8	43.8	37.5	31.2	25.0	25.0	31.2	25.0	18.8	31.2	25.0	31.2	25.0
Common Sense/Space: Environment	68.2	59.1	77.3	72.7	63.6	59.1	72.7	77.3	81.8	68.2	72.7	77.3	77.3
Common Sense/Space: Plausibility	23.5	41.2	17.6	70.6	17.6	29.4	52.9	23.5	41.2	29.4	17.6	23.5	47.1
Common Sense/Space: Relationship	72.0	68.0	60.0	60.0	72.0	56.0	76.0	60.0	72.0	68.0	60.0	68.0	68.0
Common Sense/Time: Actions	51.0	47.6	52.4	50.3	55.8	51.0	49.7	47.6	50.3	50.3	46.9	44.2	51.0
Common Sense/Time: Camera	46.1	60.7	43.8	44.9	55.1	47.2	39.3	43.8	41.6	42.7	46.1	50.6	42.7
Common Sense/Time: Causality	25.0	50.0	25.0	0.0	75.0	50.0	25.0	25.0	50.0	25.0	0.0	0.0	50.0
Common Sense/Time: Order	40.0	43.6	47.3	50.9	47.3	50.9	36.4	50.9	43.6	38.2	45.5	38.2	40.0
Common Sense/Time: Planning	66.7	66.7	33.3	33.3	66.7	66.7	66.7	66.7	66.7	66.7	33.3	66.7	66.7
Embodied Reasoning/AV	27.0	38.0	49.0	30.0	40.0	35.0	41.0	27.0	33.0	37.0	29.0	35.0	36.0
Embodied Reasoning/Agibot	36.0	34.0	36.0	37.0	34.0	35.0	37.0	36.0	35.0	38.0	38.0	36.0	33.0
Embodied Reasoning/BridgeData V2	31.0	31.0	24.0	33.0	33.0	29.0	27.0	29.0	30.0	34.0	36.0	30.0	30.0
Embodied Reasoning/HoloAssist	52.0	48.0	54.0	54.0	52.0	57.0	53.0	58.0	52.0	53.0	57.0	46.0	52.0
Embodied Reasoning/RoboFail	67.0	62.0	72.0	65.0	73.0	72.0	63.0	68.0	67.0	69.0	69.0	72.0	64.0
Embodied Reasoning/RoboVQA	85.5	85.5	87.3	87.3	83.6	86.4	87.3	86.4	85.5	85.5	88.2	83.6	86.4

Table 68 | CV-Bench: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	69.3	72.4	72.3	70.4	72.9	70.5	68.0	72.1	68.2	69.5	71.4	68.7	69.1
2D/Count/ADE20K	50.9	55.8	54.4	56.4	53.5	53.2	52.6	50.3	52.0	51.5	51.5	49.7	54.1
2D/Count/COCO	71.7	76.0	71.3	72.0	72.4	72.2	71.1	70.6	70.6	70.6	71.3	69.7	70.4
2D/Relation/ADE20K	69.4	72.9	75.9	71.1	79.7	72.5	70.8	75.6	71.8	72.2	77.0	68.4	72.9
2D/Relation/COCO	76.0	77.4	79.4	77.2	83.0	76.3	74.7	80.5	78.0	74.9	80.5	75.8	77.7
3D/Depth/Omni3D	75.5	77.5	78.2	78.3	78.0	75.7	75.5	80.3	76.5	78.2	80.2	72.8	79.2
3D/Distance/Omni3D	67.8	70.7	71.3	64.7	69.7	69.7	61.8	70.5	59.5	65.7	66.0	70.7	59.7

Table 69 | Cosmos: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	76.7	75.2	80.0	75.2	80.0	79.0	75.7	79.0	76.7	78.6	79.5	76.7	75.7
robofail	67.0	63.0	72.0	63.0	71.0	69.0	65.0	72.0	67.0	70.0	71.0	70.0	64.0
robovqa	85.5	86.4	87.3	86.4	88.2	88.2	85.5	85.5	85.5	86.4	87.3	82.7	86.4

Table 70 | BLINK: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	46.2	45.4	49.0	46.4	47.1	48.4	46.5	46.8	45.9	49.0	47.6	49.4	45.0
Art_Style	51.3	64.1	53.0	52.1	65.8	55.6	54.7	59.0	59.0	61.5	53.0	58.1	56.4
Counting	64.2	69.2	65.8	59.2	65.8	65.8	67.5	67.5	61.7	65.0	65.0	66.7	66.7
Forensic_Detection	26.5	25.8	45.5	39.4	25.8	33.3	29.5	18.2	25.8	40.2	29.5	32.6	28.0
Functional_Correspondence	24.6	23.1	29.2	24.6	26.9	26.9	31.5	29.2	25.4	27.7	27.7	26.2	23.8
IQ_Test	28.0	29.3	32.0	30.0	28.7	28.0	29.3	27.3	28.0	33.3	25.3	29.3	27.3
Jigsaw	50.7	47.3	46.7	47.3	46.0	42.0	46.0	42.0	48.7	45.3	50.0	46.7	51.3
Multi-view_Reasoning	44.4	44.4	36.1	51.9	49.6	50.4	44.4	40.6	49.6	48.9	42.9	45.1	44.4
Object_Localization	55.7	49.2	57.4	55.7	55.7	55.7	55.7	60.7	58.2	58.2	55.7	56.6	57.4
Relative_Depth	65.3	62.9	71.8	58.1	73.4	66.1	60.5	73.4	62.9	69.4	69.4	66.9	59.7
Relative_Reflectance	47.8	26.9	32.8	43.3	38.1	45.5	48.5	48.5	43.3	41.8	47.0	50.7	38.1
Semantic_Correspondence	27.3	27.3	27.3	26.6	23.0	27.3	29.5	22.3	23.0	25.2	33.8	30.9	28.8
Spatial_Relation	81.8	76.9	85.3	79.7	80.4	82.5	81.8	81.8	80.4	84.6	84.6	83.2	82.5
Visual_Correspondence	31.4	34.3	40.7	28.5	24.4	39.0	29.1	32.0	26.2	26.7	29.7	40.1	25.0
Visual_Similarity	55.6	64.4	68.9	62.2	69.6	67.4	52.6	63.7	60.7	69.6	61.5	66.7	51.1

Table 71 | TOMATO: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	31.6	36.1	29.2	33.2	34.3	30.4	34.7	30.7	34.7	30.1	31.7	32.3	34.7
count/human	19.3	36.8	10.5	15.8	17.5	10.5	17.5	21.1	17.5	19.3	15.8	21.1	21.1
count/object	47.6	43.9	46.3	48.2	45.7	40.2	47.0	46.3	53.7	42.7	45.1	45.7	51.8
count/simulated	63.4	59.2	57.7	56.3	62.0	67.6	62.0	62.0	60.6	49.3	57.7	56.3	53.5
direction/human	21.8	26.3	20.2	24.8	24.0	23.7	26.7	24.4	26.7	22.5	27.9	23.3	26.0
direction/object	42.4	40.2	52.2	45.7	51.1	45.7	37.0	42.4	37.0	40.2	41.3	45.7	39.1
direction/simulated	28.6	24.5	26.5	36.7	28.6	38.8	28.6	24.5	32.7	24.5	30.6	32.7	24.5
rot/human	31.6	23.7	10.5	34.2	18.4	21.1	31.6	23.7	26.3	31.6	36.8	39.5	34.2
rot/object	32.3	28.8	29.3	32.3	33.3	29.3	31.3	31.3	32.8	36.4	30.3	31.8	31.3
rot/simulated	28.0	28.0	32.0	26.0	22.0	24.0	28.0	26.0	16.0	24.0	28.0	22.0	26.0
shape&trend/human	34.5	41.4	29.3	39.1	40.2	36.2	43.7	28.7	42.0	30.5	31.6	37.9	43.7
shape&trend/simulated	34.7	46.9	32.7	38.8	46.9	38.8	49.0	42.9	49.0	46.9	42.9	42.9	49.0
velocity&frequency/human	9.4	42.2	9.4	9.4	14.1	6.2	15.6	4.7	10.9	6.2	6.2	6.2	12.5
velocity&frequency/object	20.5	37.9	15.2	22.7	34.1	13.6	33.3	18.2	30.3	15.9	18.2	19.7	31.1
velocity&frequency/simulated	14.3	50.0	14.3	21.4	14.3	7.1	21.4	14.3	21.4	14.3	21.4	21.4	21.4
visual cues/object	32.9	32.9	34.3	34.3	32.9	35.7	30.0	34.3	34.3	32.9	35.7	35.7	34.3

Table 72 | TVBench: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	36.5	37.4	39.4	35.8	36.4	38.4	36.7	37.1	35.0	36.3	38.7	35.7	35.4
tvbench_action_count	0.0	0.6	1.9	1.7	0.2	1.5	20.7	1.3	0.6	0.2	2.4	0.7	7.6
tvbench_action_localization	36.2	38.1	35.6	36.2	35.0	35.6	34.4	34.4	35.6	32.5	35.0	31.9	35.6
tvbench_action_seq	62.0	62.9	59.0	63.4	62.7	63.6	60.4	59.3	61.6	60.9	62.2	61.3	62.2
tvbench_egocentric_seq	31.5	32.5	41.0	37.5	33.5	37.5	34.0	35.5	27.0	34.0	39.5	25.0	30.0
tvbench_moving_direction	24.6	34.1	36.6	22.8	29.7	31.0	22.4	26.3	29.3	25.4	25.9	28.4	25.9
tvbench_object_count	24.3	21.6	23.6	25.0	25.7	25.7	23.6	28.4	25.0	23.0	24.3	23.6	26.4
tvbench_object_shuffle	39.6	37.8	37.3	36.0	36.9	38.7	40.0	41.8	35.1	42.2	43.6	39.1	34.2
tvbench_scene_transition	78.9	80.5	80.0	73.5	73.5	78.9	71.9	78.9	69.2	79.5	78.9	81.1	71.4
tvbench_unexpected_action	31.7	28.0	39.0	25.6	30.5	32.9	23.2	28.0	31.7	29.3	36.6	30.5	25.6

Table 73 | BlackSwan: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	61.8	65.6	60.6	60.5	62.7	60.8	62.7	62.5	62.4	64.2	59.6	59.5	62.0
Detective/easy	64.0	66.9	63.8	63.4	66.3	63.0	65.3	67.6	64.8	65.1	63.4	62.8	59.4
Detective/hard	45.6	50.4	51.2	44.0	47.2	43.2	47.2	46.4	44.0	44.8	44.8	44.8	47.2
Detective/medium	55.6	59.5	56.6	54.1	58.9	57.0	55.3	53.9	55.3	59.1	54.9	54.5	56.4
Reporter/easy	77.9	80.5	68.7	75.4	77.4	75.9	79.5	77.9	80.5	79.5	71.3	70.8	81.0
Reporter/hard	62.4	66.7	59.8	64.6	55.0	57.7	64.6	61.9	64.6	67.2	56.1	61.4	69.3
Reporter/medium	64.9	70.6	61.3	61.3	64.9	63.7	66.1	65.7	65.3	68.5	62.5	60.1	66.1

Table 74 | TempCompass: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	67.7	65.9	70.0	68.2	68.7	68.7	67.8	69.5	67.8	70.2	68.8	69.0	67.4
capmatch/action	96.6	96.6	97.0	96.6	96.6	97.3	97.3	97.6	97.3	98.0	97.3	97.3	97.6
capmatch/attribute_change	74.0	79.9	78.1	75.3	80.6	76.7	76.7	81.6	75.3	82.6	77.4	81.6	73.3
capmatch/direction	60.9	62.7	56.9	60.6	63.9	59.0	61.5	60.9	61.2	63.0	57.8	59.3	62.7
capmatch/order	82.7	81.0	86.3	82.7	84.7	84.3	79.0	85.0	77.7	86.0	83.7	86.3	75.0
capmatch/speed	62.2	61.9	68.7	61.5	59.1	67.0	61.5	64.6	62.9	68.0	67.4	63.2	57.7
mc/action	95.9	95.3	95.6	95.6	93.8	96.2	95.3	94.7	95.0	95.3	97.0	97.9	95.6
mc/attribute_change	68.1	74.7	73.6	68.8	77.8	69.8	66.3	78.1	67.4	77.1	69.1	76.7	67.7
mc/direction	37.9	44.5	43.9	41.5	44.2	36.1	40.9	42.4	42.4	43.0	41.8	40.0	41.2
mc/order	62.3	59.9	65.6	59.9	68.2	66.2	59.9	66.2	60.3	65.6	61.9	67.9	60.3
mc/speed	47.9	45.1	47.9	48.3	47.6	49.5	51.4	48.9	51.1	51.7	47.3	50.2	50.8
yesno/action	87.7	78.0	89.2	85.8	87.3	87.5	87.7	82.1	86.5	86.0	89.4	87.0	87.7
yesno/attribute_change	65.6	63.4	72.1	68.1	69.0	69.0	66.5	76.3	67.9	71.2	68.8	69.9	68.1
yesno/direction	56.1	53.2	55.3	55.3	54.0	52.4	55.5	53.6	55.7	54.0	51.4	54.3	54.3
yesno/order	61.3	55.0	63.9	62.6	61.8	62.3	59.4	58.9	58.1	63.1	61.5	55.2	61.5
yesno/speed	57.9	51.2	58.8	60.9	51.0	60.1	58.3	60.1	59.6	57.2	61.8	56.2	56.6

Table 75 | PerceptionTest (val): accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	62.9	58.1	63.7	61.8	60.6	63.2	60.4	62.8	60.4	62.6	62.4	63.7	60.5
abstraction	54.6	54.6	55.1	53.7	52.5	54.5	53.4	54.1	53.6	53.7	53.6	55.0	53.7
memory	47.6	46.8	46.4	46.2	48.8	44.9	44.4	46.0	44.6	45.3	45.8	46.4	46.0
physics	58.4	50.7	58.9	57.8	53.7	58.8	55.8	58.0	56.4	58.6	56.6	59.5	55.6
semantics	78.0	71.8	79.7	76.2	78.0	79.0	74.7	79.1	73.7	78.1	79.8	79.2	74.5

Table 76 | EgoTaskQA: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	81.5	74.1	77.8	81.3	79.8	81.6	80.2	78.3	80.7	74.2	81.6	82.6	80.9
egotaskqa	81.5	74.1	77.8	81.3	79.8	81.6	80.2	78.3	80.7	74.2	81.6	82.6	80.9

Table 77 | 3DSRBench (circular): accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	51.2	50.6	51.1	50.7	51.6	51.1	51.2	52.6	50.5	52.3	52.6	50.7	50.4
height_higher	53.6	50.7	53.6	54.7	52.2	53.3	52.6	49.4	50.9	51.7	54.6	55.0	50.7
location_above	61.8	60.8	59.4	59.2	64.0	61.6	61.1	67.3	59.9	64.8	64.2	62.9	59.1
location_closer_to_camera	71.8	71.5	73.5	72.9	74.8	70.0	71.3	71.6	74.0	70.6	70.9	70.4	72.6
location_next_to	51.3	56.6	53.7	48.4	54.0	51.3	55.5	62.5	49.7	57.2	57.5	51.3	52.4
multi_object_closer_to	49.9	47.3	49.6	49.1	48.1	51.3	53.6	52.7	51.6	53.0	50.7	47.7	49.1
multi_object_facing	59.4	59.7	56.5	59.1	63.6	60.0	60.0	63.4	60.5	70.1	67.6	58.1	58.5
multi_object_parallel	52.1	51.2	52.2	52.2	50.6	53.1	52.5	53.7	51.5	48.8	52.7	52.2	50.6
multi_object_same_direction	53.1	49.9	53.6	51.7	55.1	52.3	52.6	53.5	51.7	50.9	51.3	48.3	52.0
multi_object_viewpoint_towards_object	28.1	29.7	27.4	26.7	26.2	28.9	27.5	27.0	26.5	27.1	28.1	27.3	27.6
orientation_in_front_of	56.5	50.9	54.7	58.6	50.0	57.4	53.8	53.3	56.4	56.4	58.6	61.0	56.5
orientation_on_the_left	49.9	50.1	49.9	50.1	50.0	50.0	49.9	50.0	50.3	50.1	50.0	50.1	49.9
orientation_viewpoint	33.8	34.8	35.8	33.0	35.9	32.8	34.1	37.5	31.9	37.1	34.8	31.0	34.3

Table 78 | CoreCognition: accuracy (%) by official category. Columns: training configurations; rows: categories.

Category	base	full-mix	perc causal	perc temporal	insp causal	insp cf	insp temporal	navi causal	navi temporal	mani causal	mani cf	exo physical	exo temporal
Overall	59.8	53.2	57.4	57.8	52.6	57.7	57.5	56.0	58.3	57.9	56.5	58.8	57.4
boundary/Stage Sensorimotor	76.4	74.2	76.4	76.4	79.8	78.7	76.4	78.7	73.0	73.0	71.9	78.7	71.9
conservation/Stage Concrete Operational	69.5	63.8	58.1	59.0	21.9	65.7	65.7	49.5	65.7	61.0	46.7	68.6	65.7
continuity/Stage Sensorimotor	67.2	60.9	64.1	67.2	67.2	64.1	60.9	62.5	62.5	64.1	64.1	67.2	62.5
hierarchy/Stage Concrete Operational	67.0	57.3	60.2	62.1	66.0	67.0	59.2	61.2	63.1	57.3	65.0	66.0	65.0
intentionality/Stage Formal Operational	76.1	60.6	76.1	75.2	71.6	72.5	77.1	74.3	76.1	74.3	70.6	70.6	76.1
intuitivephysics/Stage Concrete Operational	58.6	50.0	53.4	56.9	56.9	53.4	51.7	63.8	56.9	58.6	58.6	58.6	53.4
mechanicalreasoning/Stage Formal Operational	65.9	61.4	65.9	65.9	67.0	63.6	60.2	60.2	62.5	65.9	69.3	67.0	64.8
perceptualconstancy/Stage Sensorimotor	61.5	50.3	64.3	60.1	48.3	65.7	53.1	55.2	51.0	62.2	64.3	62.9	51.7
permanence/Stage Sensorimotor	43.8	25.0	37.5	37.5	43.8	50.0	31.2	43.8	43.8	43.8	37.5	37.5	43.8
perspective/Stage Concrete Operational	33.5	24.3	33.5	33.0	30.8	30.8	42.2	33.0	41.1	32.4	29.7	33.0	39.5
spatiality/Stage Sensorimotor	36.6	37.4	35.0	36.6	39.0	33.3	39.8	32.5	39.0	39.8	35.8	31.7	33.3
toolusing/Stage Formal Operational	74.8	77.3	69.7	73.1	63.9	66.4	66.4	75.6	73.1	74.8	74.8	73.9	70.6

split in its native format, and $2,000 \cdot p$ items from the WOVEN cell. Items are packed into 16-row blocks that are answer-letter balanced within each source type, and the answer-letter sequence is identical across arms, so arms differ only in the substituted content. Training uses the shared SFT optimization protocol of Appendix G.1 for 3 epochs, with seeds 42/43/44, followed by 300 GRPO steps with the anti-bias reward. The fixed-budget datasets use the answer-balanced blocks described above without additional option-permutation augmentation. Evaluation uses each benchmark’s own protocol (SAT scored circularly).

Trend statistics. An OLS fit of in-domain accuracy on the share over $p \leq 50\%$ ($n=18$ runs per benchmark) gives slopes, per +10% share, of -0.03 ± 1.00 pp for SAT ($t(16)=-0.03$, $p=0.98$), -1.54 ± 0.30 pp for ActionEQA ($t(16)=-5.08$, $p=1.1 \times 10^{-4}$), and -0.01 ± 0.30 pp for CLEVRER ($t(16)=-0.04$, $p=0.97$). Per-arm seed ranges are visible in Table 79 (SAT carries the widest), so the sweep is read at the level of the fitted trend rather than of individual arms.

Table 79 | **In-domain substitution sweep, full per-seed results** (in-domain accuracy, %). p is the WOVEN share of the fixed 2,000-item training budget; the $p=0$ row is the pure in-domain baseline.

p (%)	SAT (circular)				ActionEQA				CLEVRER			
	s42	s43	s44	mean	s42	s43	s44	mean	s42	s43	s44	mean
0	45.33	43.33	58.00	48.89	79.30	80.01	78.69	79.33	83.20	81.73	83.00	82.64
10	45.33	50.67	49.33	48.44	77.60	77.55	78.82	77.99	82.47	81.53	82.60	82.20
20	54.67	42.67	35.33	44.22	77.50	77.61	75.46	76.86	82.53	84.47	82.93	83.31
30	37.33	54.00	38.00	43.11	79.51	79.98	78.42	79.30	83.60	78.67	82.33	81.53
40	58.67	40.00	53.33	50.67	74.30	74.19	73.88	74.12	76.27	81.47	83.93	80.56
50	44.67	46.67	51.33	47.56	67.66	70.84	72.55	70.35	85.00	84.80	81.93	83.91
70	54.67	54.00	46.67	51.78	64.15	66.68	67.77	66.20	75.73	81.80	80.47	79.33
100	58.00	60.00	56.67	58.22	46.54	46.51	46.38	46.47	56.80	54.40	54.40	55.20

Deletion control. To test whether preserved accuracy under substitution merely reflects saturation of the task-specific training budget, we ablate the WOVEN contribution at $p \in \{20, 40, 50\}\%$. Each deletion arm retains exactly the same task-specific subset as its substitution counterpart but omits the WOVEN examples, leaving 1,600, 1,200, or 1,000 training items under the same optimization recipe. At 40% and 50%, substitution outperforms deletion on all three benchmarks by 3.60–11.00 percentage points (Table 80); at 20%, it improves ActionEQA and CLEVRER but is 1.99 points lower on SAT. This pattern supports an additional contribution from WOVEN supervision beyond simply discarding redundant task-specific data. In Fig. 3, the deletion curves connect these three ablation settings to the shared $p=0$ reference.

Table 80 | **Deletion ablation for in-domain substitution.** Accuracy (%) after deleting the WOVEN portion (Del.) or retaining it (Sub.). Δ is substitution minus deletion in percentage points. Both arms retain the same task-specific subset.

p (%)	SAT (circular)			ActionEQA			CLEVRER		
	Del.	Sub.	Δ	Del.	Sub.	Δ	Del.	Sub.	Δ
20	46.21	44.22	-1.99	74.21	76.86	+2.65	80.31	83.31	+3.00
40	39.67	50.67	+11.00	68.41	74.12	+5.71	76.96	80.56	+3.60
50	39.72	47.56	+7.84	66.20	70.35	+4.15	77.12	83.91	+6.79

G.15. Transfer at scale: 7B and 32B

The transfer of §3 persists when the same full-mix recipe is applied at larger scale. Table 81 reports zero-shot transfer gains over the same-scale base for Qwen2.5-VL-7B (SFT and GRPO stages, following the 3B recipe) and Qwen2.5-VL-32B (SFT stage). Gains of the same character as at 3B appear at both scales: egocentric spatial reasoning (SAT +20.0 at 7B, +22.7 at 32B), paired video perception (MVP), world-model probes (WM-ABench), and dynamic-scene inference (DSI), alongside single-scale gains on temporal, embodied, and intuitive-physics surfaces.

Table 81 | **Transfer at scale.** Zero-shot transfer gains (pp over the same-scale base) after WOVEN full-mix post-training of Qwen2.5-VL-7B and Qwen2.5-VL-32B. The recipe follows the 3B protocol; the 32B run is SFT-only; SAT is under circular evaluation. Abbreviations as in Tables 4 and 5; ViewSp: ViewSpatial. ‘—’: not reported.

	SAT	DSI	MVP	WM-AB	TB-L	ViewSp	R2VLM	InPhyRe	ERQA	BSwan	CLEVRER	TVBench
7B SFT	+20.00	+6.32	+5.08	+4.39	+4.30	—	+3.24	—	—	—	—	—
7B GRPO	+20.00	+5.96	+4.49	+4.83	+5.34	+2.10	+3.54	—	+2.75	—	+2.19	+2.04
32B SFT	+22.67	—	+6.28	+5.91	—	+4.94	—	+3.54	—	+2.29	—	—

G.16. Same-backbone comparison with video-SSL mid-training

Orca-4B (Wang et al., 2026c) mid-trains the Qwen3.5-4B backbone on latent next-state prediction over 125K hours of video with 160M event annotations. We post-train the *same* Qwen3.5-4B backbone on WOVEN supervision alone: SFT on ≈ 107 K QA pairs drawn from ≈ 7 hours of generated video, four orders of magnitude less video and a post-training-only budget. The comparison uses 3DSRBench, a benchmark on which Orca-4B reports results. On this backbone, WOVEN post-training with about four orders of magnitude less video yields a larger gain over the shared base than Orca-4B mid-training (+6.7 vs. +4.0 points; Table 82).

Table 82 | **Same-backbone comparison with video-SSL mid-training.** Both models start from Qwen3.5-4B; gains in parentheses are over the shared base. Orca-4B: latent next-state mid-training (125K hours of video, 160M event annotations). Ours: WOVEN post-training (SFT, ≈ 107 K QA pairs, ≈ 7 hours of generated video).

Model	3DSRBench
Qwen3.5-4B base	48.1
Orca-4B	52.1 (+4.0)
+WOVEN (ours)	54.8 (+6.7)

G.17. WOVEN results by supervision source and training stage

We report the complete WOVEN test results for the base Qwen2.5-VL-3B model, full-mix training, and all 11 individual supervision subsets. Accuracies and error breakdowns were recomputed from model generations. The three test sets are in-distribution (ID; $n = 6,228$), held-out scenes (OOD; $n = 3,496$), and state perturbations (Pert; $n = 1,116$); chance accuracy is 25%. Tables 83–99 have separate panels for supervised fine-tuning (SFT) and reinforcement learning (RL). Full-mix RL results are not available in this set of evaluations and are marked with dashes; the base model is repeated in both panels for comparison.

Configuration prefixes denote camera motion (*perc*), object inspection (*insp*), navigation (*navi*), object manipulation (*mani*), and passive physical events (*exo*). Suffixes identify causal, counterfactual (*cf*), temporal, or physical supervision, following the training configurations in Appendix G.13. Unless a caption specifies otherwise, accuracies are percentages over all items in the named category, and overall accuracy is computed over the complete named test split. Error shares describe the distractors selected on incorrect answers; captions specify the relevant subset and any categories omitted from the display.

Overall and cross-action gains. All 11 individual subsets improve overall ID accuracy over the 26.38% base score: SFT accuracies range from 31.87% to 50.75%, and RL accuracies from 32.45% to 51.65% (Table 83). To distinguish these gains from improvement restricted to the trained action category, we also compare each source on the other four action categories. At both stages, 43 of these 44 comparisons improve over the base model: ten sources improve all four other action categories, and the remaining source improves three. Table 84 further identifies which reasoning skills improve under each source.

G.17.1. Accuracy by action, reasoning type, and test split

Table 83 | ID accuracy (%) by action type ($n = 6,228$). Overall covers the complete ID split. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT						
Config.	Perceptive	Inspective	Navigative	Manipulative	Exogenous	Overall
base	27.00	23.46	30.03	28.82	23.78	26.38
full-mix	90.71	90.49	90.02	95.31	79.43	89.29
perc_causal	60.76	34.75	56.94	64.67	29.77	48.28
perc_temporal	38.98	27.28	36.81	29.25	31.16	32.29
insp_causal	37.07	62.28	56.34	58.85	30.30	49.97
insp_cf	33.42	58.89	53.21	71.96	32.99	50.75
insp_temporal	33.94	27.96	37.15	30.47	32.29	32.03
navi_causal	34.11	34.14	60.33	78.04	31.25	46.56
navi_temporal	35.42	27.78	37.59	29.08	31.16	31.87
mani_causal	31.42	25.86	55.56	90.36	31.77	45.41
mani_cf	30.99	26.54	56.68	92.53	34.55	46.63
exo_physical	26.74	28.83	35.16	33.51	51.30	34.63
exo_temporal	35.16	28.15	37.59	29.43	32.29	32.19
RL						
Config.	Perceptive	Inspective	Navigative	Manipulative	Exogenous	Overall
base	27.00	23.46	30.03	28.82	23.78	26.38
full-mix	—	—	—	—	—	—
perc_causal	59.98	36.91	56.94	68.58	28.91	49.26
perc_temporal	37.93	28.40	38.02	30.12	32.20	32.96
insp_causal	35.94	63.33	57.20	66.49	30.56	51.65
insp_cf	34.29	61.98	54.86	71.53	30.38	51.46
insp_temporal	33.42	26.85	41.23	30.03	32.99	32.45
navi_causal	37.07	36.17	60.07	79.77	31.42	47.94
navi_temporal	39.24	27.47	38.63	31.68	31.86	33.30
mani_causal	30.90	29.20	56.25	90.19	32.03	46.32
mani_cf	32.20	28.95	57.20	93.06	34.38	47.64
exo_physical	25.78	29.20	36.72	38.45	51.22	35.74
exo_temporal	34.11	28.95	40.10	31.16	32.20	32.98

Table 84 | ID accuracy (%) by reasoning type ($n = 6,228$). Overall covers all eight reasoning types. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT									
Config.	Forward dynamics	Inverse dynamics	CF substitution	CF removal	Outcome prediction	Cued prediction	Temporal ordering	Temporal adjacency	Overall
base	21.34	40.39	19.35	18.64	21.18	23.96	27.34	25.66	26.38
full-mix	97.09	94.80	94.80	96.95	80.90	83.33	92.77	69.66	89.29
perc_causal	75.31	76.63	62.19	28.85	33.33	33.68	25.13	26.28	48.28
perc_temporal	20.81	41.71	18.82	20.61	23.26	25.35	30.34	52.73	32.29
insp_causal	73.72	75.84	74.19	41.22	32.64	34.03	25.40	25.75	49.97
insp_cf	73.72	50.53	83.15	86.92	39.93	40.62	26.63	23.72	50.75
insp_temporal	20.72	41.36	19.00	21.86	22.57	25.00	24.96	56.70	32.03
navi_causal	64.90	64.90	59.68	49.64	29.86	39.93	26.46	27.95	46.56
navi_temporal	21.25	42.50	17.20	20.43	22.57	20.83	25.93	55.82	31.87
mani_causal	63.32	62.70	60.93	48.39	29.86	38.89	25.84	26.28	45.41
mani_cf	63.23	54.76	68.10	57.35	38.54	42.71	27.25	28.48	46.63
exo_physical	25.93	47.62	15.23	38.17	76.74	77.43	28.13	23.10	34.63
exo_temporal	20.55	42.77	18.10	21.51	22.92	24.65	25.31	56.61	32.19

RL									
Config.	Forward dynamics	Inverse dynamics	CF substitution	CF removal	Outcome prediction	Cued prediction	Temporal ordering	Temporal adjacency	Overall
base	21.34	40.39	19.35	18.64	21.18	23.96	27.34	25.66	26.38
full-mix	—	—	—	—	—	—	—	—	—
perc_causal	76.01	79.28	67.56	31.00	29.86	34.72	24.51	25.84	49.26
perc_temporal	19.93	43.92	17.74	20.97	21.88	25.35	30.60	55.56	32.96
insp_causal	75.22	76.10	83.51	44.80	33.33	32.64	25.93	26.54	51.65
insp_cf	72.13	54.94	84.23	87.28	33.33	36.11	26.54	26.98	51.46
insp_temporal	20.55	43.12	14.87	23.12	23.26	24.65	24.96	58.73	32.45
navi_causal	66.31	70.55	60.39	47.49	29.51	39.24	25.40	30.51	47.94
navi_temporal	20.99	48.85	17.38	22.94	23.61	22.57	23.81	57.67	33.30
mani_causal	64.90	62.87	64.70	48.39	32.29	39.93	24.69	27.95	46.32
mani_cf	66.14	55.03	70.25	60.57	38.89	43.40	26.63	28.57	47.64
exo_physical	27.60	50.26	15.95	42.65	73.96	77.43	26.98	24.16	35.74
exo_temporal	21.34	44.36	17.56	23.66	25.35	23.26	26.54	56.26	32.98

Table 85 | Held-out-scene (OOD) accuracy (%) by action type ($n = 3,496$). Overall covers the complete OOD split. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT						
Config.	Perceptive	Inspective	Navigative	Manipulative	Exogenous	Overall
base	27.19	24.04	33.75	25.16	30.47	27.77
full-mix	84.69	87.18	90.78	95.47	83.12	88.16
perc_causal	59.69	37.93	59.84	58.12	25.94	47.43
perc_temporal	33.28	23.50	33.28	31.41	28.91	29.52
insp_causal	31.88	59.62	59.22	53.44	32.81	48.43
insp_cf	36.25	62.61	59.69	63.75	35.31	52.46
insp_temporal	29.38	25.11	32.50	25.47	30.94	28.38
navi_causal	35.16	34.08	66.88	70.47	34.38	47.00
navi_temporal	30.16	25.64	35.94	28.12	35.00	30.52
mani_causal	33.75	29.70	66.72	87.50	44.06	50.43
mani_cf	31.72	29.81	61.56	87.03	45.62	49.34
exo_physical	26.09	29.49	38.12	32.03	62.19	36.90
exo_temporal	32.66	29.49	34.38	25.94	36.56	31.61
RL						
Config.	Perceptive	Inspective	Navigative	Manipulative	Exogenous	Overall
base	27.19	24.04	33.75	25.16	30.47	27.77
full-mix	—	—	—	—	—	—
perc_causal	58.59	39.74	59.22	60.47	24.69	47.80
perc_temporal	33.44	25.75	37.66	28.75	30.31	30.72
insp_causal	32.19	63.68	58.91	54.69	26.41	48.57
insp_cf	35.31	62.71	58.75	65.94	34.84	52.46
insp_temporal	25.16	22.44	30.00	24.38	28.59	25.80
navi_causal	37.66	36.86	66.72	72.81	33.75	48.48
navi_temporal	34.69	30.24	40.78	27.19	35.78	33.44
mani_causal	36.72	34.19	67.81	87.66	47.03	52.95
mani_cf	36.09	33.87	62.19	88.75	43.91	51.34
exo_physical	29.53	30.56	41.56	35.62	61.09	38.90
exo_temporal	33.44	32.37	37.03	25.94	37.97	33.27

Table 86 | Held-out-scene (OOD) accuracy (%) by reasoning type ($n = 3,496$). Overall covers all eight reasoning types. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT									
Config.	Forward dynamics	Inverse dynamics	CF substitution	CF removal	Outcome prediction	Cued prediction	Temporal ordering	Temporal adjacency	Overall
base	19.18	35.69	14.56	24.37	24.38	31.88	37.26	27.04	27.77
full-mix	97.33	95.44	94.94	97.78	92.50	92.50	85.22	64.31	88.16
perc_causal	75.47	74.06	63.61	30.70	30.00	25.62	28.93	21.38	47.43
perc_temporal	20.44	37.11	23.42	24.05	27.50	30.62	25.31	41.19	29.52
insp_causal	70.60	76.10	74.05	38.29	41.25	42.50	22.01	20.60	48.43
insp_cf	72.96	47.48	79.75	85.13	45.62	42.50	33.18	30.66	52.46
insp_temporal	21.38	36.32	19.62	23.10	29.38	31.25	17.61	44.18	28.38
navi_causal	60.69	64.15	55.38	47.15	35.00	36.88	32.86	31.60	47.00
navi_temporal	21.70	37.89	21.52	22.15	31.25	35.62	26.10	43.55	30.52
mani_causal	61.95	62.89	61.08	45.25	53.75	53.75	40.09	32.39	50.43
mani_cf	63.52	50.47	65.82	56.96	53.75	57.50	31.13	37.11	49.34
exo_physical	24.21	44.50	15.82	42.09	94.38	93.75	30.82	27.20	36.90
exo_temporal	21.07	36.48	19.62	25.32	28.75	36.25	24.53	52.99	31.61
RL									
Config.	Forward dynamics	Inverse dynamics	CF substitution	CF removal	Outcome prediction	Cued prediction	Temporal ordering	Temporal adjacency	Overall
base	19.18	35.69	14.56	24.37	24.38	31.88	37.26	27.04	27.77
full-mix	—	—	—	—	—	—	—	—	—
perc_causal	77.83	78.30	67.09	31.01	30.00	22.50	25.16	19.50	47.80
perc_temporal	22.17	38.84	22.15	23.10	30.00	30.00	25.00	45.28	30.72
insp_causal	71.23	78.93	74.68	42.41	30.00	30.62	23.58	19.81	48.57
insp_cf	72.48	52.20	80.70	87.34	44.38	40.62	31.76	27.04	52.46
insp_temporal	20.28	38.36	16.77	20.57	29.38	31.88	12.74	36.48	25.80
navi_causal	63.05	66.98	55.70	47.78	28.75	31.25	33.33	36.64	48.48
navi_temporal	21.23	49.37	21.20	21.52	31.25	30.62	30.82	45.60	33.44
mani_causal	62.74	64.31	64.24	45.89	55.62	57.50	41.19	39.62	52.95
mani_cf	66.35	52.67	68.35	60.13	48.12	56.88	33.18	39.78	51.34
exo_physical	25.79	48.74	17.09	45.25	91.88	92.50	33.02	28.93	38.90
exo_temporal	21.70	38.36	19.62	23.73	28.75	33.75	28.93	56.60	33.27

Table 87 | State-perturbation (Pert) accuracy (%) by perturbation group ($n = 1,116$). Geometric changes affect size, orientation, or layout; appearance changes affect color, lighting, or background. Overall covers the complete Pert split. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT			
Config.	Geometric	Appearance	Overall
base	22.58	19.71	21.15
full-mix	34.95	41.58	38.26
perc_causal	23.12	19.53	21.33
perc_temporal	24.19	20.43	22.31
insp_causal	25.09	24.37	24.73
insp_cf	26.34	24.37	25.36
insp_temporal	23.66	23.66	23.66
navi_causal	37.63	30.29	33.96
navi_temporal	25.27	24.19	24.73
mani_causal	34.95	50.00	42.47
mani_cf	35.13	44.62	39.87
exo_physical	37.10	62.37	49.73
exo_temporal	24.91	26.16	25.54
RL			
Config.	Geometric	Appearance	Overall
base	22.58	19.71	21.15
full-mix	—	—	—
perc_causal	23.48	22.22	22.85
perc_temporal	28.14	22.40	25.27
insp_causal	23.66	24.55	24.10
insp_cf	25.81	22.94	24.37
insp_temporal	25.09	27.60	26.34
navi_causal	38.53	31.00	34.77
navi_temporal	29.39	26.52	27.96
mani_causal	35.66	53.05	44.35
mani_cf	36.56	46.06	41.31
exo_physical	37.99	64.16	51.08
exo_temporal	28.14	27.96	28.05

Table 88 | ID accuracy (%) by camera or viewpoint action. Direction-specific columns include only perceptive and inspective items. Overall ID is accuracy on the complete ID split ($n = 6,228$), not the camera/viewpoint subset. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT								
Config.	Rotate left	Rotate right	Move forward	Move backward	Orbit left	Orbit right	Arc up	Overall ID
base	19.79	19.79	39.58	28.82	22.04	19.63	28.70	26.38
full-mix	90.97	87.50	93.40	90.97	89.44	89.44	92.59	89.29
perc_causal	58.33	60.07	60.76	63.89	29.81	39.44	35.00	48.28
perc_temporal	34.38	32.64	42.71	46.18	28.89	21.48	31.48	32.29
insp_causal	34.38	30.21	39.58	44.10	62.41	64.81	59.63	49.97
insp_cf	26.74	27.08	42.01	37.85	53.70	56.48	66.48	50.75
insp_temporal	29.17	27.43	41.67	37.50	28.15	23.89	31.85	32.03
navi_causal	22.57	17.71	53.47	42.71	29.63	34.07	38.70	46.56
navi_temporal	34.38	28.82	40.62	37.85	28.70	22.41	32.22	31.87
mani_causal	16.67	16.32	37.15	55.56	24.81	21.48	31.30	45.41
mani_cf	14.58	14.93	48.26	46.18	25.19	26.67	27.78	46.63
exo_physical	11.46	14.24	38.89	42.36	28.15	30.37	27.96	34.63
exo_temporal	30.90	32.99	39.58	37.15	28.52	22.96	32.96	32.19
RL								
Config.	Rotate left	Rotate right	Move forward	Move backward	Orbit left	Orbit right	Arc up	Overall ID
base	19.79	19.79	39.58	28.82	22.04	19.63	28.70	26.38
full-mix	—	—	—	—	—	—	—	—
perc_causal	58.33	59.38	61.11	61.11	34.63	37.04	39.07	49.26
perc_temporal	35.07	32.64	39.93	44.10	27.04	24.44	33.70	32.96
insp_causal	33.33	32.64	41.67	36.11	65.00	66.30	58.70	51.65
insp_cf	28.12	26.39	47.92	34.72	55.56	60.00	70.37	51.46
insp_temporal	29.86	26.04	42.36	35.42	27.78	20.93	31.85	32.45
navi_causal	23.96	20.83	55.21	48.26	32.59	35.19	40.74	47.94
navi_temporal	40.28	34.72	43.06	38.89	27.04	20.93	34.44	33.30
mani_causal	17.71	17.71	33.33	54.86	27.41	25.37	34.81	46.32
mani_cf	18.06	17.36	50.35	43.06	26.11	29.81	30.93	47.64
exo_physical	8.68	14.93	39.24	40.28	29.63	29.63	28.33	35.74
exo_temporal	27.43	29.17	43.06	36.81	28.52	22.59	35.74	32.98

Table 89 | ID accuracy (%) by answer-option modality ($n = 6,228$). Image and Text refer to the options presented to the model; Overall covers the complete ID split. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT			
Config.	Image	Text	Overall
base	20.67	31.13	26.38
full-mix	93.56	85.74	89.29
perc_causal	55.02	42.68	48.28
perc_temporal	21.09	41.59	32.29
insp_causal	59.16	42.33	49.97
insp_cf	71.37	33.63	50.75
insp_temporal	21.23	41.01	32.03
navi_causal	54.74	39.77	46.56
navi_temporal	20.38	41.42	31.87
mani_causal	54.00	38.27	45.41
mani_cf	58.42	36.83	46.63
exo_physical	36.66	32.95	34.63
exo_temporal	20.91	41.56	32.19
RL			
Config.	Image	Text	Overall
base	20.67	31.13	26.38
full-mix	—	—	—
perc_causal	56.55	43.21	49.26
perc_temporal	20.45	43.36	32.96
insp_causal	62.24	42.86	51.65
insp_cf	69.89	36.16	51.46
insp_temporal	20.63	42.27	32.45
navi_causal	54.92	42.15	47.94
navi_temporal	21.09	43.45	33.30
mani_causal	55.73	38.51	46.32
mani_cf	60.76	36.74	47.64
exo_physical	38.08	33.80	35.74
exo_temporal	21.66	42.39	32.98

G.17.2. Errors by question type

Table 90 | Temporal-adjacency errors on ID ($n = 1,134$). Accuracy is in percent; Errors is the number of incorrect answers. Error shares (%) distinguish gross localization errors, off-by-one errors, and reversed before/after direction. Shares sum to approximately 100 within each run, allowing for rounding. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT					
Config.	Accuracy (%)	Errors	Gross	Off-by-one	Direction
base	25.66	843	17.2	34.4	48.4
full-mix	69.66	344	1.7	38.4	59.9
perc_causal	26.28	836	16.0	35.9	48.1
perc_temporal	52.73	536	1.5	25.6	72.9
insp_causal	25.75	842	17.6	31.4	51.1
insp_cf	23.72	865	16.5	35.1	48.3
insp_temporal	56.70	491	1.8	26.7	71.5
navi_causal	27.95	817	14.7	33.3	52.0
navi_temporal	55.82	501	3.0	27.5	69.5
mani_causal	26.28	836	15.3	34.0	50.7
mani_cf	28.48	811	14.7	35.0	50.3
exo_physical	23.10	872	15.9	34.6	49.4
exo_temporal	56.61	492	2.4	29.3	68.3
RL					
Config.	Accuracy (%)	Errors	Gross	Off-by-one	Direction
base	25.66	843	17.2	34.4	48.4
full-mix	—	—	—	—	—
perc_causal	25.84	841	18.7	34.4	47.0
perc_temporal	55.56	504	3.6	28.0	68.5
insp_causal	26.54	833	18.0	28.2	53.8
insp_cf	26.98	828	15.6	33.0	51.4
insp_temporal	58.73	468	2.6	26.3	71.2
navi_causal	30.51	788	12.4	33.1	54.4
navi_temporal	57.67	480	3.3	26.0	70.6
mani_causal	27.95	817	15.1	34.5	50.4
mani_cf	28.57	810	15.1	33.5	51.5
exo_physical	24.16	860	17.4	34.0	48.6
exo_temporal	56.26	496	2.2	31.5	66.3

Table 91 | Temporal-ordering errors on ID ($n = 1,134$). Accuracy is in percent; Errors counts incorrect answers. Random 0–2 are the three independently sampled permutation distractors. Their shares (%) describe the distribution of errors and sum to approximately 100, allowing for rounding. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT					
Config.	Accuracy (%)	Errors	Random 0	Random 1	Random 2
base	27.34	824	32.8	37.1	30.1
full-mix	92.77	82	36.6	35.4	28.0
perc_causal	25.13	849	33.8	34.5	31.7
perc_temporal	30.34	790	33.4	31.8	34.8
insp_causal	25.40	846	32.6	35.5	31.9
insp_cf	26.63	832	34.3	35.0	30.8
insp_temporal	24.96	851	33.0	34.0	33.0
navi_causal	26.46	834	32.0	35.4	32.6
navi_temporal	25.93	840	32.6	34.9	32.5
mani_causal	25.84	841	31.6	33.8	34.6
mani_cf	27.25	825	33.6	35.5	30.9
exo_physical	28.13	815	32.8	36.8	30.4
exo_temporal	25.31	847	35.3	33.5	31.2
RL					
Config.	Accuracy (%)	Errors	Random 0	Random 1	Random 2
base	27.34	824	32.8	37.1	30.1
full-mix	—	—	—	—	—
perc_causal	24.51	856	31.9	36.0	32.1
perc_temporal	30.60	787	32.0	34.8	33.2
insp_causal	25.93	840	35.1	32.5	32.4
insp_cf	26.54	833	32.7	34.6	32.8
insp_temporal	24.96	851	35.0	33.4	31.6
navi_causal	25.40	846	32.9	35.1	32.0
navi_temporal	23.81	864	34.3	31.6	34.1
mani_causal	24.69	854	31.7	35.1	33.1
mani_cf	26.63	832	33.5	32.9	33.5
exo_physical	26.98	828	36.0	34.3	29.7
exo_temporal	26.54	833	32.7	34.8	32.5

Table 92 | Physical-modeling errors on ID: exogenous outcome and cued prediction ($n = 576$). Accuracy is in percent; Errors counts all incorrect answers. The ten displayed violation types are the most frequent in the base model’s errors. Each share (%) uses all errors in that run as its denominator, including unlisted types; displayed shares are not renormalized and need not sum to 100. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT												
Config.	Accuracy (%)	Errors	Pass through	Transform	No effect	Split	Lateral	Float	Instant stop	Embed surface	Escape	Separate midair
base	22.57	446	8.1	5.6	5.6	5.2	5.2	5.2	5.2	4.7	4.7	4.5
full-mix	82.12	103	12.6	0.0	4.9	1.9	2.9	0.0	0.0	4.9	5.8	3.9
perc_causal	33.51	383	9.4	2.1	2.3	10.7	2.1	0.5	4.2	1.0	6.0	6.8
perc_temporal	24.31	436	7.3	5.3	4.8	4.6	5.3	6.2	6.0	5.0	3.0	3.9
insp_causal	33.33	384	14.1	1.0	1.0	1.3	0.5	1.6	0.0	1.3	7.3	4.2
insp_cf	40.28	344	12.8	0.9	2.9	2.6	2.3	1.2	0.0	0.6	4.9	4.1
insp_temporal	23.78	439	7.7	5.5	4.6	3.9	5.5	5.7	6.2	4.6	3.2	4.6
navi_causal	34.90	375	7.7	1.6	4.0	0.8	2.9	2.1	4.0	2.7	2.7	4.8
navi_temporal	21.70	451	7.8	4.9	3.8	4.0	5.3	5.8	6.7	4.4	3.8	4.9
mani_causal	34.38	378	8.2	0.0	4.2	0.0	4.0	2.9	5.6	1.3	4.2	2.9
mani_cf	40.62	342	7.6	0.0	6.7	2.0	5.3	1.8	1.5	1.5	5.8	2.9
exo_physical	77.08	132	4.5	0.0	16.7	0.0	0.8	3.8	0.0	10.6	0.0	3.0
exo_temporal	23.78	439	8.9	5.5	4.6	3.2	4.8	6.2	5.7	4.6	3.6	3.6

RL												
Config.	Accuracy (%)	Errors	Pass through	Transform	No effect	Split	Lateral	Float	Instant stop	Embed surface	Escape	Separate midair
base	22.57	446	8.1	5.6	5.6	5.2	5.2	5.2	5.2	4.7	4.7	4.5
full-mix	—	—	—	—	—	—	—	—	—	—	—	—
perc_causal	32.29	390	5.1	0.8	1.5	8.2	1.5	1.3	2.8	1.3	6.4	8.2
perc_temporal	23.61	440	8.2	5.2	5.2	5.7	4.1	6.4	4.3	4.5	3.2	4.8
insp_causal	32.99	386	12.4	1.0	1.6	1.8	0.0	0.0	0.0	2.1	7.0	2.3
insp_cf	34.72	376	13.8	0.5	4.3	1.6	4.3	3.5	0.0	3.2	4.3	4.3
insp_temporal	23.96	438	7.1	5.0	4.3	4.3	5.5	5.0	7.1	4.3	2.5	4.1
navi_causal	34.38	378	6.3	0.8	5.3	0.5	2.9	2.1	3.4	2.4	2.4	4.8
navi_temporal	23.09	443	7.2	5.2	5.0	6.8	3.8	6.3	5.0	5.0	3.8	4.1
mani_causal	36.11	368	9.5	0.0	3.5	0.3	4.1	1.9	5.2	0.8	4.6	1.9
mani_cf	41.15	339	8.0	0.0	6.5	3.2	2.4	1.5	0.9	0.9	5.0	1.8
exo_physical	75.69	140	3.6	0.0	19.3	0.0	1.4	5.0	0.0	8.6	0.0	6.4
exo_temporal	24.31	436	8.7	3.4	5.0	5.0	4.4	4.6	3.9	4.8	4.6	5.5

Table 93 | Incorrect option choices on the state-perturbation probe (Pert, $n = 1,116$). Accuracy is in percent; Errors counts incorrect answers. Shares (%) identify the perturbation dimension of the selected incorrect option; None denotes an unperturbed option. Shares sum to approximately 100, allowing for rounding. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT									
Config.	Accuracy (%)	Errors	None	Size	Orien- tation	Layout	Color	Lighting	Back- ground
base	21.15	880	0.0	16.2	17.6	15.2	17.0	16.2	17.6
full-mix	38.26	689	0.0	20.8	22.6	9.3	14.8	20.2	12.3
perc_causal	21.33	878	0.0	12.2	19.2	17.4	20.0	16.1	15.0
perc_temporal	22.31	867	0.0	15.5	18.2	15.1	16.3	15.6	19.4
insp_causal	24.73	840	0.0	16.8	19.0	13.9	13.8	17.6	18.8
insp_cf	25.36	833	0.0	19.3	16.8	13.2	20.0	17.3	13.3
insp_temporal	23.66	852	0.0	18.0	18.1	14.0	17.4	15.5	17.1
navi_causal	33.96	737	0.0	11.1	27.8	8.3	17.9	22.8	12.1
navi_temporal	24.73	840	0.0	16.7	19.0	13.9	16.2	17.1	17.0
mani_causal	42.47	642	0.0	22.9	25.4	8.3	17.4	15.9	10.1
mani_cf	39.87	671	0.0	21.5	23.8	8.6	17.1	16.4	12.5
exo_physical	49.73	561	0.0	26.4	28.2	8.0	13.2	20.0	4.3
exo_temporal	25.54	831	0.0	17.7	18.9	13.8	17.4	16.6	15.5
RL									
Config.	Accuracy (%)	Errors	None	Size	Orien- tation	Layout	Color	Lighting	Back- ground
base	21.15	880	0.0	16.2	17.6	15.2	17.0	16.2	17.6
full-mix	—	—	—	—	—	—	—	—	—
perc_causal	22.85	861	0.0	12.1	18.4	19.2	21.6	15.7	13.1
perc_temporal	25.27	834	0.0	17.0	16.8	14.3	16.4	15.6	19.9
insp_causal	24.10	847	0.0	18.1	19.2	13.0	13.5	15.9	20.3
insp_cf	24.37	844	0.0	18.6	17.9	12.6	15.4	19.0	16.6
insp_temporal	26.34	822	0.0	16.8	19.2	14.8	17.8	16.1	15.3
navi_causal	34.77	728	0.0	11.4	27.2	8.5	18.4	23.8	10.7
navi_temporal	27.96	804	0.0	19.7	18.3	11.1	17.8	18.9	14.3
mani_causal	44.35	621	0.0	20.8	28.0	9.0	15.5	17.9	8.9
mani_cf	41.31	655	0.0	19.8	25.2	9.0	13.6	15.9	16.5
exo_physical	51.08	546	0.0	30.8	28.2	4.4	11.2	23.1	2.4
exo_temporal	28.05	803	0.0	18.8	16.3	14.8	20.0	15.4	14.6

Table 94 | Default-state choices on ID. Forward/inverse dynamics uses the subset with a no-change option ($n = 540$); counterfactual substitution and removal each use $n = 558$. Accuracy and $P(\text{static} \mid \text{error})$ are percentages. The latter is reported separately for forward/inverse dynamics and substitution, where the default-state choice is wrong. In removal, the unchanged state is correct, so accuracy measures selecting it appropriately. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT					
Config.	Forward/inverse dynamics		CF substitution		CF removal
	Accuracy (%)	$P(\text{static} \mid \text{error})$ (%)	Accuracy (%)	$P(\text{static} \mid \text{error})$ (%)	Accuracy (%)
base	22.22	63.8	19.35	27.8	18.64
full-mix	93.52	0.0	94.80	51.7	96.95
perc_causal	43.52	7.2	62.19	36.5	28.85
perc_temporal	23.70	56.3	18.82	29.1	20.61
insp_causal	93.70	2.9	74.19	51.4	41.22
insp_cf	55.19	89.3	83.15	19.1	86.92
insp_temporal	20.93	57.6	19.00	26.8	21.86
navi_causal	39.07	35.9	59.68	47.6	49.64
navi_temporal	22.22	57.4	17.20	28.8	20.43
mani_causal	30.00	58.5	60.93	33.5	48.39
mani_cf	22.78	75.1	68.10	54.5	57.35
exo_physical	29.44	37.5	15.23	48.6	38.17
exo_temporal	24.81	43.1	18.10	28.0	21.51
RL					
Config.	Forward/inverse dynamics		CF substitution		CF removal
	Accuracy (%)	$P(\text{static} \mid \text{error})$ (%)	Accuracy (%)	$P(\text{static} \mid \text{error})$ (%)	Accuracy (%)
base	22.22	63.8	19.35	27.8	18.64
full-mix	—	—	—	—	—
perc_causal	42.96	8.1	67.56	32.0	31.00
perc_temporal	24.44	56.9	17.74	31.4	20.97
insp_causal	89.63	0.0	83.51	51.1	44.80
insp_cf	60.00	90.3	84.23	37.5	87.28
insp_temporal	22.59	57.7	14.87	28.4	23.12
navi_causal	46.11	27.1	60.39	46.2	47.49
navi_temporal	28.52	40.4	17.38	32.1	22.94
mani_causal	34.81	51.1	64.70	32.5	48.39
mani_cf	26.48	72.5	70.25	45.2	60.57
exo_physical	31.30	38.0	15.95	53.5	42.65
exo_temporal	23.52	51.3	17.56	27.4	23.66

Table 95 | Temporal-ordering errors on held-out scenes (OOD, $n = 636$). Accuracy is in percent; Errors counts incorrect answers. Error shares (%) distinguish adjacent swaps in the middle, adjacent swaps at an end, and exchanges of the first and last states. Shares sum to approximately 100, allowing for rounding. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT					
Config.	Accuracy (%)	Errors	Center swap	Edge swap	Endpoint swap
base	37.26	399	44.9	39.8	15.3
full-mix	85.22	94	26.6	71.3	2.1
perc_causal	28.93	452	31.0	41.2	27.9
perc_temporal	25.31	475	36.4	27.2	36.4
insp_causal	22.01	496	35.3	36.3	28.4
insp_cf	33.18	425	39.8	34.1	26.1
insp_temporal	17.61	524	27.3	32.1	40.6
navi_causal	32.86	427	40.3	37.7	22.0
navi_temporal	26.10	470	40.4	41.5	18.1
mani_causal	40.09	381	41.7	34.6	23.6
mani_cf	31.13	438	38.8	34.5	26.7
exo_physical	30.82	440	38.0	35.9	26.1
exo_temporal	24.53	480	39.6	42.7	17.7
RL					
Config.	Accuracy (%)	Errors	Center swap	Edge swap	Endpoint swap
base	37.26	399	44.9	39.8	15.3
full-mix	—	—	—	—	—
perc_causal	25.16	476	31.5	39.1	29.4
perc_temporal	25.00	477	38.6	27.3	34.2
insp_causal	23.58	486	32.3	39.5	28.2
insp_cf	31.76	434	38.7	37.1	24.2
insp_temporal	12.74	555	27.4	29.5	43.1
navi_causal	33.33	424	43.6	37.0	19.3
navi_temporal	30.82	440	32.5	42.5	25.0
mani_causal	41.19	374	38.2	38.2	23.5
mani_cf	33.18	425	40.2	34.6	25.2
exo_physical	33.02	426	37.3	37.6	25.1
exo_temporal	28.93	452	36.5	51.3	12.2

Table 96 | Temporal-adjacency errors on held-out scenes (OOD, $n = 636$). Accuracy is in percent; Errors counts incorrect answers. Successor and predecessor off-by-one errors extend one step beyond the correct neighbor; Swapped reverses before and after. Error shares (%) sum to approximately 100, allowing for rounding. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT					
Config.	Accuracy (%)	Errors	Successor off-by-one	Predecessor off-by-one	Swapped
base	27.04	464	29.3	30.8	39.9
full-mix	64.31	227	0.0	4.8	95.2
perc_causal	21.38	500	35.4	32.4	32.2
perc_temporal	41.19	374	1.6	7.2	91.2
insp_causal	20.60	505	23.8	39.4	36.8
insp_cf	30.66	441	24.9	32.9	42.2
insp_temporal	44.18	355	1.1	3.9	94.9
navi_causal	31.60	435	23.4	25.7	50.8
navi_temporal	43.55	359	0.0	1.4	98.6
mani_causal	32.39	430	22.3	23.0	54.7
mani_cf	37.11	400	23.2	23.2	53.5
exo_physical	27.20	463	37.4	28.9	33.7
exo_temporal	52.99	299	0.0	2.3	97.7
RL					
Config.	Accuracy (%)	Errors	Successor off-by-one	Predecessor off-by-one	Swapped
base	27.04	464	29.3	30.8	39.9
full-mix	—	—	—	—	—
perc_causal	19.50	512	36.9	31.1	32.0
perc_temporal	45.28	348	1.7	4.0	94.3
insp_causal	19.81	510	25.9	36.5	37.6
insp_cf	27.04	464	24.1	31.7	44.2
insp_temporal	36.48	404	0.7	3.7	95.5
navi_causal	36.64	403	19.9	18.4	61.8
navi_temporal	45.60	346	0.6	0.0	99.4
mani_causal	39.62	384	20.6	18.2	61.2
mani_cf	39.78	383	19.1	17.5	63.4
exo_physical	28.93	452	36.1	29.4	34.5
exo_temporal	56.60	276	0.4	0.4	99.3

Table 97 | Action-confusion errors in forward dynamics on perceptive and inspective ID items ($n = 558$). Options are outcome images. Mirror and Reverse select outcomes of the left/right or forward/backward counterpart; Other selects another action’s outcome; Static selects the unchanged scene. Accuracy and error shares are percentages; Errors counts incorrect answers. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT						
Config.	Accuracy (%)	Errors	Mirror (L/R)	Reverse (F/B)	Other action	Static option
base	24.37	422	15.4	10.7	58.3	15.6
full-mix	97.31	15	73.3	0.0	26.7	0.0
perc_causal	71.33	160	40.6	0.0	51.9	7.5
perc_temporal	24.19	423	15.1	8.5	64.3	12.1
insp_causal	70.43	165	22.4	7.3	69.7	0.6
insp_cf	71.51	159	40.9	11.3	40.9	6.9
insp_temporal	24.73	420	16.0	8.6	60.0	15.5
navi_causal	37.63	348	13.5	8.3	64.7	13.5
navi_temporal	25.09	418	16.3	12.2	55.7	15.8
mani_causal	30.11	390	9.2	11.5	48.7	30.5
mani_cf	33.87	369	14.9	12.7	50.9	21.4
exo_physical	29.75	392	20.4	18.9	59.7	1.0
exo_temporal	24.19	423	16.8	11.8	53.9	17.5
RL						
Config.	Accuracy (%)	Errors	Mirror (L/R)	Reverse (F/B)	Other action	Static option
base	24.37	422	15.4	10.7	58.3	15.6
full-mix	—	—	—	—	—	—
perc_causal	70.61	164	52.4	0.0	39.0	8.5
perc_temporal	22.04	435	14.9	7.8	60.9	16.3
insp_causal	68.82	174	18.4	5.7	75.9	0.0
insp_cf	71.68	158	31.6	20.9	38.0	9.5
insp_temporal	24.01	424	17.2	10.6	55.9	16.3
navi_causal	39.25	339	13.3	6.8	64.9	15.0
navi_temporal	23.12	429	17.5	9.3	55.0	18.2
mani_causal	33.15	373	10.7	11.0	51.7	26.5
mani_cf	38.35	344	16.6	12.2	53.5	17.7
exo_physical	30.65	387	20.7	18.1	60.2	1.0
exo_temporal	24.19	423	16.1	10.2	55.8	18.0

Table 98 | Action-confusion errors in inverse dynamics on perceptive and inspective ID items ($n = 558$). Options are action descriptions, not outcome images. Mirror and Reverse select the left/right or forward/backward counterpart; Other selects another action; Static denotes the no-action choice. Accuracy and error shares are percentages; Errors counts incorrect answers. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT						
Config.	Accuracy (%)	Errors	Mirror (L/R)	Reverse (F/B)	Other action	Static option
base	23.30	428	1.6	15.9	35.3	47.2
full-mix	94.62	30	73.3	0.0	26.7	0.0
perc_causal	72.04	156	44.2	1.3	48.1	6.4
perc_temporal	23.48	427	3.0	18.0	36.5	42.4
insp_causal	68.46	176	23.3	14.2	62.5	0.0
insp_cf	24.01	424	0.0	17.9	33.7	48.3
insp_temporal	23.12	429	6.8	14.0	37.1	42.2
navi_causal	39.43	338	12.1	13.6	53.3	21.0
navi_temporal	24.91	419	9.1	14.3	34.8	41.8
mani_causal	35.13	362	10.8	7.5	53.6	28.2
mani_cf	22.76	431	0.5	12.5	32.7	54.3
exo_physical	27.96	402	2.5	13.7	49.3	34.6
exo_temporal	29.03	396	18.7	15.7	40.2	25.5
RL						
Config.	Accuracy (%)	Errors	Mirror (L/R)	Reverse (F/B)	Other action	Static option
base	23.30	428	1.6	15.9	35.3	47.2
full-mix	—	—	—	—	—	—
perc_causal	71.51	159	50.9	3.1	39.0	6.9
perc_temporal	25.27	417	4.6	18.2	38.6	38.6
insp_causal	65.23	194	20.1	17.5	62.4	0.0
insp_cf	29.39	394	0.3	18.0	36.0	45.7
insp_temporal	25.27	417	7.9	16.1	34.8	41.2
navi_causal	49.64	281	18.1	12.8	59.1	10.0
navi_temporal	36.92	352	23.0	13.4	41.5	22.2
mani_causal	36.02	357	14.3	10.1	52.9	22.7
mani_cf	21.86	436	0.2	14.4	33.3	52.1
exo_physical	27.96	402	1.2	15.9	48.8	34.1
exo_temporal	26.88	408	4.9	13.5	48.3	33.3

Table 99 | Action-confusion errors in counterfactual substitution on inspective ID items only ($n = 270$). Options are outcome images. Mirror selects the opposite left/right orbit, Other another action’s outcome, and Static the unchanged scene. The forward/backward Reverse column is retained as supplied. Accuracy and error shares are percentages; Errors counts incorrect answers. Panels report SFT and RL separately; — denotes unavailable full-mix RL results.

SFT						
Config.	Accuracy (%)	Errors	Mirror (L/R)	Reverse (F/B)	Other action	Static option
base	18.52	220	8.2	0.0	61.4	30.5
full-mix	94.81	14	14.3	0.0	35.7	50.0
perc_causal	47.78	141	7.1	0.0	53.9	39.0
perc_temporal	20.74	214	8.9	0.0	59.3	31.8
insp_causal	80.00	54	0.0	0.0	13.0	87.0
insp_cf	93.70	17	0.0	0.0	82.4	17.6
insp_temporal	19.26	218	8.3	0.0	62.8	28.9
navi_causal	34.81	176	4.0	0.0	48.9	47.2
navi_temporal	18.52	220	8.6	0.0	59.5	31.8
mani_causal	28.52	193	3.6	0.0	70.5	25.9
mani_cf	38.89	165	4.2	0.0	40.0	55.8
exo_physical	11.85	238	11.8	0.0	38.2	50.0
exo_temporal	18.52	220	9.1	0.0	59.5	31.4
RL						
Config.	Accuracy (%)	Errors	Mirror (L/R)	Reverse (F/B)	Other action	Static option
base	18.52	220	8.2	0.0	61.4	30.5
full-mix	—	—	—	—	—	—
perc_causal	54.44	123	7.3	0.0	59.3	33.3
perc_temporal	17.04	224	8.5	0.0	58.9	32.6
insp_causal	86.30	37	0.0	0.0	16.2	83.8
insp_cf	95.19	13	0.0	0.0	53.8	46.2
insp_temporal	14.81	230	13.0	0.0	56.1	30.9
navi_causal	36.30	172	4.1	0.0	49.4	46.5
navi_temporal	16.30	226	8.0	0.0	59.3	32.7
mani_causal	35.19	175	3.4	0.0	71.4	25.1
mani_cf	43.33	153	5.9	0.0	45.8	48.4
exo_physical	12.59	236	11.0	0.0	37.3	51.7
exo_temporal	15.19	229	14.4	0.0	58.1	27.5

G.17.3. Question-dependent state judgments and the scene generalization gap

Shortcut check for the default-state result. A deflationary reading of Table 94 is that causal supervision, whose correct options are always changed frames, merely teaches a surface rule, *prefer the changed frame*, which would lower the static pull as a side effect. The counterfactual-removal probes separate the two readings: their correct option is exactly the unchanged scene, so a blanket changed-frame rule would suppress it and push accuracy *below* base. At the SFT stage, the opposite happens: every causally-trained cell improves counterfactual-removal accuracy over base (18.6% $\rightarrow$ 28.9/41.2/49.6/48.4 for perc/insp/navi/mani_causal) while simultaneously cutting the static pull on forward probes. The same weights move the unchanged-scene option in opposite directions depending on what the question asks, the signature of a removed prior with question-conditioned state selection.

Table 94 reports both stages and includes counterfactual substitution and removal alongside the forward/inverse probes. Table 90 gives the corresponding temporal-adjacency error analysis. Table 87 reports absolute accuracies under geometric and appearance perturbations, with the base row providing the reference for gains.

Competency-matched scene gap. Table 100 reports the SFT comparison that averages OOD-minus-ID accuracy differences equally across reasoning types. This statistic differs from subtracting the overall accuracies in Tables 83 and 85, which weight individual test items equally. Temporal-ordering distractors also differ between the two tests: ID uses random permutations, whereas OOD uses structured swaps. Their error distributions are therefore reported separately in Tables 91 and 95.

Table 100 | **Scene-OOD minus ID accuracy gap by supervision** (competency-matched mean, pp).

Run	OOD – ID (pp)
base	+2.06
full-mix	+1.21
perc_causal	–1.45
perc_temporal	–0.50
insp_causal	+0.33
insp_cf	+1.51
insp_temporal	–1.17
navi_causal	+0.05
navi_temporal	+1.66
mani_causal	+6.87
mani_cf	+4.48
exo_physical	+5.05
exo_temporal	+1.57

H. Controls for the transfer results

The three controls below each vary one aspect of training or evaluation: the transition content of the training data with its format kept fixed (Appendix H.1), the scoring of answer letters (Appendix H.2), and the unchanged-scene option in cross-operation transfer (Appendix H.3). The experiments in Appendices H, I.2, and J re-evaluate every model, including the base model, with one common script (greedy decoding with vLLM, with the model answering with the

option letter only), so their base scores differ from those in the main text.

H.1. Content control: transition content versus training format

The downstream gains of WOVEN training come from learned transition reasoning: they appear only when the model acquires the correct action–outcome relations, not from the question format, the answer-letter balance, or the amount of training. Training on WOVEN teaches more than transitions: answering four-option questions, spreading answers over the letters, reading several images with images as options, and simply more training. We therefore train on four data sets that match a WOVEN subset in everything except that content and compare them with the real data (Table 101). The real data are the perceptive causal-dynamics subset. Two controls keep its items, images, options, and answer-letter balance and change only the action–outcome mapping: a per-source permutation maps the four camera actions to the outcomes by a random permutation without fixed points within each source, so that no consistent rule can be learned (the answer changes in 95.1% of the examples), and a global mirror reverses the direction of every action under one mapping for all sources (the answer changes in 95.0%), a consistent rule with the wrong semantics. A third control trains on A-OKVQA multiple-choice questions (Schwenk et al., 2022) with a balanced answer-letter distribution and no WOVEN content. If the gains came from the format or from the amount of training, the controls would gain as much as the real data; if they require the transition content, only the real data gains, which is what we observe.

Table 101 | Content control: the four training sets (9,750 training examples each, same number of optimizer steps).

Arm	Training data	Relation to the real data
Real	WOVEN perceptive $\times$ causal dynamics (forward and inverse dynamics questions, four option orderings).	—
Per-source permutation	Same items, images, options, and answer-letter balance. Within each source, the four camera actions are mapped to the outcomes by a random permutation with no fixed point: the forward question for action a_i has the outcome of $a_{\pi(i)}$ as its answer, and the inverse question showing outcome s'_k has $a_{\pi^{-1}(k)}$ as its answer. The answer changes in 95.1% of the examples.	Identical format; the action–outcome mapping differs across sources, so no consistent rule can be learned.
Global mirror	Same items, images, options, and answer-letter balance. One mapping for all sources: move forward $\leftrightarrow$ move backward, rotate left $45^\circ \leftrightarrow$ rotate right 45° . The answer changes in 95.0% of the examples.	Identical format; a consistent, learnable rule with the direction of every action reversed.
A-OKVQA	2,072 four-option questions from the A-OKVQA training set (Schwenk et al., 2022) (COCO images), each in its four option orderings, plus 1,462 additional random orderings.	Multiple-choice training with a balanced answer-letter distribution, without WOVEN content.

All four training sets have 9,750 examples and the same number of optimizer steps. Each is trained on Qwen2.5-VL-3B-Instruct with LoRA (rank 16, $\alpha = 32$, dropout 0.05) on the language model’s q/k/v/o projections, vision encoder frozen, vision–language merger trained, learning rate 10^{-4} , 5% warmup, cosine schedule, effective batch size 64, 3 epochs, final checkpoint, with 3 seeds (12 models). Evaluation uses greedy decoding (vLLM) with the model asked to output only the option letter, on SAT (Ray et al., 2025) (150 two-option questions, scored circularly: each question is asked once with each option order and counts as correct only if both answers are

right), SPAR-Bench view change (Zhang et al., 2026a) on ScanNet and ScanNet++ (261 questions with two real images and ground-truth camera poses, asking how the camera moved between them, the format of WOVEN’s perceptive inverse-dynamics questions on real images; the numeric questions are converted to four options as in Appendix J), ActionEQA (Bao et al., 2026) (800 questions) and WorldPrediction (Chen et al., 2025a) (825 questions), both scored circularly (each question is asked four times with the options rotated so that the correct option appears at every letter once, and counts as correct only if all four answers are right, so a preference for any answer letter earns no credit), and WOVEN OOD (the 3,496 held-out-scene questions). For each question, the score of an arm is averaged over its 3 seeds; two arms are compared by a paired sign-flip permutation test over questions, with a bootstrap 95% confidence interval of the difference.

Table 102 | Content control: accuracy (%), mean over 3 seeds.

Benchmark	Base	Real	Permutation	Mirror	A-OKVQA
SAT (circular)	39.3	63.3	35.1	37.8	44.0
SPAR-Bench view change (real images)	26.4	54.9	27.5	35.8	21.8
ActionEQA (circular)	25.6	31.8	22.2	26.5	22.6
WorldPrediction (circular)	14.7	16.6	12.4	11.3	10.3
WOVEN OOD	36.2	45.9	36.8	32.9	32.6

Table 103 | Content control: Real minus control, percentage points with bootstrap 95% confidence intervals; every difference has $p < 0.001$ under the paired permutation test.

Benchmark	Real – Permutation	Real – Mirror	Real – A-OKVQA
SAT (circular)	+28.2 [+21.1, +35.8]	+25.6 [+18.2, +33.3]	+19.3 [+11.8, +26.9]
SPAR-Bench view change	+27.5 [+20.7, +34.5]	+19.2 [+12.4, +25.5]	+33.1 [+26.4, +39.3]
ActionEQA (circular)	+9.6 [+7.0, +12.3]	+5.3 [+3.5, +7.2]	+9.2 [+6.7, +11.8]
WorldPrediction (circular)	+4.2 [+1.9, +6.3]	+5.3 [+3.6, +7.1]	+6.3 [+4.0, +8.6]
WOVEN OOD	+9.1 [+7.2, +11.0]	+13.0 [+11.4, +14.5]	+13.3 [+11.4, +15.3]

Only the real data gains (Tables 102–104). The two matched controls fall 4.2 to 28.2 points below the real arm on every benchmark (all $p < 0.001$; Table 103), so the multiple-choice format, the answer-letter balance, multi-image input with image options, and the amount of training do not by themselves produce the gains; under circular scoring, where a letter preference earns no credit, the real arm stays above all controls. The A-OKVQA arm stays below the real arm on every benchmark and below the base model on three, so general multiple-choice training does not produce the gains either. The mirror arm learns its reversed rule: on the perceptive forward and inverse dynamics questions of the WOVEN ID test set (288 each, from sources not seen in training), it answers 85–92% of the inverse questions by the reversed rule, whereas the permutation arm stays near chance because its mapping does not carry over to a new source (Table 105). The mirror arm nevertheless obtains at most a fraction of the gains, 9.4 points above the base model on SPAR-Bench and 0.9 on ActionEQA and below it on the other three benchmarks, so the gains require the correct action semantics and not only a consistent rule. On SPAR-Bench, real images in WOVEN’s inverse-dynamics format, the real arm doubles the base accuracy (26.4 $\rightarrow$ 54.9) while the permutation arm (27.5) and the A-OKVQA arm (21.8) stay at or below the base model and the mirror arm reaches 35.8, so what is learned from the generated rollouts carries over to real images. Several controls fall below the base model (all three on WorldPrediction, the mirror and A-OKVQA arms on WOVEN OOD, the A-OKVQA arm on SPAR-Bench), so part of each difference in Table 103 comes from the control falling below the base model rather than from the real arm rising above it. For the perceptive causal-dynamics

Table 104 | Content control: per-seed accuracy (%).

Benchmark	Arm	s1	s2	s3	Mean
SAT (circular)	Real	65.3	63.3	61.3	63.3
	Per-source permutation	35.3	36.7	33.3	35.1
	Global mirror	37.3	40.0	36.0	37.8
	A-OKVQA	42.7	44.7	44.7	44.0
SPAR-Bench view change	Real	56.3	55.2	53.3	54.9
	Per-source permutation	29.9	25.7	26.8	27.5
	Global mirror	42.9	39.5	24.9	35.8
	A-OKVQA	25.3	19.2	21.1	21.8
ActionEQA (circular)	Real	32.2	31.8	31.5	31.8
	Per-source permutation	22.2	22.2	22.1	22.2
	Global mirror	27.8	26.6	25.2	26.5
	A-OKVQA	22.1	22.6	23.0	22.6
WorldPrediction (circular)	Real	15.4	19.5	14.9	16.6
	Per-source permutation	12.2	12.1	13.0	12.4
	Global mirror	9.0	8.1	16.7	11.3
	A-OKVQA	9.0	11.2	10.7	10.3
WOVEN OOD	Real	45.5	46.3	45.9	45.9
	Per-source permutation	37.3	37.4	35.8	36.8
	Global mirror	34.8	35.2	28.7	32.9
	A-OKVQA	32.6	33.3	31.8	32.6

subset, the external gains therefore come from learned transition reasoning: they require the correct action–outcome relations and are not produced by the format or the amount of training.

Table 105 | Content control, manipulation check: answers on WOVEN ID perceptive dynamics questions (%), per seed.

Arm	Forward: real answer	Forward: mirrored answer	Inverse: real answer	Inverse: mirrored answer
Base	24.7	27.1	25.3	28.8
Real	97.2 / 98.6 / 95.8	1.0 / 0.3 / 1.7	89.2 / 93.1 / 85.8	6.6 / 3.8 / 6.2
Per-source permutation	21.5 / 24.3 / 21.9	18.4 / 20.5 / 21.9	22.9 / 24.3 / 22.2	31.2 / 29.2 / 32.3
Global mirror	37.2 / 42.0 / 20.5	26.7 / 32.3 / 71.2	5.9 / 8.3 / 5.6	87.2 / 84.7 / 92.4
A-OKVQA	24.7 / 25.0 / 22.6	25.0 / 25.7 / 26.7	31.9 / 33.3 / 25.3	29.5 / 30.2 / 31.9

H.2. Letter-balance control: circular scoring

The external gains of WOVEN training remain when a letter preference earns no credit. SFT uses all four option orderings of every question and the GRPO reward penalizes an uneven answer-letter distribution (Appendix G.1), so WOVEN-trained models spread their answers over the letters more evenly than the base model, which prefers some letters (Table 106); on a benchmark whose base score is lowered by a letter preference, this alone raises accuracy. We therefore re-score with circular evaluation: each question is asked once per option rotation, so that the correct option appears at every letter once, and it counts as correct only if every rotation is answered correctly, so a model that answers without knowing the answer scores at most $(1/n)^n$ per question (0.4% for four options, 25% for two) whatever its letter distribution. A gain that remains under circular scoring comes from the content of the options.

We re-score the base model and four WOVEN-trained models from the main experiments, the full mixture after SFT and after SFT + GRPO and the perceptive causal-dynamics subset after SFT and after SFT + GRPO, on one benchmark per domain: SAT (Ray et al., 2025) (a 150-question two-option subset), ActionEQA (Bao et al., 2026) (800 four-option questions), and

SPAR-Bench view change (Zhang et al., 2026a) on ScanNet and ScanNet++ (261 four-option questions on real images, converted from the numeric questions as in Appendix J). Decoding is greedy (vLLM) with the model asked to output only the option letter; standard scoring asks each question once with its original option order (for SAT, the accuracy over the two orders of each question). Because SAT and ActionEQA are evaluated on these subsets, the standard-scoring base scores differ from those in Table 4. Each trained model is compared with the base model by a paired sign-flip permutation test over questions with a bootstrap 95% confidence interval of the difference.

Table 106 | Letter-balance control: answer-letter distribution (% of answers), standard scoring.

Benchmark	Model	A	B	C	D
SAT	Correct answers	50.0	50.0		
	Base	62.0	38.0		
	Full mixture, SFT	51.0	49.0		
	Full mixture, SFT + GRPO	49.0	51.0		
	Perceptive × causal dynamics, SFT	52.3	47.7		
	Perceptive × causal dynamics, SFT + GRPO	55.0	45.0		
ActionEQA	Correct answers	24.2	24.0	26.5	25.2
	Base	19.5	32.0	30.0	18.5
	Full mixture, SFT	24.8	21.1	28.0	26.1
	Full mixture, SFT + GRPO	22.8	21.8	31.6	23.9
	Perceptive × causal dynamics, SFT	24.1	23.5	28.5	23.9
	Perceptive × causal dynamics, SFT + GRPO	25.2	19.5	28.0	27.2
SPAR-Bench view change	Correct answers	28.7	23.0	23.0	25.3
	Base	64.0	14.2	17.6	4.2
	Full mixture, SFT	25.7	24.1	27.2	23.0
	Full mixture, SFT + GRPO	19.9	24.9	31.4	23.8
	Perceptive × causal dynamics, SFT	35.2	23.4	21.5	19.9
	Perceptive × causal dynamics, SFT + GRPO	31.8	27.6	21.5	19.2

Table 107 | Letter-balance control: accuracy (%) under standard and circular scoring.

Benchmark	Scoring	Base	Full mixture, SFT	Full mixture, SFT + GRPO	Perc. × causal, SFT	Perc. × causal, SFT + GRPO
SAT	Standard	57.3	68.3	67.7	69.7	66.3
	Circular	39.3	62.7	61.3	64.7	58.7
ActionEQA	Standard	43.1	50.2	49.0	49.5	52.0
	Circular	25.6	35.4	34.2	32.8	35.5
SPAR-Bench view change	Standard	26.4	41.8	39.5	54.8	55.9
	Circular	0.4	20.3	19.5	30.7	36.0

Table 108 | Letter-balance control: trained minus base, percentage points with bootstrap 95% confidence intervals. Every difference is significant under the paired permutation test ($p \leq 0.006$ under standard scoring; $p < 0.001$ under circular scoring).

Benchmark	Scoring	Full mixture, SFT	Full mixture, SFT + GRPO	Perc. × causal, SFT	Perc. × causal, SFT + GRPO
SAT	Standard	+11.0 [+4.7, +17.7]	+10.3 [+3.7, +16.7]	+12.3 [+6.7, +18.0]	+9.0 [+3.0, +15.0]
	Circular	+23.3 [+14.0, +32.7]	+22.0 [+12.7, +31.3]	+25.3 [+16.7, +34.0]	+19.3 [+11.3, +27.3]
ActionEQA	Standard	+7.1 [+3.0, +11.2]	+5.9 [+1.9, +10.1]	+6.4 [+3.0, +9.8]	+8.9 [+5.5, +12.4]
	Circular	+9.8 [+6.1, +13.4]	+8.6 [+5.1, +12.2]	+7.1 [+4.4, +10.0]	+9.9 [+6.9, +13.0]
SPAR view change	Standard	+15.3 [+7.3, +23.4]	+13.0 [+4.6, +21.1]	+28.4 [+21.1, +35.6]	+29.5 [+22.2, +36.8]
	Circular	+19.9 [+15.3, +24.9]	+19.2 [+14.6, +24.1]	+30.3 [+24.9, +35.6]	+35.6 [+29.9, +41.4]

Training does even out the answer letters: after training they follow the distribution of the correct answers closely (Table 106). Under circular scoring, all four trained models remain significantly above the base model on all three benchmarks (Tables 107 and 108), with larger gains than under standard scoring because the base model’s letter preference costs it more; the SFT models, trained without the balancing reward, gain as much as the SFT + GRPO models. The base model’s circular score on SPAR-Bench (0.4%) equals the expected score of answering without the content: its answers are determined by the option position. The external gains of WOVEN training thus remain significant when a letter preference earns no credit, after SFT and after GRPO; they cannot be attributed to the model having learned to balance its answer letters or to the multiple-choice format.

H.3. Shortcut control for cross-operation transfer: the unchanged-scene option

The transfer from forward dynamics to inverse dynamics and to counterfactual reasoning within an action type does not depend on the unchanged-scene option. Training only on inspective forward dynamics questions (initial view and camera action, pick the resulting view) transfers to inverse dynamics, counterfactual substitution, and counterfactual removal of the same action type (Appendix G.8). Inspective questions contain an option showing the unchanged scene (the initial view, or the text “the camera remains stationary”), which is always wrong in forward dynamics, inverse dynamics, and counterfactual substitution and always correct in counterfactual removal, so part of the transfer to substitution could be a rule about that option rather than structure shared across reasoning types. We remove the option from the forward dynamics, inverse dynamics, and substitution questions, which become three-option questions (chance 33.3%) on which avoiding it no longer helps, and evaluate removal in its original form, where the unchanged scene is the correct answer and a model that avoids it would fall below the base model.

The model is Qwen2.5-VL-3B-Instruct trained only on inspective forward dynamics (1,020 questions, each in its four option orderings, 4,080 training examples) in one run, with LoRA (rank 16, $\alpha = 32$, dropout 0.05), learning rate 10^{-4} , 3 epochs, final checkpoint, compared with the untrained base model; this configuration differs from that of Appendix G.8, so the gains differ in size. Evaluation uses the WOVEN ID inspective questions, 270 per reasoning type, with greedy decoding (vLLM) and the model asked to output only the option letter; in the static-free versions the remaining options are relabeled A–C in their original order. Differences (forward-only – base) are tested by a paired sign-flip permutation test over questions with a bootstrap 95% confidence interval.

Table 109 | Static-free questions (unchanged-scene option removed, three options), accuracy (%).

Reasoning type	Base	Forward-only	Δ [95% CI]	p
Counterfactual substitution	28.5	93.3	+64.8 [+58.5, +71.1]	< 0.001
Inverse dynamics	43.3	60.7	+17.4 [+12.2, +22.6]	< 0.001
Forward dynamics (trained)	37.8	87.4	+49.6 [+42.2, +57.0]	< 0.001

With the unchanged-scene option removed, the forward-only model still gains 64.8 points on counterfactual substitution and 17.4 points on inverse dynamics (Table 109), and on counterfactual removal, where the unchanged scene is the correct answer, it gains 27.4 points (Table 110). The transfer from forward dynamics to inverse dynamics and to counterfactual reasoning within an action type therefore does not depend on that option.

Table 110 | Original questions (four options, unchanged-scene option included), accuracy (%).

Reasoning type	Base	Forward-only	Δ [95% CI]	p
Counterfactual substitution	24.8	78.1	+53.3 [+45.9, +60.4]	< 0.001
Counterfactual removal (answer: unchanged scene)	27.8	55.2	+27.4 [+19.3, +35.6]	< 0.001
Inverse dynamics	17.4	44.1	+26.7 [+21.5, +32.2]	< 0.001
Forward dynamics (trained)	28.9	86.3	+57.4 [+50.7, +64.1]	< 0.001

I. Robustness and consistency of the results

This section checks the best-subset gains against selection and seed variation (Appendix I.1), repeats the training on a different model family (Appendix I.2), and tests whether forward and inverse queries about the same transition succeed together after training (Appendix I.3).

I.1. Selection and seed robustness of the best-subset gains

The best-subset gains on representative benchmarks of every capability domain are neither an artifact of selecting the best of 22 candidates nor of a single training seed. The controlled-subset result reports, for each benchmark, the best of the 11 subsets after SFT and after GRPO (22 candidates); taking the maximum of many candidates can produce a gain of a few points by selection alone, and a single training run can produce a gain by seed variation alone. To check both, we ran two additional GRPO seeds for every subset (3 in total) and selected two representative benchmarks for each capability domain of §3: SAT and ViewSpatial (spatial), ActionEQA and Robo2VLM (embodied), InPhyRe and CLEVRER (physical), WorldPrediction and WM-ABench (procedural and world-model prediction), and TempCompass and TemporalBench (long) (temporal). Scores are recomputed from the model outputs under each benchmark’s official protocol (Table 111); GRPO scores are per-unit means over the 3 GRPO seeds, so the best candidate and its gain can differ from the single reported checkpoint in Table 5. The selection check compares the best gain among the 22 candidates with the distribution of the best gain that selection alone produces: per evaluation unit, the 22 differences from the base model are sign-flipped jointly, the 22 gains are recomputed, and their maximum is taken (10,000 flips); Holm correction over the 22 candidates is reported as well. The seed check evaluates the best subset after GRPO separately for each of its 3 seeds against the base model (paired sign-flip test, 10,000 flips).

On all ten benchmarks, the best-subset gain exceeds what selecting the best of 22 candidates produces by chance and remains significant after Holm correction (Table 112), and the best subset improves significantly over the base model in each of its three GRPO seeds (Table 113).

I.2. Generalization across model families

The effect of WOVEN training holds across model families. The main experiments train Qwen2.5-VL; we repeat the training on Gemma-3-4B-it (Team et al., 2025a), which has a different vision encoder and a different way of handling multiple images, and compare with the untrained Gemma-3-4B-it. Training uses the WOVEN perceptive causal-dynamics subset (forward and inverse dynamics questions, four option orderings, 9,750 training examples) with LoRA (rank 16, $\alpha = 32$, dropout 0.05) on the language model’s q/k/v/o projections, vision encoder and multimodal projector frozen, learning rate 10^{-4} , 5% warmup, cosine schedule, effective batch size 64, 3 epochs, final checkpoint, with 3 seeds. Evaluation uses greedy decoding (vLLM) with the model asked to output only the option letter, on WOVEN ID (6,228 questions), WOVEN OOD (3,496 held-out-scene questions), SPAR-Bench view change (Zhang et al., 2026a) on ScanNet

Table 111 | Representative benchmarks, evaluation units, and scoring.

Domain	Benchmark	Units	Scoring
Spatial	SAT	150	circular: a question counts only if both answer orders are correct
Spatial	ViewSpatial	5,712	question accuracy
Embodied	ActionEQA	3,782	question accuracy
Embodied	Robo2VLM	6,676	question accuracy
Physical	InPhyRe	19,981	question accuracy
Physical	CLEVRER	12,000	per-option accuracy (official stratified sample)
Procedural / world-model	WorldPrediction	825	question accuracy
Procedural / world-model	WM-ABench	4,807	question accuracy, resampled by question group
Temporal	TempCompass	5,536	question accuracy
Temporal	TemporalBench (long)	5,485	dual-order binary accuracy: a caption counts only if both answer orders are correct

Table 112 | Best of 22 candidates versus the max-selection null (accuracy %, gains in points). Perc., Insp., Mani.: perceptive, inspective, manipulative; cf: counterfactual. Null: 95th percentile of the best gain under selection alone; $p_{\max}$: p under the max-selection null; p_{Holm} : Holm-corrected over the 22 candidates.

Benchmark	Base	Best candidate	Best gain [95% CI]	Null	$p_{\max}$	p_{Holm}
SAT	37.3	Perc. $\times$ causal, SFT	+26.0 [+17.3, +34.7]	+10.4	< 0.001	0.002
ViewSpatial	35.3	Mani. $\times$ cf, SFT + GRPO	+3.6 [+2.7, +4.5]	+1.3	< 0.001	0.002
ActionEQA	43.4	Mani. $\times$ causal, SFT	+11.5 [+9.9, +13.1]	+2.0	< 0.001	0.002
Robo2VLM	33.5	Mani. $\times$ cf, SFT	+7.6 [+6.6, +8.6]	+1.2	< 0.001	0.002
InPhyRe	22.0	Insp. $\times$ cf, SFT	+10.3 [+9.7, +10.9]	+0.8	< 0.001	0.002
CLEVRER	58.2	Insp. $\times$ cf, SFT + GRPO	+4.6 [+3.8, +5.4]	+1.0	< 0.001	0.002
WorldPrediction	34.8	Mani. $\times$ causal, SFT + GRPO	+6.9 [+3.0, +10.8]	+4.9	0.003	0.009
WM-ABench	31.0	Mani. $\times$ cf, SFT	+4.6 [+3.4, +6.0]	+1.6	< 0.001	0.002
TempCompass	67.7	Mani. $\times$ causal, SFT	+2.2 [+1.3, +3.1]	+1.2	< 0.001	0.002
TemporalBench (long)	16.6	Mani. $\times$ cf, SFT + GRPO	+8.1 [+7.2, +9.1]	+1.2	< 0.001	0.002

Table 113 | Best subset after GRPO: gain over the base model per GRPO seed (points). Every per-seed gain has $p < 0.001$ under the paired sign-flip test except WorldPrediction seeds 1 and 2 ($p = 0.011$ and $p = 0.001$).

Benchmark	Subset	Seed 1	Seed 2	Seed 3	Mean
SAT	Perc. $\times$ causal	+20.7	+24.0	+27.3	+24.0
ViewSpatial	Mani. $\times$ cf	+3.3	+3.1	+4.3	+3.6
ActionEQA	Mani. $\times$ causal	+11.6	+11.4	+9.5	+10.8
Robo2VLM	Mani. $\times$ cf	+8.1	+7.0	+6.8	+7.3
InPhyRe	Insp. $\times$ cf	+10.2	+9.8	+10.6	+10.2
CLEVRER	Insp. $\times$ cf	+5.1	+4.6	+4.2	+4.6
WorldPrediction	Mani. $\times$ causal	+5.5	+7.2	+8.1	+6.9
WM-ABench	Mani. $\times$ cf	+3.9	+4.5	+2.6	+3.7
TempCompass	Mani. $\times$ causal	+1.9	+2.4	+2.3	+2.2
TemporalBench (long)	Mani. $\times$ cf	+5.7	+7.0	+11.7	+8.1

and ScanNet++ (261 questions with two real images, asking how the camera moved between them, converted to four options as in Appendix J), and SAT (Ray et al., 2025) (150 two-option questions, scored circularly: each question is asked once with each option order and counts as correct only if both answers are right). For each question, the score of the trained model is averaged over the 3 seeds and compared with the base model by a paired sign-flip permutation test over questions, with a bootstrap 95% confidence interval of the difference. Table 115 reports the same training and evaluation on Qwen2.5-VL-3B-Instruct for reference; because the training configuration and the decoding protocol differ from those of the main experiments, these Qwen scores differ from the corresponding scores in the main text.

Table 114 | Gemma-3-4B-it: accuracy (%). Δ = trained (mean of 3 seeds) – base, percentage points with bootstrap 95% confidence intervals.

Benchmark	Base	Seed 1	Seed 2	Seed 3	Mean	Δ [95% CI]	p
WOVEN ID	27.9	44.4	44.5	44.3	44.4	+16.5 [+15.1, +18.0]	< 0.001
WOVEN OOD	33.0	45.2	44.3	43.9	44.5	+11.5 [+9.4, +13.5]	< 0.001
SPAR-Bench view change (real images)	28.0	46.4	45.6	51.0	47.6	+19.7 [+12.5, +26.6]	< 0.001
SAT (circular)	30.0	40.0	46.0	55.3	47.1	+17.1 [+6.9, +27.1]	0.002

Table 115 | The same training on Qwen2.5-VL-3B-Instruct, accuracy (%), for reference.

Benchmark	Base	Mean of 3 seeds	Δ
WOVEN ID	29.8	47.7	+17.9
WOVEN OOD	36.2	45.9	+9.7
SPAR-Bench view change (real images)	26.4	54.9	+28.5
SAT (circular)	39.3	63.3	+24.0

WOVEN training raises Gemma-3-4B-it by 16.5 points on WOVEN ID, 11.5 points on held-out WOVEN scenes, 19.7 points on real-image camera-motion questions, and 17.1 points on SAT (all $p \leq 0.002$), with every seed above the base model on every benchmark (Table 114). The effect of WOVEN training holds across model families.

I.3. Consistency between forward and inverse dynamics

After WOVEN training, the forward and inverse queries about the same transition succeed and fail together, whereas for the base model they are independent, so the two reasoning operations draw on one shared mapping between states, actions, and outcomes rather than on two separate skills. Training raises accuracy on both forward dynamics (initial state and action, predict the outcome) and inverse dynamics (initial state and outcome, identify the action); the two could improve independently. We therefore query every transition (s, a_i, s'_i) of the WOVEN ID test set twice, by the forward question for a_i and by the inverse question for s'_i (1,134 pairs from 306 sources, all ID transitions that have both questions), and compare the rate at which both are answered correctly (joint) with the rate expected if the two were independent, $P(\text{forward correct}) \times P(\text{inverse correct})$, computed within each action type and weighted by the number of pairs so that differences in difficulty between action types cannot produce a correlation. We also report the cycle rate, the share of transitions for which the inverse question about the outcome the model itself picked in the forward question returns the original action a_i . GRPO values are averaged over 3 GRPO seeds; 95% confidence intervals are by bootstrap over sources (2,000 resamples).

For the base model, success on the forward and the inverse question of a transition is independent (excess -0.1 , confidence interval including 0). After training on causal or counterfactual

Table 116 | Forward and inverse consistency on WOVEN ID (%). Joint: both questions of a pair correct; Independent: expected joint rate under independence within action type; Excess: joint – independent; Cycle: the inverse query recovers the action behind the outcome the model predicted; Δ joint: joint – joint of the base model.

Model	Forward	Inverse	Joint	Indep.	Excess [95% CI]	Cycle	Δ joint [95% CI]
Base	21.3	40.4	8.0	8.1	-0.1 [-1.2, +0.9]	19.0	—
Full mixture, SFT	97.1	94.8	93.5	92.1	+1.4 [+0.8, +2.1]	94.3	+85.4 [+83.2, +87.7]
Full mixture, SFT + GRPO	96.6	96.9	94.1	93.7	+0.4 [+0.1, +0.9]	94.4	+86.1 [+83.7, +88.2]
Perceptive $\times$ causal, SFT	75.3	76.6	65.5	61.8	+3.7 [+2.6, +4.8]	71.3	+57.5 [+53.6, +61.5]
Perceptive $\times$ causal, SFT + GRPO	75.7	77.4	66.9	62.8	+4.1 [+3.2, +4.9]	72.8	+58.8 [+55.1, +62.6]
Inspective $\times$ causal, SFT	73.7	75.8	61.9	59.3	+2.7 [+1.6, +3.7]	69.0	+53.9 [+49.6, +58.1]
Inspective $\times$ causal, SFT + GRPO	73.9	77.5	64.1	60.8	+3.3 [+2.4, +4.1]	70.5	+56.1 [+51.9, +60.0]
Navigative $\times$ causal, SFT	64.9	64.9	52.9	49.0	+3.9 [+2.7, +5.0]	58.6	+44.9 [+40.3, +49.3]
Navigative $\times$ causal, SFT + GRPO	63.1	64.3	51.5	47.3	+4.2 [+3.3, +5.1]	57.0	+43.5 [+39.3, +47.9]
Manipulative $\times$ causal, SFT	63.3	62.7	53.2	48.6	+4.5 [+3.5, +5.6]	57.1	+45.1 [+40.7, +49.6]
Manipulative $\times$ causal, SFT + GRPO	63.5	61.8	51.8	48.4	+3.4 [+2.7, +4.2]	56.3	+43.8 [+39.4, +48.3]
Inspective $\times$ counterfactual, SFT	73.7	50.5	40.0	38.0	+2.0 [+1.0, +3.1]	45.0	+32.0 [+28.3, +35.6]
Inspective $\times$ counterfactual, SFT + GRPO	72.5	53.4	41.7	39.6	+2.1 [+1.2, +3.0]	46.8	+33.7 [+30.2, +37.2]
Manipulative $\times$ counterfactual, SFT	63.2	54.8	46.9	43.7	+3.2 [+2.0, +4.3]	50.9	+38.9 [+34.2, +43.3]
Manipulative $\times$ counterfactual, SFT + GRPO	64.9	54.3	47.8	44.8	+3.0 [+2.1, +3.8]	51.3	+39.8 [+35.2, +44.2]

transitions, the two queries of the same transition succeed together more often than independence predicts, for every trained model (excess +0.4 to +4.5, every confidence interval above 0); the full-mixture models are close to ceiling on both queries (at least 94.8%), which leaves little room for excess. The cycle rate, where the inverse query recovers the action behind the outcome the model itself predicted, rises from 19.0% to 45–94% (Table 116).

J. Prospective validation of the training recipe

Goal. The recipe in §5 is distilled from transfer results on the 26 benchmarks. The prospective test fixes training mixtures by the recipe before training and compares them with other mixtures of the same size on questions from external benchmarks that were not used to derive the recipe. Every comparison asks how a fixed training budget should be allocated: all mixtures start from the same base model and are trained with the same protocol, so the base model enters none of the comparisons; its scores are reported for reference.

Training. Qwen2.5-VL-3B-Instruct, single-stage SFT with LoRA (rank 16, $\alpha = 32$, dropout 0.05), learning rate 10^{-4} , 5% warmup, 3 epochs. The WOVEN training set is partitioned into the 11 controlled subsets of §3, one per combination of action type and reasoning family. Each model is trained on 1,500 WOVEN items drawn from these subsets, each item with its four option orderings, about 7,000 training examples in total. The five mixtures differ only in how the 1,500 items are allocated across the 11 subsets (Table 117). Each mixture is trained with 8 seeds, where the seed determines which items are drawn and the training order, 40 models in total.

Mixtures. The target questions of the main comparisons (Set A below) ask for the outcome of an agent’s action or for the action behind an observed change, that is, they call for causal and counterfactual reasoning about agent-driven transitions. By item (1) of the recipe, the Recipe mixture allocates 82% of the budget to the six agent-action subsets of the causal and counterfactual families; by item (3), temporal and passive-physical supervision does not transfer to such questions, so the remaining five subsets keep 52–54 items each. Each comparison mixture represents another way of selecting supervision: Camera-heavy selects by matching the action (the camera-motion and object-inspection subsets, across reasoning families); Temporal-heavy selects the wrong reasoning operation (the temporal subsets); Uniform makes no selection (equal

Table 117 | Prospective test: number of training items per subset in each mixture (of 1,500).

Subset	Recipe	Uniform	Temporal-heavy	Camera-heavy	Exogenous-heavy
Perceptive $\times$ causal dynamics	197	137	45	245	45
Inspective $\times$ causal dynamics	197	137	45	245	45
Navigative $\times$ causal dynamics	196	137	45	46	45
Manipulative $\times$ causal dynamics	196	137	45	46	45
Inspective $\times$ counterfactual	226	136	44	245	45
Manipulative $\times$ counterfactual	226	136	44	46	45
Exogenous $\times$ physical modeling	54	136	44	46	548
Perceptive $\times$ temporal	52	136	297	245	45
Inspective $\times$ temporal	52	136	297	245	45
Navigative $\times$ temporal	52	136	297	46	45
Exogenous $\times$ temporal	52	136	297	45	547

shares over the 11 subsets); Exogenous-heavy is dominated by passive physical events.

Evaluation questions. All questions are drawn from external benchmarks, MMSI-Bench (Yang et al., 2026), VLM4D (Zhou et al., 2025b), PhysBench (Chow et al., 2025), SPAR-Bench (Zhang et al., 2026a), MVBench (Li et al., 2024), IntPhys 2 (Bordes et al., 2025), and CameraBench (Lin et al., 2025), none of which is among the 26 benchmarks used to derive the recipe. Decoding is greedy (vLLM), and the model is asked to output only the option letter. The questions are grouped by what each comparison requires of them. Recipe versus Temporal-heavy, Uniform, and Exogenous-heavy require only that the questions call for causal or counterfactual reasoning about an agent’s action (Set A). The other direction of item (3) requires questions about passive physical events (Set B). Recipe versus Camera-heavy asks whether matching the reasoning operation or matching the action matters more, so it is run on questions whose action Camera-heavy matches, with the action fixed to camera motion (Set C). Item (4) requires static questions that involve no change (Set D).

Set A, agent-action questions (1,673). All require the outcome of an action or the motion behind a change; the action type is not restricted (Table 118). The score is the accuracy on each subset, averaged with equal weight over the five subsets. The PhysBench questions come from a sample of 1,001 PhysBench questions stratified by category.

Table 118 | Prospective test: Set A.

Source	Subset	Questions	Example
MMSI-Bench	Motion (Cam.)	74	“The images are taken continuously from a first-person perspective. In which direction are you moving?”
VLM4D (real videos)	object motion direction	1,111	“Which way does the person turn?”
VLM4D (real videos)	motion direction from a stated viewpoint	260	“From the camera perspective, which direction are the cyclists moving toward?”
PhysBench	relationships · motion	145	“Moving in the direction indicated by the arrow in the picture, which of the following options are you most likely to see?”
PhysBench	dynamics · manipulation	83	“Which of the following options presents the correct sequence to use the spoon to pick the objects in the green bowl and put them in the green pot?”

Set B, passive-physics questions (1,174). Every subset shows objects that move, collide, or persist without any agent acting on them (Table 119). MVBench items use 8 frames sampled uniformly from each video; IntPhys 2 items ask “Is what happens in this video physically possible?” with the answers Yes / No. The score is the accuracy over all questions.

Table 119 | Prospective test: Set B.

Source	Subset	Questions	What is asked
MVBench	counterfactual inference	200	which collision happens if an object is removed
MVBench	moving attribute	200	attributes of the objects that move or stay still
MVBench	moving count	200	how many objects of a kind are moving
MVBench	object existence	198	whether moving objects are still present at the end
IntPhys 2	solidity, fixed camera	104	whether the event is physically possible
IntPhys 2	immutability, moving camera	136	whether the event is physically possible
IntPhys 2	continuity, moving camera	136	whether the event is physically possible

Set C, camera-motion questions (7,592). In every subset the action is the camera’s own motion, which corresponds to WOVEN’s perceptive actions, and the reasoning is to infer how the camera moved from the observations (inverse dynamics; Table 120). The 74 MMSI-Bench questions also belong to Set A. For SPAR view change, the original questions ask for the camera’s translation and rotation as numbers and are converted to four-option questions: the correct option is the motion the camera actually made (a turn of at least 30°, or, with a turn of at most 10°, a translation of at least 0.6 m in a single direction), and the three wrong options are motions that clearly did not happen, including the opposite of the correct one. The CameraBench questions are the yes/no questions of the CameraBench VQA release, grouped by the camera motion they ask about, with 8 frames sampled uniformly from each video. The score is the accuracy over all questions.

Set D, static questions (886). Questions about a single state with no change, from the same benchmarks as Set A: PhysBench property (attribute, color, mass, number) and relationships (depth, distance, location, size), 327 questions; MMSI-Bench Attribute (Appr.), Attribute (Meas.), and the five positional-relationship categories, 559 questions. The two benchmarks are scored separately.

Statistics. Each of the 8 models of a mixture gives one score. Two mixtures are compared by an exact two-sided permutation test over all 12,870 splits of their 16 model scores; $p < 0.05$ is significant. The 95% confidence interval of the difference in means uses Welch’s t . One comparison is made per recipe item and direction; no family-wise correction is applied.

Results. Table 7 reports the five comparisons; in every comparison both mixtures score above the untrained base model. Selecting the wrong reasoning operation costs 3.5 points (Temporal-heavy) and selecting passive physical events costs 4.7 points (Exogenous-heavy); making no selection costs 1.5 points (Uniform). On camera-motion questions, Camera-heavy holds more exact-match supervision than Recipe (735 versus 620 items in the camera-motion and object-inspection subsets of the causal and counterfactual families) and still trails by 0.6 points ($p = 0.04$); the two mixtures differ in the remaining budget, which Camera-heavy spends on same-action temporal subsets (490 items) and Recipe on same-operation navigation and manipulation subsets

Table 120 | Prospective test: Set C.

Source	Subset	Questions	What is asked
MMSI-Bench	Motion (Cam.)	74	how the camera moved or rotated across consecutive images
VLM4D	camera motion	6	which way the camera turned or moved in the video
SPAR-Bench	view change, ScanNet / ScanNet++	125 / 136	which motion the camera made between two images
CameraBench	pan	1,200	whether the camera pans left or right
CameraBench	tilt	703	whether the camera tilts up or down
CameraBench	roll	524	whether the camera rolls clockwise or counterclockwise
CameraBench	dolly	753	whether the camera moves forward or backward
CameraBench	truck	863	whether the camera moves laterally left or right
CameraBench	pedestal	220	whether the camera moves up or down
CameraBench	static	628	whether the camera stays still
CameraBench	tracking	1,344	whether the camera follows a moving subject
CameraBench	stability	828	whether the camera motion is smooth or shaky
CameraBench	other camera motion	188	pedestal-only and single-direction movements

(618 items). On passive-physics questions, Exogenous-heavy scores 0.5 points above Recipe ($p = 0.04$), consistent with the direction of item (3). In the other direction, Exogenous-heavy gains least on Set A (Table 121), consistent with §5.3: passive-physical supervision contributes least to agent-action questions. Its small gain is attributable to the 405 items (27%) it draws from agent-action subsets, whereas §5.3 uses the passive-physical subset alone.

Item (4). This item concerns whether training helps at all on tasks that involve no transition, so the comparison is with the untrained base model (Table 121). On static questions the five mixtures differ from the base model by -0.2 to $+1.2$ points, and Recipe does not differ significantly from any other mixture ($p \geq 0.37$), whereas the same models gain 2.1 to 6.8 points over the base model on Set A. The PhysBench static questions are the main evidence; the MMSI-Bench static questions are close to chance for the base model and are reported for completeness.

Table 121 | Prospective test: static questions versus agent-action questions (accuracy %, mean over 8 models).

Questions	Base	Recipe	Uniform	Temporal-heavy	Camera-heavy	Exogenous-heavy
Set D, PhysBench static (327)	55.7	56.1	55.4	56.5	56.5	56.5
Set D, MMSI-Bench static (559)	28.4	29.0	28.6	29.0	29.0	29.6
Set A (1,673)	31.1	37.9	36.4	34.4	36.3	33.2

Item (2) (supervision with larger state changes gives more robustness) is outside this test: the external benchmarks have no perturbation questions graded by the extent of the state change.

Table 122 | Prospective test: per-seed scores (accuracy %). Base model: Set A 31.1, Set B 70.3, Set C 54.1.

Questions	Mixture	s1	s2	s3	s4	s5	s6	s7	s8	Mean
Set A	Recipe	38.7	36.8	38.3	37.0	38.4	38.3	36.3	39.6	37.9
Set A	Uniform	38.4	36.9	35.2	34.5	38.0	36.1	36.2	36.1	36.4
Set A	Temporal-heavy	35.8	35.1	33.0	35.8	35.6	35.3	32.5	32.4	34.4
Set A	Exogenous-heavy	30.6	33.5	34.5	32.2	35.2	33.9	34.4	31.6	33.2
Set B	Recipe	70.3	71.1	71.5	70.7	70.6	71.0	71.3	71.1	71.0
Set B	Exogenous-heavy	71.4	71.2	71.2	70.7	71.8	72.6	71.5	71.6	71.5
Set C	Recipe	58.2	58.3	58.3	58.8	58.5	58.8	58.2	57.7	58.4
Set C	Camera-heavy	57.5	56.8	57.4	58.8	58.0	57.4	58.0	58.3	57.8

K. Limitations

WOVEN deliberately scopes to world modeling, single-step, vision-grounded, action-conditioned reasoning over (s_t, a, s_{t+1}) triples, and therefore does not directly evaluate the broader world-model lineages: long-horizon procedural planning over abstract action sequences (Chen et al., 2025a), symbolic-environment dynamics inference (Chen et al., 2026; Warrier et al., 2026), and purely latent-space predictive representations evaluated by downstream control rather than per-cell attribution (Assran et al., 2025; Hafner et al., 2025). These programmes operate over distinct state spaces and admit different yardsticks; extending the cell-level statistical-attribution methodology to them is a natural follow-up but outside the present scope.