

RAE-PPG: DURATION-GROUNDED RETAIN-AND-EXTEND PRETRAINING FOR PPG FOUNDATION MODELS

Suyeong Lee* Hochang Lee* Seokyong Sheem Daekyum Kim†

Korea University

{tsw1615, cvcv99, sheem, daekyum}@korea.ac.kr

ABSTRACT

Signal features derived from photoplethysmography (PPG) require different signal durations to characterize. Existing PPG foundation models treat duration as a pretraining or evaluation condition rather than using the different durations required by PPG features to organize self-supervision. We hypothesize that self-supervision should expand with signal duration, allowing a single encoder to progressively acquire additional features while preserving and reusing earlier learning. We introduce Retain-and-Extend PPG (RAE-PPG), which trains a single Transformer encoder successively on 10 s, 30 s, and 240 s inputs, adding supervision for signal features supported by each longer observation. The encoder is partitioned into duration-specific parameter groups, allowing later stages to reuse earlier groups while updating only the group assigned to the current stage. Selected earlier targets are reused to supervise later stages, encouraging the corresponding features to remain accessible in longer-input representations. Direct decoding from the final encoder shows that earlier features remain recoverable from longer-input representations, while later-stage features show higher mean decoding performance at their introduction durations. Controlled comparisons further show that prior-stage learning provides a better basis for learning newly introduced features at both transitions. Across 18 tasks from eight datasets, the final frozen encoder achieves the best observed score on 12 tasks compared with five existing PPG foundation models.

1 INTRODUCTION

Photoplethysmography (PPG) is a non-invasive and widely accessible method for monitoring cardiovascular, respiratory, and autonomic physiology (Allen, 2007; Sheem et al., 2026). PPG signals contain physiology-relevant features spanning local pulse morphology, fiducial timing, and temporal variability. Local morphology and fiducial timing can be characterized from individual pulses or a few cardiac cycles (Elgendi, 2012), whereas beat-interval variability and slower waveform dynamics require observations over tens of seconds to minutes (Mejía-Mejía & Kyriacou, 2023; Kiselev et al., 2024). Signal duration therefore determines which physiology-relevant features can be reliably characterized from PPG.

Existing PPG foundation models have been pretrained on fixed-length inputs ranging from seconds to minutes, using morphology-aware, contrastive, and generative self-supervised objectives (Pillai et al., 2025; Saha et al., 2025; Guo et al., 2026). Recent work has also incorporated physiologically grounded supervision into PPG representation learning using PPG morphology indices and auxiliary physiological metrics, including those derived from ECG (Pillai et al., 2025; Geenjaer et al., 2026). However, such supervision is still typically defined within a fixed observation duration, such as 10 s (Pillai et al., 2025; Geenjaer et al., 2026). This limits the range of physiology-relevant features that can guide representation learning: short inputs can support local pulse features but not features that require longer observations (Elgendi, 2012; Mejía-Mejía & Kyriacou, 2023). Such longer-

*Equal contribution.

†Corresponding author.

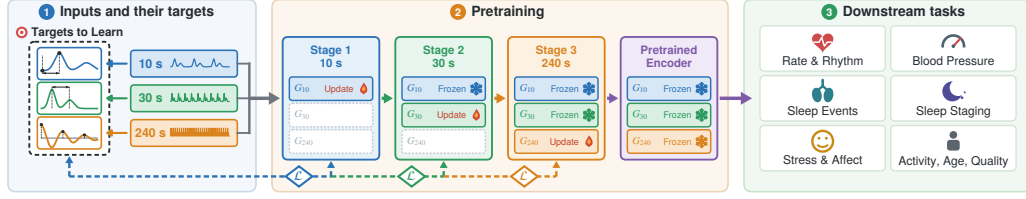


Figure 1: RAE-PPG overview: duration-grounded targets, retain-and-extend pretraining, and frozen-encoder downstream evaluation.

timescale features may capture task-relevant information for downstream tasks requiring longer signal durations. These observations motivate learning from physiology-relevant features at the signal durations needed to characterize them. The key question is how to use such duration-appropriate supervision to learn representations that remain informative across varying input lengths.

We address this question with Retain-and-Extend PPG (RAE-PPG), a single Transformer encoder trained successively on 10 s, 30 s, and 240 s inputs (Figure 1). Our focus is the successive setting in which learning acquired at one signal duration becomes prior learning for the next as additional feature supervision is introduced. RAE-PPG follows a retain-and-extend strategy: as signal duration increases, it retains earlier learning for reuse while extending supervision with additional PPG-derived targets supported by the longer observation. Longer PPG recordings contain the local pulse structure present in shorter recordings while supporting features that require longer observation. However, successive training creates a risk that learning newly available information alters what the encoder has already learned from shorter inputs. To preserve earlier learning, the encoder is partitioned into duration-specific parameter groups, allowing later stages to use groups learned at shorter durations while updating only the group assigned to the current stage. Furthermore, selected earlier targets continue to supervise later stages so that features learned at shorter signal durations remain accessible in longer-input representations.

Across 18 downstream tasks from eight datasets spanning 10 s, 30 s, and 240 s inputs, the final frozen RAE-PPG encoder achieves the best observed score on 12 tasks compared with five existing PPG foundation models. Beyond downstream transfer, direct feature decoding verifies the intended retain-and-extend behavior: features learned at shorter durations remain recoverable from longer-input representations, while features introduced at later stages become more decodable on average at their introduction durations. Ablations further clarify how the proposed components contribute to this behavior. Protected parameter organization preserves shorter-input computations, while retained-target supervision improves access to earlier features from longer inputs. Controlled comparisons between reusing prior-stage parameters and resetting them to their initial values show that prior-stage learning improves the acquisition of newly introduced features. Together, these findings support a physiology-guided framework for successive duration extension, in which a single encoder preserves and reuses earlier learning while incorporating additional feature supervision as longer observations become available.

2 RELATED WORK

Self-supervision in PPG foundation models. PPG foundation models have used participant-aware contrastive learning, waveform-derived priors, signal-quality objectives, cross-modal alignment with ECG, and reconstruction or prediction of signal content (Abbaspourazad et al., 2024; Pillai et al., 2025; Ding et al., 2024; Nie et al., 2026; Chen et al., 2025; Guo et al., 2026; Thukral et al., 2026; Lee et al., 2026). A close precedent, PaPaGei-S, uses established PPG morphology indices from 10 s signals for contrastive learning and auxiliary prediction (Pillai et al., 2025), whereas Geenjaar et al. (2026) use ECG- and respiratory-derived metrics to guide contrastive learning over 10 s PPG windows. These studies demonstrate that physiologically grounded supervision can support PPG representation learning without downstream labels. However, both approaches operate on fixed 10 s PPG windows rather than progressively organizing signal-feature supervision across signal durations.

Signal duration in PPG representation learning. The signal duration needed to characterize a physiology-relevant PPG feature depends on the feature. Local waveform morphology and fiducial timing are defined on individual pulses or consecutive pulse pairs (Elgendi, 2012), whereas variability and spectral indices are typically evaluated over longer segments: prior studies have reported analysis durations of roughly 30–60 s for RMSSD, 60–90 s for pNN50, and 1–2 min for low-frequency power of beat-interval series (Task Force, 1996; Baek et al., 2015; Mejía-Mejía & Kyriacou, 2023). Baek et al. (2015) compared variability indices from ultra-short segments (10–270 s) with those from 5 min recordings, and Mejía-Mejía & Kyriacou (2023) evaluated PRV indices computed from simulated PPG signals of different durations. These studies indicate that suitable analysis duration differs across variability indices and study settings.

PPG foundation-model studies also report duration-dependent downstream performance. Pulse-PPG shows non-monotonic performance across models pretrained with 1 min, 2 min, and 4 min PPG signals (Saha et al., 2025), while SIGMA-PPG reports task-dependent performance with 30 s, 60 s, 120 s, and 240 s inputs (Guo et al., 2026). However, these approaches vary signal duration as a pretraining or evaluation condition rather than progressively organizing signal-feature supervision across signal durations. HiMAE studies a related but different problem by learning representations at multiple internal temporal resolutions while keeping the physical signal duration fixed (Lee et al., 2026). In RAE-PPG, increasing signal duration instead organizes the staged introduction of additional signal-feature supervision within a single encoder, adding physiology-relevant signal features as longer inputs support their prescribed analysis intervals.

Progressive and continual learning. Sequential training can alter previously learned representations, motivating methods that protect earlier parameters or reuse earlier features (Ramasesh et al., 2021; Elsayed & Mahmood, 2024). Progressive Neural Networks freeze earlier task-specific columns and reuse their features through lateral connections when new tasks are learned (Rusu et al., 2016). Unlike these task-sequential settings, RAE-PPG applies preservation and reuse across increasing signal durations, introducing additional signal features as longer inputs support their prescribed analysis intervals.

3 METHOD

RAE-PPG addresses two coupled requirements: introducing supervision as longer inputs support additional signal features, and preserving earlier parameters for reuse during subsequent learning. For $\mathcal{D} = \{10, 30, 240\}$ s, a single encoder maps a preprocessed, root-wise z-scored single-channel PPG input $x^{(r)} \in \mathbb{R}^{rf_s}$, sampled at $f_s = 64$ Hz, to

$$H^{(r)} = E_\theta(x^{(r)}) \in \mathbb{R}^{K \times d}, \quad K = 64, \quad d = 384, \quad r \in \mathcal{D}. \quad (1)$$

A local feature extractor maps the PPG waveform to a feature vector at each sample. We pool these local features within K consecutive intervals, determined by a predefined rule based on signal quality, to form tokens (§ A.2). A Transformer processes the tokens, and its full output sequence $H^{(r)}$ is used as the learned representation for downstream tasks. The resulting encoder has 10.76M parameters (§ A.3).

3.1 DURATION-GROUNDED SIGNAL-FEATURE SUPERVISION

To specify what the encoder learns, we use the signal features that classical PPG analysis derives before physiological interpretation (Allen, 2007; Elgendi, 2012; Mejía-Mejía et al., 2022). Computed directly from unlabeled PPG over prescribed analysis intervals, these measurements provide duration-grounded targets without external physiological annotations. For a physical interval W , the two pathways are

$$\begin{aligned} \text{Classical PPG:} \quad & x_{\text{rec}} \xrightarrow{\phi_f(\cdot; W)} y_f(W) \xrightarrow{\text{interpretation}} I_{\text{phys}}, \\ \text{RAE-PPG pretraining:} \quad & x^{(r)} \xrightarrow{E_\theta} H^{(r)} \xrightarrow{\text{Read}_W, g_f} \hat{y}_f^{(r)}(W), \quad \hat{y}_f^{(r)}(W) \approx \tilde{y}_f(W). \end{aligned} \quad (2)$$

Here, x_{rec} is the continuous recording and ϕ_f performs fixed, target-specific preprocessing and extraction (§ A.4); Read_W is an interval-specific token readout, g_f is a feature-prediction head,

a single affine map without a hidden layer or output activation, and I_{phys} denotes physiological interpretation. Targets summarize W ; filtering and beat detection use surrounding recording context. For each signal feature f , we normalize the target y_f by subtracting its median and dividing by a scale derived from its interquartile range (IQR), yielding $\tilde{y}_f$. The median and IQR are computed using only the training data.

Target set and duration grounding. Signal features require different analysis intervals. We therefore introduce duration-defining targets only when inputs contain their prescribed intervals. Table 1 summarizes sixteen PPG-derived pretraining targets across four physiology-relevant feature families and separate signal-quality supervision. Morphology and vascular-timing targets characterize waveforms rather than directly measure vascular properties (Hickey et al., 2016). Beat-interval variability targets are PPG-derived PRV measures and are not assumed to be interchangeable with ECG-derived HRV (Mejía-Mejía et al., 2020).

Table 1: Physiology-relevant signal-feature families used by RAE-PPG.

Feature family	Signal-processing role	Realization in RAE-PPG
Rate	Pulse cadence	Local pulse rate at 10 s; full-window mean rate at 240 s [†]
Morphology / vascular timing	Within-beat contour, fiducial timing, and reflected-wave structure	Local morphology at 10 s; reflected-wave timing at 30 s
Beat-interval variability	Successive interval changes and dispersion	PRV-RMSSD at 30 s; PRV-pNN50 and interval dispersion at 240 s
Waveform statistics	Baseline-sensitive autocorrelation and low-frequency modulation	Uncentered ACF index and low-frequency waveform variability at 240 s
Signal quality [†]	Reliability of periodic pulse structure	Spectral purity at 10 s

[†] Auxiliary targets provide cadence or quality supervision; their placement does not define when the corresponding quantity first becomes measurable.

We translate these duration requirements into a progression of signal-feature supervision for a single encoder. The 10 s stage provides local pulse and quality supervision, 30 s accommodates the prescribed 20 s normalized reflected-delay and 30 s PRV-RMSSD targets, and 240 s covers the remaining prescribed intervals up to 240 s (Table 7). For a duration-defining target with prescribed interval length ℓ_f , the introduction stage is $r_f = \min\{r \in \mathcal{D} : \ell_f \leq r\}$. At the stage using 240 s inputs, we introduce targets computed over 60 s or 120 s intervals within each input. The stages introduce nine, two, and five targets, respectively, including the auxiliary targets distinguished in Table 1. These placements reflect the selected target definitions rather than universal physiological thresholds. We use three stages because two successive extensions are the minimum needed to test whether learning acquired at one extension can serve as prior learning for the next; 60 s and 120 s targets are therefore grouped into the 240 s stage rather than defining additional stages. § A.4 details target-set selection and construction, availability and numerical checks, and signal-level characterization.

Interval-aligned prediction. To align each prediction with its target, the analysis interval $W_{f,j} = [a_{f,j}, b_{f,j})$ for feature f and occurrence j also serves as the query interval. For pulse-level targets, it spans an individual pulse or pulse pair. With token $h_k^{(r)}$ assigned to interval $\tau_k^{(r)}$, we compute

$$y_{f,j} = \phi_f(x_{\text{rec}}; W_{f,j}), \quad \hat{y}_{f,j}^{(r)} = g_f(z^{(r)}(W_{f,j})),$$

$$z^{(r)}(W) = \text{Read}_W(H^{(r)}) = \sum_{k=1}^K \alpha_k^{(r)}(W) h_k^{(r)}, \quad \alpha_k^{(r)}(W) = \frac{|W \cap \tau_k^{(r)}|}{\sum_{q=1}^K |W \cap \tau_q^{(r)}|}. \quad (3)$$

The query interval is not a learned query token; it selects readout support without restricting the encoder’s receptive field, as tokens are contextualized over the complete input.

Feature-prediction loss. Within each input, we compute the Huber loss between the predicted and training-normalized target values for each feature f at each assigned analysis interval (Huber, 1964). We sum these losses and divide by the total number of assigned intervals to obtain $\mathcal{L}_f^{(r)}(x)$. Intervals with unavailable targets or invalid readouts contribute zero loss but remain included in the denominator (§ A.5).

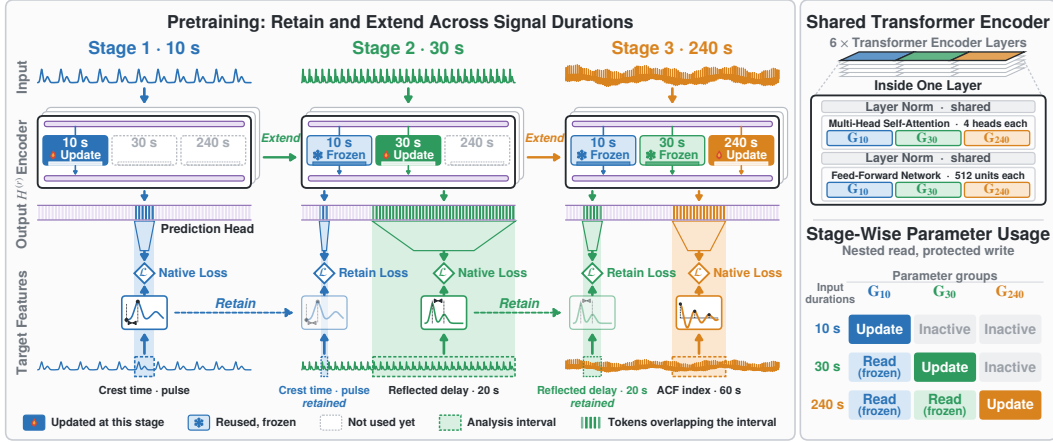


Figure 2: RAE-PPG architecture and pretraining. Later stages reuse frozen groups and learn new targets while retaining selected earlier targets.

3.2 RETAIN-AND-EXTEND PRETRAINING

Longer inputs support additional features but still contain the pulse structure observed in shorter inputs. We therefore separate read access from parameter updates to reuse information learned at shorter signal durations without overwriting the corresponding parameters. Pretraining proceeds from 10 to 30 to 240 s, with each successive pretraining stage initialized from the preceding checkpoint.

Nested read and protected write. We partition the encoder into duration-specific parameter groups G_{10} , G_{30} , and G_{240} , each containing four attention heads and 512 feed-forward units in each of six pre-norm Transformer layers (Figure 2). We assign the parameters of the local feature extractor, token projection, and layer normalization, together with shared bias terms, to G_{10} . These parameters are used for all input durations but are updated only during the 10 s stage. Each input duration has a separate embedding, updated only during its corresponding stage (§ A.7). For signal duration r , $\mathcal{A}_r$ denotes the groups read and $\mathcal{U}_r$ those updated at its pretraining stage: $\mathcal{A}_{10} = G_{10}$ and $\mathcal{U}_{10} = G_{10}$; $\mathcal{A}_{30} = G_{10} \cup G_{30}$ and $\mathcal{U}_{30} = G_{30}$; $\mathcal{A}_{240} = G_{10} \cup G_{30} \cup G_{240}$ and $\mathcal{U}_{240} = G_{240}$. Nested read activates the heads and feed-forward units in $\mathcal{A}_r$, allowing shorter-duration groups and the current-duration group to contribute to the same token representation. Protected write updates only $\mathcal{U}_r$, preserving all other encoder parameters and optimizer states. Because groups assigned to longer signal durations are inactive for shorter inputs, the shorter-duration input-specific computations remain unchanged during subsequent pretraining.

Retained-target supervision. Preserving the computation for a shorter signal duration does not ensure that its features remain decodable from longer-input representations. Newly active groups contribute to the shared residual stream, so frozen earlier groups can receive different intermediate activations when processing longer inputs. We therefore retain selected targets introduced at shorter signal durations while learning newly introduced features. Each retained target keeps its signal-processing definition, analysis interval, training-split normalization, and frozen prediction head. Gradients pass through the head and token readout to update only the current-duration group.

Stage objectives. Let $\mathcal{F}_r$ denote targets introduced at signal duration r and $\mathcal{R}_{r' \rightarrow r} \subseteq \mathcal{F}_{r'}$ those retained from the immediately preceding pretraining stage. Weighted sums of their feature losses (Section 3.1) define $\mathcal{L}_{\text{native}}^{(r)}$ and $\mathcal{L}_{\text{retain}}^{(r' \rightarrow r)}$, respectively: $\mathcal{L}^{(10)} = \mathcal{L}_{\text{native}}^{(10)}$, $\mathcal{L}^{(30)} = \mathcal{L}_{\text{native}}^{(30)} + \lambda_{10 \rightarrow 30} \mathcal{L}_{\text{retain}}^{(10 \rightarrow 30)}$, and $\mathcal{L}^{(240)} = \mathcal{L}_{\text{native}}^{(240)} + \lambda_{30 \rightarrow 240} \mathcal{L}_{\text{retain}}^{(30 \rightarrow 240)}$. The coefficients $\lambda_{r' \rightarrow r}$ scale retained-target supervision. We retain all nine 10 s targets at 30 s and both 30 s targets at 240 s, with no direct retention term from 10 s to 240 s. New prediction heads are trained only at their introduction stage. Stage-specific loss coefficients and retained-query placements are given in § A.5–A.6. After pretraining, prediction heads are removed. One final checkpoint produces $H^{(r)}$ using $\mathcal{A}_r$ for all three signal durations.

4 EXPERIMENTS

Pretraining. We pretrained RAE-PPG on the MIMIC-III Waveform Database Matched Subset (Moody et al., 2020; Johnson et al., 2016) and VitalDB (Lee et al., 2022), using approximately 11.79, 7.26, and 1.34 million eligible input segments at the 10 s, 30 s, and 240 s stages, respectively. Encoder inputs were low-pass filtered at 12 Hz, resampled to 64 Hz, and z-scored using valid waveform samples. All recordings from each MIMIC-III participant or VitalDB surgical case were assigned to only one of the training, validation, or test sets. Preprocessing and optimization details are provided in § A.

Downstream transfer across tasks and durations. We evaluate the final frozen RAE-PPG encoder on 18 tasks from eight datasets and compare it with PaPaGei-P/S (Pillai et al., 2025), Pulse-PPG (Saha et al., 2025), SIGMA-PPG (Guo et al., 2026), and AnyPPG (Nie et al., 2026). RAE-PPG uses mean-pooled token representations, while each baseline uses a checkpoint-specific interface, with duration and normalization adaptations detailed in § B.2. For each task, we assign one input duration using a prior-study-informed feature–task rationale together with the recording and label setting, choosing a duration by which the relevant feature families have been introduced in RAE-PPG. Seven tasks use 10 s, five use 30 s, and six use 240 s. For each task, all encoders are evaluated on the same labeled samples, input duration, and participant- or case-level splits. Following PaPaGei (Pillai et al., 2025), probe selection and fitting are restricted to the training split, while the original validation and test splits are combined for final held-out evaluation. Regularization is selected by grouped four-fold cross-validation within the training split; standardization is fitted within each training fold and refitted on the full training split before held-out evaluation. Classification tasks use L2-regularized logistic regression and regression tasks use ridge regression; we report AUROC, macro-F1, or MAE according to the task (§ B.1 and B.3). For 13 tasks with PPG recordings long enough to construct all three input durations, we also evaluate matched 10 s, 30 s, and 240 s inputs centered at the same recording point and paired with the same label. We use the same final frozen encoder with its duration-specific read sets and fit a separate linear probe at each duration using the same participant- or case-level splits. With a reference duration defined for each task, Retention tests whether performance at every longer duration remains within a prespecified margin of the reference, whereas Extend tests improvement from the immediately shorter duration to the reference. Decisions use paired confidence intervals with Holm correction (§ B.8–B.9); grouped out-of-fold evaluation is reported in § B.10.

Signal-feature retention and extension. We test whether earlier features remain decodable from longer-input representations and whether later-stage features are more decodable at their introduction duration than from the preceding shorter input. Using recordings held out from pretraining, we apply the same final frozen encoder at every duration and fit separate ridge probes for each feature and interval. For feature retention, we assess continued decodability using the shorter stage’s pooling interval; downstream Retention tests task-performance preservation within a prespecified margin. Extension compares the same later-stage targets decoded from mean-pooled representations at the preceding shorter duration and their introduction duration. Target values, analysis intervals, and validity masks are matched within each comparison. We quantify feature decodability as the fraction of Huber error removed relative to a fixed constant baseline, $\text{gain} = 1 - E_{\text{probe}}/E_0$. The baseline predicts the median of each feature estimated from the pretraining training split, making gain 0 at baseline performance, 1 at zero probe error, and negative when probe error exceeds the baseline. This normalization allows decodability to be compared across features with different scales (§ C.1).

Downstream prediction from signal features. For each downstream task, we identify PPG feature families that prior studies associate with that task. We first test whether features from these families predict the task labels in our downstream data. We then test whether the corresponding feature information remains accessible in the frozen representation. The Feature-to-Task Bridge evaluates 22 core relations used to motivate the task-duration assignments, together with 11 additional prior-study relations. For each relation, task labels are predicted either from feature values computed directly from PPG using the pretraining definitions or from the corresponding feature values decoded from frozen representations. The linear feature probes used for the latter are trained without downstream labels. Both analyses are compared with 32 participant-reassignment controls that jointly reassign feature-family vectors and their availability masks across participants while keeping the downstream samples and labels fixed; the full feature-decoding and downstream-prediction procedure is repeated for each control. Control construction and sensitivity analyses are detailed in § C.2. A relation is

positive when the one-sided 95% lower confidence bound for improvement over the median control exceeds zero (§ C.2).

Encoder organization and retained-target supervision. To test how the two design components contribute to retain-and-extend behavior, we train four variants: nested read with protected write and a fully shared encoder, each with retained-target supervision enabled or disabled. All variants use the same data, native targets, initialization, stage order, optimization schedule, and training budget. We first test whether shorter-duration learning is preserved during later pretraining by comparing representations, feature decodability, and downstream predictions across checkpoints with the 10 s or 30 s input fixed. We then compare the final encoders to test whether retained-target supervision keeps earlier features accessible from longer-input representations while measuring newly introduced feature decodability and downstream transfer (§ D).

Reuse of prior-stage learning. Finally, we test whether prior-stage learning is reused when acquiring features introduced at the next stage. At each transition, 10 s to 30 s and 30 s to 240 s, two matched training continuations start from the same parent checkpoint. LEARNED retains the learned previous-stage parameters, whereas FULL-PRIOR INITIAL restores them to their initial values, including the local feature extractor, token projection and normalization layers, and earlier attention/FFN groups. In both conditions, these parameters remain active in the forward pass but are frozen, and retained-target supervision is disabled. All other training conditions are matched. After each continuation, independent ridge probes predict the newly introduced features from frozen mean-pooled representations. We report feature gain and the percentage reduction in probe error achieved by LEARNED relative to FULL-PRIOR INITIAL (§ D.4).

5 RESULTS

5.1 DOWNSTREAM TRANSFER

Table 2: Frozen-encoder downstream comparison (95% CIs in brackets).

Downstream task	PaPaGei-P	PaPaGei-S	Pulse-PPG	SIGMA-PPG	AnyPPG	RAE-PPG
A. Regression: MAE ↓						
DaLiA: HR ¹⁰	13.9397 [12.25–15.86]	16.2506 [13.25–19.37]	10.4389 [8.34–12.71]	14.8701 [12.28–18.98]	8.1192 [5.54–11.30]	<u>8.6522</u> [6.31–11.18]
BUT PPG: HR ¹⁰	10.9192 [8.05–14.40]	10.8344 [8.06–14.22]	10.5904 [8.00–13.76]	10.6122 [7.91–13.87]	9.6609 [7.24–12.62]	<u>10.5144</u> [8.21–13.37]
PTT-PPG: SBP ¹⁰	9.9489 [5.53–15.25]	10.4675 [5.81–15.99]	<u>9.8620</u> [5.36–15.32]	10.3279 [5.64–15.98]	10.1314 [5.63–15.52]	9.5291 [5.24–14.87]
PTT-PPG: DBP ¹⁰	<u>5.6742</u> [3.94–7.48]	5.9042 [4.02–7.90]	5.7877 [4.10–7.55]	6.0150 [4.19–7.91]	5.8514 [4.03–7.76]	5.4489 [3.78–7.21]
DREAMT: Age ¹⁰	10.8791 [8.66–13.41]	11.9138 [9.55–14.51]	11.0811 [8.63–13.91]	12.1837 [9.58–14.75]	<u>10.9798</u> [8.37–13.81]	11.8329 [9.13–14.75]
MESA*: A/H ²⁴⁰	0.0887 [0.086–0.091]	0.0897 [0.087–0.092]	0.0893 [0.087–0.092]	0.0885 [0.086–0.091]	<u>0.0867</u> [0.084–0.089]	0.0834 [0.081–0.086]
MESA*: Arousal ²⁴⁰	0.0464 [0.045–0.047]	0.0474 [0.046–0.049]	0.0474 [0.046–0.048]	0.0460 [0.045–0.047]	<u>0.0437</u> [0.043–0.045]	0.0432 [0.042–0.044]
MESA*: SpO ₂ ²⁴⁰	<u>0.2008</u> [0.198–0.204]	0.2085 [0.205–0.211]	0.2021 [0.199–0.205]	0.2078 [0.204–0.211]	0.2022 [0.199–0.206]	0.1768 [0.174–0.180]
Mean rank ↓	3.25	5.63	3.38	4.63	<u>2.50</u>	1.63
B. Classification: AUROC/macro-F1 ↑						
DeepBeat: AF ¹⁰	0.6694 [0.637–0.719]	0.6413 [0.609–0.687]	0.6877 [0.632–0.719]	0.7357 [0.680–0.779]	0.8443 [0.768–0.890]	<u>0.7774</u> [0.716–0.809]
DeepBeat: Quality ^{10†}	0.5981 [0.554–0.629]	0.5969 [0.543–0.640]	<u>0.6502</u> [0.608–0.679]	0.6350 [0.596–0.660]	0.6427 [0.604–0.672]	0.6718 [0.636–0.690]
WESAD: Stress ³⁰	0.8320 [0.751–0.922]	0.8435 [0.765–0.922]	0.8334 [0.721–0.931]	0.8859 [0.821–0.944]	<u>0.9335</u> [0.892–0.971]	0.9514 [0.918–0.979]
WESAD: Arousal ³⁰	0.7106 [0.587–0.841]	0.7198 [0.570–0.871]	0.7308 [0.579–0.888]	0.7381 [0.631–0.847]	<u>0.7729</u> [0.683–0.908]	0.8571 [0.758–0.959]
WESAD: Valence ³⁰	0.6253 [0.553–0.715]	0.5613 [0.427–0.695]	0.5280 [0.486–0.627]	0.6547 [0.517–0.783]	<u>0.6587</u> [0.581–0.760]	0.6973 [0.602–0.841]
DaLiA: Activity ^{30†}	0.2636 [0.199–0.315]	0.1429 [0.108–0.176]	0.2919 [0.190–0.363]	0.2740 [0.203–0.349]	<u>0.3135</u> [0.233–0.389]	0.4078 [0.312–0.507]
DREAMT: Sleep ^{30†}	0.2353 [0.215–0.257]	0.2234 [0.203–0.247]	0.2464 [0.225–0.264]	0.2490 [0.226–0.272]	0.2746 [0.242–0.309]	<u>0.2687</u> [0.236–0.307]
MESA*: Sleep ^{240†}	0.4295 [0.421–0.438]	0.4310 [0.423–0.439]	0.4246 [0.417–0.433]	0.4469 [0.439–0.455]	0.4743 [0.463–0.485]	<u>0.4735</u> [0.464–0.483]
SDB: AHI code ²⁴⁰	0.5426 [0.391–0.705]	0.5238 [0.370–0.683]	0.5414 [0.381–0.714]	<u>0.5977</u> [0.442–0.759]	0.5476 [0.374–0.718]	0.6779 [0.525–0.818]
DREAMT: A/H ²⁴⁰	0.5060 [0.424–0.589]	0.5145 [0.420–0.608]	0.4932 [0.398–0.583]	<u>0.5192</u> [0.430–0.604]	0.4887 [0.402–0.586]	0.5225 [0.435–0.614]
Mean rank ↓	4.90	5.10	4.40	3.00	<u>2.30</u>	1.30
Overall mean rank ↓	4.17	5.33	3.94	3.72	<u>2.39</u>	1.44

Bold/underline: best/second-best. Superscripts: input duration (s); † macro-F1 (otherwise AUROC). MESA regression targets are event burdens. * MESA used in PaPaGei-P/S and AnyPPG pretraining. Details: § B.1–B.3; abbreviations: end of B.1’s first paragraph (p. 24).

Transfer across tasks. RAE-PPG showed broad transfer across the 18 evaluated tasks rather than strong performance confined to a particular task type or input duration. The final frozen encoder achieved the best observed score on 12 of 18 tasks and ranked first or second on 17, giving the lowest overall mean rank among the six models, 1.44 versus 2.39 for AnyPPG (Table 2). Top-two performance covered six of seven tasks at 10 s and every task evaluated at 30 s and 240 s, with the lowest mean rank for both regression (1.63) and classification (1.30). The learned representation therefore remained broadly useful across tasks evaluated at all three durations, rather than deriving

its aggregate advantage from a narrow subset of settings. § B.4–B.7 and E report robustness checks and comparison-model retraining.

Task-dependent effects of input duration. Increasing input duration did not consistently improve downstream performance. Retention was confirmed for 2 of 8 applicable tasks and Extend for 6 of 11. Both sleep-staging tasks met Retention, while all three MESA event-burden tasks improved from 30 s to 240 s. WESAD arousal instead reached its highest AUROC at 30 s (Table 20 and § B.8–B.9, with grouped OOF results in § B.10). Additional observation time therefore changed downstream utility selectively, benefiting some tasks while offering little benefit or reducing performance for others.

5.2 SIGNAL-FEATURE INFORMATION ACROSS DURATIONS

Earlier-feature retention in longer inputs. Despite these task-dependent changes, longer-input representations continued to carry information about features learned at earlier stages. The nine 10 s features achieved a mean gain of 0.830 when decoded from 30 s representations, only 0.008 below their native-duration gain. The two 30 s features achieved a mean gain of 0.666 at 240 s, compared with 0.898 at their native 30 s duration (Table 3A and § C.1). Earlier-feature accessibility was therefore nearly unchanged from 10 s to 30 s and remained recoverable, although reduced, from 30 s to 240 s. Thus, moving to a longer input did not simply replace shorter-duration information. Earlier-stage feature information remained available in the longer-input representations.

Acquisition of later-stage features. The features introduced at the 30 s and 240 s stages were recoverable from the final encoder representations, showing that the encoder learned the additional signal features targeted at each stage. Mean gain reached 0.898 for the two 30 s features and 0.755 for the five 240 s features (Table 3A). When the same later-stage target values were predicted from representations of the preceding shorter inputs, mean gain was lower: 0.611 from 10 s representations for the 30 s targets and 0.579 from 30 s representations for the 240 s targets. Providing the input duration at which these features were introduced increased gain by 28.7 and 17.6 percentage points, respectively. Both 30 s features showed higher gain with 30 s than with 10 s representations, and four of the five 240 s features showed higher gain with 240 s than with 30 s representations. Together with the retention results, this shows that each duration extension broadens the feature information available in the representation: information from the preceding stage remains accessible while additional features supported by the longer input are learned.

Downstream prediction from signal features. The signal features recovered from the frozen representation also carried information useful for downstream prediction. For 13 of the 22 core task–feature–family relations used in the primary duration rationale, both the directly computed PPG features and the corresponding decoded features predicted the downstream labels better than participant-reassigned controls. The same pattern was observed for five of the 11 additional prior-study relations, yielding 18 of 33 relations in which both pathways showed downstream predictive value (Table 3B and § C.2). This agreement was most frequent for morphology/vascular-timing relations (8/9), followed by rate (8/16) and beat-interval variability (2/8). Thus, for many relations, the same task–feature–family relationship observed with features computed directly from PPG was also observed when those features were estimated from the RAE-PPG representation. This shows that the representation preserves information about these signal features that remains useful for downstream prediction, rather than merely making the pretraining targets decodable.

Table 3: Signal-feature retention, extension, and downstream prediction.

A. Retention / extension	Gain or Δ gain [95% CI]
retention 10 $\rightarrow$ 30 s ($n = 9$)	0.830 [0.815, 0.846]
extension 10 $\rightarrow$ 30 s ($n = 2$)	0.611 $\rightarrow$ 0.898; +0.287 [0.267, 0.307]
retention 30 $\rightarrow$ 240 s ($n = 2$)	0.666 [0.645, 0.687]
extension 30 $\rightarrow$ 240 s ($n = 5$)	0.579 $\rightarrow$ 0.755; +0.176 [0.163, 0.189]
B. Feature family	Relations PPG Decoded Both
Rate	16 9 8 8
Morphology / vascular timing	9 9 8 8
Beat-interval variability	8 2 3 2
All 33 relations	33 20 19 18

A: n counts targets. retention: aligned earlier features; extension: new later-stage features. Intersection-union test: $p_{\text{IUT}} < .001$. B: positive relations; Both: intersection. Families may share tasks.

5.3 PRESERVATION AND REUSE ACROSS DURATIONS

Preservation during later pretraining. Shorter-input representations remained unchanged throughout later pretraining only when earlier parameter groups were protected from subsequent updates. Both nested/protected variants produced identical shorter-input representations and predictions across later stages, whereas earlier-feature decodability decreased in both fully shared variants. In the fully shared variant without retained-target supervision, mean gain fell by 16.4, 18.7, and 38.1 percentage points for the 10 s to 30 s, 10 s to 240 s, and 30 s to 240 s comparisons, respectively. Retained-target supervision reduced these losses in the fully shared encoder but did not eliminate them (§ D.2). Protected write therefore preserves the computations used for shorter inputs, which retained-target supervision alone does not guarantee in a fully shared encoder.

Retained-target supervision and longer-input accessibility. Within the protected organization, retained-target supervision had a different effect. It improved earlier-feature accessibility when the encoder processed a longer input. Mean gain increased from 0.710 to 0.830 for 10 s features read from 30 s representations and from 0.534 to 0.666 for 30 s features read from 240 s representations, corresponding to 12.1 and 13.2 additional percentage points of baseline error removed (Table 4 and § D.3). By comparison, native-duration decodability of the newly introduced features changed by only 0.60 and 0.65 percentage points. Retained-target supervision therefore primarily improved access to previously learned feature information from longer inputs, complementing the preservation of shorter-input computations provided by protected write.

Preservation–adaptation trade-off. The full design also showed a different balance of downstream performance across durations. RAE-PPG achieved the lowest mean rank among the four ablation variants, 2.03 versus 2.56 for the fully shared encoder with retained-target supervision (Table 4). With retained-target supervision enabled in both encoders, RAE-PPG led on six of seven 10 s tasks and all five 30 s tasks, whereas the fully shared encoder led on five of six 240 s tasks and achieved higher native 240 s feature decodability (§ D.2–D.3). The ablation therefore exposes a preservation–adaptation trade-off. Protected training showed stronger transfer across earlier and intermediate durations, while fully shared training showed stronger adaptation to the terminal duration.

Reuse of prior-stage learning. Earlier-stage learning was not only preserved but also useful for acquiring newly introduced signal features. Keeping the learned inherited pathway reduced the remaining baseline-normalized Huber error by 34.7% (95% CI: 29.2–39.8%) from 10 s to 30 s and 35.2% (32.4–38.1%) from 30 s to 240 s relative to resetting the inherited pathway to its initial values. All seven feature-level confidence intervals favored LEARNED (§ D.4). The inherited pathway was frozen in both conditions, so it could not acquire additional information during either continuation. The consistently better acquisition of new features with the learned pathway therefore shows that prior-stage learning was reused to support learning at the next duration.

6 DISCUSSION

Summary. RAE-PPG organizes self-supervision around signal duration, introducing features as longer observations support them while retaining earlier learning. Across 18 tasks, the frozen encoder showed broad transfer across three durations, although longer inputs did not uniformly improve downstream performance. Feature decoding showed earlier features remained accessible while later-stage features became more decodable on average at their introduction durations. Ablations separated protected write from retained-target supervision, and matched continuations showed learned prior-stage parameters supported newly introduced features, demonstrating preservation and reuse across successive duration extensions. **Limitations and future work.** RAE-PPG introduces each feature only when the input duration is long enough to support its prescribed analysis interval. The exact stage durations, however, are design choices. The present 10 s, 30 s, and 240 s

Table 4: Ablations of parameter organization and retained-target supervision.

Evaluation	Nested/protected		Fully shared	
	A: ON	D: OFF	B: ON	C: OFF
Mean rank (18 tasks) ↓	2.03	2.58	2.56	2.83
<i>Earlier features: aligned readout, gain ↑</i>				
10 → 30 s ($n = 9$)	0.830	0.710	0.663	0.635
30 → 240 s ($n = 2$)	0.666	0.534	0.747	0.530
<i>New features: native-duration mean pooling, gain ↑</i>				
30 s ($n = 2$)	0.898	0.892	0.606	0.533
240 s ($n = 5$)	0.755	0.749	0.802	0.787

Gains are feature-equal means. A = RAE-PPG. ON/OFF: retained-target supervision. Arrows: feature duration to input duration. n counts targets. A–D label the conditions as in Table 25.

configuration establishes retain-and-extend behavior over two successive extensions. Future work can study alternative stage partitions and longer observation horizons, including different numbers and spacings of stages and additional terminal durations, to determine how preservation, reuse, and adaptation behave as features requiring longer analysis intervals are progressively introduced.

REPRODUCIBILITY STATEMENT

The accompanying RAEPPG code package provides the core implementation of the proposed method: pretrained weights, signal preprocessing, signal-feature target extraction, the encoder, staged pretraining, embedding extraction and frozen linear-probe evaluation. It includes numerical configurations, training-split target statistics, dependency versions, synthetic verification tests and a README with setup and execution instructions. Appendices A.1–A.9 specify the pretraining data, model, targets and optimization; Appendix B documents downstream cohorts and evaluation, and Appendices C, D and E describe the additional analyses. Source recordings remain available from their respective providers, and no participant-level data are redistributed.

AI USE STATEMENT

Generative AI tools were used for literature discovery, language editing and polishing, feedback on author-developed research methodology, and assistance with software implementation and code organization. The core research questions, methodological design, experimental decisions, and scientific claims were developed and determined by the authors.

ACKNOWLEDGMENTS

This work was supported by the Korean ARPA-H Project through the Korea Health Industry Development Institute (KHIDI), funded by the Ministry of Health & Welfare, Republic of Korea (No. RS-2025-25455839).

REFERENCES

- Salar Abbaspourazad, Oussama Elachqar, Andrew C. Miller, Saba Emrani, Udhyakumar Nallasamy, and Ian Shapiro. Large-scale training of foundation models for wearable biosignals. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=pC3WJHf51j>.
- Jae Mok Ahn. New aging index using signal features of both photoplethysmograms and acceleration plethysmograms. *Healthcare Informatics Research*, 23(1):53–59, 2017. doi: 10.4258/hir.2017.23.1.53.
- John Allen. Photoplethysmography and its application in clinical physiological measurement. *Physiological Measurement*, 28(3):R1–R39, 2007. doi: 10.1088/0967-3334/28/3/R01.
- Robert Avram, Geoffrey H. Tison, Kirstin Aschbacher, Peter Kuhar, Eric Vittinghoff, Michael Butzner, Ryan Runge, Nancy Wu, Mark J. Pletcher, Gregory M. Marcus, and Jeffrey Olgin. Real-world heart rate norms in the Health eHeart study. *npj Digital Medicine*, 2:58, 2019. doi: 10.1038/s41746-019-0134-9.
- Hyun Jae Baek, Chul-Ho Cho, Jaegool Cho, and Jong-Min Woo. Reliability of ultra-short-term analysis as a surrogate of standard 5-min analysis of heart rate variability. *Telemedicine and e-Health*, 21(5):404–414, 2015. doi: 10.1089/tmj.2014.0104.
- Mikołaj Basza, Damian Walag, Weronika Kowalczyk, Aleksandra Bożym, Michalina Ciurla, Małgorzata Krzyżanowska, Cezary Maciejewski, Wojciech Bojanowicz, Mateusz Soliński, and Łukasz Kołtowski. Photoplethysmography wave morphology in patients with atrial fibrillation. *Physiological Measurement*, 44(4):045001, 2023. doi: 10.1088/1361-6579/acc725.
- Yoav Benjamini and Yosef Hochberg. Controlling the false discovery rate: A practical and powerful approach to multiple testing. *Journal of the Royal Statistical Society: Series B (Methodological)*, 57(1):289–300, 1995. doi: 10.1111/j.2517-6161.1995.tb02031.x.
- Anne-Marie Brouwer, Nelleke van Wouwe, Christian Mühl, Jan van Erp, and Alexander Toet. Perceiving blocks of emotional pictures and sounds: effects on physiological variables. *Frontiers in Human Neuroscience*, 7: 295, 2013. doi: 10.3389/fnhum.2013.00295.

- Patrick Celka, Peter H Charlton, Bushra Farukh, Philip Chowienzyk, and Jordi Alastruey. Influence of mental stress on the pulse wave features of photoplethysmograms. *Healthcare Technology Letters*, 7(1):7–12, 2020. doi: 10.1049/htl.2019.0001.
- Xiaoli Chen, Rui Wang, Phyllis Zee, Pamela L. Lutsey, Sogol Javaheri, Carmela Alcántara, Chandra L. Jackson, Michelle A. Williams, and Susan Redline. Racial/ethnic differences in sleep disturbances: The multi-ethnic study of atherosclerosis (MESA). *Sleep*, 38(6):877–888, 2015. doi: 10.5665/sleep.4732.
- Zhaoliang Chen, Cheng Ding, Saurabh Kataria, Runze Yan, Minxiao Wang, Randall Lee, and Xiao Hu. GPT-PPG: A GPT-based foundation model for photoplethysmography signals. *Physiological Measurement*, 46(5):055004, 2025. doi: 10.1088/1361-6579/add988.
- Cheng Ding, Zhicheng Guo, Zhaoliang Chen, Randall J. Lee, Cynthia Rudin, and Xiao Hu. SiamQuality: A ConvNet-based foundation model for photoplethysmography signals. *Physiological Measurement*, 45(8):085004, 2024. doi: 10.1088/1361-6579/ad6747.
- Mohamed Elgendi. On the analysis of fingertip photoplethysmogram signals. *Current Cardiology Reviews*, 8(1):14–25, 2012. doi: 10.2174/157340312801215782.
- Mohamed Elgendi. Optimal signal quality index for photoplethysmogram signals. *Bioengineering*, 3(4):21, 2016. doi: 10.3390/bioengineering3040021.
- Mohamed Elgendi, Ian Norton, Matt Brearley, Derek Abbott, and Dale Schuurmans. Systolic peak detection in acceleration photoplethysmograms measured from emergency responders in tropical conditions. *PLOS ONE*, 8(10):e76585, 2013. doi: 10.1371/journal.pone.0076585.
- Mohamed Elsayed and A. Rupam Mahmood. Addressing loss of plasticity and catastrophic forgetting in continual learning. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=sKPzAXoylB>.
- Pedro Fonseca, Tim Weysen, Maaïke S. Goelema, Els I. S. Møst, Mustafa Radha, Charlotte Lunsingh Scheurleer, Leonie van den Heuvel, and Ronald M. Aarts. Validation of photoplethysmography-based sleep staging compared with polysomnography in healthy middle-aged adults. *Sleep*, 40(7):zsx097, 2017. doi: 10.1093/sleep/zsx097.
- Ainara Garde, Parastoo Dehkordi, Walter Karlen, David Wensley, J. Mark Ansermino, and Guy A. Dumont. Development of a screening tool for sleep disordered breathing in children using the phone oximeter. *PLOS ONE*, 9(11):e112959, 2014. doi: 10.1371/journal.pone.0112959.
- Eloy Geenjaer, Vince D. Calhoun, Scott Daly, Gouthaman KV, Lie Lu, Trisha Mittal, and Daniel P. Darcy. A robust PPG foundation model using multimodal physiological supervision. In *Proceedings of the Forty-Third International Conference on Machine Learning*, 2026. URL <https://openreview.net/forum?id=JF4045xnh1>.
- Márton Á. Goda, Peter H. Charlton, and Joachim A. Behar. pyPPG: a Python toolbox for comprehensive photoplethysmography signal analysis. *Physiological Measurement*, 45(4):045001, 2024. doi: 10.1088/1361-6579/ad33a2.
- Zongheng Guo, Tao Chen, Yang Jiao, Yi Pan, Xiao Hu, and Manuela Ferrario. SIGMA-PPG: Statistical-prior informed generative masking architecture for PPG foundation model. In *Proceedings of the Forty-Third International Conference on Machine Learning*, 2026. URL <https://openreview.net/forum?id=PKgGsbORt9>.
- José Haba-Rubio, Georges Darbellay, François R Herrmann, Jean G Frey, Alda Fernandes, Jean M Vesin, Jean P Thiran, and Jean M Tschopp. Obstructive sleep apnea syndrome: effect of respiratory events and arousal on pulse wave amplitude measured by photoplethysmography in NREM sleep. *Sleep and Breathing*, 9(2):73–81, 2005. doi: 10.1007/s11325-005-0017-y.
- Junichiro Hayano, Hiroaki Yamamoto, Izumi Nonaka, Makoto Komazawa, Kenichi Ito, Norihiro Ueda, Haruhito Tanaka, and Emi Yuda. Quantitative detection of sleep apnea with wearable watch device. *PLOS ONE*, 15(11):e0237279, 2020. doi: 10.1371/journal.pone.0237279.
- Michelle Hickey, Justin P. Phillips, and Panayiotis A. Kyriacou. Investigation of peripheral photoplethysmographic morphology changes induced during a hand-elevation study. *Journal of Clinical Monitoring and Computing*, 30(5):727–736, 2016. doi: 10.1007/s10877-015-9761-0.
- Sture Holm. A simple sequentially rejective multiple test procedure. *Scandinavian Journal of Statistics*, 6(2):65–70, 1979. URL <https://www.jstor.org/stable/4615733>.

- Peter J. Huber. Robust estimation of a location parameter. *The Annals of Mathematical Statistics*, 35(1):73–101, 1964. doi: 10.1214/aoms/1177703732.
- Alistair E. W. Johnson, Tom J. Pollard, Lu Shen, Li-wei H. Lehman, Mengling Feng, Mohammad Ghassemi, Benjamin Moody, Peter Szolovits, Leo Anthony Celi, and Roger G. Mark. MIMIC-III, a freely accessible critical care database. *Scientific Data*, 3:160035, 2016. doi: 10.1038/sdata.2016.35.
- Syed Ghufuran Khalid, Jufen Zhang, Fei Chen, and Dingchang Zheng. Blood pressure estimation using photoplethysmography only: Comparison between different machine learning approaches. *Journal of Healthcare Engineering*, 2018:1548647, 2018. doi: 10.1155/2018/1548647.
- Anton R. Kiselev, Elena N. Mureeva, Viktoria V. Skazkina, Olga S. Panina, Anatoly S. Karavaev, and Yuri V. Chernenkov. Full-term and preterm newborns differ more significantly in photoplethysmographic waveform variability than heart rate variability. *Life*, 14(6):675, 2024. doi: 10.3390/life14060675.
- Henri Korkalainen, Juhani Aakko, Brett Duce, Samu Kainulainen, Akseli Leino, Sami Nikkonen, Isaac O Afara, Sami Myllymaa, Juha Töyräs, and Timo Leppänen. Deep learning enables sleep staging from photoplethysmogram for patients with suspected sleep apnea. *Sleep*, 43(11):zsaa098, 2020. doi: 10.1093/sleep/zsaa098.
- Hyung-Chul Lee, Yoonsang Park, Soo Bin Yoon, Seong Mi Yang, Dongnyeok Park, and Chul-Woo Jung. VitalDB, a high-fidelity multi-parameter vital signs database in surgical patients. *Scientific Data*, 9(1):279, 2022. doi: 10.1038/s41597-022-01411-5.
- Simon A. Lee, Cyrus Tanade, Hao Zhou, Juhyeon Lee, Megha Thukral, Md Sazzad Hissain Khan, Keum San Chun, Baiying Lu, Migyeong Gwak, Mehrab Bin Morshed, Viswam Nathan, Md Mahbubur Rahman, Li Zhu, Subramaniam Venkatraman, and Sharanya Arcot Desai. HiMAE: Hierarchical masked autoencoders discover resolution-specific structure in wearable time series. In *The Fourteenth International Conference on Learning Representations*, 2026. URL https://proceedings.iclr.cc/paper_files/paper/2026/hash/6a3a5b1ad657c46ab99958b138bcd525-Abstract-Conference.html.
- Jun Li, Aaron D. Aguirre, Valdery Moura Junior, Jiarui Jin, Che Liu, Lanhai Zhong, Chenxi Sun, Gari Clifford, M. Brandon Westover, and Shenda Hong. An electrocardiogram foundation model built on over 10 million recordings. *NEJM AI*, 2(7), 2025. doi: 10.1056/AIoa2401033.
- Yanjun Li, Zengli Wang, Lin Zhang, Xianglin Yang, and Jinzhong Song. Characters available in photoplethysmogram for blood pressure estimation: Beyond the pulse transit time. *Australasian Physical & Engineering Sciences in Medicine*, 37(2):367–376, 2014. doi: 10.1007/s13246-014-0269-6.
- Ivan Liu, Luming Hu, Jing Luo, Chang Liu, Qi Zhong, and Shiguang Ni. Assessing Mental Health and Emotional States by Using Smartphone Photoplethysmography-Based Digital Pulse Waveform Analysis: Cross-Sectional Observational Study. *JMIR mHealth and uHealth*, 14:e81301, 2026. doi: 10.2196/81301.
- Longjian Liu, Shunsaku Mizushima, Katsumi Ikeda, Yasuo Nara, Yukio Yamori, and Cardiovascular Disease and Alimentary Comparison Study Group. Resting heart rate in relation to blood pressure: results from the World Health Organization-Cardiovascular Disease and Alimentary Comparison study. *International Journal of Cardiology*, 145(1):73–74, 2010. doi: 10.1016/j.ijcard.2009.04.032.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In *International Conference on Learning Representations*, 2019. URL <https://openreview.net/forum?id=Bkg6RiCqY7>.
- Mieli Luukinen, Henna Pitkänen, Timo Leppänen, Juha Töyräs, Anna Sigridur Islind, Samu Kainulainen, and Henri Korkalainen. Variation in the photoplethysmogram response to arousal from sleep depending on the cause of arousal and the presence of desaturation. *IEEE Journal of Translational Engineering in Health and Medicine*, 12:328–339, 2024. doi: 10.1109/JTEHM.2024.3349916.
- Philip Mehrgardt, Matloob Khushi, Simon Poon, and Anusha Withana. Pulse transit time PPG dataset. PhysioNet, 2022. URL <https://doi.org/10.13026/jpan-6n92>. Dataset, version 1.1.0.
- Elisa Mejía-Mejía and Panicos A. Kyriacou. Duration of photoplethysmographic signals for the extraction of pulse rate variability indices. *Biomedical Signal Processing and Control*, 80:104214, 2023. doi: 10.1016/j.bspc.2022.104214.
- Elisa Mejía-Mejía, James M. May, Robinson Torres, and Panayiotis A. Kyriacou. Pulse rate variability in cardiovascular health: A review on its applications and relationship with heart rate variability. *Physiological Measurement*, 41(7):07TR01, 2020. doi: 10.1088/1361-6579/ab998c.

- Elisa Mejía-Mejía, John Allen, Karthik Budidha, Chadi El-Hajj, Panicos A. Kyriacou, and Peter H. Charlton. Photoplethysmography signal processing and synthesis. In Panicos A. Kyriacou and John Allen (eds.), *Photoplethysmography: Technology, Signal Analysis and Applications*, pp. 69–146. Elsevier, 2022. doi: 10.1016/B978-0-12-823374-0.00015-3.
- Benjamin Moody, George Moody, Mauricio Villarroel, Gari D. Clifford, and Ikaro Silva. MIMIC-III Waveform Database Matched Subset. PhysioNet, 2020. URL <https://physionet.org/content/mimic3wdb-matched/1.0/>. Dataset, version 1.0.
- Serena Moscato, Luca Palmerini, Pierpaolo Palumbo, and Lorenzo Chiari. Quality Assessment and Morphological Analysis of Photoplethysmography in Daily Life. *Frontiers in Digital Health*, 4:912353, 2022. doi: 10.3389/fdgh.2022.912353.
- Aravind Natarajan, Alexandros Pantelopoulos, Hulya Emir-Farinas, and Pradeep Natarajan. Heart rate variability with photoplethysmography in 8 million individuals: A cross-sectional study. *The Lancet Digital Health*, 2(12):e650–e657, 2020. doi: 10.1016/S2589-7500(20)30246-6.
- Keerthana Natarajan, Robert C. Block, Mohammad Yavarimanesh, Anand Chandrasekhar, Lalit K. Mestha, Omer T. Inan, Jin-Oh Hahn, and Ramakrishna Mukkamala. Photoplethysmography fast upstroke time intervals can be useful features for cuff-less measurement of blood pressure changes in humans. *IEEE Transactions on Biomedical Engineering*, 69(1):53–62, 2022. doi: 10.1109/TBME.2021.3087105.
- Andrea Nemcova, Enikő Vargova, Radovan Smisek, Lucie Marsanova, Lukas Smital, and Martin Vitek. Brno university of technology smartphone PPG database (BUT PPG): Annotated dataset for PPG quality assessment and heart rate estimation. *BioMed Research International*, 2021:3453007, 2021. doi: 10.1155/2021/3453007.
- Andrea Nemcova, Radovan Smisek, Eniko Vargova, Lucie Maršánová, Martin Vitek, Lukas Smital, Marina Filipenska, Pavlina Sikorova, and Pavel Gálík. Brno university of technology smartphone PPG database (BUT PPG). PhysioNet, 2024. URL <https://physionet.org/content/butppg/2.0.0/>. Dataset, version 2.0.0.
- Guangkun Nie, Xiaocheng Fang, Gongzheng Tang, Yujie Xiao, Jun Li, Bo Liu, Hongyan Li, and Shenda Hong. AnyPPG: An ECG-guided PPG foundation model trained on over 100,000 hours of recordings for holistic health profiling. In *Proceedings of the 32nd ACM SIGKDD Conference on Knowledge Discovery and Data Mining V.2*, pp. 11717–11727. ACM, 2026. doi: 10.1145/3770855.3818911.
- Arvind Pillai, Dimitris Spathis, Fahim Kawsar, and Mohammad Malekzadeh. PaPaGei: Open foundation models for optical physiological signals. In *International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=kYwTmlq6Vn>.
- Vinay Venkatesh Ramasesh, Ethan Dyer, and Maithra Raghu. Anatomy of catastrophic forgetting: Hidden representations and task semantics. In *International Conference on Learning Representations*, 2021. URL <https://arxiv.org/abs/2007.07400>.
- Attila Reiss, Ina Indlekofer, Philip Schmidt, and Kristof Van Laerhoven. Deep PPG: Large-scale heart rate estimation with convolutional neural networks. *Sensors*, 19(14):3079, 2019. doi: 10.3390/s19143079.
- Andrei A. Rusu, Neil C. Rabinowitz, Guillaume Desjardins, Hubert Soyer, James Kirkpatrick, Koray Kavukcuoglu, Razvan Pascanu, and Raia Hadsell. Progressive neural networks. arXiv preprint arXiv:1606.04671, 2016. URL <https://arxiv.org/abs/1606.04671>.
- Mithun Saha, Maxwell A. Xu, Wanting Mao, Sameer Neupane, James M. Rehg, and Santosh Kumar. Pulse-PPG: An open-source field-trained PPG foundation model for wearable applications across lab and field settings. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies*, 9(3):126:1–126:35, 2025. doi: 10.1145/3749494.
- Philip Schmidt, Attila Reiss, Robert Duerichen, Claus Marberger, and Kristof Van Laerhoven. Introducing WESAD, a multimodal dataset for wearable stress and affect detection. In *Proceedings of the 20th ACM International Conference on Multimodal Interaction*, pp. 400–408. ACM, 2018. doi: 10.1145/3242969.3242985.
- Seokyong Sheem, Yujin Cho, In Kyung Lee, Hanjun Cho, Taegeun Kim, Byung Hyung Kim, and Daekyum Kim. MUST: Smartwatch-based multimodal framework for predicting driver state and takeover performance. In *Proceedings of the 2026 CHI Conference on Human Factors in Computing Systems*, pp. 1–17. ACM, 2026. doi: 10.1145/3772318.3791703. Article 1121.

- Kenji Takazawa, Nobuhiro Tanaka, Masami Fujita, Osamu Matsuoka, Tokuyu Saiki, Masaru Aikawa, Sinobu Tamura, and Chiharu Ibukiyama. Assessment of vasoactive agents and vascular aging by the second derivative of photoplethysmogram waveform. *Hypertension*, 32(2):365–370, 1998. doi: 10.1161/01.HYP.32.2.365.
- Task Force of the European Society of Cardiology and the North American Society of Pacing and Electrophysiology. Heart rate variability: Standards of measurement, physiological interpretation, and clinical use. *Circulation*, 93(5):1043–1065, 1996. doi: 10.1161/01.CIR.93.5.1043.
- Megha Thukral, Cyrus Tanade, Simon A. Lee, Juhyeon Lee, Hao Zhou, Keum San Chun, Migyeong Gwak, Viswam Nathan, Md Mahbubur Rahman, Li Zhu, Mehrab Bin Morshed, Subramaniam Venkatraman, and Sharanya Arcot Desai. Wavelet-driven masked multiscale reconstruction for PPG foundation models. arXiv preprint arXiv:2601.12215, 2026. URL <https://arxiv.org/abs/2601.12215>.
- Jessica Torres-Soto and Euan A. Ashley. Multi-task deep learning for cardiac rhythm detection in wearable devices. *npj Digital Medicine*, 3:116, 2020. doi: 10.1038/s41746-020-00320-4.
- Ying-Ying Tsai, Yu-Jie Chen, Yen-Feng Lin, Fan-Chi Hsiao, Ching-Han Hsu, and Lun-De Liao. Photoplethysmography-based HRV analysis and machine learning for real-time stress quantification in mental health applications. *APL Bioengineering*, 9(2):026103, 2025. doi: 10.1063/5.0256590.
- Eemu-Samuli Väliäho, Pekka Kuoppa, Jukka A. Lipponen, Juha E. K. Hartikainen, Helena Jäntti, Tuomas T. Rissanen, Indrek Kolk, Hanna Pohjantähti-Maaroos, Maaret Castrén, Jari Halonen, Mika P. Tarvainen, Onni E. Santala, and Tero J. Martikainen. Wrist band photoplethysmography autocorrelation analysis enables detection of atrial fibrillation without pulse detection. *Frontiers in Physiology*, 12:654555, 2021. doi: 10.3389/fphys.2021.654555.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in Neural Information Processing Systems*, volume 30, pp. 5998–6008, 2017. URL <https://papers.nips.cc/paper/7181-attention-is-all-you-need>.
- Ke Wang, Jiamu Yang, Ayush Shetty, and Jessilyn Dunn. DREAMT: Dataset for real-time sleep stage estimation using multisensor wearable technology. PhysioNet, 2026. URL <https://physionet.org/content/dreamt/2.2.0/>. Dataset, version 2.2.0.
- Weinan Wang, Pedram Mohseni, Kevin L. Kilgore, and Laleh Najafizadeh. PulseDB: A large, cleaned dataset based on MIMIC-III and VitalDB for benchmarking cuff-less blood pressure estimation methods. *Frontiers in Digital Health*, 4:1090854, 2023. doi: 10.3389/fdgh.2022.1090854.
- Will Ke Wang, Jiamu Yang, Leeor Hershkovich, Hayoung Jeong, Bill Chen, Karnika Singh, Ali R. Roghanizad, Md Mobashir Hasan Shandhi, Andrew R. Spector, and Jessilyn Dunn. Addressing wearable sleep tracking inequity: A new dataset and novel methods for a population with sleep disorders. In *Proceedings of the Fifth Conference on Health, Inference, and Learning*, volume 248 of *Proceedings of Machine Learning Research*, pp. 380–396. PMLR, 2024. URL <https://proceedings.mlr.press/v248/wang24a.html>.
- Gizem Yilmaz, Ju Lynn Ong, Lieng-Hsi Ling, and Michael W. L. Chee. Insights into vascular physiology from sleep photoplethysmography. *Sleep*, 46(10):zsad172, 2023. doi: 10.1093/sleep/zsad172.

APPENDIX

A METHOD DETAILS

A.1 PRETRAINING CORPUS AND PARTITIONING

Pretraining uses the PLETH channel from MIMIC-III Waveform Matched Subset v1.0 (125 Hz ICU recordings) (Moody et al., 2020; Johnson et al., 2016) and VitalDB (500 Hz surgical recordings) (Lee et al., 2022). All records from a MIMIC participant or a VitalDB case share one partition. Partitions are assigned before screening and crop generation using the first 48 bits of a SHA-1 hash of each participant or case key with a fixed prefix, mapped to TRAIN/VAL/TEST at 0.8/0.1/0.1. Table 5 summarizes the processed pretraining pool. Continuous blocks are variable-length intervals between recording gaps. Blocks pass the stored quality screen when valid-sample fraction is at least 0.8, flatline fraction at most 0.25, and saturation fraction at most 0.05.

Table 5: Pretraining corpus after block-level screening. Counts before and after screening are shown for participants (MIMIC-III) or cases (VitalDB). Records are source segment files for MIMIC-III and case recordings for VitalDB. Hours are interval unions within each source record, before crop selection; they are not deduplicated across separate records.

Source	Partition	Groups: before → after	Records	Blocks	Source hours
MIMIC-III	TRAIN	5,614 → 5,544	174,858	3,101,986	421,887
MIMIC-III	VAL	729 → 724	21,560	465,577	66,397
MIMIC-III	TEST	737 → 736	22,447	413,427	56,047
VitalDB	TRAIN	4,930 → 4,609	4,609	7,216	13,841
VitalDB	VAL	604 → 566	566	898	1,698
VitalDB	TEST	622 → 582	582	867	1,774

For a root of n samples and a block containing N samples, let $m = \lfloor N/n \rfloor$ and $k = \min(4, m)$. We select offsets $n\lfloor j(m-1)/(k-1) \rfloor$, $j = 0, \dots, k-1$, using offset zero when $k = 1$ and no crop when $k = 0$. Thus each block contributes at most four non-overlapping crops per duration; crops at different durations may overlap. After root-normalization screening, MIMIC-III contributes 11,757,100/7,229,324/1,312,393 roots and VitalDB 28,731/28,322/26,434 roots at 10/30/240 s. The 240 s pools cover 5,480 participants and 4,608 cases; the shorter pools cover all retained TRAIN groups in Table 5. Each stage permutes its combined root pool without replacement, with no additional dataset or participant balancing. VitalDB accounts for 0.24%, 0.39% and 1.97% of eligible roots at 10, 30 and 240 s, respectively. Table 10 reports stage-level root counts and training exposure.

Target-candidate development and the final-extractor consistency analysis use TRAIN panels; the one-time confirmation of selected realizations used 512 VAL participants/cases (512 further TRAIN participants/cases for the LF fraction). The 1,308-group decoding panel in Appendix C.1 contains every TEST participant or case with an eligible 240 s root, and the reuse analysis in Appendix D.4 uses a hash-selected VAL panel. Feature normalization is fitted only on unique available native occurrences in TRAIN.

A.2 INPUT, LOCAL FEATURE EXTRACTOR, AND TOKENIZATION

Inputs are single-channel PPG at 64 Hz (low-pass 12 Hz view), giving 640, 1,920, and 15,360 samples for the 10, 30, and 240 s roots. Before applying the local feature extractor, the input pipeline z -scores each complete root using the mean and population standard deviation of its finite, quality-mask-valid samples. Invalid samples are set to zero, and no clipping is applied. Signal-feature targets are computed from the unnormalized waveform views of Appendix A.4; root normalization changes only the encoder input. Roots with invalid normalization statistics are not admitted to pretraining. Appendix B.2 specifies downstream preprocessing and handling of invalid roots. No augmentation is applied and dropout is 0.

The local feature extractor computes $\text{LN}(\text{Linear}_{1 \rightarrow 128}(x)) + 0.5 \text{LN}(\text{Conv}_3 \circ \text{GELU} \circ \text{Conv}_3(x))$, producing a 128-dimensional feature vector at each sample. Both convolutions use kernel size 3, stride 1, padding 1, and biases; layer-normalization ϵ is 10^{-5} .

Token boundaries are obtained by inverting cumulative quality-weighted mass at $K = 64$ equal levels; Appendix B.7 reports pretraining with $K = 128$ and $K = 256$. Valid samples have weight 1, and invalid samples have weight 10^{-4} . Each token is an overlap-weighted mean of the local feature vectors inside its boundary pair.

The token projector is $\text{LN}(\text{Linear}_{128 \rightarrow 384}(\text{token}) + \text{Linear}_{32 \rightarrow 384}(\text{pos}) + e_{\text{root}})$. The vector $e_{\text{root}} \in \mathbb{R}^{384}$ is the learned embedding for the input duration. For token boundaries a, b in sample coordinates, the position vector contains a/N , b/N , $c = (a + b)/(2N)$, $w = (b - a)/N$, $\log w$, the token index divided by 63, the duration index divided by 2, and $\log N/10$. Sine/cosine pairs $\sin(2\pi ft)$, $\cos(2\pi ft)$ use frequencies $f = 1, 2, 4, 8, 16, 32$ for $t = c$ and $f = 1, 2, 4$ for each normalized boundary $t = a/N, b/N$, giving 32 coordinates.

A.3 ENCODER

The encoder uses multi-head self-attention (Vaswani et al., 2017) in six pre-norm Transformer layers with $d_{\text{model}} = 384$, 12 heads of dimension 32, feed-forward width 1,536 (ReLU), no positional attention bias, and a final layer normalization. Table 6 reports module sizes and parameter ownership; the exported encoder excludes the feature heads.

Table 6: Architecture and parameter ownership. B is batch size, N the input length in samples, and Q_h and d_h the query count and output width of head h . Counts include biases and normalization parameters.

Module	Operations and output shape	Parameters	Writable stage
Local feature extractor	Linear and local two-convolution branch; $B \times N \times 128$	50,560	10 s
Token projection	Content + position + duration embedding, LN; $B \times 64 \times 384$	64,128	10 s; duration embeddings at their corresponding stages
Transformer	Six attention/FFN blocks; $B \times 64 \times 384$	10,646,784	Current attention/FFN group; shared norms/biases at 10 s
Final LN	$B \times 64 \times 384$	768	10 s
Feature heads	Eight affine maps $384 \rightarrow d_h$; $B \times Q_h \times d_h$	7,315	Selected rows at their introduction stage
Exported encoder	Signal tokens; downstream mean is $B \times 384$	10,762,240	Frozen for evaluation
Complete model	Encoder and feature heads	10,769,555	Stage-dependent masks

Each prediction head is a single affine map, with no hidden layer or output activation. The eight head widths are 1, 7, 1, 2, 3, 2, 1, 2; sixteen of the nineteen configured output coordinates are supervised. Heads use PyTorch’s default initialization, and the three unsupervised coordinates keep their initial values. Retained queries reuse their original head rows. The encoder has 3,672,832, 3,544,704, and 3,544,704 parameter entries owned by the 10 s, 30 s, and 240 s groups. Including active head rows, the corresponding writable counts are 3,676,297, 3,545,474, and 3,546,629.

Read masks are applied to dense attention/FFN computations. Local feature-extraction cost depends on input length.

A.4 SIGNAL-FEATURE TARGETS

Table 7 specifies the definitions, analysis intervals, and sources of the sixteen pretraining targets. Table 8 reports the matched-event ECG comparison for pulse-interval SD, and Table 9 summarizes adjacent-window rank consistency and held-out availability of the final targets.

Target-set selection. We use a compact rather than exhaustive set of PPG-derived targets. Guided by prior PPG signal-analysis studies, we considered scalar features with explicit definitions whose

values can be computed from the PPG waveform or PPG-derived events over analysis intervals no longer than 240 s. We excluded or reserved candidates that required longer intervals or non-PPG information, closely duplicated a selected feature, or lacked a sufficiently specified extraction procedure. The set contains fourteen duration-defining targets spanning rate, morphology/vascular timing, beat-interval variability, and waveform statistics, plus two auxiliary targets for signal quality and full-window pulse cadence. Feature identities and extractor implementations were selected separately. ECG reference beats were used to assess interval detection and PPG–ECG correspondence, not to define pretraining target values.

Preprocessing and pulse detection. Pretraining targets are computed from the same MIMIC-III and VitalDB recordings as the encoder inputs, before root-wise normalization. Each recording is split into continuous blocks of finite samples lasting at least 30 s; gaps are not bridged. At the source rate (125 Hz for MIMIC-III and 500 Hz for VitalDB), fourth-order Butterworth filters are applied forward and backward with odd-extension padding to obtain a 12 Hz low-pass measurement view and a 0.5–12 Hz band-pass detection view. Both views are resampled to 64 Hz by linear interpolation on sample times, without an additional anti-aliasing filter. Per-sample masks flag flatlines (at least 0.5 s with $|\Delta x| \leq 10^{-6}$), saturation (samples at or beyond the block’s 0.5th or 99.5th percentile), non-finite or interpolated samples, and filter edges. At each block boundary, the edge mask covers 2 s or 5% of the block duration, whichever is shorter. The source-support ratio is stored alongside these masks.

Peaks are detected once per continuous block on the detection view using a two-event-related-moving-average detector adapted from Elgendi et al. (2013), with $W_1 = 111$ ms, $W_2 = 667$ ms, and $\beta = 0.02$. For gap rescue, the local reference interval is the median of up to four neighboring inter-peak gaps on each side, excluding the current gap. When an inter-peak gap is at least 1.5 times this reference, up to three candidates from a secondary peak detector can be inserted. Each candidate must reach at least 40% of the median positive pulse height of the initially detected peaks, remain more than 0.35 times the local reference interval from the bounding peaks and at least that distance from other inserted peaks, and lie within half the local reference interval of its rhythm-predicted position. Each onset is the leftmost minimum of the detection view strictly between two consecutive peaks. Landmark times are stored in continuous-record coordinates and reused when forming input windows. The 240 s mean-rate target uses a separate implementation of the same detector and accepts intervals of 0.25–2 s. For PRV targets, peak times are additionally refined by parabolic interpolation while preserving the original interval-run adjacency.

Analysis intervals and input durations. An analysis interval is the pulse, pulse pair, or waveform segment used to compute one target value. Input duration is the length of the signal supplied to the encoder. Filtering and beat detection use the surrounding continuous recording, which can extend beyond the target’s analysis interval. A duration-defining target is introduced at the earliest selected stage whose input contains its prescribed interval (Section 3.1). When retained at a later stage, it keeps the same analysis interval and training-fitted normalization rather than being recomputed over the entire longer input. Auxiliary targets use the placements in Table 1.

Choice of stage number and durations. Three stages provide two successive extensions, allowing learning acquired at the intermediate stage to be reused at the next stage. We use 10 s for pulse-local and quality supervision, consistent with morphology-based PPG pretraining (Pillai et al., 2025). The 30 s stage accommodates the prescribed 20 s reflected-delay and 30 s RMSSD intervals. The 240 s stage accommodates the longest selected interval, that of pulse-interval SD, while also introducing the 60 s and 120 s features without changing their analysis intervals. These stage durations are design choices that group target introductions rather than assign a separate stage to every analysis interval.

Pulse landmarks. Let p_i and o_i denote peak and onset times in seconds, with $I_i = p_{i+1} - p_i$ and pulse $[o_i, o_{i+1})$ of duration $T_i = o_{i+1} - o_i$. For PRV targets, I_i uses the parabolically refined peak times; the peak-interval rate uses the detector’s sample-aligned times. Pulse-level features use the measurement view x . The crest s_i is the leftmost maximum of x strictly inside the pulse. Slope transit time divides the crest amplitude $x(s_i) - x(o_i)$ by the largest three-point central derivative between o_i and s_i . The APG is the five-point cubic Savitzky–Golay second derivative of x , with coefficients $f_s^2(2, -1, -2, -1, 2)/7$, where $f_s = 64$ Hz, giving waveform units per second squared.

Its a wave is the leftmost maximum between o_i and the detection-view peak p_i and must be positive. Starting after the a wave, b , c , and d are identified sequentially as the first strict local minimum, maximum, and minimum, respectively, all before $o_i + 0.6 T_i$. The signed amplitudes are a_i, b_i, d_i , and q_i^b is the b -wave time. A ratio is unavailable when a_i does not exceed a scale-relative numerical floor, and a missing b or d wave removes only the features that use it. These automatic selections use the APG wave names of Takazawa et al. (1998).

PW50 and the split-area ratio share a linear baseline from $x(o_i)$ to the value at o_{i+1} extrapolated from the last two samples of the pulse. The crossings $t_i^{\uparrow 50}$ and $t_i^{\downarrow 50}$ are the last upward crossing before s_i and the first downward crossing after s_i of half the baseline-subtracted crest height, located by linear interpolation; any sample exactly at that level or a missing crossing makes the pulse unavailable. Among strict local minima after p_i and before $o_i + 0.8 T_i$, we select the one whose subsequent strict local maximum within this range occurs earliest. The selected minimum must follow the steepest post-crest descent and rebound by at least 0.02 times the pulse excursion; otherwise, the pulse is unavailable. Only when no such minimum exists, a fallback uses the negative-to-nonnegative APG zero crossing in the same range with the most negative first derivative. Areas $A_i^{\text{sys}}, A_i^{\text{dia}}$ are trapezoidal signed integrals of the baseline-subtracted waveform before and after the split point; the ratio is unavailable when A_i^{sys} does not exceed a numerical floor, and the areas describe waveform shape rather than blood volume. Ahn (2017) split the pulse area at the dicrotic notch; the fallback branch, baseline, and notch-acceptance rule are our implementation choices. The reflected point q_i^{TP} is the first strict local maximum that follows a strict local minimum after s_i and before $o_i + 0.8 T_i$; without one, it is the largest local maximum of the five-point first derivative after that derivative has become negative within the same range, taking the earliest in a tie.

Spectral purity. For spectral purity, P is Welch power, f_1 maximizes power over 0.5–3 Hz, and $B_k = [kf_1 - 0.1k, kf_1 + 0.1k] \cap [0.5, 8]$. The estimator uses 512-sample Hann segments with 50% overlap, mean removal and an 8192-point FFT. At 64 Hz, each 10 s query contributes one 512-sample (8 s) segment to this Welch estimate. The spectrum uses the stored samples without masking or interpolation; the value is unavailable only when a sample in the 10 s query is non-finite, the query is flat, or total power is not positive. Spectral purity is an auxiliary target, not a common exclusion threshold for the other targets.

Uncentered ACF index. For the uncentered ACF index, let $u_0, \dots, u_{n-1}$ be the query samples after interpolation to 128 Hz and a 257-tap, 4 Hz low-pass filter with reflected edges. We compute $R_\ell = (\sum_{t=0}^{n-\ell-1} u_t u_{t+\ell}) / (\sum_{t=0}^{n-1} u_t^2)$ without mean removal, as in the equation of Väliäho et al. (2021). The 60 s query must be gap-free with source support of at least 0.5 and at least 55 s of unflagged samples; flagged samples remain in both sums, which run over all sample pairs of the query. We use $\Lambda = \{32, \dots, 512\}$ samples (0.25–4 s), an implementation choice spanning two pulse cycles at 30 bpm. For fixed query support, the index is invariant to uniform amplitude scaling but sensitive to additive offsets. Across 11,968 windows of 60 s from the 1,536 groups in the adjacent-window analysis, its Spearman correlation was 0.99 with the baseline-power fraction, $\bar{u}^2/\bar{u}^2$, and 0.02 with the mean-removed index. We therefore describe it as a baseline-sensitive waveform index. Decoding this target from root-normalized inputs does not establish recovery of the original waveform baseline.

LF fraction. The LF fraction uses the LF (0.04–0.15 Hz) and total-power (0–0.4 Hz) bands of Kiselev et al. (2024). That study used Welch spectra in 2 min sliding windows of longer recordings; we compute one linearly detrended, symmetric-Hann periodogram per 120 s query. The query must be gap-free, with at least 11/12 unflagged samples, unflagged endpoints, and no flagged run longer than 1 s. Flagged samples remain in the primary estimate. We also recompute the fraction after linearly interpolating those samples and mark the query unavailable if the absolute change exceeds 0.05.

Native-query placement. In 30 s inputs, the 20 s reflected-delay queries start at 0 and 10 s. In 240 s inputs, 60 s queries start at 0, 30, $\dots$, 180 s, and 120 s queries start at 2, 60, 120 s. Native queries covering the full input start at zero. Event-level targets retain their individual pulse or pulse-pair support. Retained-query placements are specified in Appendix A.6.

Quality control. A pulse-level value requires every sample of its pulse to be finite and valid, outside gaps and filter edges, with source support of at least 0.5 and no flatline, saturation, or interpolation flag. Each target also applies the fiducial, count, and duration requirements specified in Table 7. Missing fiducials and numerically degenerate denominators yield unavailable targets.

PRV interval screening. For each query window, every admitted interval is compared with the median of up to the five nearest admitted intervals on each side within the same contiguous admitted run. These medians are computed before gating and exclude the interval being assessed. With at least three such neighbors, an interval is kept only if its duration lies within $[0.6, 1.6]$ times that median; intervals with fewer neighbors are kept ungated. Gating is query-specific, so overlapping queries can retain different interval sets. With the continuous-record preprocessing fixed, the same physical query has identical interval membership, gating, availability, and target values across enclosing input durations. Successive differences use only pairs that were adjacent in the original pre-gating run and whose two intervals both survive gating. Excluded intervals therefore break adjacency rather than reconnect the surviving intervals. Let $\mathcal{C}$ contain these valid adjacent pairs, $D = |\mathcal{C}|$, and N_I denote the number of retained intervals. Pulse-interval SD uses the retained interval set without successive differencing.

The minimum interval counts, valid-pair counts, and merged interval coverage in Table 7 are availability requirements within the prescribed windows. Targets summarize the retained intervals; the entire window need not be valid. Our pNN50 divides by D , the number of valid adjacent pairs, rather than the total interval count used in the ECG-HRV definition (Task Force, 1996).

PRV duration references. Baek et al. (2015) reported study-specific minimum durations of 30 s for RMSSD, 60 s for pNN50, and 240 s for SDNN against 5 min references obtained from resting fingertip PPG. In noise-free simulated PPG, Mejía-Mejía & Kyriacou (2023) reported 30–60 s for RMSSD and 90 s for pNN50. Task Force, 1996 specifies approximately 2 min for low-frequency power of beat-interval series, a different quantity from the PPG waveform LF fraction. The coverage floors in Table 7 are operational availability requirements within the prescribed analysis windows.

Across the training corpus, 99.94% of roots passed input normalization and 93.3% of native target rows had available values. Unavailable targets contribute zero loss without imputation (Appendix A.5).

Selection of extractor realizations. Development-stage candidates varied in landmark search, derivative filtering, and baseline handling. Candidate sets and selection rules were fixed before candidate outputs were inspected, with features sharing a landmark selected jointly. Selection used numerical checks, invariance across enclosing input durations for identical physical queries, and availability on a 1,024-group TRAIN panel (512 groups per dataset). Selected development-stage realizations were confirmed once on 512 additional VAL groups (TRAIN for the LF fraction), without re-ranking. The two auxiliary targets were outside this selection. Selection used no downstream labels, task metrics, representation probes, pretraining losses, or TEST data. Subsequent extraction revisions are reflected in the final definitions above; Table 9 reports checks of the final implementations, not the development-stage candidates. Candidate-specific settings and development-only results are documented in the accompanying development record.

Numerical checks. The final PRV implementation was separately verified to give identical target values and availability for identical physical query windows across enclosing input durations. The variability, ACF, and LF values used in the adjacent-window analysis matched the production target values bit for bit in 55,296 windows.

PRV screening check. In 87 groups with usable ECG-derived beat references, the gate removed 45–55% of mismatched intervals in MIMIC-III and 14–21% in VitalDB, while removing at most 0.09% of matched intervals. This check evaluates interval screening; the matched-event comparison below evaluates pulse-interval SD values.

Adjacent-window rank consistency. We assessed whether relative feature rankings were consistent across adjacent, non-overlapping windows, using the final extractors on a TRAIN analysis panel of 1,024 groups and a TRAIN replication panel of 512 groups. Each participant or case contributed

Table 7: The sixteen pretraining targets. *Pulse* denotes $[o_i, o_{i+1})$; ratios are dimensionless unless a unit is shown. $P(B)$ sums spectral power in band B . Source citations identify the underlying signal-feature definitions; the extraction settings and support requirements are specified in this section. *Adapted from* indicates a changed definition or extraction procedure. PRV denotes variability of PPG-derived pulse intervals.

Feature (unit)	Support	Definition	Source
<i>Introduced at 10 s</i>			
Peak-interval rate (bpm)	Peak pair	$60/I_i; 0.3 \leq I_i \leq 2$ s	Adapted from Goda et al. (2024)
Slope transit time (s)	Pulse	$[x(s_i) - x(o_i)] / \max_{[o_i, s_i]} \dot{x}$	Natarajan et al. (2022)
APG b/a	Pulse	Signed amplitude ratio b_i/a_i	Takazawa et al. (1998)
APG d/a	Pulse	Signed amplitude ratio d_i/a_i	Takazawa et al. (1998)
Onset-to-APG- b (s)	Pulse	$q_i^b - o_i$	Adapted from Natarajan et al. (2022)
Normalized crest time	Pulse	$(s_i - o_i)/T_i$	Adapted from Goda et al. (2024)
Normalized PW50	Pulse	$(t_i^{\downarrow 50} - t_i^{\uparrow 50})/T_i$	Adapted from Goda et al. (2024); width-at-50% precedent: Khalid et al. (2018)
Pulse split-area ratio	Pulse	$A_i^{\text{dia}}/A_i^{\text{sys}}$	Adapted from Ahn (2017)
Spectral purity	10 s	$\sum_{k=1}^3 P(B_k)/P([0.5, 8])$ over one 8 s segment	Harmonic-band variant of Elgendi (2016)
<i>Introduced at 30 s</i>			
Normalized reflected delay	20 s	$\text{mean}_i[(q_i^{\text{rp}} - s_i)/T_i]; \geq 10$ valid pulses	Adapted from Hickey et al. (2016)
PRV-RMSSD (ms)	30 s	$1000\sqrt{D^{-1} \sum_{(a,b) \in C} (I_b - I_a)^2}; N_I \geq 20, \text{coverage} \geq 15 \text{ s}, D \geq 10$	Adapted from Task Force (1996); Mejía-Mejía et al. (2020)
<i>Introduced at 240 s</i>			
PRV-pNN50 (%)	60 s	$100D^{-1} \sum_{(a,b) \in C} \mathbf{1}[I_b - I_a > 0.05]; N_I \geq 40, \text{coverage} \geq 30 \text{ s}, D \geq 10$	Adapted from Task Force (1996); Mejía-Mejía et al. (2020)
Uncentered ACF index	60 s	$ \Lambda ^{-1} \sum_{\ell \in \Lambda} R_\ell $, uncentered R_ℓ ; gap-free, ≥ 55 unflagged seconds	Adapted from Väliäho et al. (2021)
PPGV LF fraction	120 s	$P([5/120, 18/120])/P([0, 48/120]); \geq 7040$ unflagged samples	Adapted from Kiselev et al. (2024)
Pulse-interval SD (ms)	240 s	$1000\sqrt{(N_I - 1)^{-1} \sum_i (I_i - \bar{I})^2}; N_I \geq 120, \text{interval coverage} \geq 120 \text{ s}$	Adapted from SDNN, Task Force (1996); Mejía-Mejía et al. (2020)
Mean pulse rate (bpm)	240 s	$60/\text{mean}(I_i); \geq 30$ intervals, ≥ 60 s coverage	Peak detector: Elgendi et al. (2013)

one 480 s block. Each block was divided into adjacent non-overlapping windows of a given span, and each window received one value: the median of its pulse values for pulse and pulse-pair targets, the mean of its pulse values for reflected delay, and otherwise the target computed over the window. The spans searched were 10, 20, 30, 60, 120 and 240 s for pulse and pulse-pair targets; 20, 30, 60, 120 and 240 s for reflected delay; 30, 60, 120 and 240 s for RMSSD; 60, 120 and 240 s for pNN50 and the ACF index; 120 and 240 s for the LF fraction; and 240 s for interval SD. A 480 s block holds a single adjacent pair of 240 s windows, so longer spans could not be tested.

For each window length, we computed Spearman’s ρ across complete adjacent-window pairs and transformed it to the prespecified rank-consistency score $2\rho/(1 + \rho)$ using the Spearman–Brown formula. Confidence intervals used 1,000 participant/case-cluster bootstrap draws. This score is not an estimate of single-window measurement reliability; a score of 0.70 corresponds to $\rho \approx 0.54$. A window length met the criterion when the lower 95% bound was at least 0.70 overall and in each dataset, with at least 384 groups overall and 128 per dataset contributing complete pairs. A target passed if the shortest length meeting the criterion in both panels did not exceed its assigned input duration.

Twelve of the fourteen evaluated targets met the criterion at the first tested window length (Table 9). The LF fraction and pulse-interval SD did not; rank consistency was a diagnostic, not a target-inclusion rule. For the LF fraction, the minimum lower bounds remained below 0.70 at 240 s: 0.686

and 0.565 in the analysis and replication panels, with 797 and 394 groups contributing complete pairs, respectively. Table 9 reports the results at the first tested window length.

Table 8: Matched-event PPG–ECG comparison of pulse-interval SD in 240 s windows. Bias is the mean PPG-minus-ECG difference; brackets show ECG-reference quartiles. P90 denotes the 90th percentile of absolute differences.

Dataset	Final groups	ECG reference median [Q1–Q3]	Bias (PPG – ECG)	Median / P90 absolute difference
MIMIC-III	50	23.53 [12.13, 37.40] ms	+3.23 ms	2.39 / 11.91 ms
VitalDB	19	25.99 [18.73, 44.14] ms	+2.84 ms	1.21 / 14.74 ms

Groups are the reference-scorable, matched-comparable subsets of the fixed TRAIN panel and are equally weighted. The ECG reference is an automatic two-detector consensus, not adjudicated normal-to-normal intervals; the comparison describes correspondence conditional on matched events.

Table 9: Adjacent-window rank consistency and held-out availability of the final targets. Rank-check windows summarize pulse and pulse-pair values by their median and reflected-delay values by their mean; other targets are computed over the indicated window. Each bound is the minimum of the overall and per-dataset lower 95% bounds of the Spearman–Brown score, shown for the analysis and replication panels at the first tested window length. Held-out availability is the percentage of 87,362 held-out trajectories with an available final-target summary. Dashes indicate auxiliary targets excluded from the rank-consistency analysis.

Feature	Rank-check window (s)	Lower 95% bound (analysis / replication)	Held-out availability (%)
<i>Introduced at 10 s</i>			
Peak-interval rate	10	0.932 / 0.919	97.8
Slope transit time	10	0.935 / 0.929	97.5
APG b/a	10	0.878 / 0.873	96.4
APG d/a	10	0.848 / 0.849	88.4
Onset-to-APG- b	10	0.794 / 0.782	96.4
Normalized crest time	10	0.878 / 0.867	97.5
Normalized PW50	10	0.918 / 0.920	97.5
Split-area ratio	10	0.834 / 0.813	95.7
Spectral purity	–	–	99.9
<i>Introduced at 30 s</i>			
Normalized reflected delay	20	0.900 / 0.895	90.6
PRV-RMSSD	30	0.851 / 0.823	86.7
<i>Introduced at 240 s</i>			
PRV-pNN50	60	0.821 / 0.750	97.1
Uncentered ACF index	60	0.914 / 0.881	99.9
PPGV LF fraction	120	0.652 / 0.560	99.2
Pulse-interval SD	240	0.697 / 0.698	93.9
Mean pulse rate	–	–	99.9

Matched-event comparison of pulse-interval SD. We compared PPG-derived and ECG-derived interval SD computed from identical matched interval sets. A fixed hash rule selected 128 MIMIC-III participants and 64 VitalDB cases from TRAIN groups with an eligible 240 s root, independently of target values. ECG-reference qualification retained 51 and 28 groups, respectively; final matched-comparable counts after production-availability and event-matching requirements are reported in Table 8. Groups were not replaced based on comparison outcomes. ECG reference beats were constructed from WFDB XQRS and GQRS detections matched one-to-one within ± 50 ms. A record-specific PPG–ECG lag was estimated from a separate 300–360 s calibration interval and held fixed for the 0–240 s scoring interval; after lag correction, PPG peaks were matched one-to-one to ECG consensus beats within ± 150 ms. Pulse-interval SD was then recomputed from identical matched interval sets in the two modalities. Median absolute differences were 2.39 ms in MIMIC-III and 1.21 ms in VitalDB (Table 8).

Within-participant variation of the LF fraction. We analyzed four consecutive 120 s LF-fraction values from the 480 s analysis and replication blocks. The analysis included 1,153 participants with all four values available. Across dataset/panel combinations, within-participant SD, calculated as the square root of the mean within-participant variance, ranged from 0.107 to 0.125. The SD of participant-mean LF fractions ranged from 0.130 to 0.143, with within/between variance ratios of 0.645–0.837. Substantial within-participant variation persisted under stricter signal-quality restrictions, although rank consistency improved in some high-quality subsets. Correlation did not decrease consistently with temporal separation across panels. For available LF windows, the 90th percentile of the change after interpolating flagged samples was 0.012; excluding the 0-Hz bin from total power preserved the ranking (Spearman $\rho = 0.9996$). These analyses do not separate genuine temporal variation from finite-window estimation variability. We use the LF fraction as a window-level low-frequency waveform statistic.

Target decodability. All sixteen target summaries had positive decoding gains at their introduction durations on participants or cases held out from pretraining, with each reported 95% interval above zero (Table 22). These included gains of 0.544 for the LF fraction and 0.761 for pulse-interval SD.

A.5 LOSS, NORMALIZATION, AND VALIDITY

Available targets are normalized as $(y - \text{median}) / \max(\text{IQR} / 1.349, 10^{-4})$, using statistics fitted on deduplicated available native TRAIN occurrences at each feature’s introduction duration. For sample u , input-duration identifier c (denoted by r in the main text), feature f , and role $\eta \in \{\text{native, retained}\}$, let $\Omega_{u,c,f,\eta}^{\text{struct}}$ denote the configured target occurrences before availability and readout masks are applied. The feature loss is

$$\mathcal{L}_{u,c,f,\eta} = \frac{1}{\max(1, |\Omega_{u,c,f,\eta}^{\text{struct}}|)} \sum_{j \in \Omega_{u,c,f,\eta}^{\text{struct}}} z_f a_j v_j \rho_1(\hat{y}_j - \tilde{y}_j). \quad (4)$$

Here, z_f , a_j , and v_j indicate a selected target coordinate, target availability, and a valid interval-aligned readout, respectively. The function ρ_1 is the Huber loss with threshold 1 in the normalized coordinates shared by $\hat{y}_j$ and $\tilde{y}_j$. The denominator counts all configured occurrences, including those with unavailable targets or invalid readouts, whose loss contributions are zero. Per-example feature losses are averaged over the batch and combined using feature weights that do not vary with target availability.

Native weights are stage-specific loss-balancing coefficients: each target receives 1/9 at 10 s and 1/5 at both 30 s and 240 s. The two native targets at 30 s therefore have a total coefficient of 0.4. These weights remain unchanged when retained-target supervision is disabled.

A.6 RETAINED QUERIES

At the 30 s stage, all nine targets introduced at 10 s are retained. Peak-interval rate uses fully contained peak-pair queries, and the seven pulse-morphology targets use fully contained onset-to-onset pulse queries. Spectral-purity queries span 10 s and start at 0, 10, and 20 s. Each retained feature has coefficient $\lambda_{\text{ret}}/9$.

The 240 s stage retains only normalized reflected delay and PRV-RMSSD. Reflected-delay queries span 20 s and start at 0, 10, $\dots$, 220 s (23 placements); RMSSD queries span 30 s and start at 0, 30, $\dots$, 210 s (eight placements). Their coefficients are $\lambda_{\text{ret}}/4$ and $\lambda_{\text{ret}}/6$, respectively. No direct 10 s-to-240 s retention term is used.

Retained queries reuse the target values and normalization defined at each feature’s introduction duration. Earlier prediction-head rows remain fixed, while gradients pass through the heads and interval-aligned readout to the current-duration encoder group. We use $\lambda_{\text{ret}} = 1.25$.

A.7 NESTED-READ, PROTECTED-WRITE ALLOCATION

In each of the six layers, attention heads $\{0\text{--}3\}$, $\{4\text{--}7\}$, and $\{8\text{--}11\}$, together with feed-forward units $\{0\text{--}511\}$, $\{512\text{--}1023\}$, and $\{1024\text{--}1535\}$, form G_{10} , G_{30} , and G_{240} , respectively. Each attention

Table 10: Stage-specific training settings and exposure.

Setting	10 s	30 s	240 s
Initialization	Random	10 s checkpoint	30 s checkpoint
Optimizer updates	857,664	340,309	125,551
Micro-batch $\times$ accumulation	64×1	64×1	8×4
Training roots	11,785,831	7,257,646	1,338,827
Processed roots	54.9 M	21.8 M	4.02 M
Nominal epochs	4.66	3.0	3.0
Weight decay	0.0132	0.0160	0.0101
Warm-up optimizer updates	21,442	8,344	3,066
Training time (GPU-h)	15.3	10.0	3.5

Micro-batches count input roots. Training roots are normalization-valid inputs in each stage’s pool; processed roots include repeated presentations. Training time includes checkpoint writes and in-loop diagnostics, but excludes data preloading and separate evaluations.

head owns its query/key/value projection rows and biases and its output-projection columns. Each feed-forward unit owns its first-layer row and bias and its second-layer column. Layer norms, shared biases, the final norm, the local feature extractor, and token projection belong to G_{10} . Each input duration has an embedding row updated only at its corresponding stage. Active prediction-head rows are updated only at their introduction stage; inactive rows are never updated.

During the forward pass at input duration r , read masks zero the contributions of attention output-projection columns and feed-forward-unit activations outside the readable set.

Write masks apply to parameter entries, both AdamW moment estimates, and per-entry step counters. The global gradient norm is computed over writable entries and clipped at 3.0. Protected parameter and optimizer-state entries remain bit-identical across later stages. For a fixed shorter input, the local feature extractor, its input-duration embedding, and all readable parameters remain unchanged; with zero dropout, its computation is preserved during later pretraining.

A.8 TRAINING SCHEDULE

All stages use masked AdamW (Loshchilov & Hutter, 2019) with $\beta = (0.9, 0.95)$ and $\epsilon = 10^{-8}$. Table 10 gives the stage-specific settings. Each stage saves its terminal checkpoint and sampler/optimizer state; the next stage inherits the parameters and optimizer state. The final checkpoint after 1,323,524 updates is used at all three input durations.

Let T be the number of optimizer updates in a stage and $t = 0, \dots, T - 1$ its zero-based update index. We use $\eta_{\max} = 3 \times 10^{-4}$ and $\eta_{\min} = 0.1\eta_{\max}$. Each stage has a separate learning-rate schedule starting at $\eta_{\min}$. At 10 s, the rate is evaluated at $f(t) = t/(T - 1)$:

$$\eta_{10}(t) = \begin{cases} \eta_{\min} + (\eta_{\max} - \eta_{\min}) \frac{f(t)}{0.025}, & f(t) < 0.025, \\ \eta_{\min} + \frac{\eta_{\max} - \eta_{\min}}{2} \left[1 + \cos \left(\pi \frac{f(t) - 0.025}{0.975} \right) \right], & f(t) \geq 0.025. \end{cases} \quad (5)$$

The 30 s and 240 s stages use a discrete reference schedule with P positions, of which the first W are warm-up. At optimizer update t , this schedule is evaluated at $j(t) = \min(P - 1, \lfloor tP/T \rfloor)$:

$$\eta_{\text{ref}}(j) = \begin{cases} \eta_{\min} + (\eta_{\max} - \eta_{\min}) \frac{j}{W - 1}, & j < W, \\ \eta_{\min} + \frac{\eta_{\max} - \eta_{\min}}{2} \left[1 + \cos \left(\pi \frac{j - W}{P - W - 1} \right) \right], & j \geq W, \end{cases} \quad \eta(t) = \eta_{\text{ref}}(j(t)). \quad (6)$$

The schedule parameters are $(T, P, W) = (340,309, 100,496, 2,464)$ at 30 s and $(125,551, 18,841, 460)$ at 240 s. The floor in $j(t)$ repeats reference rates across consecutive optimizer updates. All three stages end at $\eta_{\min}$.

A.9 IMPLEMENTATION AND DATA ACCESS

Training used one NVIDIA B200 GPU and one process per stage, totaling 28.8 GPU-hours (Table 10). Model parameters are float32, automatic mixed precision is not used, and deterministic algorithms are enforced. The code leaves PyTorch’s TF32 defaults unchanged, so matrix multiplications run in full float32 while cuDNN convolutions may use TF32. The recorded pretraining environment specifies Python 3.10.19 and PyTorch 2.9.1 with CUDA 12.8 and cuDNN 9.10.2. The terminal-transfer evaluation records NumPy 2.2.6, SciPy 1.15.3, and scikit-learn 1.7.2.

Dataset releases are identified in Appendices A.1 and B.1 and are used under their respective access conditions; MESA access is through the National Sleep Research Resource. Code and weights will be released publicly upon publication. The accompanying package is described in the Reproducibility Statement.

B DOWNSTREAM DATA AND EVALUATION

Table 11 summarizes the evaluation protocols used throughout the paper.

Table 11: Evaluation protocols. Folds and bootstrap resampling group participants or cases, and paired comparisons use shared draws. Task-probe search grids and selection metrics are specified in Appendix B.3. Intervals condition on the fitted encoders and probes.

Analysis	Fitting and evaluation	Draws / inference
Primary transfer; terminal ablations	Four inner TRAIN folds; refit TRAIN, evaluate VAL+TEST	1,000; score CIs and descriptive ranks
Cross-duration transfer	Same TRAIN/VAL+TEST roles and window centers	1,000; Holm-8 Retention, Holm-11 Extend
RAE-PPG cross-duration OOF	Five outer / four inner folds	Same inference as fixed-partition cross-duration evaluation
LOSO	One held-out participant; four inner folds	1,000; unadjusted contrasts
Feature decoding; feature ablations	Five outer / four inner folds; group-weighted fits; Huber selection, $\alpha \in \{10^{-1}, \dots, 10^6\}$	5,000, dataset-stratified; retention/extension: Holm-4, BH-18; ablations: unadjusted
Feature-to-task Bridge	Nested TRAIN feature-probe cross-fitting ($\alpha = 1$) and task-probe selection; VAL+TEST evaluation	1,000; 32 reassignment controls; relation-wise lower bounds
Downstream stage preservation	Fixed inputs, participants and probe folds across checkpoints	1,000; unadjusted contrasts
Prior-stage reuse	VAL panel; five outer / four inner folds; row-weighted fits; balanced Huber selection, $\alpha \in \{10^{-2}, \dots, 10^4\}$	5,000, dataset-stratified; unadjusted contrasts

B.1 DATASETS, TASKS AND EVALUATION COHORTS

We evaluate PPG-DaLiA (Reiss et al., 2019), BUT PPG (Nemcova et al., 2021), version 2.0.0 (Nemcova et al., 2024), DeepBeat (Torres-Soto & Ashley, 2020), PTT-PPG (Mehrgardt et al., 2022), WE-SAD (Schmidt et al., 2018), MESA (Chen et al., 2015), SDB (Garde et al., 2014), and DREAMT v2.2.0 (Wang et al., 2024; 2026). PulseDB (Wang et al., 2023) was excluded because it is derived from the MIMIC-III and VitalDB pretraining corpora. Tables 12 and 13 specify the primary evaluation cohorts, input durations, and acquisition and label-construction rules. In Table 2, DaLiA denotes PPG-DaLiA; HR, SBP/DBP, A/H, and AF denote heart rate, systolic/diastolic blood pressure, apnea/hypopnea, and atrial fibrillation, respectively.

Task-duration selection. Task durations were fixed using the recording and label context together with the feature families introduced by each duration. These are evaluation settings, not estimates of the minimum or optimal duration for each task. Tables 23–24 document the source findings and identify the core anchors and contextual relations used in this rationale.

Table 12: Primary downstream tasks and evaluation cohorts. Counts are eligible examples (participants); final evaluation uses VAL+TEST.

Dataset	Task(s)	Input (s)	Metric	TRAIN	Final evaluation
PPG-DaLiA	Heart rate	10	MAE	316 (9)	216 (6)
	Activity	30	macro-F1	311 (9)	207 (6)
BUT PPG	Heart rate	10	MAE	2,492 (30)	1,396 (20)
DeepBeat	Atrial fibrillation	10	AUROC	7,990 (119)	21,617 (30)
	Signal quality	10	macro-F1	7,990 (119)	21,617 (30)
PTT-PPG	SBP; DBP	10	MAE	84 (14)	48 (8)
WESAD	Stress	30	AUROC	651 (9)	435 (6)
	Arousal; valence	30	AUROC	82 (9)	55 (6)
MESA	Sleep stage	240	macro-F1	29,616 (1,234)	19,728 (822)
	Apnea/hypopnea burden	240	MAE	29,616 (1,234)	19,728 (822)
	Arousal burden	240	MAE	29,616 (1,234)	19,728 (822)
	SpO ₂ desaturation	240	MAE	29,616 (1,234)	19,728 (822)
SDB	AHI-code classification	240	AUROC	87 (87)	59 (59)
DREAMT	Age	10	MAE	1,416 (59)	960 (40)
	Sleep stage	30	macro-F1	1,416 (59)	960 (40)
	Apnea/hypopnea	240	AUROC	1,416 (59)	960 (40)

Examples are input windows except for SDB, which uses one pooled example per participant. DREAMT age is scored after participant-level prediction averaging. Tasks can share participants and windows, so their counts should not be summed.

Table 13: Acquisition, window selection, and labels. Sampling rates refer to source signals before the model-specific processing in Appendix B.2; cohort sizes and partitions are given in Table 12.

Dataset	Acquisition / channel	Window selection and labels
DaLiA	Daily activities; wrist BVP, 64 Hz	Centered 10 s/30 s crops from finite, non-flat, non-overlapping 240 s blocks. HR is the central official 8 s ECG annotation on its 2 s grid. Activity is the modal label within the 30 s crop, with at least 80% label purity; transition code 0 is retained.
BUT PPG	Smartphone PPG (Xiaomi Mi9, Huawei P20 Pro), finger or ear, 30 Hz; v2.0.0	All 3,888 released 10 s records from 50 participants: 1,926 finger records (30 participants) and 1,962 ear records (20 participants). The red channel is used in RGB files; 48 legacy files use the flattened 300-sample layout. WFDB samples retain the declared regular grid. HR comes from the record-level ECG reference; both quality categories are retained.
DeepBeat	Released wearable PPG, 32 Hz	The central 10 s is cropped from each released, min–max-scaled 25 s segment. AF labels are binary; quality labels are noise, acceptable, or excellent. Validation records from the eight participants also present in TEST are removed. TRAIN and validation are randomly capped at 8,000 and 4,000 segments without using labels; TEST is not subsampled. Non-finite or flat crops are excluded.
PTT-PPG	Exercise recordings; pleth_2, 500 Hz	First and last 10 s of each recording are paired with its start/end cuff SBP and DBP. Repeated trials remain with the same participant.
WESAD	Laboratory protocol; wrist BVP, 64 Hz	Stress is TSST versus baseline/amusement; meditation is excluded. Stress inputs are contiguous, non-overlapping 30 s crops inside one condition. Arousal/valence use the central 30 s of non-overlapping 240 s windows from all five conditions, including meditation, and inherit that condition’s SAM rating (1–9), with class 1 for ratings ≤ 5 and class 0 for ratings > 5 .
MESA	Overnight PSG; Pleth, 256 Hz	24 eligible, evenly spaced 240 s windows per participant, centered on scored 30 s epochs. Stages map to wake/light/deep/REM (N1+N2 light; N3+N4 deep). Each event burden is the duration of the union of annotated intervals clipped to the 240 s window, divided by 240 s, giving a value in $[0, 1]$.
SDB	Pediatric overnight phone-oximeter recordings, 62.5 Hz	Up to 128 evenly spaced finite, non-flat, non-overlapping 240 s windows per participant. Participant-level classification of the released AHI codes: 0 versus 1–3 (93 versus 53 children). The release does not specify their clinical AHI cutoffs. Window embeddings are averaged within participants before probing.
DREAMT	Wrist BVP aligned with sleep annotations, 64 Hz; v2.2.0	24 evenly spaced valid 240 s parent windows per participant. Sleep uses the central scored 30 s epoch (W/N1/N2/N3/REM). A/H presence is any positive overlap with obstructive apnea, central apnea or hypopnea. Age predictions are averaged within participants.

B.2 FOUNDATION-MODEL INTERFACES

The comparison models were selected for their released encoder checkpoints and reproducible inference interfaces.

All six encoders are frozen. RAE-PPG uses its final checkpoint with the read set matching the input duration and averages all 64 signal tokens to obtain a 384-dimensional representation; pretraining heads are excluded. Table 14 specifies model-specific preprocessing and readouts, and Table 15 identifies the comparison checkpoints (Pillai et al., 2025; Saha et al., 2025; Guo et al., 2026; Nie et al., 2026).

RAE-PPG processes each evaluation window separately at its source rate using the 12 Hz zero-phase low-pass filter, linear-interpolation resampling to 64 Hz, and masks described in Appendix A.4. Edge masks cover 0.5, 1.5, and 2 s at each end of 10 s, 30 s, and 240 s inputs, respectively. The resulting input is z -scored over mask-valid samples as specified in Appendix A.2. Invalid normalization statistics produce an all-zero input without dropping the evaluation example.

DeepBeat uses the stored comparison inputs: the 32 Hz segment is upsampled to 64 Hz by polyphase resampling, and its central 10 s is filtered with a fourth-order, zero-phase, 12 Hz Butterworth low-pass filter and min-max scaled to $[0, 1]$. All samples are marked valid before root-wise z -scoring, without edge or saturation masks.

Table 14: Model-specific interfaces for downstream evaluation. Sampling rates and dimensions refer to model inputs and probe representations. BP and LP denote band-pass and low-pass filtering. The DeepBeat-specific RAE-PPG preprocessing is described in Appendix B.2.

Model	f_s (Hz)	Preprocessing used	Input handling	Representation	Dim.
PaPaGei-P	125	z -score; 0.5–12 Hz BP; resample	10 s tiles	512-D embedding; tile mean + SD	512/1,024
PaPaGei-S	125	z -score; 0.5–12 Hz BP; resample	10 s tiles	512-D embedding; tile mean + SD	512/1,024
Pulse-PPG	50	Window z -score; no filter; resample	Full variable-length input	Global max	512
SIGMA-PPG	50	0.5–8 Hz BP; resample; min-max $[-1, 1]$	2 s patches; native positions	Mean of non-class patch tokens; final normalization	360
AnyPPG	125	0.5–8 Hz BP; resample; window z -score	Full variable-length input	Internal global mean	512
RAE-PPG	64	12 Hz LP; resample; masked root z -score	10/30/240 s; 64 tokens	Signal-token mean	384

PaPaGei uses a 512-dimensional embedding for 10 s inputs. For longer inputs, the mean and population standard deviation of embeddings from complete, non-overlapping 10 s tiles are concatenated, yielding 1,024 dimensions.

Pulse-PPG uses per-window z -scoring because its pretraining participant-normalization statistics are unavailable. Checkpoints are loaded with strict key matching. The SIGMA-PPG snapshot retains the released student-encoder tensors unchanged, removes the `student.` prefix, and omits pretraining-only heads and optimizer state.

Table 15: Comparison checkpoint files, source revisions and SHA-256 prefixes.

Model	Checkpoint file	Source commit	SHA-256 prefix
PaPaGei-P	papagei_p.pt	0c537da	3a6850961af5
PaPaGei-S	papagei_s.pt	0c537da	79d68671e51b
Pulse-PPG	checkpoint_best.pkl sigma_student_strict_	716eaf9	485ade5033b3
SIGMA-PPG	b185072e.pt	b1cc8d9	3fe728902855
AnyPPG	anyppg_ckpt.pth	661b877	99b9bb0a3c2b

Primary transfer and both cross-duration evaluations use deterministic float32 representation extraction, with TF32 disabled for CUDA matrix multiplication and cuDNN. Pretraining precision settings are specified separately in Appendix A.9.

The released PaPaGei-P/S and AnyPPG checkpoints were pretrained on MESA, but exact participant overlap is unavailable (Pillai et al., 2025; Nie et al., 2026). RAE-PPG pretraining excludes MESA. Appendix E reports comparison-model retraining on eligible RAE-PPG source recordings.

B.3 LINEAR-PROBE EVALUATION

Probe selection and fitting use TRAIN only, with VAL+TEST reserved for evaluation, following the split principle of PaPaGei (Pillai et al., 2025). All crops and repeated trials from a participant or case remain in the same partition. These fixed partitions are shared across encoders, feature-to-task pathways, and stage-checkpoint comparisons. Regularization is selected using four grouped inner folds: GroupKFold for regression and StratifiedGroupKFold for classification. StandardScaler is fitted on each inner-training fold. After selecting regularization by the mean inner-validation score, the scaler and probe are refitted on all TRAIN examples.

Probe search space. Classification uses L_2 -regularized logistic regression with `lbfgs` and `max_iter=10000`; regression uses ridge regression with an intercept. Primary transfer and fixed-partition cross-duration evaluation use a float64 SVD ridge solution, whereas LOSO and grouped-OOE evaluation use LSQR. All encoders use the nine-value grid $\{10^{-4}, 10^{-3}, \dots, 10^4\}$ for C or α . Selection maximizes binary AUROC or multiclass macro-F1, or minimizes regression MAE.

Metrics and uncertainty. Binary classification is evaluated by AUROC, multiclass classification by macro-F1, and regression by MAE. SDB uses participant-mean window embeddings before probe fitting. DREAMT age instead fits the probe to window-level embeddings and averages predictions within participants for final scoring. The 95% intervals use 1,000 participant/case-cluster bootstrap draws of VAL+TEST, retaining all examples from each sampled group and sharing draws across models within a task. Encoders and probes remain fixed. The same procedure evaluates the four final ablation checkpoints. Ranks in Table 2 use unrounded task scores.

B.4 LEAVE-ONE-SUBJECT-OUT EVALUATION

LOSO uses each task’s primary input duration. Each outer fold holds out one participant and trains on the other 14 participants for DaLiA/WESAD or 21 for PTT-PPG. Four grouped inner folds select regularization using the search and scaling procedure in Appendix B.3. Scores pool held-out predictions from all outer folds. WESAD stress uses its primary cohort of 1,086 windows. For each task, the comparator is the external model with the best pooled score. Paired intervals use 1,000 shared participant-bootstrap draws, with the fitted models and observed-best comparator fixed.

Table 16: Primary-duration LOSO evaluation. ΔU is RAE-PPG minus the observed-best external model, with utility defined as $-\text{MAE}$, AUROC, or macro-F1. Brackets give paired, unadjusted 95% participant-bootstrap intervals. Bold marks the better point score.

Task / duration	RAE-PPG	Best external model	ΔU [95% CI]
DaLiA heart rate	8.6138	AnyPPG	-1.2844 [-2.0133, -0.4897]
10 s; MAE ↓		7.3293	
DaLiA activity	0.3937	AnyPPG	+0.0540 [-0.0021, +0.1194]
30 s; macro-F1 ↑		0.3397	
WESAD stress	0.9484	AnyPPG	+0.0077 [-0.0080, +0.0242]
30 s; AUROC ↑		0.9407	
WESAD arousal	0.8016	AnyPPG	+0.0235 [-0.1299, +0.1607]
30 s; AUROC ↑		0.7781	
WESAD valence	0.7095	PaPaGei-S	+0.0546 [-0.0998, +0.2477]
30 s; AUROC ↑		0.6549	
PTT SBP	9.4724	PaPaGei-P	+0.0207 [-0.6675, +0.6648]
10 s; MAE ↓		9.4932	
PTT DBP	7.2528	Pulse-PPG	-0.3112 [-0.9697, +0.2514]
10 s; MAE ↓		6.9416	

RAE-PPG has the better point score on five of seven tasks; the paired interval excludes zero only for DaLiA heart rate, favoring AnyPPG.

B.5 RANK STABILITY

For each task, we rank the six models within each of the 1,000 shared participant/case-bootstrap draws. Table 17 reports mean ranks and first-place counts, averaging ranks equally across the 18 tasks. RAE-PPG has the lowest bootstrap mean rank and the highest mean first-place count.

Table 17: Rank stability across the 18 downstream tasks. Bootstrap summaries use the 1,000 shared participant/case resamples within each task.

Model	Observed scores		Bootstrap mean	
	Firsts /18	Rank ↓	Firsts /18	Rank ↓
RAE-PPG	12	1.444	11.217	1.656
AnyPPG	5	2.389	4.647	2.480
SIGMA-PPG	0	3.722	0.697	3.795
Pulse-PPG	0	3.944	0.528	3.958
PaPaGei-P	1	4.167	0.572	3.997
PaPaGei-S	0	5.333	0.371	5.114

Firsts count tasks with the best score; joint firsts count for each tied model, so totals may exceed 18. Ranks use average ranks for ties, with rank 1 best.

B.6 ROBUSTNESS TO THE PRETRAINING SEED

We performed five additional complete 10 s, 30 s, and 240 s pretraining runs, varying only the random seed governing parameter initialization and sample order. Data, targets, hyperparameters, and update counts were fixed.

Table 18: Sensitivity to the pretraining seed. Primary denotes the run used for the main results; five additional runs vary only the random seed.

Downstream task	Metric	Primary	Five additional runs		Rank range (six runs)	Runs ahead /6
			Mean $\pm$ SD	Range		
DaLiA: HR ¹⁰	MAE ↓	8.652	8.460 $\pm$ 0.262	8.152–8.864	2	0
BUT PPG: HR ¹⁰	MAE ↓	10.514	10.518 $\pm$ 0.112	10.441–10.716	2–4	0
PTT-PPG: SBP ¹⁰	MAE ↓	9.529	9.629 $\pm$ 0.064	9.561–9.709	1	6
PTT-PPG: DBP ¹⁰	MAE ↓	5.449	5.367 $\pm$ 0.055	5.283–5.433	1	6
DREAMT: Age ¹⁰	MAE ↓	11.833	11.909 $\pm$ 0.061	11.813–11.966	4–5	0
MESA: A/H ²⁴⁰	MAE ↓	0.0834	0.0842 $\pm$ 0.0002	0.0839–0.0843	1	6
MESA: Arousal ²⁴⁰	MAE ↓	0.0432	0.0437 $\pm$ 0.0002	0.0436–0.0440	1–2	4
MESA: SpO ₂ ²⁴⁰	MAE ↓	0.1768	0.1805 $\pm$ 0.0015	0.1787–0.1821	1	6
DeepBeat: AF ¹⁰	AUROC ↑	0.777	0.765 $\pm$ 0.005	0.758–0.771	2	0
DeepBeat: Quality ¹⁰	F1 ↑	0.672	0.682 $\pm$ 0.010	0.675–0.700	1	6
WESAD: Stress ³⁰	AUROC ↑	0.951	0.952 $\pm$ 0.008	0.939–0.960	1	6
WESAD: Arousal ³⁰	AUROC ↑	0.857	0.817 $\pm$ 0.007	0.810–0.828	1	6
WESAD: Valence ³⁰	AUROC ↑	0.697	0.729 $\pm$ 0.009	0.719–0.739	1	6
DaLiA: Activity ³⁰	F1 ↑	0.408	0.379 $\pm$ 0.022	0.353–0.413	1	6
DREAMT: Sleep ³⁰	F1 ↑	0.269	0.262 $\pm$ 0.017	0.248–0.288	1–3	1
MESA: Sleep ²⁴⁰	F1 ↑	0.474	0.467 $\pm$ 0.004	0.463–0.472	2	0
SDB: AHI code ²⁴⁰	AUROC ↑	0.678	0.695 $\pm$ 0.047	0.628–0.758	1	6
DREAMT: A/H ²⁴⁰	AUROC ↑	0.522	0.505 $\pm$ 0.020	0.474–0.527	1–6	2
Best observed score, tasks /18		12	10–12			
Mean rank ↓		1.44	1.56–1.72			

Superscripts: input seconds. Mean, sample SD, and score range summarize the five additional runs. Rank range and runs ahead include the primary run, for six runs in total. Ranks compare each RAE-PPG run with the five fixed baseline scores in Table 2; runs ahead counts strict improvements over the best baseline. F1 is macro-F1, and task abbreviations follow Table 2.

Each final encoder was evaluated using Appendix B.3, with identical examples, splits, and probe grids; baseline scores were fixed to Table 2. Across all six runs, RAE-PPG outperformed the best

baseline on the same ten tasks and underperformed it on the same five; the ordering varied across seeds for the remaining three tasks (Table 18).

B.7 TOKEN-COUNT SENSITIVITY

We compared $K = 64, 128, 256$ tokens, with one complete 10 s, 30 s, and 240 s pretraining run per setting. Data, targets, initialization seed, objective, parameter count, optimizer, and update budgets were fixed, without hyperparameter retuning. Final encoders were evaluated using Appendix B.3 against the same five baseline checkpoints (Table 19). Increasing K did not improve the aggregate ranking in these runs, and $K = 64$ remains the default.

Table 19: Token-count sensitivity on the 18 primary tasks. Each setting uses one complete pretraining run and the same five fixed comparison checkpoints.

Tokens K	Best-score tasks /18	Mean rank ↓
64	12	1.44
128	12	1.44
256	12	1.44

B.8 FIXED-PARTITION CROSS-DURATION EVALUATION

The 13-task analysis uses fixed TRAIN/VAL+TEST participant partitions and matched labels and window centers at 10 s, 30 s, and 240 s. Separate probes are fitted for each task and duration using Appendix B.3; all durations use the same final frozen encoder with duration-specific read sets. WESAD stress uses the 107 windows with complete 240 s support: 64 TRAIN windows from nine participants and 43 evaluation windows from six participants, rather than the primary cohort of 1,086 windows. Reference durations are fixed per task; MESA sleep staging uses a 30 s reference and the central 30 s label.

Table 20: Fixed-partition cross-duration evaluation of RAE-PPG. Probes are selected and fitted on TRAIN and evaluated on VAL+TEST. Brackets give 95% participant/case-cluster bootstrap intervals.

Task	10 s	30 s	240 s	Retention	Extend
DaLiA heart rate					
MAE ↓, ref. 10 s	8.6522 [6.3069–11.1771]	7.0623 [5.2881–8.7911]	8.8074 [7.8910–9.8989]	×	–
DaLiA activity					
F1 ↑, ref. 30 s	0.3097 [0.2425–0.3547]	0.4078 [0.3115–0.5070]	0.4581 [0.4109–0.4975]	×	×
WESAD stress					
AUROC ↑, ref. 30 s	0.8436 [0.7286–0.9640]	0.8821 [0.7522–0.9750]	0.9410 [0.8083–1.0000]	×	×
WESAD arousal					
AUROC ↑, ref. 30 s	0.7527 [0.6300–0.8685]	0.8571 [0.7583–0.9593]	0.7875 [0.6763–0.8964]	×	✓
WESAD valence					
AUROC ↑, ref. 30 s	0.6907 [0.6469–0.7590]	0.6973 [0.6023–0.8406]	0.6080 [0.4887–0.7766]	×	×
MESA sleep staging					
F1 ↑, ref. 30 s	0.3607 [0.3556–0.3656]	0.3821 [0.3758–0.3889]	0.4735 [0.4640–0.4833]	✓	✓
MESA A/H burden					
MAE ↓, ref. 240 s	0.0930 [0.0906–0.0956]	0.0912 [0.0889–0.0937]	0.0834 [0.0813–0.0858]	–	✓
MESA arousal-event burden					
MAE ↓, ref. 240 s	0.0521 [0.0510–0.0533]	0.0505 [0.0494–0.0516]	0.0432 [0.0422–0.0442]	–	✓

Score aggregation and the 1,000 shared participant/case-cluster bootstrap draws follow Appendix B.3. Utility is $U = -\text{MAE}$ for regression and AUROC or macro-F1 for classification. Retention compares a 10 s reference with both longer durations, or a 30 s reference with 240 s. Its task-level p -value is the maximum of the component p -values. A task meets Retention when every paired two-sided 95% interval has a lower bound above the negative task-specific margin and the Holm-adjusted task-level p -value is at most .05. Extend compares the immediately preceding duration with the reference and requires the lower endpoint of its paired two-sided 95% interval to exceed

zero, together with Holm-adjusted $p \leq .05$. Null-centered one-sided tests use a plus-one correction, with separate Holm families for the eight Retention and eleven Extend tests (Holm, 1979). Table 20 reports all scores, intervals, and decisions.

Table 20: Fixed-partition cross-duration evaluation of RAE-PPG (continued).

Task	10 s	30 s	240 s	Retention	Extend
MESA SpO ₂ desaturation burden	0.2258 [0.2228–0.2291]	0.2166 [0.2137–0.2195]	0.1768 [0.1739–0.1797]	–	✓
MAE ↓, ref. 240 s					
SDB AHI-code classification	0.4286 [0.2802–0.6050]	0.5000 [0.3483–0.6486]	0.6779 [0.5250–0.8184]	–	×
AUROC ↑, ref. 240 s					
DREAMT age	11.8329 [9.1310–14.7515]	11.1262 [8.6348–13.9619]	10.3018 [7.5973–13.2041]	×	–
MAE ↓, ref. 10 s					
DREAMT sleep staging	0.2643 [0.2327–0.2999]	0.2687 [0.2361–0.3071]	0.3014 [0.2705–0.3322]	✓	×
F1 ↑, ref. 30 s					
DREAMT A/H detection	0.4958 [0.4282–0.5627]	0.4500 [0.3684–0.5383]	0.5225 [0.4355–0.6143]	–	✓
AUROC ↑, ref. 240 s					
Confirmed tasks / applicable tasks				2/8	6/11

Reference is the prespecified duration for this analysis, which can differ from the primary reporting duration. ✓: both the paired-interval and Holm-adjusted test criteria are met; ×: these criteria are not met; –: not applicable.

B.9 RETENTION-MARGIN SENSITIVITY

The primary operational Retention margin δ is 0.02 for AUROC/macro-F1, 0.190 bpm for DaLiA heart rate, and 0.257 years for DREAMT age. We scale each task’s margin by 0.5, 1, 1.5, or 2.5, using the same 1,000 paired draws and a separate Holm-8 correction at each setting. Retention is confirmed on one, two, three, and three of the eight applicable tasks, respectively. MESA sleep staging passes at every setting, DREAMT sleep staging from δ , and DREAMT age from 1.5δ . Extend is unchanged at six of eleven because its criterion does not use this margin.

B.10 GROUPED OUT-OF-FOLD CROSS-DURATION EVALUATION

We evaluated the final frozen RAE-PPG encoder on the same 13 matched-duration cohorts as in Appendix B.8, using five participant-grouped outer folds and four inner folds. Participants, labels, window centers, and folds were matched across input durations. Scaling and probe selection follow the fold-local procedure in Appendix B.3. Scores pool the outer-fold predictions so that every participant contributes held-out predictions; DREAMT age is scored after averaging predictions within participants. Bootstrap resampling, reference durations, operational margins, and Retention/Extend criteria follow Appendix B.8. Table 21 reports the RAE-PPG results.

Table 21: Grouped out-of-fold cross-duration evaluation of RAE-PPG, using five outer and four inner participant-grouped folds. Brackets give 95% participant/case-cluster bootstrap intervals; Retention and Extend follow the criteria in Appendix B.8.

Task	10 s	30 s	240 s	Retention	Extend
DaLiA heart rate	8.4987 [7.1158–10.1447]	7.3716 [6.2626–8.6637]	8.9185 [7.8384–10.3123]	×	–
MAE ↓, ref. 10 s					
DaLiA activity	0.3148 [0.2824–0.3469]	0.3795 [0.3291–0.4273]	0.4651 [0.4070–0.5196]	✓	✓
F1 ↑, ref. 30 s					
WESAD stress	0.7792 [0.6938–0.8729]	0.9446 [0.9071–0.9762]	0.8742 [0.7992–0.9582]	×	✓
AUROC ↑, ref. 30 s					
WESAD arousal	0.7430 [0.6458–0.8500]	0.7556 [0.6825–0.8368]	0.7398 [0.6140–0.8644]	×	×
AUROC ↑, ref. 30 s					

Table 21: Grouped out-of-fold cross-duration evaluation of RAE-PPG (continued).

Task	10 s	30 s	240 s	Retention	Extend
WESAD valence	0.6757 [0.6011–0.7900]	0.6792 [0.5729–0.8272]	0.6414 [0.5312–0.7686]	×	×
AUROC ↑, ref. 30 s					
MESA sleep staging	0.3594 [0.3563–0.3627]	0.3789 [0.3754–0.3830]	0.4688 [0.4633–0.4749]	✓	✓
F1 ↑, ref. 30 s					
MESA A/H burden	0.0934 [0.0920–0.0949]	0.0920 [0.0906–0.0934]	0.0840 [0.0827–0.0854]	–	✓
MAE ↓, ref. 240 s					
MESA arousal-event burden	0.0519 [0.0512–0.0526]	0.0504 [0.0498–0.0511]	0.0436 [0.0430–0.0443]	–	✓
MAE ↓, ref. 240 s					
MESA SpO ₂ desaturation burden	0.2255 [0.2235–0.2275]	0.2164 [0.2144–0.2184]	0.1779 [0.1760–0.1798]	–	✓
MAE ↓, ref. 240 s					
SDB AHI-code classification	0.5023 [0.4121–0.5992]	0.5769 [0.4737–0.6762]	0.6730 [0.5847–0.7647]	–	×
AUROC ↑, ref. 240 s					
DREAMT age	11.1645 [9.6883–12.8526]	10.8672 [9.3503–12.5800]	10.8876 [9.4015–12.4720]	×	–
MAE ↓, ref. 10 s					
DREAMT sleep staging	0.2276 [0.2114–0.2430]	0.2749 [0.2525–0.2965]	0.3109 [0.2851–0.3341]	✓	✓
F1 ↑, ref. 30 s					
DREAMT A/H detection	0.4889 [0.4513–0.5238]	0.5226 [0.4794–0.5646]	0.5931 [0.5452–0.6344]	–	✓
AUROC ↑, ref. 240 s					
Confirmed tasks / applicable tasks				3/8	8/11

Reference is the prespecified duration for this analysis, which can differ from the primary reporting duration. ✓: both the paired-interval and Holm-adjusted test criteria are met; ×: these criteria are not met; –: not applicable.

C SIGNAL-FEATURE ANALYSES

C.1 SIGNAL-FEATURE RETENTION AND EXTENSION

Feature decoding uses 87,362 aligned trajectories from 1,308 participants or cases held out from pretraining, without downstream labels. All input durations use the same final frozen encoder. A separate ridge probe is fitted for each feature and representation view using five participant/case-grouped outer folds and four inner folds. Inner validation selects α from $\{10^{-1}, 10^0, \dots, 10^6\}$ by Huber error. Standardization and probe fitting are performed within each training fold, with equal weight per participant or case.

Targets and readouts. Each decoding target averages available native feature occurrences within the centered 10 s, 30 s, or 240 s interval for its introduction stage, after pretraining-TRAIN normalization (Appendix A.5). For each feature, all compared views use the same trajectories with available targets. Feature retention decodes earlier features from longer inputs using overlap-weighted token readouts aligned to the earlier interval. Feature extension predicts the same later-stage targets from the means of all signal tokens in shorter and longer inputs. In the shorter-input condition, the target is not recomputed over a shorter window. Table 22 specifies the input durations and readouts.

Decoding gain. Outer-fold predictions are pooled. For each feature f , the probe error $E_{\text{probe},f}$ and constant-zero prediction error $E_{0,f}$ use unit-threshold Huber loss in normalized target coordinates, with the same valid targets in both errors. Each error is averaged within participants/cases, then equally across available groups within each dataset, and finally equally across MIMIC-III and VitalDB. Gain is defined as $\text{gain}_f = 1 - E_{\text{probe},f}/E_{0,f}$; positive gain indicates improvement over the zero predictor. Table 3A averages gains equally across the relevant features. Feature retention reports gain at the longer input duration, while feature extension reports the longer-minus-shorter gain difference.

Constant-predictor controls. Positive gain over zero alone does not exclude improvement from a learned intercept, because pretraining normalization need not center the window-level decoding targets. We therefore compared the saved probe predictions with three controls fitted separately for each feature using only the corresponding outer training fold: a participant/case-weighted mean, a constant minimizing the same dataset- and group-balanced Huber error used for evaluation, and separate Huber-minimizing constants for each dataset. The mean matches an intercept-only ridge predictor; the latter two controls minimize Huber error without using representations. All controls

use the original target masks, outer folds, evaluation weights, and 5,000 bootstrap draws, with fitted predictors fixed. Across all 45 feature/readout combinations, probe error was lower than under each of the three controls; all 135 paired error-reduction comparisons had positive individual 95% confidence-interval lower bounds. Against the pooled Huber constant, mean gains for retained 10 s features at 30 s and retained 30 s features at 240 s were 0.812 [0.795, 0.828] and 0.663 [0.642, 0.685], respectively. The original zero-reference gains above remain unchanged. These comparisons support feature information beyond a learned constant or dataset identity alone.

Uncertainty and tests. Percentile 95% intervals use 5,000 participant/case bootstrap draws stratified by dataset and shared across features and views, with fitted probes fixed. Each draw recomputes the group- and dataset-balanced errors and feature-average gains over available targets. Four pre-specified one-sided tests assess accessibility of 10 s features at 30 s, extension of 30 s features from 10 s to 30 s inputs, accessibility of 30 s features at 240 s, and extension of 240 s features from 30 s to 240 s inputs. Null-centered component tests use Holm correction (Holm, 1979). The intersection–union test takes the largest raw component p -value; all four components are positive ($p_{\text{IUT}} < .001$). Benjamini–Hochberg correction is applied across the 18 secondary feature-level tests (Benjamini & Hochberg, 1995).

Paired decoding comparisons. Relative to the corresponding introduction-duration readouts, mean gain differences were -0.008 [$-0.013, -0.004$] for 10 s features at 30 s, -0.194 [$-0.205, -0.183$] for 10 s features at 240 s, and -0.232 [$-0.253, -0.211$] for 30 s features at 240 s. Brackets denote paired 95% intervals. Both features introduced at 30 s and four of the five features introduced at 240 s showed positive extension after correction across the 18 secondary tests. The PRV-pNN50 extension difference was -0.007 [$-0.035, 0.018$].

Table 22: Decoding of the sixteen signal features from the final frozen encoder. Column headings give input duration, and entries report gain [95% CI]. Readouts are specified by panel or row.

Signal feature / readout	N	10 s	30 s	240 s
<i>A. Features introduced at 10 s; centered 10 s readout</i>				
Slope transit time	85,150	0.930 [0.915, 0.942]	0.935 [0.922, 0.945]	0.782 [0.758, 0.805]
APG b/a	84,187	0.767 [0.720, 0.812]	0.775 [0.727, 0.819]	0.670 [0.624, 0.714]
APG d/a	77,251	0.643 [0.586, 0.697]	0.627 [0.572, 0.680]	0.450 [0.394, 0.500]
Onset-to-APG- b	84,187	0.866 [0.850, 0.881]	0.859 [0.842, 0.875]	0.727 [0.707, 0.746]
Normalized crest time	85,153	0.864 [0.841, 0.885]	0.855 [0.833, 0.875]	0.628 [0.597, 0.657]
Normalized PW50	85,148	0.905 [0.884, 0.923]	0.901 [0.877, 0.920]	0.771 [0.744, 0.795]
Split-area ratio	83,614	0.694 [0.655, 0.732]	0.668 [0.627, 0.707]	0.299 [0.263, 0.335]
Peak-interval rate	85,432	0.942 [0.928, 0.954]	0.947 [0.935, 0.958]	0.864 [0.848, 0.879]
Spectral purity	87,302	0.933 [0.924, 0.942]	0.904 [0.890, 0.917]	0.607 [0.577, 0.635]
<i>B. Features introduced at 30 s; readout specified below</i>				
Normalized reflected delay	79,108	–	0.904 [0.896, 0.912]	0.677 [0.654, 0.700]
30 s readout				
token mean		0.646 [0.618, 0.672]	0.904 [0.896, 0.912]	–
PRV-RMSSD	75,734	–	0.892 [0.877, 0.905]	0.655 [0.623, 0.685]
30 s readout				
token mean		0.577 [0.541, 0.610]	0.892 [0.877, 0.905]	–
<i>C. Features introduced at 240 s; token mean</i>				
PPGV LF fraction	86,626	–	0.194 [0.159, 0.228]	0.544 [0.515, 0.572]
Pulse-interval SD	82,027	–	0.555 [0.511, 0.596]	0.761 [0.709, 0.805]
Mean pulse rate	87,255	–	0.910 [0.895, 0.923]	0.938 [0.926, 0.947]
PRV-pNN50	84,794	–	0.787 [0.763, 0.808]	0.779 [0.751, 0.805]
Uncentered ACF index	87,274	–	0.451 [0.407, 0.493]	0.755 [0.718, 0.789]

An interval readout uses overlap-weighted pooling over the centered interval; token mean averages all 64 signal tokens. N counts available trajectories and is shared across a feature’s views. Intervals describe individual-view gains; paired comparisons are reported in Appendix C.1. Dashes indicate views not reported in this table.

C.2 DOWNSTREAM PREDICTION FROM SIGNAL FEATURES

The Feature-to-Task Bridge tests downstream prediction using either features computed directly from PPG or the same features decoded from the frozen encoder.

Task–feature relations. The fixed analysis set contains 33 task–family relations: 22 core anchors used in the task-duration rationale and 11 additional relations. Core-anchor status denotes inclusion in the prespecified task-duration rationale, not the strength or statistical significance of the reported

source finding. At each task’s input duration, only features introduced by that duration are eligible; a family with no eligible features is marked ineligible. Table 24A reports all 90 task–family combinations. Under the original source classification, 71 are eligible: the 33 main relations, 18 contextual relations, and 20 unmapped relations. The remaining 19 are duration-ineligible. Table 23 records the source measurements and findings for the main relations; core anchors are marked by an asterisk.

Source labels distinguish related measurements (R), indirect support (I), general task or waveform context (C), and relations not mapped by the cited sources (U). The labels were assigned without using the present Bridge outcomes. Alternative classifications from the subsequent source re-audit are examined below.

Contextual sources. Signal-quality context comes from a relative-power SQI evaluated on 60 s recordings; it differs from spectral purity and did not separate quality classes after correction (Elgendi, 2016). Other contextual sources concern end-to-end sleep staging from raw PPG (Korkalainen et al., 2020), arousal-related PPG amplitude and spectral-mean-frequency responses (Luukinen et al., 2024), and cyclic pulse-interval variation (Hayano et al., 2020). Hayano et al. (2020) reported an AHI association for the hourly frequency of detected cyclic variation, but not for conventional variability indices. These sources provide task or event context rather than tests of the present waveform-statistics targets or 240 s burden endpoints.

Feature construction. The Bridge uses the sixteen target definitions in Appendix A.4. Each of the 109,929 windows used in this analysis is linked to its source recording. Features are extracted from the finite source block containing the window, using the pretraining filters, resampling, extraction kernels, quality gates, and TRAIN-fitted target normalizers. The 30 s minimum-block requirement applies only to the pretraining corpora: the Bridge uses each complete 10 s BUT PPG record and 25 s DeepBeat segment, with DeepBeat targets evaluated on the central 10 s crop. Processing respects the available record boundaries, without concatenating or extending records. Available normalized occurrence values are averaged within each input to form one scalar per eligible feature; SDB values are further averaged within participants. Encoder inputs follow Appendix B.2.

Probe fitting. Both pathways use the primary-transfer participants, examples, labels, and metrics. Task-probe selection follows Appendix B.3. The decoded pathway fits feature probes with $\alpha = 1$ using feature targets, without downstream labels. Within each grouped task-selection split, cross-fitting within the training subset generates decoded features for task-probe training. Feature probes fitted on that entire training subset generate the task-validation features. After selection, the final task probe is fitted on cross-fitted TRAIN features, and feature probes fitted on all TRAIN data provide the VAL+TEST features.

Within each fitting subset, a feature requires at least eight valid rows from at least three participant groups and positive variance. Both pathways and all controls use the same eligible coordinates. Scaling and mean imputation are fitted only on the corresponding fitting subset. Evaluation rows are retained, and validity indicators are not supplied as predictors.

Participant-reassignment controls. Each pathway has 32 controls. Within each fitting or prediction partition, feature-family vectors and their availability masks are jointly reassigned to different participants, independently of the labels. Donor rows are reused in shuffled complete cycles followed by a remainder. Decoded controls fit feature probes to the reassigned targets, and each control fits its own task probe. This preserves row coverage, but participant-level row-count imbalance can cause donor rows to be reused or omitted and therefore can change the empirical feature distribution.

Control sensitivity. We audited donor-row reuse and omission for the fixed 33-relation analysis. For 19 relations, every fitting and prediction partition already used each donor row exactly once, preserving the complete set of feature-family vectors and availability masks. For the remaining 14 relations, we additionally tested a without-replacement, no-self reassignment whenever such a mapping was feasible in every partition. This was feasible for four relations, and their joint Raw/Decoded decisions were unchanged, including the DeepBeat AF morphology/vascular-timing relation, which showed the largest Kolmogorov–Smirnov distance in the final evaluation partitions under the original control. One individual pathway, decoded features for WESAD valence, changed from negative to positive without changing its joint relation decision. For the other ten relations, at least one partition contained a participant with more rows than all other participants combined, making the same one-to-one, no-self reassignment infeasible without changing the partition or donor constraint.

This analysis is therefore a partial sensitivity test of donor-row reuse and omission rather than a replacement control for all 33 relations.

Inference. For each relation and pathway, the effect is observed task utility minus the median utility of its 32 controls. Utility is $-MAE$, AUROC, or macro-F1, as appropriate. We use 1,000 paired participant/case bootstrap draws, shared across pathways and families within a task; each draw recomputes the control median while fitted models remain fixed. Age uses participant-averaged predictions, and macro-F1 uses the fixed class set. Binary-task draws containing only one class are excluded, with at least 500 valid draws required. A pathway is positive for a relation when the one-sided 95% lower bound of its effect exceeds zero. These relation-wise comparisons are unadjusted. Both denotes positivity in each pathway. Table 3B summarizes the fixed relation set, and Table 24A reports all task–family combinations.

Table 23: Literature sources for the fixed 33 Bridge relations. Tasks sharing the same source and finding are grouped within each feature family. Asterisks mark the 22 core anchors. Source measurements and findings, including mixed or nonsignificant results, are distinct from the Bridge outcomes reported in Table 24A.

Task(s)	Source measurement and setting	Reported finding
<i>Rate</i>		
DaLiA HR*; BUT PPG HR*	Smartphone PPG HR compared with simultaneous 10 s ECG recordings in a clinic subset (Avram et al., 2019).	HR was compared with ECG in that acquisition setting; the DaLiA and BUT PPG settings differ.
PTT SBP; PTT DBP	Resting HR and BP measured by the same automated BP monitor after seated rest (Liu et al., 2010).	Adjusted population-level associations of HR with SBP and DBP; not a PPG-based prediction experiment.
DeepBeat AF*	PPG from AF and sinus-rhythm groups; 120 s segments from 10 min recordings (Basza et al., 2023).	Univariate HR difference; the groups also differed in age and clinical characteristics.
DREAMT age	Smartphone PPG HR in a large cohort (Avram et al., 2019).	HR was associated with age; the source used smartphone rather than wrist PPG.
WESAD stress*	30 s fingertip-PPG intervals during Stroop and rest (Tsai et al., 2025).	Mean RR interval decreased during Stroop phases.
WESAD arousal*	ECG HR over 60 s portions of emotion blocks (Brouwer et al., 2013).	HR was associated with arousal; the source signal was ECG.
WESAD valence*	ECG HR over 60 s portions of emotion blocks (Brouwer et al., 2013).	HR was associated with valence; the source signal was ECG.
DaLiA activity	Daily-life wrist-PPG pulse time compared with a 1 min activity index (Moscato et al., 2022).	Pulse time was associated with the activity index, which differs from the present activity labels.
DREAMT sleep*; MESA sleep*	Fingertip-PPG HR by sleep stage, with labels assigned to 30 s epochs (Yilmaz et al., 2023).	HR differed across sleep stages; the present input durations are fixed evaluation settings.
MESA A/H burden; DREAMT A/H presence	ECG R–R-derived HR around respiratory events (Haba-Rubio et al., 2005).	Event-locked HR changes; the present window-level burden and presence endpoints differ.
MESA arousal burden*	ECG HR time courses (Haba-Rubio et al., 2005) and PPG power-weighted mean frequency around arousals (Luukinen et al., 2024).	HR time courses differed by arousal grade, but maximal HR rise and ΔHR did not differ significantly. PPG spectral-mean-frequency responses differed by arousal cause; the burden endpoint differs.
SDB AHI code*	Overnight summaries of 2 min pulse-interval windows in source-defined pediatric SDB groups ($AHI \geq 5$) (Garde et al., 2014).	Mean-interval contrast: $p = .04$ versus the source criterion $p < .01$. Source groups are distinct from the released-code endpoint in Appendix B.1.
<i>Morphology / vascular timing</i>		
PTT SBP*	One-minute means of PPG area-ratio and timing indices versus cuff BP across rest, exercise, and recovery (Li et al., 2014).	SBP associations; multivariable models also included ECG–PPG pulse transit time.
PTT DBP*	Single-index fits using PPG-derived features (Li et al., 2014).	DBP was calculated as predicted SBP minus predicted pulse pressure; multivariable models also included ECG–PPG pulse transit time.
DeepBeat AF*	PPG waveform descriptors in AF and sinus-rhythm groups; 120 s segments from 10 min recordings (Basza et al., 2023).	Differences in selected features, including b/a and crest time; groups differed in age and clinical characteristics, and crest time was not pulse-duration normalized.
DREAMT age*	Fingertip APG in 600 adults (Takazawa et al., 1998).	b/a increased and d/a decreased with age; cross-sectional, not wrist.
WESAD stress*	Arm-PPG timing across Stroop and rest phases (Celka et al., 2020).	Crest-time significance varied by contrast: $p = .07$ for baseline versus the first Stroop phase; later contrasts were significant.
WESAD arousal	Repeated 4 min smartphone PPG recordings and self-reported arousal (Liu et al., 2026).	Crest time met nominal significance with cluster-robust standard errors, but not with participant-level aggregation or the Bonferroni threshold of .0056.
DaLiA activity*	Daily-life wrist PPG compared with a 1 min activity index (Moscato et al., 2022).	Pulse time and systolic–diastolic delay were associated with the activity index; rise time was not.

Table 23: Literature sources for the fixed Bridge relations (continued).

Task(s)	Source measurement and setting	Reported finding
<i>Morphology / vascular timing (continued)</i>		
DREAMT sleep; MESA sleep	Fingertip-PPG timing and shape by sleep stage (Yilmaz et al., 2023).	Stage differences in normalized timing and shape; the present input durations are fixed evaluation settings.
<i>Beat-interval variability</i>		
WESAD stress*	30 s fingertip-PPG RMSSD during Stroop and rest (Tsai et al., 2025).	Sex-specific RMSSD responses were described; pooled adjacent-phase differences were not marked significant.
WESAD arousal*	ECG normalized RMSSD over 60 s; the source specified at least 1 min for HRV analysis (Brouwer et al., 2013).	RMSSD was associated with arousal but not valence; the source signal was ECG.
DaLiA activity	Five-minute wrist-PPG variability at 06:00–07:00 compared with mean daily steps over the preceding 90 days (Natarajan et al., 2020).	Activity associations were quantified for HF and LF power; analogous findings for other HRV metrics were stated without data. Habitual steps differ from contemporaneous activity labels.
DREAMT sleep*; MESA sleep*	A model trained with ECG-derived HRV and movement features and evaluated using wrist-PPG-derived HRV and movement (Fonseca et al., 2017).	Sleep-stage prediction used HRV and movement jointly; 30 s denotes label epochs rather than every feature’s analysis interval.
MESA A/H burden*; DREAMT A/H presence*	Whole-night wrist-PPG pulse-interval variability compared with sleep-apnea indices (Hayano et al., 2020).	Conventional indices were not significantly associated with AHI; whole-night severity differs from the present 240 s burden and presence endpoints.
SDB AHI code	Overnight means and across-window dispersions of 2 min PRV values (Garde et al., 2014).	Mean RMSSD and SDNN showed no significant group differences. Their dispersions met $p < .01$ under Mann–Whitney tests, but not log-transformed t-tests; these differ from the averaged Bridge features.

Sensitivity to source interpretation. The fixed relation set and original labels predate the source re-audit. In an alternative classification, the 12 marked cells in Table 24A change as follows: seven R to I, two I to C, and three C to U. The first two changes reflect differences in source measurements, endpoints, or reported findings; the C-to-U changes remove contextual mappings without a corresponding family measurement in the cited sources. The resulting R/I subset contains 31 relations. A separate post-audit check excludes the MESA and DREAMT apnea/hypopnea–BIV relations, whose cited source was revised during the re-audit. Table 24B reports these subsets and their combination using the same predictions and positivity decisions; the fixed 33-relation set remains the main analysis.

Table 24: Bridge results for all task–feature-family combinations (A) and source-sensitivity subsets (B).

A. Task–feature-family results

Task	Seconds	Rate	Morph.	BIV	Wave.	SQ
DaLiA HR	10	$R^* + / +$	$U + / +$	–	–	$U - / -$
BUT PPG HR	10	$R^* - / -$	$U + / +$	–	–	$U - / -$
PTT SBP	10	$I^\ddagger - / -$	$R^* + / -$	–	–	$U - / -$
PTT DBP	10	$I^\ddagger - / -$	$I^* + / +$	–	–	$U - / -$
DeepBeat AF	10	$R^* - / -$	$R^{*\ddagger} + / +$	–	–	$U + / +$
DeepBeat quality	10	$U + / +$	$C + / +$	–	–	$C + / +$
DREAMT age	10	$R - / -$	$R^* + / +$	–	–	$U - / -$
WESAD stress	30	$R^* + / +$	$R^{*\ddagger} + / +$	$I^* - / -$	–	$U + / +$
WESAD arousal	30	$I^* + / -$	$R^\ddagger + / +$	$I^* - / -$	–	$U + / +$
WESAD valence	30	$I^* - / -$	$C + / +$	$U - / -$	–	$U + / +$
DaLiA activity	30	$I + / +$	$R^{*\ddagger} + / +$	$I - / -$	–	$C + / +$
DREAMT sleep staging	30	$R^* + / +$	$R + / +$	$R^{*\ddagger} - / +$	–	$U + / +$
MESA sleep staging	240	$R^* + / +$	$R + / +$	$R^{*\ddagger} + / +$	$C + / +$	$U + / +$
MESA apnea/hypopnea burden	240	$I + / +$	$C + / +$	$I^* + / +$	$C + / +$	$U + / +$
MESA arousal burden	240	$I^* + / +$	$C + / +$	$C^\ddagger + / +$	$C^\ddagger + / +$	$U + / +$
MESA desaturation burden	240	$C + / +$	$C + / +$	$C^\ddagger + / +$	$C + / +$	$U + / +$
SDB AHI-code classification (binary; participant-level)	240	$R^{*\ddagger} + / +$	$C - / -$	$I - / -$	$C - / -$	$U - / -$
DREAMT apnea/hypopnea presence	240	$I - / -$	$C - / -$	$I^* - / -$	$C - / -$	$U - / -$

R: related measurement; I: indirect support; C: contextual; U: unmapped in the cited sources. * marks core anchors; $\ddagger$ marks re-audit changes (R to I, I to C, or C to U). Sign pairs give PPG/Decoded decisions: + meets the one-sided 95% lower-bound criterion, – does not; dashes denote duration-ineligible families. Decisions are relation-wise and unadjusted. Morph.: morphology/vascular timing; BIV: beat-interval variability; Wave.: waveform statistics; SQ: signal quality.

Table 24: Bridge results for all task–feature–family combinations and source-sensitivity subsets (continued).

B. Source-sensitivity subsets

Analysis set	Relations	PPG positive	Decoded positive	Both positive
Fixed analysis set	33	20	19	18
Alternative R/I subset	31	20	19	18
Excluding the two A/H–BIV relations	31	19	18	17
Both restrictions	29	19	18	17

Alternative R/I applies the marked source reclassifications before selecting R/I relations. The two A/H–BIV relations concern MESA burden and DREAMT presence. Both positive counts the intersection of pathway-wise decisions; predictions and decision thresholds are unchanged across subsets.

D ABLATIONS OF THE RETAIN-AND-EXTEND DESIGN

D.1 MATCHED CONDITIONS AND EVALUATION

The four-arm ablation compares nested-read/protected-write and fully shared encoders, each with retained-target supervision ON or OFF. A (RAE-PPG) and D use the nested/protected organization with supervision ON and OFF, respectively; B and C use the fully shared organization with supervision ON and OFF. Fully shared encoders read and update all groups at every stage, so the organization contrast changes read access, update protection, and active capacity together. Data, native targets and their weights, initialization, stage order, optimization schedules, and update budgets are matched. Disabling retained-target supervision removes the retained-loss terms without rescaling the native losses (Appendices A.5–A.8).

D.2 FINAL TRANSFER AND PRESERVATION DURING TRAINING

The four final encoders are evaluated on the 18 downstream tasks using the fixed TRAIN/VAL+TEST partitions and linear-probe procedure in Appendix B.3. Table 25 reports all scores and confidence intervals; Table 4 summarizes mean ranks.

Shorter-input representations and predictions. Let S, M, and L denote checkpoints after the 10 s, 30 s, and 240 s pretraining stages. We keep the input examples, participants, labels, and inner folds fixed while comparing these checkpoints. Seven tasks use 10 s inputs for S→M and S→L comparisons, and five tasks use 30 s inputs for M→L, giving 19 comparisons across 12 tasks. Within each of A and D, representations and predictions are identical across all 19 comparisons. Both fully shared conditions have seven positive and twelve negative changes in downstream utility (Table 26).

Earlier-feature decoding across stages. We use the separate held-out trajectory panel and grouped feature-probe evaluation in Appendix C.1. The nine features introduced at 10 s are decoded from the same 10 s inputs at S, M, and L; the two features introduced at 30 s are decoded from the same 30 s inputs at M and L. Input examples, normalized targets, validity masks, aligned readouts, and grouped folds are matched across checkpoints and conditions. We use the existing, independently fitted feature probes for each checkpoint. Probe fitting, regularization selection, and feature-equal gain aggregation follow Appendix C.1. We report $\Delta G = G_{\text{later}} - G_{\text{earlier}}$, where G is the mean gain over the corresponding feature set. Paired changes and supervision contrasts are computed using 5,000 shared, dataset-stratified participant/case bootstrap draws with the checkpoints, probes, and folds fixed. Table 27 reports unadjusted 95% percentile intervals.

Within each protected condition, the corresponding $87,362 \times 384$ readout matrices are bit-identical across the compared checkpoints, giving zero change in gain. For the three introduction-to-later comparisons, every feature-wise interval in both fully shared conditions is below zero. Retained-target supervision reduces the cumulative gain loss relative to the introduction checkpoint. Table 27 also reports the secondary M→L comparison for the 10 s features.

Table 25: Final downstream performance of the four ablation conditions. Each score is followed by its 95% participant/case-cluster bootstrap interval. Bold marks the best point score, including ties; F1 denotes macro-F1. Condition definitions are given in Appendix D.1.

Downstream task	Nested/protected		Fully shared	
	A: ON	D: OFF	B: ON	C: OFF
PPG-DaLiA heart rate	8.6522	8.6522	9.8918	10.8341
10 s, MAE ↓	[6.3069, 11.1771]	[6.3069, 11.1771]	[7.9631, 11.9085]	[8.8499, 12.8399]
BUT PPG ECG-referenced heart rate	10.5144	10.5144	10.8212	10.7846
10 s, MAE ↓	[8.2084, 13.3728]	[8.2084, 13.3728]	[8.0354, 14.1561]	[8.0600, 14.0935]
DeepBeat atrial fibrillation	0.7774	0.7774	0.7040	0.6895
10 s, AUROC ↑	[0.7164, 0.8087]	[0.7164, 0.8087]	[0.6700, 0.7336]	[0.6464, 0.7170]
DeepBeat signal quality	0.6718	0.6718	0.6601	0.6647
10 s, F1 ↑	[0.6360, 0.6903]	[0.6360, 0.6903]	[0.6158, 0.6916]	[0.6297, 0.6882]
PTT-PPG systolic blood pressure	9.5291	9.5291	9.8373	10.0162
10 s, MAE ↓	[5.2400, 14.8673]	[5.2400, 14.8673]	[5.5890, 15.0733]	[5.5610, 15.2647]
PTT-PPG diastolic blood pressure	5.4489	5.4489	5.5652	5.6967
10 s, MAE ↓	[3.7838, 7.2084]	[3.7838, 7.2084]	[4.1228, 7.1169]	[4.1493, 7.3704]
WESAD stress	0.9514	0.9298	0.9042	0.9017
30 s, AUROC ↑	[0.9183, 0.9794]	[0.8776, 0.9667]	[0.8076, 0.9694]	[0.8152, 0.9682]
WESAD arousal	0.8571	0.8425	0.7033	0.8022
30 s, AUROC ↑	[0.7583, 0.9593]	[0.7617, 0.9238]	[0.5655, 0.8298]	[0.6591, 0.9325]
WESAD valence	0.6973	0.7413	0.6227	0.6493
30 s, AUROC ↑	[0.6023, 0.8406]	[0.6577, 0.8252]	[0.5031, 0.7736]	[0.5679, 0.7619]
PPG-DaLiA activity	0.4078	0.3405	0.3650	0.3434
30 s, F1 ↑	[0.3115, 0.5070]	[0.2841, 0.3858]	[0.3024, 0.4216]	[0.2986, 0.3773]
MESA sleep staging	0.4735	0.4727	0.4967	0.4934
240 s, F1 ↑	[0.4640, 0.4833]	[0.4649, 0.4806]	[0.4878, 0.5057]	[0.4844, 0.5019]
MESA apnea/hypopnea burden	0.0834	0.0840	0.0824	0.0829
240 s, MAE ↓	[0.0813, 0.0858]	[0.0818, 0.0864]	[0.0802, 0.0847]	[0.0808, 0.0852]
MESA arousal-event burden	0.0432	0.0438	0.0420	0.0428
240 s, MAE ↓	[0.0422, 0.0442]	[0.0428, 0.0448]	[0.0411, 0.0430]	[0.0418, 0.0438]
MESA SpO ₂ -desaturation burden	0.1768	0.1779	0.1711	0.1713
240 s, MAE ↓	[0.1739, 0.1797]	[0.1752, 0.1806]	[0.1684, 0.1740]	[0.1686, 0.1741]
SDB AHI-code classification	0.6779	0.6253	0.6291	0.6115
240 s, AUROC ↑	[0.5250, 0.8184]	[0.4694, 0.7692]	[0.4717, 0.7857]	[0.4615, 0.7624]
DREAMT age	11.8329	11.8329	10.9565	11.0956
10 s, MAE ↓	[9.1310, 14.7515]	[9.1310, 14.7515]	[8.5759, 13.7628]	[8.7766, 13.7448]
DREAMT sleep staging	0.2687	0.2574	0.2441	0.2720
30 s, F1 ↑	[0.2361, 0.3071]	[0.2344, 0.2797]	[0.2183, 0.2679]	[0.2347, 0.3028]
DREAMT apnea/hypopnea detection	0.5225	0.5269	0.5548	0.5700
240 s, AUROC ↑	[0.4355, 0.6143]	[0.4393, 0.6115]	[0.4861, 0.6333]	[0.4898, 0.6527]

Table 26: Changes in downstream utility across pretraining checkpoints for fixed input windows. Entries are later-minus-earlier differences with paired, unadjusted 95% participant-cluster intervals. Utility is −MAE, AUROC, or macro-F1, so positive differences indicate improvement.

Task / input	Checkpoints	A and D (each)	B: ON	C: OFF
DaLiA HR / 10 s	S→M	0	-0.6653	-1.4716
			[-2.4852, +1.5717]	[-2.7188, +0.2765]
DaLiA HR / 10 s	S→L	0	-0.8051	-1.7474
			[-2.0708, +1.4527]	[-3.0385, +0.4282]
BUT PPG HR / 10 s	S→M	0	+0.0412	-0.1614
			[-0.3957, +0.4515]	[-0.4752, +0.0820]
BUT PPG HR / 10 s	S→L	0	-0.1816	-0.1450
			[-0.5692, +0.1106]	[-0.4798, +0.1277]
DeepBeat AF / 10 s	S→M	0	-0.0568	-0.0356
			[-0.0797, -0.0207]	[-0.0562, -0.0238]
DeepBeat AF / 10 s	S→L	0	-0.0654	-0.0799
			[-0.0903, -0.0197]	[-0.0970, -0.0431]
DeepBeat quality / 10 s	S→M	0	+0.0135	+0.0019
			[-0.0053, +0.0295]	[-0.0189, +0.0247]
DeepBeat quality / 10 s	S→L	0	-0.0055	-0.0009
			[-0.0297, +0.0232]	[-0.0133, +0.0144]

Table 26: Changes in downstream utility across pretraining checkpoints for fixed input windows (continued).

Task / input	Checkpoints	A and D (each)	B: ON	C: OFF
PTT SBP / 10 s	S→M	0	-0.0806 [-0.5095, +0.3675]	-0.2695 [-0.7449, +0.1594]
PTT SBP / 10 s	S→L	0	-0.2082 [-0.8874, +0.4442]	-0.3870 [-1.0548, +0.3268]
PTT DBP / 10 s	S→M	0	+0.4238 [-0.7027, +1.3793]	+0.2218 [-0.9236, +1.2553]
PTT DBP / 10 s	S→L	0	+0.2420 [-0.7670, +1.1346]	+0.1105 [-0.9515, +1.0945]
DREAMT age / 10 s	S→M	0	+0.7183 [-0.0397, +1.6900]	+0.5945 [-0.3183, +1.6819]
DREAMT age / 10 s	S→L	0	+1.2587 [+0.3049, +2.7789]	+1.1196 [+0.1184, +2.6454]
WESAD stress / 30 s	M→L	0	-0.0558 [-0.1346, -0.0035]	-0.0355 [-0.0850, +0.0002]
WESAD arousal / 30 s	M→L	0	-0.1172 [-0.1749, -0.0460]	-0.0659 [-0.1920, +0.0190]
WESAD valence / 30 s	M→L	0	-0.1027 [-0.1786, +0.0037]	-0.0707 [-0.1427, +0.0041]
DaLiA activity / 30 s	M→L	0	+0.0133 [-0.0537, +0.0694]	+0.0170 [-0.0809, +0.0883]
DREAMT sleep stage / 30 s	M→L	0	-0.0431 [-0.0999, +0.0054]	+0.0035 [-0.0380, +0.0379]

S, M, and L denote checkpoints after the 10 s, 30 s, and 240 s stages. Within each of A and D, all changes are exactly zero with intervals [0, 0], reflecting identical representations and predictions across the compared checkpoints. Intervals use 1,000 shared participant-bootstrap draws with the checkpoint-specific task probes fixed.

Table 27: Changes in earlier-feature decoding across pretraining checkpoints at fixed input duration. B and C report later-minus-earlier feature-average gain changes; the final column reports the paired difference between those stage changes. Entries include unadjusted 95% percentile intervals.

Fixed input / feature set	Checkpoints	A and D (each)	B: ON	C: OFF	Stage-change difference: B−C
10 s / nine 10 s features	S→M	0	−0.1324 [−0.1401, −0.1248]	−0.1637 [−0.1732, −0.1542]	+0.0313 [+0.0252, +0.0372]
10 s / nine 10 s features	S→L	0	−0.1660 [−0.1747, −0.1575]	−0.1866 [−0.1965, −0.1769]	+0.0205 [+0.0140, +0.0271]
30 s / two 30 s features	M→L	0	−0.3128 [−0.3327, −0.2931]	−0.3807 [−0.4036, −0.3583]	+0.0679 [+0.0519, +0.0840]
10 s / nine 10 s features	M→L (secondary)	0	−0.0336 [−0.0392, −0.0282]	−0.0228 [−0.0297, −0.0161]	−0.0107 [−0.0197, −0.0019]

The A and D entries are zero within each condition, with intervals [0, 0]. B−C is $(G_{\text{later}, B} - G_{\text{earlier}, B}) - (G_{\text{later}, C} - G_{\text{earlier}, C})$; positive values indicate a more favorable stage change with retained-target supervision. Intervals use the shared draws described in Appendix D.2. Readouts are interval-aligned, unlike the mean-pooled native-feature readouts in Table 4.

D.3 FEATURE DECODABILITY AFTER PRETRAINING

We compare the four final checkpoints on the held-out trajectories, feature targets, validity masks, and grouped folds used in Appendix C.1. Earlier features are decoded from longer inputs using readouts aligned to the centered earlier interval; newly introduced features use the mean of all 64 tokens at their introduction duration. Feature probes are fitted separately for each condition. For RAE-PPG, the representation exports and probe fits are separate from those used for Table 3A. Feature-probe selection, target normalization, and gain aggregation follow Appendix C.1. The same 5,000 dataset-stratified participant/case bootstrap draws provide absolute-gain intervals and paired contrasts, with the fitted checkpoints, probes, and folds fixed. Ablation contrasts are unadjusted.

Retained-target supervision increases the point estimates for all nine 10 s features decoded at 30 s and both 30 s features decoded at 240 s in the nested/protected encoder. The corresponding counts

Table 28: Feature decodability after pretraining. Panel A reports feature-average gain [95% CI] for each condition; Panel B reports paired gain differences for the same feature sets and readouts. Feature introduction / input gives the targets' introduction duration and the encoder input duration.

A. Feature decoding gains

		Nested/protected		Fully shared	
Feature introduction / input	n	A: ON	D: OFF	B: ON	C: OFF
<i>Earlier features in longer inputs: aligned readout</i>					
		0.8303	0.7097	0.6634	0.6348
10 s / 30 s	9	[0.8149, 0.8458]	[0.6944, 0.7248]	[0.6487, 0.6784]	[0.6206, 0.6485]
		0.6441	0.5866	0.6647	0.6104
10 s / 240 s	9	[0.6284, 0.6591]	[0.5710, 0.6017]	[0.6497, 0.6790]	[0.5973, 0.6234]
		0.6661	0.5341	0.7470	0.5297
30 s / 240 s	2	[0.6443, 0.6871]	[0.5104, 0.5574]	[0.7304, 0.7624]	[0.5069, 0.5517]
<i>New features at introduction duration: token mean</i>					
		0.8984	0.8924	0.6057	0.5334
30 s / 30 s	2	[0.8901, 0.9060]	[0.8841, 0.9001]	[0.5855, 0.6252]	[0.5095, 0.5561]
		0.7553	0.7488	0.8015	0.7872
240 s / 240 s	5	[0.7392, 0.7712]	[0.7333, 0.7640]	[0.7859, 0.8163]	[0.7711, 0.8023]

in the fully shared encoder are seven of nine and two of two. Table 28A reports absolute gains, and Table 28B reports paired supervision and organization contrasts.

Table 28: Feature decodability after pretraining (continued).

B. Paired differences in decoding gain

Feature introduction / input	n	A—D	B—C	A—B
<i>Earlier features in longer inputs: aligned readout</i>				
		+0.1205	+0.0287	+0.1668
10 s / 30 s	9	[+0.1130, +0.1285]	[+0.0224, +0.0351]	[+0.1579, +0.1760]
		+0.0575	+0.0544	-0.0207
10 s / 240 s	9	[+0.0504, +0.0645]	[+0.0470, +0.0620]	[-0.0277, -0.0137]
		+0.1320	+0.2173	-0.0809
30 s / 240 s	2	[+0.1180, +0.1459]	[+0.2004, +0.2352]	[-0.0960, -0.0669]
<i>New features at introduction duration: token mean</i>				
		+0.0060	+0.0723	+0.2927
30 s / 30 s	2	[+0.0011, +0.0110]	[+0.0574, +0.0879]	[+0.2730, +0.3127]
		+0.0065	+0.0144	-0.0462
240 s / 240 s	5	[+0.0017, +0.0113]	[+0.0079, +0.0207]	[-0.0527, -0.0398]

n counts targets. A—D and B—C compare supervision ON versus OFF within an organization; A—B compares organizations with supervision ON. Positive differences favor the first condition. Paired contrasts are computed before rounding using the shared draws in Appendix D.3. Multiplying Δ gain by 100 gives percentage points of baseline error removed.

D.4 PRIOR-STAGE REUSE

Intervention and stage initialization. We test reuse of the inherited pathway as a whole using a separate matched pair of continuations at each transition. The 30 s pair starts from the 10 s parent checkpoint and runs for 340,309 updates; the 240 s pair starts independently from the 30 s parent checkpoint and runs for 125,551 updates. LEARNED retains all previously learned parameters used in the next stage's forward pass. FULL-PRIOR INITIAL restores this entire pathway to values from a fixed untrained reference model, including the shared local feature extractor, token projection and normalization layers, and earlier attention/FFN groups (Appendix A.7). In both conditions, these parameters remain active but frozen, and retained-target supervision is disabled. Parameters and prediction heads assigned to the next stage have identical initial values in the two conditions. Data membership, sample order, new targets, normalizers, optimizer ownership, and schedules are also matched.

Independent feature probes. Evaluation uses the pretraining VAL panel: 4,508 recordings from 1,020 participants/cases for the 30 s continuation and 4,359 recordings from 1,022 groups for the 240 s continuation, across MIMIC-III and VitalDB. Fresh ridge probes use the mean of all 64 output tokens to predict each newly introduced feature. Each target is the average of the available native feature values after TRAIN normalization. Feature-specific validity masks and five outer/four inner

participant/case-grouped folds are matched across conditions. Scaling and probe fitting give each recording equal weight. Regularization α is selected from $\{10^{-2}, 10^{-1}, \dots, 10^4\}$ using validation Huber error balanced across participants/cases and datasets.

Aggregation and uncertainty. For each feature and condition, probe Huber error is averaged within participants/cases, then equally across groups within each dataset, and finally equally across MIMIC-III and VitalDB. Dividing by the correspondingly aggregated zero-prediction error gives normalized error, and subtracting it from one gives feature gain. Let G be the equal-weight mean gain over the two features introduced at 30 s or the five introduced at 240 s. With INITIAL denoting FULL-PRIOR INITIAL, we report $\Delta G = G_{\text{LEARNED}} - G_{\text{INITIAL}}$ and

$$\text{Error reduction (\%)} = 100 \frac{G_{\text{LEARNED}} - G_{\text{INITIAL}}}{1 - G_{\text{INITIAL}}}.$$

Here, $1 - G$ is the feature-average error after normalization by each feature’s zero-prediction error. Thus, the percentage measures how much of the INITIAL condition’s remaining normalized error is removed by LEARNED. Paired 95% intervals use 5,000 shared, dataset-stratified participant/case bootstrap draws, with the continuation checkpoints, fitted probes, and folds fixed. Percentage intervals require at least 1,000 finite draws with $1 - G_{\text{INITIAL}} > 0$. Results are reported without multiplicity adjustment (Table 29).

LEARNED reduces normalized probe error at both transitions, with all seven feature-level intervals favoring reuse.

Table 29: Decoding newly introduced features after matched training continuations. Error reduction is relative to FULL-PRIOR INITIAL, as defined in Appendix D.4. Brackets give unadjusted 95% participant/case-cluster bootstrap intervals; error-reduction intervals are paired.

Input	Newly introduced feature	FULL-PRIOR INITIAL gain	LEARNED gain	Error reduction (%)
30 s	Normalized reflected delay	0.7346	0.8449	41.57 [34.42, 47.88]
	PRV-RMSSD	0.8396	0.8771	23.41 [16.56, 29.74]
	Aggregate: two features	0.7871 [0.7670, 0.8061]	0.8610 [0.8472, 0.8731]	34.72 [29.23, 39.77]
240 s	PRV-pNN50	0.6294	0.7712	38.25 [32.35, 43.85]
	Uncentered ACF index	0.5973	0.7654	41.74 [35.43, 48.01]
	PPGV LF fraction	0.3998	0.5472	24.55 [20.22, 28.63]
	Pulse-interval SD	0.6682	0.7815	34.14 [27.53, 41.01]
	Mean pulse rate	0.8585	0.9389	56.80 [49.49, 62.87]
	Aggregate: five features	0.6306 [0.6128, 0.6475]	0.7608 [0.7455, 0.7754]	35.24 [32.39, 38.09]

Aggregate gains are equal-weight means over the two new features at 30 s or the five at 240 s. Aggregate error reductions are calculated from the aggregate normalized errors, not by averaging the feature-level percentages.

E COMPARISON-MODEL RETRAINING

To assess sensitivity to pretraining-data differences, we retrained the PPG encoders of PaPaGei-P/S, Pulse-PPG, SIGMA-PPG, and AnyPPG from scratch using eligible source recordings in the RAE-PPG TRAIN partition. Table 30 specifies the model-specific data subsets, training procedures, and optimization budgets, adapted from the published methods and released implementations (Pillai et al., 2025; Saha et al., 2025; Guo et al., 2026; Nie et al., 2026). AnyPPG retained a frozen, pretrained ECG teacher. The RAE-PPG checkpoint was unchanged.

Retraining data. Source signals are read at their native sampling rates at the offsets of RAE-PPG TRAIN windows with the corresponding input duration. Each model then applies its own admission and preprocessing rules. No RAE-PPG pretraining VAL or TEST recordings, or MESA recordings, are used in these retraining runs. No downstream score was used to tune the retraining settings.

Evaluation. The retrained encoders are frozen and evaluated using the model-specific interfaces in Appendix B.2 and the participants, examples, and shared bootstrap draws in Appendix B.3. Probes are selected and fitted separately for each encoder on TRAIN using that appendix’s procedure. Table 31 uses the first run for each PaPaGei model and the checkpoint specified in Table 30 for each other model; each checkpoint is used across all 18 tasks. Re-extracting representations from the re-

leased checkpoints through this pipeline reproduced the stored features within 0.15% of the largest feature magnitude in each task.

Results. With all five comparison models replaced by their retrained versions, RAE-PPG achieves the best point score on 12 of 18 tasks and the lowest mean rank, 1.556 (Table 31A). Table 31B summarizes comparisons of RAE-PPG with each retrained model and of each retrained model with its released checkpoint.

Table 30: Model-specific retraining procedures. Data are drawn from the RAE-PPG pretraining TRAIN partition; counts refer to the admitted pools before the recipe-specific validation split where one is used.

Model	Preprocessing and objective	Admitted data	Optimization and checkpoint
PaPaGei-P/S	10 s, 125 Hz; 0.5–12 Hz Chebyshev-II filtering and 50 ms smoothing; segment z -score; flat-line screening of the z -scored segment and morphology-range admission. S: sVRI-bin contrastive loss with IPA/SQI regression. P: same-participant positives.	11,350,415 windows; 10,126 participants/cases.	Adam, 10^{-4} ; global batch 1,024; 15,000 updates. Five runs per model, differing only in random-number streams.
Pulse-PPG	240 s, 50 Hz; no filtering; per-participant z -score. Learned motif-based distance (MotifDist), then relative contrastive training (RelCon).	1,337,278 windows; 2% of participants/cases held out for validation-loss checkpoint selection.	MotifDist: 20 epochs, batch 16, 10^{-3} . RelCon: 6 epochs, batch 64, 10^{-4} . ^a Lowest-validation-loss checkpoint at each stage.
SIGMA-PPG	240 s, 50 Hz; 0.5–8 Hz second-order Butterworth filtering; min–max scaling; quality scores over 2 s patches. Vector-quantized tokenizer, then teacher-guided masked modeling.	1,337,261 windows; released 80/20 file split within eligible TRAIN data.	Tokenizer: 100 epochs. Masked modeling: 80 epochs. Global batch 4,096; masked-modeling gradient accumulation 2.
AnyPPG	10 s PPG–ECG pairs. PPG: 0.5–8 Hz band-pass, 125 Hz. Lead-II ECG: 0.5 Hz high-pass, 50 Hz notch, 500 Hz. Flat-segment and ECG-quality screening; segment z -score. Contrastive alignment with a frozen, pretrained single-lead ECGFounder teacher (Li et al., 2025).	8,205,102 pairs, MIMIC-III only; 2% of participants/cases held out for validation-loss checkpoint selection.	AdamW, 5×10^{-4} ; 2,560 pairs per process, two processes, accumulation 1. Run: 24 epochs, 37,848 optimizer updates. Lowest-validation-loss saved checkpoint: 33,116 updates. ^b

^aRelCon batch size 64 and 6 epochs follow the paper; the released configuration lists 16 and 20. The released loader’s amplitude-clipping step is omitted because its threshold is unspecified. ^bThe scheduler counter advances twice per optimizer update; the counts above are optimizer updates, not scheduler positions. Selection minimizes validation loss over all 24 saved checkpoints using fixed batches. The VitalDB retraining cache contains PPG only; Appendix A.4 obtains ECG separately for selected VitalDB cases.

Table 31: Downstream performance after comparison-model retraining. Panel A compares the unchanged RAE-PPG checkpoint with the five retrained checkpoints; bold and underline mark the best and second-best point scores. Panel B summarizes paired comparisons. Released-checkpoint scores are reported in Table 2.

A. RAE-PPG and the five retrained models						
Downstream task	RAE-PPG	PaPaGei-P	PaPaGei-S	Pulse-PPG	SIGMA-PPG	AnyPPG
<i>Regression: MAE ↓</i>						
DaLiA: HR ¹⁰	8.6522	<u>8.7955</u> [▲]	17.6340 [▼]	14.4006 [▼]	14.2939	9.0165 [▼]
BUT PPG: HR ¹⁰	10.5144	<u>10.1444</u> [▲]	10.8978	10.9398 [▼]	10.6272	10.1215 [▼]
PTT-PPG: SBP ¹⁰	9.5291	<u>9.6366</u>	10.2725	10.3561 [▼]	10.4055	10.2046
PTT-PPG: DBP ¹⁰	5.4489	<u>5.5092</u>	5.8239	6.0458 [▼]	6.0637	5.9476
DREAMT: Age ¹⁰	11.8329	10.4513	13.3999 [▼]	12.0621 [▼]	11.9785	<u>11.5162</u>
MESA: A/H ²⁴⁰	0.0834	0.0907 [▼]	0.0887 [▲]	0.0895	<u>0.0880</u> [▲]	0.0905 [▼]
MESA: Arousal ²⁴⁰	0.0432	0.0476 [▼]	0.0471 [▲]	0.0483 [▼]	<u>0.0455</u> [▲]	0.0480 [▼]
MESA: SpO ₂ ²⁴⁰	0.1768	0.2086 [▼]	0.2033 [▲]	<u>0.2007</u>	0.2082	0.2151 [▼]

Table 31: Downstream performance after comparison-model retraining (continued).

A. RAE-PPG and the five retrained models						
Downstream task	RAE-PPG	PaPaGei-P	PaPaGei-S	Pulse-PPG	SIGMA-PPG	AnyPPG
<i>Classification: AUROC $\uparrow$ ($\uparrow$ macro-F1 $\uparrow$)</i>						
DeepBeat: AF ¹⁰	<u>0.7774</u>	0.7750 [▲]	0.6541	0.6397	0.7275	0.8197[▼]
DeepBeat: Quality ^{10†}	0.6718	<u>0.6639[▲]</u>	0.5986	0.6360 [▼]	0.6139 [▼]	0.6366
WESAD: Stress ³⁰	0.9514	<u>0.9499[▲]</u>	0.8288	0.7983	0.8778	0.9035 [▼]
WESAD: Arousal ³⁰	0.8571	<u>0.7875</u>	0.6978	0.6886	0.7289	0.7637
WESAD: Valence ³⁰	<u>0.6973</u>	0.7120[▲]	0.6493	0.5440	0.6573	0.6640
DaLiA: Activity ^{30†}	0.4078	<u>0.3807[▲]</u>	0.2265 [▲]	0.1689 [▼]	0.2831	0.3119
DREAMT: Sleep ^{30†}	<u>0.2687</u>	0.2508	0.2131	0.2400	0.2776	0.2612
MESA: Sleep ^{240†}	0.4735	0.4428 [▲]	0.4374	0.4243	<u>0.4436</u>	0.4043 [▼]
SDB: AHI code ²⁴⁰	0.6779	0.5213	0.4649	0.4424	<u>0.5395</u>	0.5263
DREAMT: A/H ²⁴⁰	0.5225	0.5237	0.4916	<u>0.5358</u>	0.5566	0.4975

Table 31: Downstream performance after comparison-model retraining (continued).

A. Summary across the 18 tasks						
Summary	RAE-PPG	PaPaGei-P	PaPaGei-S	Pulse-PPG	SIGMA-PPG	AnyPPG
Best-score tasks /18	12	<u>2</u>	0	0	<u>2</u>	<u>2</u>
Mean rank $\downarrow$	1.556	<u>2.778</u>	4.722	5.000	3.500	3.444
B. Paired-comparison summaries						
Retrained model	RAE-PPG vs. retrained		Retrained vs. released			
	RAE-PPG better (tasks /18)	CI favors RAE-PPG / retrained	Retrained better (tasks /18)	CI favors retrained / released		
PaPaGei-P	14	5 / 1	14	8 / 3		
PaPaGei-S	18	14 / 0	10	4 / 2		
Pulse-PPG	17	13 / 0	3	0 / 8		
SIGMA-PPG	16	11 / 0	8	2 / 1		
AnyPPG	15	7 / 1	2	0 / 8		

Numeric superscripts on task names give input duration in seconds; $\uparrow$ denotes macro-F1. Ranks use unrounded scores from the six models in Panel A only. [▲]/[▼] indicates that the paired 95% interval for a retrained model versus its own released checkpoint lies entirely on the better/worse side of zero; no symbol means the interval includes zero. Panel B counts tasks out of 18. Intervals use 1,000 shared participant/case-bootstrap draws with fitted encoders and probes fixed, without multiplicity adjustment. Paired intervals favor a retrained model over RAE-PPG for BUT PPG: HR (AnyPPG); DREAMT: Age (PaPaGei-P).

Additional runs. Across the five individual runs of each PaPaGei model, RAE-PPG has the better point score on 13–14 tasks against PaPaGei-P and on 17–18 against PaPaGei-S. Two additional five-epoch AnyPPG runs use the released warm-up length and the paper’s warm-up fraction, respectively. The first outperforms the released AnyPPG checkpoint on five tasks, with one numerical tie; the second outperforms it on two tasks. Neither run has a paired 95% interval entirely favoring retraining.