
Spatial Pattern Formation from Multi-Agent Learning in Public Goods Dilemmas

Yefei Zhang

Department of Mathematics
University of Illinois Urbana-Champaign
Urbana, IL 61801, USA
yefeiz2@illinois.edu

Yuxuan Zhao

Department of Mathematics
University of Illinois Urbana-Champaign
Urbana, IL 61801, USA
yuxuan44@illinois.edu

Abstract

Spatial public goods models show that prescribed movement toward richer locations can generate spatial patterns. We ask how such patterns emerge when agents learn where to move and how learning rates shape their consequences for collective welfare. Fixed populations of cooperators and defectors independently learn movement policies using tabular Q-learning and local observations. Cooperator learning generates clusters around resource peaks, while co-adaptation changes their strength and motion. At a fixed training budget, the largest welfare losses occur when cooperators learn at high rates and defectors at low rates. In part of this regime, learned policies also generate traveling bands supported by a shared directional preference. The conditions supporting travel change with further training, so these patterns reflect training history rather than an established asymptotic outcome. Across the tested learning-rate conditions with cooperator learning, mean collective welfare falls below random movement because increased crowding outweighs gains in resource benefit. Charging agents for the crowding they impose on others during learning recovers much of the welfare loss in the tested conditions. These results connect learning rates to the emergence and welfare costs of spatial organization driven by individual rewards.

1 Introduction

Spatial public goods models couple the movement of producers and consumers to a shared resource. Cooperators produce the good, both types consume it, and individuals can move between locations with different resource availability. Prescribed movement rules based on local payoffs or environmental conditions can generate various spatial patterns [39, 11, 46, 45, 49]. Such models explain how a specified movement rule organizes a population. Here we ask what happens if movement rules are learned through interaction with a public good field that agents themselves produce and consume. Which parts of the learned policy generate aggregation and collective behavior? How do these policies depend on the partners encountered during training, and what are the consequences for collective welfare?

Learning adds another layer to this feedback. Agents learn where to move from the payoffs they receive, while their movements relocate resource production and consumption and change local crowding. These environmental changes, in turn, shape what other agents learn. If both populations adapt, the resulting spatial organization depends not only on the policies being executed but also on the partners with which those policies were learned.

We study this feedback on a ring of patches. Each agent has a fixed cooperator or defector type and independently learns whether to stay, move left, or move right using tabular Q-learning (Figure 1). It observes only its own patch and its two neighbors and receives its own payoff. There is no prescribed gradient response or preferred direction. Holding types and population sizes fixed isolates learned

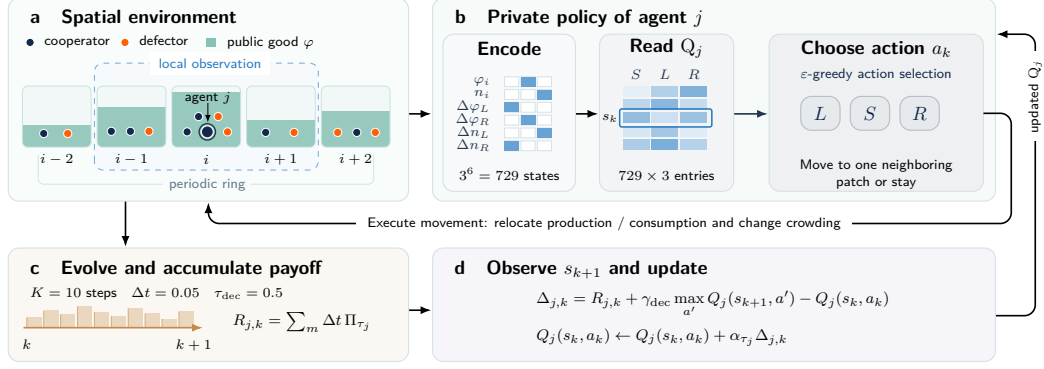


Figure 1: The model and the learning loop of one agent. (a) Agent j on patch i of the ring observes its own and the two adjacent patches. (b) It bins the observation into one of 729 states, reads its private table Q_j , and chooses $a_k \in \{S, L, R\}$. (c) The environment evolves over the decision interval while the agent accumulates payoff. (d) At its next decision it observes s_{k+1} and updates Q_j .

mobility from changes in the population composition. Private Q-tables also allow us to test the mechanisms through policy interventions. We distill policies into compact movement rules, remove resource-seeking preferences from these rules or directional preferences from the original policies, and recombine policies learned with different training partners.

Previous work on chemotaxis learning and spatial games with learned migration has shown that agents can learn resource-seeking movement and that learned movement can generate spatial clustering (Section 2). We build on these findings by examining the mechanisms, training dependence, and welfare consequences of learned spatial organization. First, learning by cooperators is sufficient to generate persistent spatial clusters, and policy interventions show that a preference for richer neighboring patches is necessary for aggregation in the tested distilled rules (Sections 4.1 and 4.2). Second, co-adaptation changes the learned movement policies: the same defector policies can weaken or intensify clustering depending on the cooperators' training history (Section 4.2). When cooperators learn faster than defectors, frozen policies can produce traveling bands supported by a spontaneously learned preference for a common direction. The learning-rate conditions under which these bands appear and whether travel persists with further training depend on the training budget (Sections 4.3 and 4.4). Third, the resulting spatial organization lowers welfare primarily by increasing crowding. Total production is independent of location, and total resource uptake remains nearly unchanged across the evaluated conditions, so aggregation increases crowding costs without a comparable gain in aggregate resource benefit. Charging agents for the crowding they impose on others during learning recovers much of the welfare loss (Section 4.5).

2 Related Work

Random dispersal can favor cooperation [38, 29, 7], while migration in response to success, aspiration, or local resource conditions allows individuals to adapt their movement to their surroundings [12, 43, 41, 17]. Migration costs and speeds can further shape cooperative outcomes [22, 16, 1, 47]. Models with an explicit public good field connect movement to Turing patterns and instabilities induced by directed motion [39, 11, 49]. Related evolutionary game models show that movement in response to payoff or environmental conditions can similarly destabilize homogeneous states and generate spatial patterns in both agent-based and continuum descriptions [46, 45]. Similar links between gradient-following responses and population patterns also appear in chemotaxis, including classical analyses of aggregation and traveling bands [19, 20, 14, 35], as well as in ideal-free distributions and mean-field games [5, 6].

Reinforcement learning has been used to study contribution decisions in spatial and networked public goods games [50, 31, 30, 42], including models with adaptive incentives [21]. In these settings, agents do not learn where to move. Movement itself has been learned in a spatial prisoner's dilemma [27] and in a cyclic-dominance model of species coexistence [18]. Related work also shows that agents can learn chemotactic behavior in prescribed fields [9, 37, 33, 36], while sequential social dilemmas

study multiple learners interacting through shared resources [23, 32, 15, 24]. These works study learned mobility, cooperation, coexistence, or navigation in a given environmental signal. In our setting, the resource field is instead produced and depleted by the mobile agents themselves. We keep social types fixed and ask how this feedback shapes the learned movement policies, the spatial patterns they generate, and their consequences for welfare.

Independent learning makes each agent’s environment nonstationary [8, 28, 13]. The relative learning rates of interacting agents can further change the resulting dynamics [4, 10, 25, 3, 2]. Repeated interaction can also give rise to shared conventions [48, 34, 26]. In our model, this takes the form of a common directional preference. Left and right are equivalent in the underlying environment, but once a population begins to move, the two directions are no longer equivalent to the agents themselves. We use policy interventions to separate this directional preference from the mechanism that generates aggregation. Finally, we connect the resulting collective behavior to incentive design [44, 21] by asking how agents change their movement when their reward includes the crowding cost they impose on others, while continuing to evaluate outcomes using the original payoff.

3 The Model

The model couples a public good field to agents that learn where to move. Its resource dynamics follow [47, 49], while the populations remain fixed so that learning changes locations but not population sizes.

3.1 Resource production, consumption, and crowding

The environment is a ring of M patches, $\mathcal{G} = \mathbb{Z}_M$, with spacing $\ell = L/M$ and patch volume Ω . Patch indices $i \pm 1$ are interpreted modulo M . There are N_C cooperators and N_D defectors. Agent $j \in \{1, \dots, N\}$ has a fixed type $\tau_j \in \{C, D\}$ and a position $x_j(t) \in \mathcal{G}$, where $N = N_C + N_D$. The local populations are

$$U_i = \sum_{j:\tau_j=C} \mathbf{1}\{x_j = i\}, \quad V_i = \sum_{j:\tau_j=D} \mathbf{1}\{x_j = i\}, \quad n_i = U_i + V_i. \quad (1)$$

There are no births, deaths, or type changes. In particular, a cluster of cooperators represents their redistribution, not an increase in their number.

The public good concentration $\varphi_i \geq 0$ obeys

$$\frac{d\varphi_i}{dt} = c \frac{U_i}{\Omega} - \left(\kappa \frac{n_i}{\Omega} + \delta \right) \varphi_i + \frac{D\varphi}{\ell^2} (\varphi_{i+1} + \varphi_{i-1} - 2\varphi_i). \quad (2)$$

Cooperators produce the public good, which is consumed by all agents, decays naturally, and diffuses between neighboring patches. Moving a cooperator therefore relocates both production and consumption, while moving a defector relocates consumption alone.

An agent on patch i receives the payoff rate

$$\begin{aligned} \Pi_C(\varphi_i, n_i) &= r_u \varphi_i - c - \gamma n_i / \Omega, \\ \Pi_D(\varphi_i, n_i) &= r_v \varphi_i - \gamma n_i / \Omega. \end{aligned} \quad (3)$$

Resource access is valuable to both types, crowding is costly to both, and production costs fall on cooperators. We take $r_u > r_v$ to allow producers to value the resource more strongly. All parameters appear in Table 1.

At uniform densities $u_0 = N_C/(M\Omega)$ and $n_0 = N/(M\Omega)$, the equilibrium resource is $\varphi^* = cu_0/(\kappa n_0 + \delta) \approx 0.699$, giving $\Pi_D^* \approx 3.69$ and $\Pi_C^* \approx 3.39$. More generally, defectors have a free-rider advantage on the same patch because $\Pi_D - \Pi_C = 1 - \varphi_i \geq 0$ under our parameters, with $\varphi_i \leq 1$ preserved by the dynamics from the initial condition $\varphi_i = \varphi^*$ (see Appendix A). Agents learn mobility while their contribution types remain fixed.

3.2 Agent observations, movement, and rewards

An agent chooses $a \in \mathcal{A} = \{S, L, R\}$ to stay, move one patch left, or move one patch right. The environment advances in steps $\Delta t = 0.05$, while each agent decides once every $K = 10$ steps, giving

Table 1: Model and simulation parameters.

symbol	meaning	value
M, L, Ω	patches, ring length, patch volume	64, 8, 20
N_C, N_D	agents per type	448, 192
$c, \kappa, \delta, D_\varphi$	production, uptake, decay, diffusion	1, 1, 10^{-3} , 0.03
r_u, r_v, γ	benefit (C, D), crowding cost	7, 6, 1
$\Delta t, K, \tau_{\text{dec}}$	time step, steps per decision, interval	0.05, 10, 0.5
$\beta, \gamma_{\text{dec}}$	discount rate, per-decision discount	0.5, 0.779
α_C, α_D	learning rates (default)	0.05, 0.05
$\varepsilon, \varepsilon_{\text{eval}}$	exploration (training, evaluation)	$0.3 \rightarrow 0.01, 0.01$
$E, T_{\text{ep}}, T_{\text{eval}}$	episodes, episode and evaluation length	200, 200, 400

a decision interval $\tau_{\text{dec}} = 0.5$. Agent j draws an independent phase $\theta_j \sim \text{Unif}\{0, \dots, K-1\}$ at the start of each episode and decides at steps $m_{j,k} = \theta_j + kK$. Agents that decide at the same step observe the same pre-movement configuration and execute their moves together. Between decisions, an agent remains at its current patch while the resource and other agents continue to change.

The observation describes the current patch and its differences from the two neighbors. For two thresholds $E = (e_1, e_2)$, define $\lambda_E(z) = \sum_{q=1}^2 \mathbf{1}\{z > e_q\} \in \{0, 1, 2\}$. An agent on patch i observes

$$s = (\lambda_{E_\varphi}(\varphi_i), \lambda_{E_n}(n_i), \lambda_{E_{\Delta\varphi}}(\varphi_{i-1} - \varphi_i), \lambda_{E_{\Delta\varphi}}(\varphi_{i+1} - \varphi_i), \lambda_{E_{\Delta n}}(n_{i-1} - n_i), \lambda_{E_{\Delta n}}(n_{i+1} - n_i)). \quad (4)$$

The thresholds are $E_\varphi = (0.65, 0.75)$, $E_n = (7.5, 12.5)$, $E_{\Delta\varphi} = (-0.01, 0.01)$, and $E_{\Delta n} = (-2.5, 2.5)$. The six components distinguish three levels each, producing 729 states. Agents do not observe the types of their neighbors or anything beyond the adjacent patches.

Each agent has a private table $Q_j : \mathcal{S} \times \mathcal{A} \rightarrow \mathbb{R}$ with 2187 entries. It learns from the payoff earned over a complete decision interval, rather than the payoff immediately after moving (Figure 1):

$$R_{j,k} = \sum_{m=m_{j,k}}^{m_{j,k}+K-1} \Delta t \Pi_{\tau_j} \left(\bar{\varphi}_{x_j^{(m)}}^{(m)}, n_{x_j^{(m)}}^{(m)} \right). \quad (5)$$

Positions and occupancies here are measured after the step's moves, and $\bar{\varphi}^{(m)}$ is the step-averaged resource. This reward includes the consequences of waiting in the selected patch as other agents arrive or leave and the resource evolves.

At the next decision, agent j updates its previous state-action pair by Q-learning [40]:

$$Q_j(s_k, a_k) \leftarrow Q_j(s_k, a_k) + \alpha_{\tau_j} \Delta_{j,k}, \quad \Delta_{j,k} = R_{j,k} + \gamma_{\text{dec}} \max_{a'} Q_j(s_{k+1}, a') - Q_j(s_k, a_k). \quad (6)$$

The rates α_C and α_D control value updates for the two types. We use $\gamma_{\text{dec}} = e^{-\beta\tau_{\text{dec}}} \approx 0.779$, with $\beta = 0.5$. Each agent maintains a private Q-table and learns from its own reward. All entries are initialized to $\tau_{\text{dec}} \Pi_{\tau_j}^* / (1 - \gamma_{\text{dec}})$, and actions are selected ε -greedily with uniform tie-breaking. A zero learning rate thus keeps all entries equal and actions uniformly random. By contrast, freezing a trained table stops updates while preserving learned action preferences.

Each step executes decisions and moves, integrates (2) at the new occupancies, and accumulates payoffs. Integration uses two Euler substeps of length $\Delta t/2$, with negative concentrations clipped to zero after each substep. The substep diffusion number is 0.048, and Appendix A details the update order. Because the local observation need not be Markov and other agents may be learning, we treat Q-learning as the adaptation mechanism being studied rather than assume optimality or convergence [8, 28].

3.3 Separating training from spatial dynamics

The main conditions are cooperator-only learning (0.05, 0), defector-only learning (0, 0.05), and equal-rate learning (0.05, 0.05). Further experiments vary both rates. Each condition is trained for

Table 2: Frozen-policy evaluation of the main conditions (means over ten training seeds, matched placements): clustering of cooperators (I_U) and defectors (I_V), number of coherently traveling seeds, and welfare $W = B - N_C c - \mathcal{K}$ with between-seed SD. Rate pairs are (α_C, α_D) . [†]Equal-rate co-trained cooperators with random defectors.

Condition	I_U	I_V	Travel	W	B	$\mathcal{K}$
No movement	0.97	0.96	0/10	2199 ± 4	2999	352
Random movement	0.94	0.97	0/10	2199 ± 1	2998	352
Only D learns	0.94	0.45	0/10	2205 ± 1	2997	344
Only C learns	24.7	0.97	0/10	1759 ± 49	3066	858
Both learn (0.05, 0.05)	7.9	1.46	0/10	1977 ± 94	3001	576
C co-trained, D random [†]	11.0	0.97	0/10	2022 ± 25	3039	570
Both learn (0.2, 0.05)	14.7	2.61	10/10	1783 ± 129	3008	777
Both learn (0.05, 0.0125)	22.6	3.21	10/10	1599 ± 169	3014	967

200 episodes of duration 200, approximately 8×10^4 decisions per agent. Each episode starts with an independent uniform placement, resources reset to φ^* , and newly drawn decision phases, while Q-tables persist. Exploration decreases linearly from 0.3 to 0.01 over the first 160 episodes and then remains constant.

After training, we freeze the tables and evaluate for 400 time units from a held-out placement, using $\varepsilon = 0.01$. This separates spatial dynamics generated by acquired policies from further adaptation. Payoff statistics use the second half, $t \in [200, 400]$. Main comparisons use ten independent training seeds. Random-movement and no-movement baselines use the same evaluation placements and decision clocks. The training seed is the unit of replication, with rollouts from each seed averaged before comparison. Reported intervals are 95% percentile bootstrap intervals over the ten seeds, for a mean or for a per-seed paired difference. Runs with the same seed share the placements of all training episodes, the decision phases, and the evaluation placement, whatever the learning rates or rewards, but action draws are not shared.

Two interventions then test the mechanism. Policy recombination holds one population’s tables fixed while changing its partners, separating acquired training effects from movement during evaluation. Policy replay replaces private tables with compact stochastic rules estimated from recorded action frequencies, in which selected preferences can be altered while the others are retained. Full protocols are given in Appendix C.

3.4 Measurements

We measure aggregation by $I_U = \text{Var}_i(U_i)/\overline{U}$, sampled at $t = 200, 300$, and 400. Independent uniform placement gives $I_U \approx 1$, while larger values indicate concentration into fewer patches. The spatial correlation $\rho_{U\varphi}$ measures how closely cooperator concentrations align with resource peaks.

To detect travel, once per time unit we find the cyclic shift $k^*(t)$ best aligning $U(t)$ with $U(t+5)$, with velocity $v = k^*/5$ patches per time unit. We classify travel as coherent when the mean correlation after alignment exceeds 0.7 and more than 90% of windows have velocities of the same nonzero sign. Appendix B gives the complete algorithm. The directional action bias of type τ is $\chi_\tau = (\#R - \#L)/\#\text{decisions}$. The same expression computed for a single agent gives its individual bias.

Welfare is the sum of agents’ original payoffs:

$$W = \sum_j \Pi_{\tau_j} = B - N_C c - \mathcal{K}, \quad B = \sum_i (r_u U_i + r_v V_i) \varphi_i, \quad \mathcal{K} = \frac{\gamma}{\Omega} \sum_i n_i^2. \quad (7)$$

Here B is resource benefit and $\mathcal{K}$ is crowding cost. Production costs are fixed, so this decomposition identifies which of the other two terms changes when spatial organization changes.

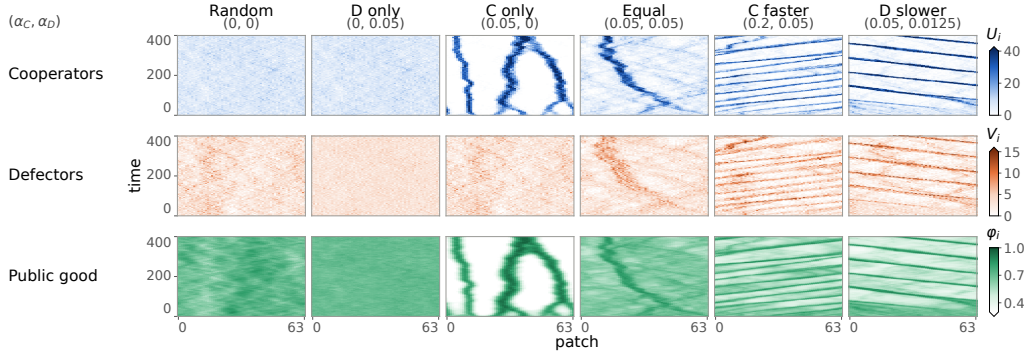


Figure 2: Spatial dynamics under frozen policies. Columns show the six learning conditions and rows show cooperators, defectors, and the public good. Cooperator learning produces aggregation, while faster cooperator learning can generate traveling bands. All panels start from the same held-out placement, and learned policies are frozen after 200 training episodes.

4 Results

4.1 Spatial organization under frozen policies

Figure 2 shows one evaluation trajectory per condition, and Table 2 summarizes the statistics over ten training seeds. Under random movement, cooperator clustering is $I_U = 0.94$, close to the independent-placement baseline. With defector-only learning, cooperators retain random movement, while defector clustering falls from $I_V = 0.97$ to 0.45 and the spatial correlation between cooperator occupancy and resource availability rises from $\rho_{U\varphi} = 0.32$ to 0.61. Cooperator-only learning instead generates pronounced clusters that coincide with resource peaks, with $I_U = 24.7$ and $\rho_{U\varphi} = 0.83$. Equal-rate co-learning produces weaker clusters with $I_U = 7.9$ and no coherent travel in any seed. When cooperators learn four times faster, the clusters form bands that travel coherently around the ring in all ten seeds of both tested rate pairs. Defector occupancy and the resource field show the same bands in the examples of Figure 2.

4.2 Learned resource seeking and the role of training partners

What have the cooperators learned under cooperator-only training? To summarize their private 729-state tables, we pool recorded actions across cooperators and mirror-reflected observations. The resulting rule depends on the current patch’s resource level and whether exactly one neighbor is classified as richer. In these contexts, we relabel the three actions as moving toward the richer neighbor, staying, or moving away from it. Otherwise, the rule retains the observed stay probability and splits the remaining probability equally between left and right. This construction removes absolute directional preferences but reveals a clear preference for richer neighbors (Figure 3a). On poor patches, cooperators move toward the richer neighbor with probability 0.71 and away with probability 0.08. These probabilities are 0.61 and 0.04 on intermediate patches. On rich patches, staying is the most common action with probability 0.45, while moving toward the richer neighbor remains more likely than moving away, with probabilities 0.36 and 0.19, respectively.

To test whether resource seeking supports aggregation, we replay the pooled rule and two targeted modifications of it. Each rule is estimated from the evaluation rollout of its training seed and run on five fresh rollouts with new placements and decision phases. The learned tables are run on the same rollouts, and comparisons are paired by training seed. Despite discarding occupancy observations and individual differences between agents, the pooled rule reproduces strong aggregation, with $I_U = 27.3$ compared with 24.6 under the learned tables, and also produces a welfare loss relative to random movement.

Equalizing the probabilities of moving toward and away from the richer neighbor while keeping the stay probability unchanged eliminates pronounced aggregation in all 50 rollouts. The clustering measure I_U falls to 0.8–1.2, and welfare returns to approximately the random-movement level.

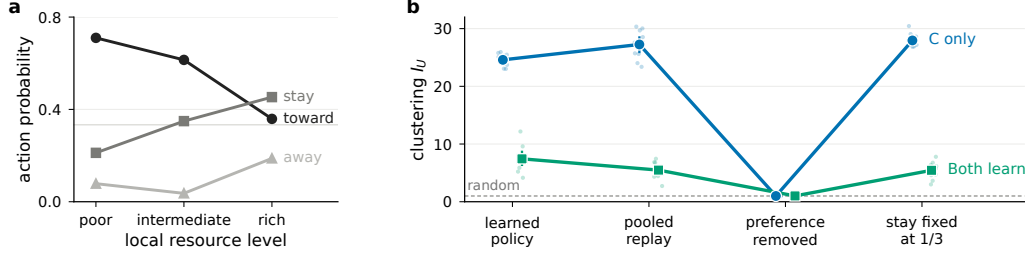


Figure 3: Resource seeking drives aggregation. (a) Under cooperator-only learning, the pooled policy favors movement toward richer patches. (b) Replaying this preference preserves clustering, while removing it collapses clustering to the random-movement level. Fixing the stay probability at one third does not remove the pattern. Blue shows cooperator-only learning at $\alpha_C = 0.05$ and green shows equal-rate co-learning at $\alpha_C = \alpha_D = 0.05$.

Conversely, setting the stay probability to 1/3 while preserving the relative probabilities of moving toward and away from the richer neighbor retains strong aggregation, with $I_U = 28.0$ (Figure 3b). Equal-rate co-learning gives the same qualitative result, with weaker clusters under the pooled rules that disappear when the resource-seeking preference is removed (Figure 3b). Aggregation also persists under greedy evaluation of the learned tables (see Appendix H).

These interventions identify the preference for richer neighboring patches as necessary for aggregation in the tested distilled policies, whereas the learned dependence of staying on resource availability is not required. The resource dynamics provide a consistent feedback. A cooperator entering a patch contributes $(c - \kappa\varphi_i)/\Omega \geq 0$ to the local rate of resource change (here $c = \kappa$ and $\varphi_i \leq 1$), whereas a defector contributes $-\kappa\varphi_i/\Omega$. Resource-seeking cooperators can therefore reinforce the concentrations that attract further arrivals, as in prescribed-taxi models, but here the preference is acquired through individual learning.

For comparison, we evaluate three hand-designed resource-seeking rules for cooperators while defectors move randomly. On the same fresh rollouts, these rules produce stronger aggregation, with I_U ranging from 39.9 to 51.3 compared with 24.6 under the learned policies, and lower welfare, with W ranging from 1105 to 1378 compared with 1742. None of these mirror-symmetric rules produces coherent travel (see Appendix I).

Training partners change what cooperators learn. Equal-rate co-learning yields weaker clustering with $I_U = 7.9$ compared with 24.7 under cooperator-only learning. This difference could arise from the cooperator policies acquired during training or the learned defectors' behavior during evaluation, or both. To distinguish these effects, we pair co-trained cooperators with random defectors. Clustering rises to $I_U = 11.0$ but remains well below 24.7, showing that co-training changes the cooperator policies themselves. Reintroducing learned defectors reduces mean clustering from 11.0 to 7.9, with a reduction in every seed, without a detectable welfare improvement. Welfare is 1977 with learned defectors versus 2022 with random defectors, giving a paired difference of -45 with a 95% interval of $[-96, 4]$.

The same learned defector policies have the opposite effect when paired with cooperators trained with random defectors. Clustering increases from 24.7 to 45.6, and welfare falls from 1759 to 883. Thus, the effect of learned defectors depends on the cooperator policies they encounter, which in turn depend on the partners present during training (see Appendix K).

4.3 Learning-rate dependence and directional conventions

We next vary both learning rates over fifteen values between 0.00625 and 0.8, with ten training seeds per rate pair, twenty at $\alpha_D = 0.05$, and the same 200-episode budget (Figure 4a, b). Across cells with learning cooperators, mean clustering ranges from $I_U = 3.5$ to 49, while mean welfare losses relative to random movement range from 74 to 1417. Cell means of W and I_U are strongly negatively correlated with $r = -0.99$. Losses are largest at high cooperator and low defector learning rates, but coherent travel occupies only part of this region. All 69 cells where at least half the seeds travel satisfy $\alpha_C \geq 2\alpha_D$ and $\alpha_D \leq 0.1$. No seed travels when $\alpha_C \leq \alpha_D$, and at most one in ten travels

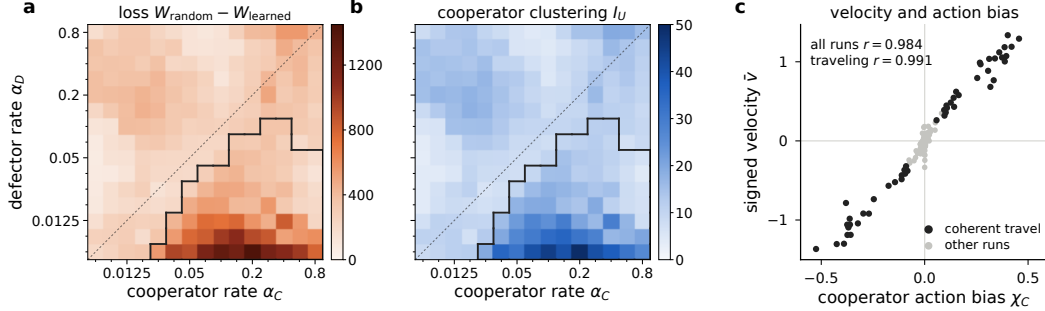


Figure 4: Learning-rate dependence and directional bias after 200 training episodes. Panels (a) and (b) show welfare loss relative to random movement, $W_{\text{random}} - W_{\text{learned}}$, and cooperator clustering I_U , averaged over ten training seeds and twenty seeds when $\alpha_D = 0.05$. The black outline marks cells in which at least half of the seeds travel coherently, and the dashed line marks $\alpha_C = \alpha_D$. Panel (c) shows signed velocity against cooperator left–right action bias for the 172 runs from the main conditions and the 5×5 rate grid. These maps summarize finite-budget outcomes rather than an asymptotic phase diagram.

when $\alpha_D \geq 0.14$. A finer sweep along $\alpha_D = 0.05$ shows traveling counts rising from 0 to 19 of 20 as α_C increases from 0.079 to 0.126 (see Appendix N). These observed boundaries depend on the training budget and shift with further training (Section 4.4).

Travel is accompanied by a shared directional preference despite the environment’s left–right symmetry. Across the 172 runs from the main conditions and a coarser 5×5 rate grid, signed velocity correlates with cooperator action bias χ_C at $r = 0.984$, rising to $r = 0.991$ within the 50 traveling runs. Their signs agree in every traveling run (Figure 4c). Averaged across traveling runs, 96% of cooperators and 86% of defectors favor the band direction, and these preferences persist even in mirror-symmetric observations. We call this shared, spontaneously selected preference a directional convention. Because bias and velocity are measured on the same rollout, their correlation alone does not establish causality. We therefore test the role of this preference through policy interventions.

Unlike the pooled rule of Section 4.2, the directional rule retains distinct left and right actions, with 27 contexts defined by the resource level of the current patch and the resource differences from its two neighbors. We mirror-symmetrize this rule by averaging it with its reflection, exchanging both the neighboring observations and the left and right actions. This removes absolute directional preference while retaining a response to relative resource availability. Among the 50 runs whose original learned policies produce coherent travel, replay of the directional rule preserves travel in 49, whereas its symmetrized version produces none. Mean speed falls from 0.84 under the original learned policies to 0.12 under the symmetrized rule, while substantial aggregation remains, with $I_U = 15.6$ compared with 16.3. On 100 fresh rollouts across the two ratio-4 conditions, the original policies, directional rules, and symmetrized rules produce coherent travel in 99, 100, and 0 rollouts, respectively (see Appendix F).

We also remove directional preferences directly from the original policies, without distillation. For each agent, we use $\pi_j^{\text{sym}}(a | s) = \frac{1}{2}[\pi_j(a | s) + \pi_j(\mathcal{M}a | \mathcal{M}s)]$, where $\mathcal{M}$ swaps the two neighboring observations and the left and right actions. This retains all six observation components and a separate policy for each agent. Symmetrizing both populations reduces coherent travel from 49/50 to 0/50 fresh rollouts at $\alpha_C = 0.2$ and $\alpha_D = 0.05$, while clustering falls from $I_U = 14.8$ to 7.3. At $\alpha_C = 0.05$ and $\alpha_D = 0.0125$, travel falls from 50/50 to 2/50, while clustering remains strong at $I_U = 20.9$ compared with 22.6.

To test whether added randomness alone explains this result, we add uniform exploration matched to the mean action-disagreement rate. It also suppresses travel, leaving 4/50 coherent rollouts in each condition, but reduces clustering much further to $I_U = 3.0$ and 2.5, respectively. Weaker exploration already reduces clustering below the symmetrized levels while most rollouts still travel (see Appendix J). This contrast supports a specific role for directional preference, although the control matches only the average rate of action changes, not their dependence on the observation.

Symmetrizing only defectors keeps travel in all 100 rollouts. Symmetrizing only cooperators leaves

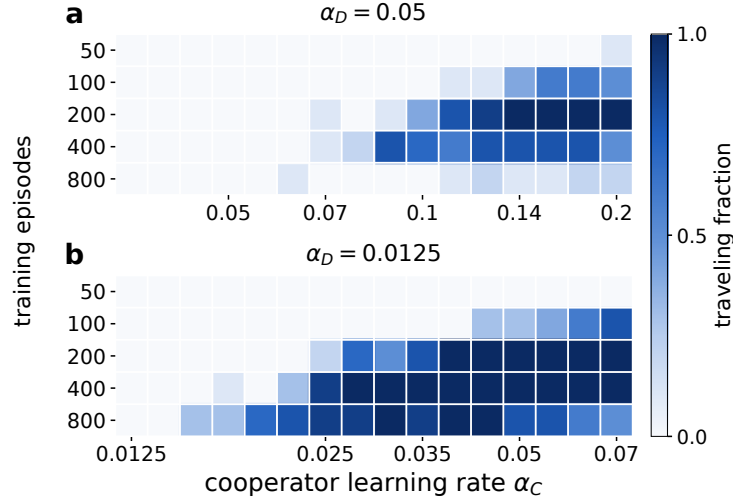


Figure 5: Training duration reshapes coherent travel. Each heatmap shows the fraction of ten training seeds whose frozen policies produce coherent travel. Panel (a) uses $\alpha_D = 0.05$, and panel (b) uses $\alpha_D = 0.0125$. Travel appears, disappears, and shifts across learning rates as training continues, with different behavior at the two defector learning rates. These finite-training results do not define an asymptotic phase boundary.

38/50 traveling rollouts in the first condition and 6/50 in the second, with slower bands in the first. The populations’ contributions therefore depend on the learning rates. Together, the interventions distinguish resource seeking that supports aggregation in the tested distilled rules from directional preferences that support coherent travel in the original policies.

4.4 Traveling bands under continued training

The preceding results use policies frozen after 200 episodes. To examine longer training, we train ten seeds at each of sixteen α_C values for each of $\alpha_D = 0.05$ and $\alpha_D = 0.0125$. We evaluate frozen policies after 50, 100, 200, 400, and 800 episodes (Figure 5). After 50 episodes, at most one seed per condition produces coherent travel. Longer training allows travel at smaller α_C . At $\alpha_C = 0.025$ and $\alpha_D = 0.0125$, the traveling counts at the five checkpoints are 0, 0, 2, 9, and 9 out of ten. Travel can also disappear with further training. At $\alpha_C = 0.141$ and $\alpha_D = 0.05$, the corresponding counts are 0, 4, 10, 8, and 1. After 800 episodes, at most two seeds per condition travel along $\alpha_D = 0.05$, even though mean clustering across this sweep increases from $I_U = 10.5$ at episode 200 to 16.5.

We then extend the two conditions with $\alpha_C/\alpha_D = 4$ to 1600 episodes using five seeds each, alongside three seeds each for cooperator-only and equal-rate learning. We evaluate frozen policies every 20 episodes (see Appendix L). At $\alpha_C = 0.05$ and $\alpha_D = 0.0125$, most later checkpoints produce coherent travel, with one direction reversal per seed. At $\alpha_C = 0.2$ and $\alpha_D = 0.05$, travel appears intermittently as directional preferences repeatedly weaken and reverse. These changes compare policies learned at different checkpoints, not the motion of one continuously adapting band. Equal-rate learning produces travel at only 1 of 213 seed-checkpoints from episode 200 onward, but aggregation grows with further training. Over episodes 1400 to 1600, mean clustering reaches $I_U = 20.3$ compared with 24.9 under cooperator-only learning. Mean welfare falls to 1587 compared with 1731, reversing their welfare ranking at episode 200. Nevertheless, welfare stays below random movement at every checkpoint from episode 20 onward in every long run and at all 1600 seed-checkpoints of the training-length sweep. Thus, travel and welfare rankings change with training duration, while welfare losses persist across these evaluations. These finite runs establish neither a fixed threshold for travel nor an asymptotic outcome of learning.

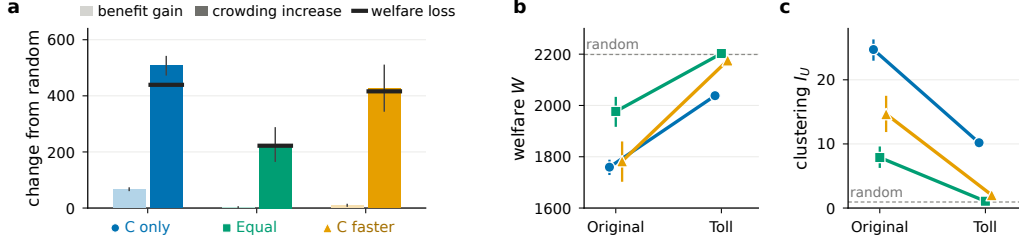


Figure 6: Crowding drives the welfare loss, and a toll largely reverses it. (a) Gain in resource benefit and increase in crowding cost relative to random movement. Black markers show the resulting welfare loss. (b) Welfare and (c) clustering after training with the original reward and with the crowding toll, which raises welfare and reduces clustering in all three conditions. Colors and marker shapes mark cooperator-only learning, equal-rate learning, and $(\alpha_C, \alpha_D) = (0.2, 0.05)$, as labeled in panel a.

4.5 Crowding costs and the effect of a toll

After 200 training episodes, every seed of the untolled conditions with cooperator learning in Table 2 has lower welfare than both the random- and no-movement baselines, whose mean welfare is approximately 2199. Mean welfare is also below the random-movement baseline in every cell of the learning-rate map.

The welfare decomposition shows that increased crowding accounts for most of the welfare loss (Table 2 and Figure 6a). Random movement gives resource benefit $B = 2998$ and crowding cost $\mathcal{K} = 352$. Across the clustered conditions, benefit ranges from 3001 to 3066, while crowding cost reaches 967 and production costs remain fixed. Under cooperator-only learning, the mean resource level experienced by cooperators rises from 0.70 to 0.85, but their mean payoff falls from 3.38 to 3.23 relative to random movement.

Resource accounting explains why aggregation changes aggregate benefit only modestly. Total production is always cN_C . Defining $\Phi(t) = \sum_i \varphi_i(t)$, summing (2) over the ring and averaging over an evaluation window $[t_0, t_1]$ of duration T yields

$$\kappa \left\langle \sum_i n_i \varphi_i \right\rangle = cN_C - \delta \Omega \langle \Phi \rangle - \frac{\Omega}{T} [\Phi(t_1) - \Phi(t_0)]. \quad (8)$$

Decay and net changes in storage are small relative to production, leaving total uptake nearly unchanged across the evaluated conditions. The measured mean of $\sum_i n_i \varphi_i$ ranges from 446.7 to 448.1 across all seeds of the main and tolled conditions (see Appendix B).

Writing $B = r_v \sum_i n_i \varphi_i + (r_u - r_v) N_C \bar{\varphi}_C$, where $\bar{\varphi}_C$ is the mean resource level experienced by cooperators, movement can then change aggregate benefit mainly through the resource access of cooperators. Crowding cost instead grows with the spatial variance of occupancy $\mathcal{K} = \gamma N^2 / (M\Omega) + (\gamma/\Omega) \sum_i (n_i - N/M)^2$, so aggregation can raise it substantially without a comparable gain in benefit.

Individual rewards account for an agent’s own crowding cost but not the crowding it imposes on others. An agent’s presence adds γ/Ω to the cost of each of the other $n_i - 1$ occupants of its patch. To test whether accounting for this externality changes the learned organization, we subtract a toll $\gamma(n_i - 1)/\Omega$ per unit time from the learning reward. This toll prices the direct crowding imposed on others, but not the effects of movement on resource production and consumption. At the reward-function level, this corresponds to doubling the crowding coefficient and adding an action-independent constant; finite-training trajectories are not exactly equivalent because the initial Q-values are not shifted accordingly (see Appendix F). Evaluation continues to use the original payoff in (3), so the reported welfare changes are not changes in the evaluation objective.

With equal-rate co-learning, the toll reduces I_U from 7.9 to 1.06 and raises welfare from 1977 to 2203, close to the random-movement baseline. The paired welfare increase is 226, with a 95% interval of [170, 285]. At (0.2, 0.05), the toll reduces clustering from 14.7 to 2.0 and raises welfare from 1783 to 2176, approximately 1% below the baseline. Neither tolled condition produces coherent travel, and welfare improves in every training seed (Figure 6b, c).

When only cooperators learn, the toll improves welfare in all ten seeds, raising the mean from 1759 to 2038 and recovering approximately 63% of the loss relative to random movement. Mean cooperator payoff reaches 3.59 and exceeds the random-movement baseline in every seed. However, substantial clustering remains with $I_U = 10.2$, and defectors still experience lower resource availability than under random movement.

At five further rate pairs with large untolled losses, the toll raises welfare in all ten seeds, but does not always restore the random-movement baseline. Recovery is nearly complete at (0.05, 0.0125), from 1599 to 2193 with no traveling seed, and partial at (0.2, 0.00625), from 781 to 1617 with eight seeds still traveling (see Appendix N).

4.6 Robustness

At the same 200-episode budget, the three core conditions retain their clustering and welfare orderings across separately tested variants with three training seeds each. These use rings of 32 or 128 patches at fixed densities, doubled resource diffusion, or defector valuation $r_v = 6.5$. The ordering also persists with a 225-state observation based on neighbor differences. Adding own-patch occupancy gives 675 states and preserves the ordering of the two conditions tested. Coherent travel is more sensitive. At $\alpha_C = 0.2$ and $\alpha_D = 0.05$, it occurs in all three seeds at each alternative ring size, two with doubled diffusion, and none with $r_v = 6.5$ (see Appendices K and M).

5 Discussion and Future Work

Our results show how learned movement connects individual adaptation to collective spatial organization. Previous spatial public goods models prescribe responses to payoffs or resource gradients [39, 11, 46, 49], while classical chemotaxis models generate traveling bands through prescribed responses to a substrate that organisms also modify [20]. Here, resource seeking emerges through individual learning, and removing this preference eliminates aggregation in the tested distilled policies. Policy interventions also identify a shared directional preference as an important contributor to coherent travel. Despite the environment’s left–right symmetry, learners can acquire a common directional preference whose removal strongly suppresses travel while retaining substantial aggregation.

The resulting patterns depend on how long and how quickly the agents learn. Traveling bands are reproducible across training seeds and fresh rollouts at the tested checkpoints, but their occurrence depends on both learning rates and training duration. Successive frozen policies can sustain travel, lose it, or generate movement in the opposite direction. These observations characterize finite-training outcomes rather than establish convergence to an equilibrium. The welfare loss is more consistent across the tested conditions. With production independent of location and total uptake nearly unchanged, aggregation increases crowding costs much more than aggregate resource benefit. Mean welfare remains below the random-movement baseline in every tested untolled learning-rate condition with cooperator learning. Charging agents for the crowding they impose on others recovers much of this loss at the evaluated training budget.

Future work could connect frozen policies to continuum descriptions with effective diffusion or taxis terms [46]. Other graph topologies may alter aggregation and collective motion by changing resource transport and agent connectivity. Learning contribution and movement jointly, or using function approximation, would test whether the identified mechanisms extend beyond fixed social types and tabular policies.

Acknowledgments

We thank Prof. Daniel B. Cooney at the University of Illinois Urbana-Champaign for helpful discussions, insightful suggestions on the role of learning rates, and for pointing us to relevant literature.

Declaration on the Use of AI

We used Claude Fable 5.1 (Anthropic) and GPT-6 Astra (OpenAI) as assistive tools for language editing and for drafting and optimizing code for the numerical experiments. The authors reviewed and checked the AI-assisted content and code, and take full responsibility for the manuscript and reported results.

References

- [1] Jacques Bara, Fernando P. Santos, and Paolo Turrini. The impact of mobility costs on cooperation and welfare in spatial social dilemmas. *Scientific Reports*, 14(1):10572, 2024. doi: 10.1038/s41598-024-60806-z. URL <https://doi.org/10.1038/s41598-024-60806-z>.
- [2] Wolfram Barfuss and Janusz M. Meylahn. Intrinsic fluctuations of reinforcement learning promote cooperation. *Scientific Reports*, 13(1):1309, 2023. doi: 10.1038/s41598-023-27672-7. URL <https://doi.org/10.1038/s41598-023-27672-7>.
- [3] Jakub Bielawski, Thiparat Chotibut, Fryderyk Falniowski, Michał Misiurewicz, and Georgios Piliouras. Heterogeneity, reinforcement learning, and chaos in population games. *Proceedings of the National Academy of Sciences*, 122(25):e2319929121, 2025. doi: 10.1073/pnas.2319929121. URL <https://www.pnas.org/doi/abs/10.1073/pnas.2319929121>.
- [4] Michael Bowling and Manuela Veloso. Multiagent learning using a variable learning rate. *Artificial Intelligence*, 136(2):215–250, 2002. ISSN 0004-3702. doi: [https://doi.org/10.1016/S0004-3702\(02\)00121-2](https://doi.org/10.1016/S0004-3702(02)00121-2). URL <https://www.sciencedirect.com/science/article/pii/S0004370202001212>.
- [5] Robert S. Cantrell, Chris Cosner, and Yuan Lou. Evolution of dispersal and the ideal free distribution. *Mathematical Biosciences and Engineering*, 7(1):17–36, 2010. doi: <https://doi.org/10.3934/mbe.2010.7.17>. URL <https://www.proquest.com/scholarly-journals/evolution-dispersal-ideal-free-distribution/docview/3300733202/se-2>.
- [6] Robert Stephen Cantrell, Chris Cosner, King-Yeung Lam, and Idriss Mazari-Fouquer. Mean field games and ideal free distribution. *Journal of Mathematical Biology*, 91(4):46, 2025. doi: 10.1007/s00285-025-02276-z. URL <https://doi.org/10.1007/s00285-025-02276-z>.
- [7] Alessio Cardillo, Sandro Meloni, Jesús Gómez-Gardeñes, and Yamir Moreno. Velocity-enhanced cooperation of moving agents playing public goods games. *Phys. Rev. E*, 85(6):067101, 2012. doi: 10.1103/PhysRevE.85.067101. URL <https://link.aps.org/doi/10.1103/PhysRevE.85.067101>.
- [8] Caroline Claus and Craig Boutilier. The dynamics of reinforcement learning in cooperative multiagent systems. In *Proceedings of the Fifteenth National/Tenth Conference on Artificial Intelligence/Innovative Applications of Artificial Intelligence*, AAAI ’98/IAAI ’98, page 746–752, USA, 1998. American Association for Artificial Intelligence. ISBN 0262510987.
- [9] Simona Colabrese, Kristian Gustavsson, Antonio Celani, and Luca Biferale. Flow navigation by smart microswimmers via reinforcement learning. *Phys. Rev. Lett.*, 118(15):158004, 2017. doi: 10.1103/PhysRevLett.118.158004. URL <https://link.aps.org/doi/10.1103/PhysRevLett.118.158004>.
- [10] Jakob Foerster, Richard Y. Chen, Maruan Al-Shedivat, Shimon Whiteson, Pieter Abbeel, and Igor Mordatch. Learning with opponent-learning awareness. In *Proceedings of the 17th International Conference on Autonomous Agents and MultiAgent Systems*, AAMAS ’18, page 122–130, Richland, SC, 2018. International Foundation for Autonomous Agents and Multiagent Systems.
- [11] Felix Funk and Christoph Hauert. Directed migration shapes cooperation in spatial ecological public goods games. *PLOS Computational Biology*, 15(8):1–14, 2019. doi: 10.1371/journal.pcbi.1006948. URL <https://doi.org/10.1371/journal.pcbi.1006948>.
- [12] Dirk Helbing and Wenjian Yu. The outbreak of cooperation among success-driven individuals under noisy conditions. *Proceedings of the National Academy of Sciences*, 106(10):3680–3685, 2009. doi: 10.1073/pnas.0811503106. URL <https://www.pnas.org/doi/abs/10.1073/pnas.0811503106>.
- [13] Pablo Hernandez-Leal, Bilal Kartal, and Matthew E. Taylor. A survey and critique of multiagent deep reinforcement learning. *Autonomous Agents and Multi-Agent Systems*, 33(6):750–797, 2019. doi: 10.1007/s10458-019-09421-1. URL <https://doi.org/10.1007/s10458-019-09421-1>.

- [14] T. Hillen and K. J. Painter. A user’s guide to PDE models for chemotaxis. *Journal of Mathematical Biology*, 58:183–217, 2009. doi: 10.1007/s00285-008-0201-3.
- [15] Edward Hughes, Joel Z. Leibo, Matthew Phillips, Karl Tuyls, Edgar Dueñez-Guzman, Antonio García Castañeda, Iain Dunning, Tina Zhu, Kevin McKee, Raphael Koster, Heather Roff, and Thore Graepel. Inequity aversion improves cooperation in intertemporal social dilemmas. In *Proceedings of the 32nd International Conference on Neural Information Processing Systems*, NIPS’18, page 3330–3340, Red Hook, NY, USA, 2018. Curran Associates Inc.
- [16] Rashid Ibrahimli, Marco Tomassini, and Alberto Antonioni. Migration costs and rewarding schemes in spatial public goods games. *Phys. Rev. E*, 109(5):054303, 2024. doi: 10.1103/PhysRevE.109.054303. URL <https://link.aps.org/doi/10.1103/PhysRevE.109.054303>.
- [17] Masaaki Inaba and Eizo Akiyama. Evolution of cooperation among migrating resource-oriented agents under environmental variability. *Chaos, Solitons & Fractals*, 202:117592, 2026. ISSN 0960-0779. doi: <https://doi.org/10.1016/j.chaos.2025.117592>. URL <https://www.sciencedirect.com/science/article/pii/S0960077925016054>.
- [18] Kaiwen Jiang, Chenyang Zhao, Shengfeng Deng, Weiran Cai, Jiqiang Zhang, and Li Chen. Decoding species coexistence: A reinforcement learning perspective. *Phys. Rev. E*, 113(5):054411, 2026. doi: 10.1103/nyts-2vk1. URL <https://link.aps.org/doi/10.1103/nyts-2vk1>.
- [19] Evelyn F. Keller and Lee A. Segel. Initiation of slime mold aggregation viewed as an instability. *Journal of Theoretical Biology*, 26(3):399–415, 1970. ISSN 0022-5193. doi: [https://doi.org/10.1016/0022-5193\(70\)90092-5](https://doi.org/10.1016/0022-5193(70)90092-5). URL <https://www.sciencedirect.com/science/article/pii/0022519370900925>.
- [20] Evelyn F. Keller and Lee A. Segel. Traveling bands of chemotactic bacteria: A theoretical analysis. *Journal of Theoretical Biology*, 30:235–248, 1971.
- [21] Chuizhao Kong, Yuzhu Wang, and Zhangbing Zhou. Adaptive reward-punishment mechanism with Q-learning in spatial public goods games. *Physica A: Statistical Mechanics and its Applications*, 702:132089, 2026. ISSN 0378-4371. doi: 10.1016/j.physa.2026.132089. URL <https://www.sciencedirect.com/science/article/pii/S0378437126008356>.
- [22] Hsuan-Wei Lee, Colin Cleveland, and Attila Szolnoki. When costly migration helps to improve cooperation. *Chaos: An Interdisciplinary Journal of Nonlinear Science*, 32(9), 2022.
- [23] Joel Z. Leibo, Vinicius Zambaldi, Marc Lanctot, Janusz Marecki, and Thore Graepel. Multi-agent reinforcement learning in sequential social dilemmas. In *Proceedings of the 16th Conference on Autonomous Agents and MultiAgent Systems*, AAMAS ’17, page 464–473, Richland, SC, 2017. International Foundation for Autonomous Agents and Multiagent Systems.
- [24] Joel Z Leibo, Edgar A Dueñez-Guzman, Alexander Vezhnevets, John P Agapiou, Peter Sunehag, Raphael Koster, Jayd Matyas, Charlie Beattie, Igor Mordatch, and Thore Graepel. Scalable evaluation of multi-agent reinforcement learning with melting pot. In *International conference on machine learning*, pages 6187–6199. PMLR, 2021.
- [25] Stefanos Leonardos and Georgios Piliouras. Exploration-exploitation in multi-agent learning: Catastrophe theory meets game theory. *Artificial Intelligence*, 304:103653, 2022.
- [26] Adam Lerer and Alexander Peysakhovich. Learning existing social conventions via observationally augmented self-play. In *Proceedings of the 2019 AAAI/ACM Conference on AI, Ethics, and Society*, AIES ’19, page 107–114, New York, NY, USA, 2019. Association for Computing Machinery. ISBN 9781450363242. doi: 10.1145/3306618.3314268. URL <https://doi.org/10.1145/3306618.3314268>.
- [27] Gustavo C. Mangold, Mendeli H. Vainstein, and Heitor C.M. Fernandes. Dilution, diffusion and symbiosis in spatial prisoner’s dilemma with reinforcement learning. *Chaos, Solitons & Fractals*, 201:117382, 2025. ISSN 0960-0779. doi: 10.1016/j.chaos.2025.117382. URL <https://www.sciencedirect.com/science/article/pii/S0960077925013955>.

- [28] Laetitia Matignon, Guillaume J. Laurent, and Nadine Le Fort-Piat. Independent reinforcement learners in cooperative Markov games: a survey regarding coordination problems. *The Knowledge Engineering Review*, 27(1):1–31, 2012. doi: 10.1017/S0269888912000057.
- [29] S. Meloni, A. Buscarino, L. Fortuna, M. Frasca, J. Gómez-Gardeñes, V. Latora, and Y. Moreno. Effects of mobility in a population of prisoner’s dilemma players. *Phys. Rev. E*, 79(6):067101, 2009. doi: 10.1103/PhysRevE.79.067101. URL <https://link.aps.org/doi/10.1103/PhysRevE.79.067101>.
- [30] Benedikt Valentin Meylahn. Multi-agent reinforcement learning in the all-or-nothing public goods game on networks. In *Proceedings of the 24th International Conference on Autonomous Agents and Multiagent Systems, AAMAS ’25*, page 1492–1500, Richland, SC, 2025. International Foundation for Autonomous Agents and Multiagent Systems. ISBN 9798400714269.
- [31] B. Mintz and F. Fu. Evolutionary multi-agent reinforcement learning in group social dilemmas. *Chaos: An Interdisciplinary Journal of Nonlinear Science*, 35(2):023140, 2025. ISSN 1054-1500. doi: 10.1063/5.0246332. URL <https://doi.org/10.1063/5.0246332>.
- [32] Julien Perolat, Joel Z Leibo, Vinicius Zambaldi, Charles Beattie, Karl Tuyls, and Thore Graepel. A multi-agent reinforcement learning model of common-pool resource appropriation. *Advances in neural information processing systems*, 30, 2017.
- [33] Ramesh Pramanik, Shradha Mishra, and Sakuntala Chatterjee. Run-and-tumble chemotaxis using reinforcement learning. *Phys. Rev. E*, 111(1):014106, 2025. doi: 10.1103/PhysRevE.111.014106. URL <https://link.aps.org/doi/10.1103/PhysRevE.111.014106>.
- [34] Yoav Shoham and Moshe Tennenholtz. On the emergence of social conventions: modeling, analysis, and simulations. *Artificial Intelligence*, 94(1):139–166, 1997. ISSN 0004-3702. doi: 10.1016/S0004-3702(97)00028-3. URL <https://www.sciencedirect.com/science/article/pii/S0004370297000283>. Economic Principles of Multi-Agent Systems.
- [35] Angela Stevens. The derivation of chemotaxis equations as limit dynamics of moderately interacting stochastic many-particle systems. *SIAM Journal on Applied Mathematics*, 61(1):183–212, 2000. doi: 10.1137/S0036139998342065. URL <https://doi.org/10.1137/S0036139998342065>.
- [36] Nicholas Tovazzi, Gorka Muñoz-Gil, and Michele Caraglio. Run-and-tumble particles learning chemotaxis. *Soft Matter*, 21(46):8886–8896, 2025. ISSN 1744-683X. doi: 10.1039/d5sm01040c. URL <https://doi.org/10.1039/d5sm01040c>.
- [37] Samuel Tovey, Christoph Lohrmann, and Christian Holm. Emergence of chemotactic strategies with multi-agent reinforcement learning. *Machine Learning: Science and Technology*, 5(3):035054, 2024. doi: 10.1088/2632-2153/ad5f73. URL <https://doi.org/10.1088/2632-2153/ad5f73>.
- [38] Mendeli H. Vainstein, Ana T.C. Silva, and Jeferson J. Arenzon. Does mobility decrease cooperation? *Journal of Theoretical Biology*, 244(4):722–728, 2007. ISSN 0022-5193. doi: 10.1016/j.jtbi.2006.09.012. URL <https://www.sciencedirect.com/science/article/pii/S0022519306004218>.
- [39] Joe Yuichiro Wakano, Martin A. Nowak, and Christoph Hauert. Spatial dynamics of ecological public goods. *Proceedings of the National Academy of Sciences*, 106(19):7910–7914, 2009. doi: 10.1073/pnas.0812644106. URL <https://www.pnas.org/doi/abs/10.1073/pnas.0812644106>.
- [40] Christopher J. C. H. Watkins and Peter Dayan. Q-learning. *Machine Learning*, 8(3):279–292, 1992. doi: 10.1007/BF00992698.
- [41] Te Wu, Feng Fu, Yanling Zhang, and Long Wang. Expectation-driven migration promotes cooperation by group interactions. *Phys. Rev. E*, 85(6):066104, 2012. doi: 10.1103/PhysRevE.85.066104. URL <https://link.aps.org/doi/10.1103/PhysRevE.85.066104>.

- [42] Kai Xie and Attila Szolnoki. Reinforcement learning in evolutionary game theory: A brief review of recent developments. *Applied Mathematics and Computation*, 510:129685, 2026. ISSN 0096-3003. doi: 10.1016/j.amc.2025.129685. URL <https://www.sciencedirect.com/science/article/pii/S0096300325004114>.
- [43] Han-Xin Yang, Zhi-Xi Wu, and Bing-Hong Wang. Role of aspiration-induced migration in cooperation. *Phys. Rev. E*, 81(6):065101(R), 2010. doi: 10.1103/PhysRevE.81.065101. URL <https://link.aps.org/doi/10.1103/PhysRevE.81.065101>.
- [44] Jiachen Yang, Ang Li, Mehrdad Farajtabar, Peter Sunehag, Edward Hughes, and Hongyuan Zha. Learning to incentivize other learning agents. In *Advances in Neural Information Processing Systems*, volume 33, pages 15208–15219. Curran Associates, Inc., 2020. URL https://proceedings.neurips.cc/paper_files/paper/2020/file/ad7ed5d47b9baceb12045a929e7e2f66-Paper.pdf.
- [45] Tianyong Yao and Daniel B Cooney. Spatial pattern formation in eco-evolutionary games with environment-driven motion. *arXiv preprint arXiv:2502.06723*, 2025.
- [46] Tianyong Yao, Chenning Xu, and Daniel B. Cooney. Pattern formation in agent-based and PDE models for evolutionary games with payoff-driven motion. *Bulletin of Mathematical Biology*, 88(4):46, 2026.
- [47] Glenn Young and Andrew Belmonte. Fast cheater migration stabilizes coexistence in a public goods dilemma on networks. *Theoretical Population Biology*, 121:12–25, 2018. ISSN 0040-5809. doi: <https://doi.org/10.1016/j.tpb.2018.03.007>. URL <https://www.sciencedirect.com/science/article/pii/S004058091730179X>.
- [48] H. Peyton Young. The evolution of conventions. *Econometrica*, 61(1):57–84, 1993. ISSN 00129682, 14680262. doi: 10.2307/2951778. URL <http://www.jstor.org/stable/2951778>.
- [49] Yuxuan Zhao, Kaisheng Zhu, Yefei Zhang, and Daniel B. Cooney. Pattern formation in a spatial public goods dilemma due to diffusive or directed motion. *Bulletin of Mathematical Biology*, 88(10):173, 2026. doi: 10.1007/s11538-026-01733-0.
- [50] Guozhong Zheng, Jiqiang Zhang, Shengfeng Deng, Weiran Cai, and Li Chen. Evolution of cooperation in the public goods game with Q-learning. *Chaos, Solitons & Fractals*, 188: 115568, 2024. ISSN 0960-0779. doi: <https://doi.org/10.1016/j.chaos.2024.115568>. URL <https://www.sciencedirect.com/science/article/pii/S0960077924011202>.

Summary of Appendix Sections

Section A gives the numerical scheme and the learning update in full, Section B the measurements, including the complete algorithm that classifies coherent travel, and Section C the protocols of policy recombination, distillation, and replay. Section D gives the complete main table and seed-level intervals for the main comparisons. Section E collects the figures referred to in the main text: training curves, policy recombination, the directional replay on one fresh rollout, the complete learning-rate and directional-bias analysis, the aligned band profiles, and the long-training trajectories. Section F gives the distilled rules, the replay of every trained run, the per-agent analysis of the directional convention, and the crowding-toll runs per seed. Section G gives the learning-rate grid with traveling counts. Sections H–J report three additional controls: the sensitivity of the frozen policies to evaluation exploration, hand-designed movement rules, and the mirror-symmetrization of the original learned tables. Section K gives the environment variants. Section L gives per-seed values, Section M the observation variants, Section N the finer learning-rate sweep, the training-length runs, and the additional toll runs, and Section O the code and what is needed to reproduce every number.

Notation follows the main text. Agents are indexed by j , patches by i , and actions by a . All runs use the parameters of Table 1 of the main text unless stated otherwise, and rate pairs are written as (α_C, α_D) . Seeds 0–9 index both the training stream and the held-out evaluation placement. For a given seed, every policy starts from the same placement and uses the same decision phases. This holds for no movement, random movement, learned tables, and replayed rules.

Evaluation sets. Frozen policies are evaluated in three settings, and the same condition gives slightly different numbers in each. Set E is the held-out evaluation placement of each training seed, with one rollout per seed. It is used for the main table, the grid, the toll runs, the recombination, and the broad-scan replay. Set F consists of five fresh rollouts per training seed with new placements and phases. It is used for the fresh-rollout replay, the exploration test, the hand-designed rules, and the mirror-symmetrized tables. Set L covers the long-training runs, which are evaluated on E at every checkpoint with three or five seeds. For example, cooperator-only learning has $W = 1759$ on E and 1742 on F .

A Numerical scheme and learning update

One step $t_m \rightarrow t_{m+1}$ performs, in order:

1. *Decisions.* Every agent j with $m \equiv \theta_j \pmod{K}$ observes its state s from the configuration $(\varphi(t_m), n(t_m))$ before any move of this step. If it has already decided in this episode, it applies the Q-update to its previous state–action pair with the accumulated reward R and next state s . It then chooses an action ε -greedily. With probability ε the action is drawn uniformly from the three actions. Otherwise the agent takes a maximizer of its own table, with ties broken uniformly. Its reward accumulator is then reset to zero.
2. *Moves.* All chosen moves are executed simultaneously, and U , V , and n are updated. Agents that do not decide in this step stay where they are. This waiting is not a stay action and is not updated.
3. *Public good.* The public good equation is integrated at the new occupancies with two explicit Euler substeps of length $\Delta t/2$, and negative values are clipped to zero after each substep. The step-averaged resource is the trapezoidal average of the three stages, $\bar{\varphi}^{(m)} = \frac{1}{4}\varphi^{(0)} + \frac{1}{2}\varphi^{(1/2)} + \frac{1}{4}\varphi^{(1)}$.
4. *Rewards.* Every agent adds $\Delta t \Pi_{\tau_j}(\bar{\varphi}_{x_j}^{(m)}, n_{x_j})$ to its accumulator, using its post-move position and occupancy. In the toll runs it also subtracts $\Delta t \gamma(n_{x_j} - 1)/\Omega$.

The diffusion number is $D_\varphi \Delta t / (2\ell^2) = 0.048$, well inside the stability bound $1/2$ of the explicit scheme. Each Euler substep writes the new value as a combination of φ_i , $\varphi_{i\pm 1}$, and the production term. The coefficients are nonnegative whenever $(\Delta t/2)(\kappa n_i/\Omega + \delta + 2D_\varphi/\ell^2) < 1$. This holds for every possible occupancy of the main model, since $n_i \leq N = 640$ gives 0.90. In the environment variants the worst case is not always covered. On the 128-patch ring, for example, all 1280 agents on one patch would violate it. The occupancies observed in the frozen evaluations of the variants do satisfy the condition, although training trajectories were not checked. The largest observed occupancy is 72 for $M = 32$, 135 for $M = 128$, 83 with doubled diffusion, and 86 with $r_v = 6.5$. The corresponding coefficients are 0.81, 0.74, 0.70, and 0.80, and the largest concentration is below 0.98. These checks are in `checks.py`.

Two consequences follow. First, the concentration stays nonnegative, so the clipping never acts. Second, since $c = \kappa$ and $U_i \leq n_i$, the bound $\varphi \leq 1$ is preserved along every trajectory that starts below 1, and all runs start from $\varphi^* < 1$. For the continuous equation this is the maximum principle. At a spatial maximum with $\varphi_i = 1$, the diffusion term is nonpositive and $cU_i/\Omega - (\kappa n_i/\Omega + \delta) \leq -\delta < 0$. For the discrete scheme, if all $\varphi_i \leq 1$ before a substep, then $\varphi_i \leq 1 - (\Delta t/2)((n_i - U_i)/\Omega + \delta) \leq 1$ after it. The largest value in any frozen evaluation of the 172 trained runs is 0.98. The same-location payoff gap $\Pi_D - \Pi_C = c - (r_u - r_v)\varphi_i = 1 - \varphi_i$ is nonnegative in every reachable state of the main model. In the $r_v = 6.5$ variant the gap is $1 - 0.5\varphi_i$, which is also nonnegative.

Episode boundaries. At the start of every episode the positions are redrawn uniformly, φ_i is reset to φ^* , and the phases θ_j are redrawn. The reward accumulators and previous state–action pairs are cleared, while the Q-tables persist. The first decision of an agent in an episode has no predecessor and triggers no update. The payoff collected after an agent’s last decision of the episode covers an unfinished interval of fewer than K steps and is discarded. Each agent makes $T_{\text{ep}}/\tau_{\text{dec}} = 400$ decisions and 399 updates per episode. Exploration in training episode e is $\varepsilon_e = 0.3 - 0.29 \min\{1, e/(0.8E)\}$.

Observation levels. The resource levels are $\varphi_i \leq 0.65$, $0.65 < \varphi_i \leq 0.75$, and $\varphi_i > 0.75$. The occupancy levels are $n_i \leq 7$, $8-12$, and $n_i \geq 13$. A resource difference $\varphi_{i\pm 1} - \varphi_i$ is lower if it is at most -0.01 , similar if it lies in $(-0.01, 0.01]$, and higher if it exceeds 0.01 . An occupancy difference $n_{i\pm 1} - n_i$ is lower if it is at most -3 , similar from -2 to 2 , and higher if it is at least 3 . Under random movement, agents see poor, intermediate, and rich patches with frequencies of 16%, 70%, and 14%. The three occupancy levels occur with frequencies of 22%, 57%, and 21% over patches and 13%, 57%, and 30% as seen by agents, who are more often found on crowded patches.

Reward and reported payoff. The learning reward uses the step-averaged resource $\bar{\varphi}^{(m)}$. Reported payoffs are computed from the configuration (U, V, φ) stored once per time unit. In the main table, the toll comparison, the policy recombination, the exploration test, the hand-designed rules, and the mirror-symmetrized tables, W , B , $\mathcal{K}$, Π_τ , and φ_τ are averages over the 201 snapshots at $t = 200, 201, \dots, 400$ of the frozen-policy evaluation. In the grid, replay, long-training, environment-variant, and observation-variant results, W is the average of the instantaneous welfare over all numerical steps of the same interval. The two averages differ by about one unit of W on average and by up to three units in a single seed. For equal-rate learning, for example, they give 1977 and 1976. This is why the same condition can differ in the last digit between tables. The no-movement baseline differs from W^* because the random placement is not exactly uniform.

B Measurements

Clustering and alignment. $I_U = \text{Var}_i(U_i)/\bar{U}$ and the Pearson correlation $\rho_{U\varphi}$ between U_i and φ_i over patches are averaged over the three snapshots $t = 200, 300, 400$.

Coherent travel. Let $U(t) \in \mathbb{R}^M$ be the cooperator profile at integer time t and $\tilde{U}(t)$ the profile minus its spatial mean. For each window start $t = 200, 201, \dots, 395$ (196 windows) and lag $\Delta = 5$ we compute, for every cyclic shift $k \in \{-M/2, \dots, M/2 - 1\}$,

$$c_k(t) = \frac{\sum_i \tilde{U}_{i-k}(t) \tilde{U}_i(t + \Delta)}{\|\tilde{U}(t)\| \|\tilde{U}(t + \Delta)\|},$$

and take $k^*(t) = \arg \max_k c_k(t)$. If several shifts attain the maximum, the smallest k is taken. The window velocity is $v(t) = k^*(t)/\Delta$ patches per time unit, positive toward increasing patch index, and the largest detectable speed is $M/(2\Delta) = 6.4$. We report the speed $|v| = \langle |v(t)| \rangle_t$, the signed velocity $\bar{v} = \langle v(t) \rangle_t$, the best-shift correlation $r = \langle c_{k^*(t)}(t) \rangle_t$, and the main-direction share

$$d = \max \left\{ \frac{1}{196} \# \{t : v(t) > 0\}, \frac{1}{196} \# \{t : v(t) < 0\} \right\}.$$

Windows with $k^*(t) = 0$ count toward neither direction, so a stationary profile has d near zero. A run *travels coherently* if $r > 0.7$ and $d > 0.9$. Both conditions are needed. A fluctuating profile without structure has a large speed because the best shift is arbitrary, but its correlation is low and it has no dominant direction. Under random movement, for example, $|v| = 1.9$, $r = 0.31$, and $d = 0.46$. Stationary clusters have a high correlation but d near zero. The classification is not sensitive to the thresholds on r and d . Among the 172 trained runs, 50 are coherent at $(r, d) > (0.7, 0.9)$, 50 at $(0.6, 0.9)$, 48 at $(0.8, 0.9)$, 56 at $(0.7, 0.8)$, and 46 at $(0.7, 0.95)$. Proportions of traveling runs are computed over training seeds, never over the correlated time windows of one run.

Directional bias. $\chi_\tau = (\#R - \#L)/\#\text{decisions}$ over all decisions of type τ during the 400 time units of the evaluation, including stays in the denominator. The per-agent bias uses the decisions of one agent.

Crowding cost. Because the total number of agents is fixed,

$$\mathcal{K} = \frac{\gamma}{\Omega} \sum_i n_i^2 = \frac{\gamma N^2}{M\Omega} + \frac{\gamma}{\Omega} \sum_i \left(n_i - \frac{N}{M} \right)^2.$$

The first term is 320 for the parameters used, and the second is the spatial variance of the total occupancy. Random movement gives $\mathcal{K} \approx 352$ and the clustered conditions up to 967. $\mathcal{K}$ depends on the occupancy of both types, whereas I_U measures cooperators only, so the two need not move together.

Resource benefit. Summing the public good equation over patches cancels the diffusion term and gives $\frac{d}{dt} \sum_i \varphi_i = cN_C/\Omega - \sum_i (\kappa n_i/\Omega + \delta) \varphi_i$. Over an evaluation window in which $\sum_i \varphi_i$ does not drift, total uptake balances production minus decay, $\kappa \langle \sum_i n_i \varphi_i \rangle = cN_C - \delta \Omega \langle \sum_i \varphi_i \rangle \approx 448 - 0.9$, whatever the spatial arrangement. Since $B = r_v \sum_i n_i \varphi_i + (r_u - r_v) \sum_i U_i \varphi_i = r_v \sum_i n_i \varphi_i + (r_u - r_v) N_C \bar{\varphi}_C$, under the approximation of fixed total uptake, the benefit can change only through the resource level $\bar{\varphi}_C$ experienced by cooperators. We recover $\sum_i n_i \varphi_i = (B - (r_u - r_v) N_C \bar{\varphi}_C) / r_v$ from the stored B and $\bar{\varphi}_C$. It lies between 446.7 and 448.1 in every seed of the eleven rows of Table 3, which cover the baselines and the learned and tolled conditions. The approximation $B \approx r_v \cdot 447.1 + (r_u - r_v) N_C \bar{\varphi}_C$ reproduces the condition means of B to within four units. Under this approximation and because $\varphi \leq 1$ (Section A), B can exceed its random-movement value by at most $(r_u - r_v) N_C (1 - 0.705) \approx 132$, and $\mathcal{K}$ can fall at most 32 below it. Under the approximation of fixed total uptake, the estimated maximum welfare gain over random movement is about 165.

C Policy interventions

Recombination. Each agent owns its table, so cooperator tables from one run can be evaluated with defector tables from another run of the same seed, or with untrained tables that move at random. Row $\dagger$ of the main table evaluates the cooperator tables of the equal-rate run with untrained defector tables. The reverse pairing combines the defector tables of the equal-rate run with the cooperator tables of the cooperator-only run of the same seed.

Distillation. During the frozen evaluation of a trained population, on the placement and phases of its seed, every decision is recorded with its context. The action frequencies per context and type define a stochastic rule shared by all agents of that type. The *absolute rule* uses 27 contexts, formed by the level of φ_i and the levels of $\varphi_{i-1} - \varphi_i$ and $\varphi_{i+1} - \varphi_i$. Its actions are stay, left, and right. The *pooled rule* merges mirror-image contexts into six, formed by the level of φ_i and whether exactly one neighbor is in the higher level. If so, the actions are up, stay, and down relative to that neighbor. Otherwise the agent stays or moves, with left and right equally likely. The *symmetrized rule* averages the absolute rule with its reflection, which exchanges the two neighbor differences and the labels left and right. It is applied to both types. Contexts that were never visited receive the uniform rule. Visited contexts are not smoothed, and every decision has equal weight. The recorded decisions include the 1% exploratory actions of the evaluation, so a rule is replayed without additional exploration. None of the rules uses the occupancy components of the observation. A distilled rule is a different, smaller model that reproduces the collective behavior. It is not an equivalent representation of the tables, and interventions on it show what suffices and what is necessary within that model. Section J gives an intervention on the original tables.

Ablations of the pooled rule. *Equal up/down:* in the three contexts with exactly one richer neighbor, the cooperators' up and down probabilities are both set to their mean, and the stay probability is unchanged. *Stay 1/3:* in every context, the cooperators' stay probability is set to 1/3 and the remaining 2/3 keeps the original split between up and down. In every condition, including equal-rate learning, both ablations modify only the cooperators' rule. Defectors keep their own distilled rule.

Replay. A rule is replayed by letting every agent draw its actions from the rule of its type, and nothing is learned. The *fresh-rollout* tests cover cooperator-only learning, equal-rate learning, and the two ratio-4 conditions. The rules estimated from the evaluation rollout of training seed s are replayed on five new rollouts $j = 0, \dots, 4$ with new placements and new decision phases, using rollout seed $5000 + 10s + j$. These rollouts are never used for estimation, and the learned tables are run on the same five rollouts. In the *broad scan* over all trained runs, a rule is replayed from the placement and phases on which it was estimated, with new action draws. This scan tests whether a rule reproduces the observed behavior, not whether it transfers.

D Complete main table and seed-level uncertainty

Table 3 is the complete version of Table 2 of the main text, and Table 4 gives seed-level intervals for the comparisons made there. The unit of replication is the training seed. The 50 fresh rollouts of a condition come from ten trained populations, so the five rollouts of each seed are averaged first

Table 3: Complete version of Table 2 of the main text. Values are means over ten training seeds, and W also gives the between-seed standard deviation. I_U is clustering, $\rho_{U,\varphi}$ the spatial correlation of cooperator occupancy and public good, $|v|$ the speed, trav. the number of coherently traveling seeds, and $|\chi_C|$ the absolute left-right action bias of the cooperators. Welfare is $W = B - N_C c - \mathcal{K}$ with resource benefit B and crowding cost $\mathcal{K}$. Π_τ and φ_τ are the mean payoff and the mean public good experienced by type τ . Rate pairs are (α_C, α_D) .

condition	I_U	$\rho_{U,\varphi}$	$ v $	trav.	$ \chi_C $	W	(sd)	B	$\mathcal{K}$	Π_C	Π_D	φ_C	φ_D
No movement	0.97	0.36	0.00	0/10	–	2199	4	2999	352	3.39	3.55	0.71	0.68
Random movement	0.94	0.32	1.85	0/10	–	2199	1	2998	352	3.38	3.56	0.70	0.68
Only D learns	0.94	0.61	1.85	0/10	0.00	2205	1	2997	344	3.36	3.65	0.70	0.69
Only C learns	24.7	0.83	0.05	0/10	0.01	1759	49	3066	858	3.23	1.63	0.85	0.36
Both learn, (0.05, 0.05)	7.9	0.88	0.16	0/10	0.01	1977	94	3001	576	3.00	3.30	0.71	0.67
C co-trained, D random	11.0	0.84	0.12	0/10	0.01	2022	25	3039	570	3.49	2.39	0.79	0.48
Both learn, (0.2, 0.05)	14.7	0.91	1.06	10/10	0.33	1783	129	3008	777	2.73	2.92	0.73	0.63
Both learn, (0.05, 0.0125)	22.6	0.88	0.97	10/10	0.32	1599	169	3014	967	2.44	2.63	0.74	0.60
<i>Learning with a crowding toll</i>													
Only C learns	10.2	0.88	0.05	0/10	0.01	2038	22	3044	558	3.59	2.24	0.80	0.46
Both learn, (0.05, 0.05)	1.06	0.66	0.93	0/10	0.00	2203	3	2997	347	3.37	3.61	0.70	0.69
Both learn, (0.2, 0.05)	2.0	0.81	0.25	0/10	0.01	2176	9	3000	376	3.35	3.52	0.71	0.68

and every interval is computed over ten values. Intervals are percentile bootstrap intervals. The ten seed-level values or per-seed differences are resampled with replacement 10,000 times, and we report the 2.5 and 97.5 percentiles of the resampled means. They need not coincide with t intervals computed from rounded table entries. Differences are paired by seed, and the pairing holds by construction rather than by label, as described under Seeds in Section O.

Table 4: Seed-level uncertainty of the main comparisons. The unit of replication is the training seed ($n = 10$), and the five fresh rollouts of a seed are averaged before any statistic is computed. Entries are means with 95% percentile bootstrap intervals over seeds from 10,000 resamples. Differences are taken per seed between conditions that share the seed and therefore the evaluation placement and decision phases. For the toll, the paired runs also share the training placements and phases. The last column counts the seeds in which the difference has the sign of its mean.

	comparison	mean [95% interval]	paired difference [95% interval]	seeds
I_U	random movement	0.9 [0.9, 1.0]	—	—
I_U	only D learns	0.9 [0.9, 1.0]	identical	—
I_U	only C learns	24.7 [23.0, 26.3]	+23.8 [+22.0, +25.4]	10/10
I_U	both learn (0.05, 0.05)	7.9 [6.3, 9.6]	+6.9 [+5.4, +8.6]	10/10
I_U	C co-trained, D random	11.0 [10.5, 11.6]	+10.1 [+9.5, +10.7]	10/10
I_U	both learn (0.2, 0.05)	14.7 [11.9, 17.5]	+13.7 [+10.9, +16.5]	10/10
I_U	both learn (0.05, 0.0125)	22.6 [19.1, 26.3]	+21.7 [+18.2, +25.3]	10/10
W	random movement	2199 [2198, 2199]	—	—
W	only D learns	2205 [2205, 2206]	+6 [+6, +7]	10/10
W	only C learns	1759 [1729, 1789]	−439 [−470, −410]	10/10
W	both learn (0.05, 0.05)	1977 [1917, 2033]	−222 [−282, −165]	10/10
W	C co-trained, D random	2022 [2006, 2036]	−177 [−192, −163]	10/10
W	both learn (0.2, 0.05)	1783 [1702, 1860]	−416 [−496, −339]	10/10
W	both learn (0.05, 0.0125)	1599 [1494, 1701]	−599 [−705, −497]	10/10
I_U	both learn (0.05, 0.05) minus only C learns	7.9 [6.3, 9.6]	−16.8 [−19.4, −14.3]	10/10
I_U	C co-trained, D random minus only C learns	11.0 [10.5, 11.6]	−13.7 [−15.2, −11.9]	10/10
I_U	C co-trained: D learned minus D random	7.9 [6.3, 9.6]	−3.1 [−4.6, −1.7]	10/10
W	both learn (0.05, 0.05) minus only C learns	1977 [1917, 2033]	+217 [+152, +288]	10/10
W	C co-trained, D random minus only C learns	2022 [2006, 2036]	+262 [+230, +294]	10/10
W	C co-trained: D learned minus D random	1977 [1917, 2033]	−45 [−96, +4]	7/10
I_U	toll minus original: only C learns	10.2 [9.4, 10.9]	−14.5 [−16.3, −12.5]	10/10
I_U	toll minus original: both learn (0.05, 0.05)	1.1 [1.0, 1.2]	−6.8 [−8.5, −5.2]	10/10
I_U	toll minus original: both learn (0.2, 0.05)	2.0 [1.8, 2.3]	−12.6 [−15.4, −9.9]	10/10
W	toll minus original: only C learns	2038 [2026, 2053]	+279 [+249, +307]	10/10
W	toll minus original: both learn (0.05, 0.05)	2203 [2200, 2204]	+226 [+170, +285]	10/10
W	toll minus original: both learn (0.2, 0.05)	2176 [2169, 2181]	+393 [+316, +472]	10/10
I_U	only C learns: learned tables	24.6 [23.9, 25.2]	—	—
I_U	only C learns: pooled replay minus learned	27.3 [25.8, 28.7]	+2.7 [+1.4, +3.9]	8/10
I_U	only C learns: no preference minus pooled	1.0 [1.0, 1.0]	−26.3 [−27.7, −24.8]	10/10
I_U	only C learns: stay 1/3 minus pooled	28.0 [27.3, 28.7]	+0.7 [−0.6, +1.9]	6/10
W	only C learns: pooled replay minus learned	1689 [1661, 1717]	−53 [−80, −25]	9/10
I_U	both learn (0.05, 0.05): learned tables	7.4 [6.2, 8.9]	—	—
I_U	both learn (0.05, 0.05): pooled replay minus learned	5.5 [4.6, 6.3]	−2.0 [−3.1, −0.7]	9/10
I_U	both learn (0.05, 0.05): no preference minus pooled	1.0 [1.0, 1.0]	−4.5 [−5.3, −3.6]	10/10
I_U	both learn (0.05, 0.05): stay 1/3 minus pooled	5.4 [4.6, 6.3]	−0.0 [−0.5, +0.4]	4/10
W	both learn (0.05, 0.05): pooled replay minus learned	2046 [2019, 2074]	+42 [+6, +73]	8/10
$ v $	both learn (0.2, 0.05): absolute replay	1.03 [0.88, 1.16]	—	—
$ v $	both learn (0.2, 0.05): symmetrized minus absolute	0.15 [0.13, 0.17]	−0.88 [−1.00, −0.73]	10/10
I_U	both learn (0.2, 0.05): symmetrized minus absolute	9.1 [6.9, 11.5]	−11.9 [−15.8, −7.7]	9/10
$ v $	both learn (0.05, 0.0125): absolute replay	0.94 [0.89, 0.99]	—	—
$ v $	both learn (0.05, 0.0125): symmetrized minus absolute	0.13 [0.11, 0.14]	−0.82 [−0.86, −0.77]	10/10
I_U	both learn (0.05, 0.0125): symmetrized minus absolute	20.3 [15.5, 25.8]	−5.4 [−10.4, −0.2]	8/10

In every untolled condition in which cooperators learn, the clustering and welfare differences from random movement have the same sign in all ten seeds. The same holds for every toll effect, computed as toll minus original reward and paired by seed, and for the effect of removing the preference for richer neighbors. The tolled populations are close to random-movement welfare, and their difference from it does not have one sign. With the toll, equal-rate learning is above random movement in 9/10 seeds and the other two conditions in 0/10.

With only defectors learning, cooperators move at random exactly as in the baseline, so I_U is identical and only welfare differs. The defectors themselves do not aggregate. Their clustering $I_V = \text{Var}_i(V_i)/\bar{V}$, measured at the same snapshots as I_U , is 0.45 against 0.97 under random movement and ranges from 0.37 to 0.50 over seeds. The learned defectors spread more evenly than

under independent placement. Their spatial correlation with the public good is weaker, at -0.27 against -0.53 . With consumption more uniform, $\rho_{U\varphi}$ rises from 0.32 to 0.61. Under co-learning the defectors cluster with the cooperators. For $(0.05, 0.05)$, $(0.2, 0.05)$, and $(0.05, 0.0125)$, I_V is 1.46, 2.61, and 3.21, and the correlation of U_i and V_i over patches is 0.53, 0.60, and 0.56. These values are computed by `vstats.py`. Standard deviations in Table 3 and in Table 2 of the main text are population standard deviations over the ten seeds.

Two differences are not distinguishable from zero. The first is the welfare change from replacing random by learned defectors next to fixed co-trained cooperators. It is -45 with interval $[-96, 4]$ and is negative in 7/10 seeds, and the main text reports it with its interval. The second is the change in clustering from setting the stay probability to $1/3$. For cooperator-only learning it is $+0.7$ with interval $[-0.6, 1.9]$, which supports the statement that a raised stay probability is not required.

E Additional figures

Figures 7–12 are collected here and discussed in the sections that cite them. They show training dynamics (Section A), policy recombination (Section K), the directional replay on one fresh rollout, the complete learning-rate and convention analysis (Sections F and G), the aligned band profiles, and long training (Section L).

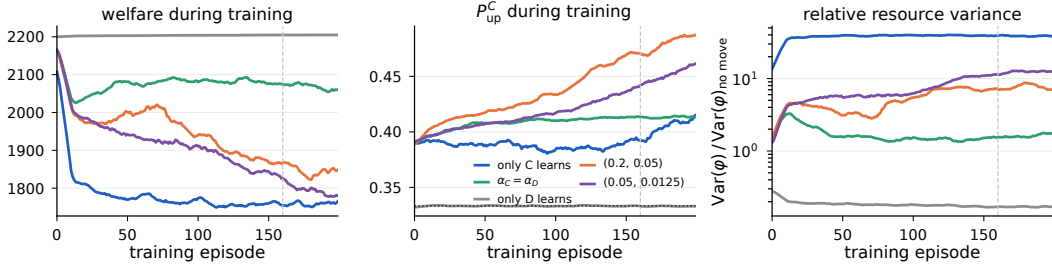


Figure 7: Training dynamics, averaged over ten seeds with a 10-episode running average. Exploration is still on during training and reaches $\varepsilon = 0.01$ at episode 160, marked by the dashed line. Left: welfare per training episode. Middle: the cooperators' probability of moving to the richer neighbor when exactly one neighbor is richer, with the random value dotted. Right: relative resource variance, the spatial variance of the public good divided by its no-movement value. Clusters appear within the first twenty training episodes.

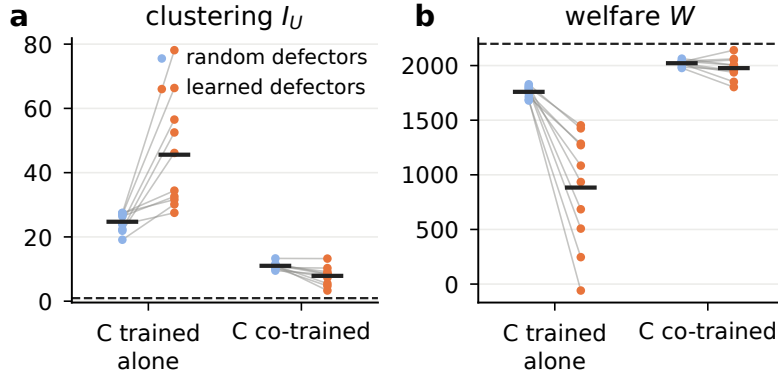


Figure 8: Policy recombination. Cooperator tables were trained with non-learning defectors or co-trained at equal rates. They are evaluated with untrained, randomly moving defectors or with the defector tables of the equal-rate run of the same seed. (a) Clustering. (b) Welfare. Points are training seeds, lines join the two defector policies of a seed, bars mark means, and dashed lines show random movement.

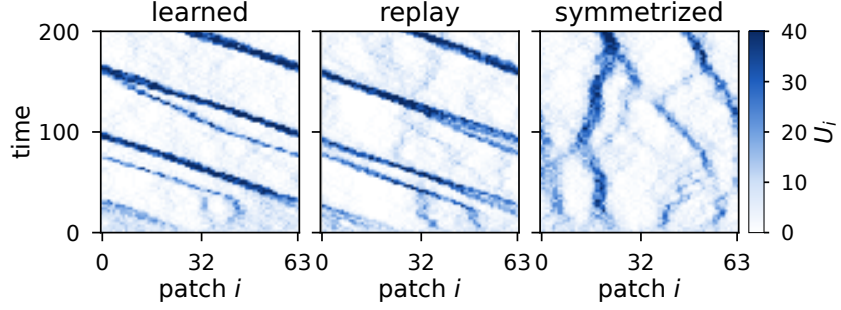


Figure 9: Cooperator occupancy on one fresh rollout of the $(0.05, 0.0125)$ run with training seed 0. The panels show the learned tables, the distilled directional rule, and the mirror-symmetrized version of that rule, all from the same placement and decision phases. Across the two ratio-4 conditions, with 10 training seeds and 5 fresh rollouts each, the three policies travel coherently in 99, 100, and 0 of the 100 rollouts. Figure 2 of the main text shows all three fields for the six main conditions.

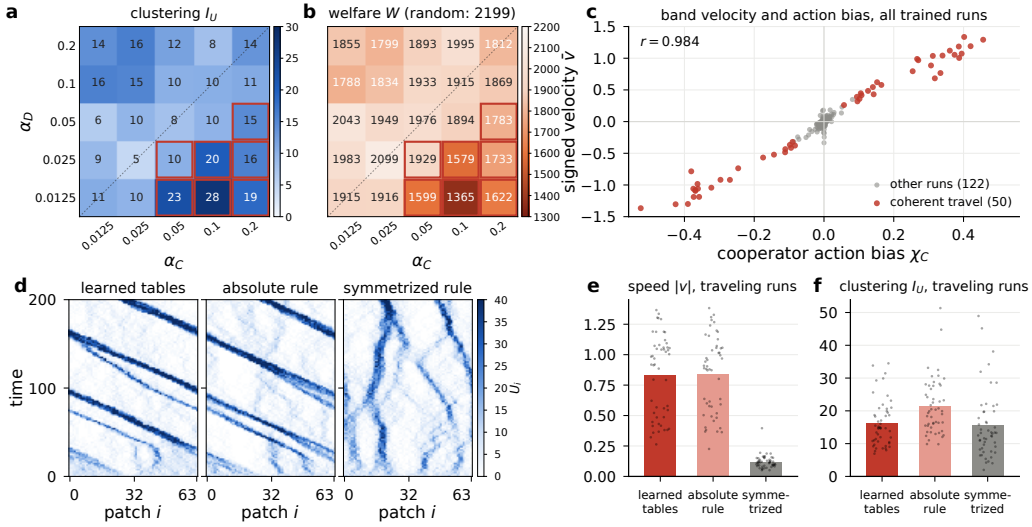


Figure 10: Complete learning-rate and directional-bias analysis of the 172 trained runs. (a,b) Cell means of clustering and welfare on the 5×5 grid. Red boxes mark cells in which at least half of the seeds travel coherently, and the dashed line marks equal rates. (c) Signed velocity $\bar{v}$ against the cooperators' action bias χ_C for every trained run. (d) A fresh rollout of a ratio-4 run under the learned tables, the absolute rule, and the symmetrized rule. Figure 9 shows the same rollout enlarged. (e,f) Speed and clustering of the 50 coherently traveling runs under the three policies in the broad scan. Bars are means and dots are runs.

F Distilled rules, replay, convention, and toll

Distilled rules. Table 5 gives the pooled rules of the core conditions for both types, by own-patch level and context. The shares are fractions of all decisions of that type, so the three contexts with exactly one richer neighbor do not sum to one. With only cooperators learning, cooperators on poor and intermediate patches move up strongly and almost never move down. In the traveling conditions they stay less on rich patches.

Replay in the broad scan. Table 6 replays the pooled, absolute, and symmetrized rules of every trained run. Across all 172 runs, clustering under the replayed absolute rule correlates with that of the learned population at $r = 0.76$, and welfare correlates at $r = 0.74$. For the pooled rule the clustering correlation is 0.69. The pooled rule has no left-right bias and never travels coherently. The absolute rule travels coherently in 49 of the 50 runs whose learned population travels coherently and

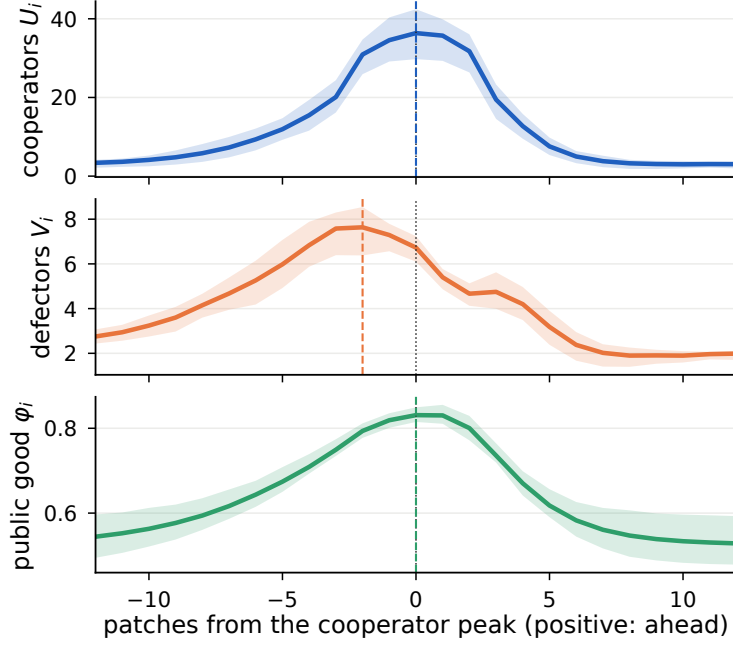


Figure 11: Aligned profiles of the traveling bands. For each of the 50 coherently traveling runs and each snapshot $t = 200, \dots, 400$, the profiles are shifted so that the maximum of the cooperator profile, smoothed over five patches, is at 0. They are reflected so that the band travels to the right and are then averaged over snapshots. Lines show the mean over runs and shading the interquartile range over runs. Dashed lines mark the maximum of each mean profile, and the horizontal axis is in patches. The defector maximum lies two patches behind the cooperator maximum.

in 3 of the other 122. The symmetrized rule never does. In the traveling runs the mean speed is 0.84 under the learned tables, 0.84 under the absolute rule, and 0.12 under the symmetrized rule. The corresponding clustering values are 16.3, 21.3, and 15.6.

Fresh-rollout replay. Table 7 replays the rules of the core and ratio-4 conditions on five fresh rollouts per training seed. The pooled rule reproduces the clusters. Equalizing its up and down probabilities abolishes them in all 200 rollouts, while setting the stay probability to 1/3 does not. In the two ratio-4 conditions, the absolute rules travel coherently in 100/100 fresh rollouts. The learned tables travel in 99/100, and also in 99/100 under greedy evaluation. The symmetrized rules never travel, and no training seed has a single traveling rollout under them.

Directional convention. Across all 172 runs, the cooperators' bias χ_C and the signed velocity $\bar{v}$ correlate with $r = 0.984$ (Figure 10c). Most runs lie near the origin, so we also report the correlation within the 50 traveling runs alone. It is $r = 0.991$ for the signed values and 0.956 between $|\chi_C|$ and $|\bar{v}|$. The fitted slope is 2.98 patches per time unit per unit bias. An individual cooperator makes two decisions per time unit and drifts on average by $2\chi_C$, so the band moves faster than the net displacement of its members. In each of the 50 traveling runs, the sign of χ_C matches the direction of travel. In these runs $|\chi_C|$ ranges from 0.057 to 0.53 with mean 0.26. In the contexts of the absolute rule in which both neighbors fall in the same φ -difference level, it averages 0.22, without conditioning on occupancy differences. In the 122 other runs, $|\chi_C| \leq 0.087$ with mean 0.012. The two ranges overlap slightly, so the bias magnitude alone does not classify a run.

Conditioning on the complete observation gives the same picture. In mirror-symmetric observations, $s = \mathcal{M}s$, both the resource-difference levels and the occupancy-difference levels are equal on the two sides, so the observation offers no cue for either side. Such observations make up 11% of the cooperators' decisions in the traveling runs and at least 9% in every run. In these observations the cooperators' bias has the sign of the direction of travel in 50/50 traveling runs. Its mean magnitude is 0.24, with a minimum of 0.07. The seed-level mean is 0.277 with interval $[0.234, 0.312]$ at

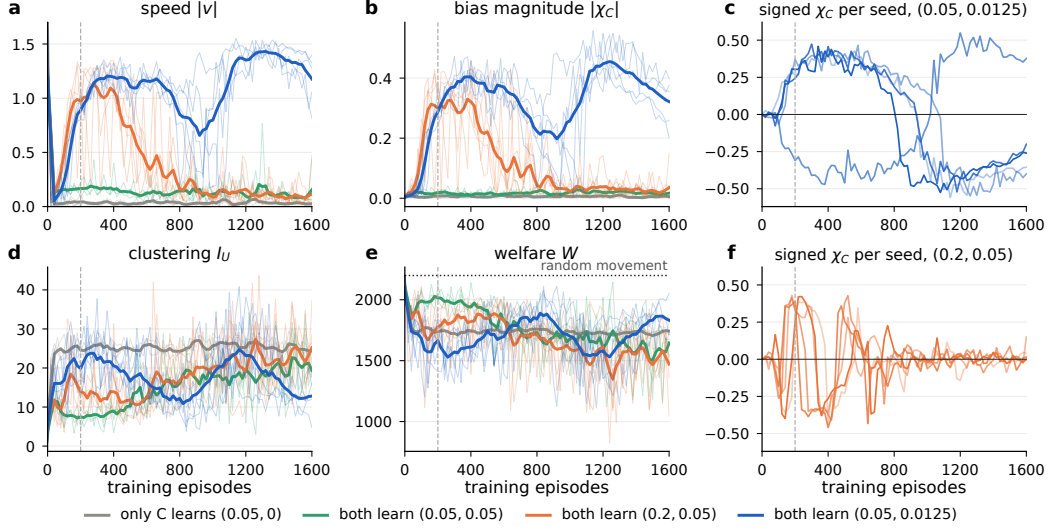


Figure 12: Long training to 1600 episodes, with frozen checkpoints every 20 episodes and exploration 0.01 after episode 160. The dashed line marks the main budget of 200 episodes. Thin lines are seeds and thick lines are means smoothed over three checkpoints. The ratio-4 conditions have five seeds and the two reference conditions three. (a) Speed. (b) Magnitude of the cooperators’ action bias. The signed bias is not averaged because seeds travel in opposite directions. (c,f) Signed bias of the individual seeds of the two ratio-4 conditions. At (0.05, 0.0125) every seed reverses once. At (0.2, 0.05) the bias forms, dissolves, and reverses repeatedly and is small at the end. (d) Clustering. (e) Welfare.

(0.2, 0.05) and 0.284 with interval $[0.264, 0.305]$ at (0.05, 0.0125). In the 112 other runs with learning cooperators, the mean magnitude is 0.02 and the maximum 0.11. Action bias and velocity are measured on the same rollout. Their agreement shows that the population moves the way most of its members step. It is not an independent test of what a deviating agent would earn. At the level of individual agents, on average 96% of cooperators and 86% of defectors in the traveling runs move more often in the band’s direction than against it, with minima of 79% and 64%. In the other runs with learning cooperators, on average 61% of cooperators are on the majority side, with a maximum of 91%.

Crowding toll. Table 8 gives the toll runs per seed. The original reward rate of an agent on patch i contains $-\gamma n_i/\Omega$, and the toll subtracts $\gamma(n_i - 1)/\Omega$. The tolled reward rate is therefore the original one with crowding coefficient 2γ plus the constant γ/Ω . Because every decision interval has the same length, this constant shifts the fixed point of every action value by the same amount and leaves the greedy policy of the converged tables unchanged. Exact equivalence of the finite training trajectories would also require shifting the initial tables by $\tau_{\text{dec}}\gamma/\Omega/(1 - \gamma_{\text{dec}})$. We did not apply this shift, so visited and unvisited entries absorb the constant at different rates. The toll is closely related to doubling the crowding coefficient in the learning reward and is not a separate control. It can be read as a price because $\gamma(n_i - 1)/\Omega$ is the crowding cost the agent imposes on the other occupants of its patch. It does not price the effect of a move on production and consumption of the public good.

G Learning-rate grid and the ratio-2 boundary

Table 9 gives every cell of the grid with the number of coherently traveling seeds and a 95% Wilson interval for the probability that a trained run travels coherently. All four cells with $\alpha_C/\alpha_D = 2$ have ten seeds, and Table 10 gives the per-seed values of the two cells that lie off the sweep lines. The cell (0.05, 0.025) travels in 10/10 seeds with interval $[0.72, 1]$, (0.1, 0.05) in 4/10 with interval $[0.17, 0.69]$, and (0.025, 0.0125) and (0.2, 0.1) in 2/10 each with interval $[0.06, 0.51]$. The outcome at ratio two depends on the absolute rates, and the intervals remain wide. Cells with three seeds give intervals of $[0.44, 1]$ for 3/3 and $[0, 0.56]$ for 0/3. We describe the grid as the empirical distribution

Table 5: Pooled rules, means over ten seeds. In contexts with exactly one richer neighbor, the table gives for each own-patch level the probabilities of moving up, staying, and moving down, and the share of all decisions made in these contexts. In all other contexts it gives the stay probability, with moves split equally between left and right, and the share of all decisions. Shares are fractions of all decisions of that type and sum to one over the six contexts.

condition	own φ_i	up	stay	down	share	stay (other)	share
only C learns, C	poor	0.71	0.21	0.08	0.03	0.38	0.00
	intermediate	0.61	0.35	0.04	0.13	0.32	0.01
	rich	0.36	0.45	0.19	0.50	0.29	0.33
both learn, (0.05, 0.05), C	poor	0.44	0.32	0.24	0.11	0.34	0.12
	intermediate	0.42	0.35	0.23	0.23	0.35	0.21
	rich	0.37	0.41	0.22	0.14	0.35	0.18
both learn, (0.05, 0.05), D	poor	0.48	0.31	0.21	0.27	0.36	0.16
	intermediate	0.36	0.38	0.26	0.27	0.38	0.15
	rich	0.37	0.33	0.30	0.08	0.37	0.07
both learn, (0.2, 0.05), C	poor	0.52	0.29	0.19	0.12	0.33	0.14
	intermediate	0.54	0.28	0.18	0.17	0.30	0.08
	rich	0.46	0.27	0.27	0.24	0.25	0.24
both learn, (0.2, 0.05), D	poor	0.57	0.26	0.17	0.35	0.34	0.20
	intermediate	0.46	0.30	0.24	0.18	0.35	0.06
	rich	0.48	0.28	0.24	0.13	0.32	0.09
both learn, (0.05, 0.0125), C	poor	0.53	0.28	0.19	0.12	0.35	0.10
	intermediate	0.54	0.29	0.17	0.16	0.35	0.07
	rich	0.44	0.29	0.26	0.30	0.26	0.26
both learn, (0.05, 0.0125), D	poor	0.50	0.29	0.21	0.40	0.35	0.17
	intermediate	0.44	0.33	0.22	0.16	0.37	0.05
	rich	0.44	0.30	0.26	0.14	0.33	0.08
only D learns, D	poor	0.36	0.35	0.30	0.01	0.32	0.01
	intermediate	0.37	0.47	0.16	0.43	0.58	0.55
	rich	0.29	0.40	0.32	0.00	0.47	0.00

of outcomes at a finite training budget and do not claim a threshold. Section N extends the grid to a finer and wider scan of both rates.

H Exploration sensitivity of the frozen policies

The main protocol evaluates frozen tables with $\varepsilon_{\text{eval}} = 0.01$. To test whether the patterns depend on this residual exploration, we evaluate the same saved tables, without retraining, with $\varepsilon_{\text{eval}} = 0, 0.01$, and 0.05 on the same five fresh rollouts per training seed (Table 11). With $\varepsilon_{\text{eval}} = 0$ every decision is greedy, and ties between equal table entries are still broken uniformly, as in training. Clustering, welfare, the number of coherently traveling rollouts, and the directional bias are essentially unchanged between $\varepsilon_{\text{eval}} = 0$ and 0.01 in all four conditions. Five percent exploration slightly weakens the clusters of the ratio-4 conditions and leaves travel intact in 49/50 rollouts in both. The patterns come from the learned action preferences and not from exploration noise.

I Hand-designed movement rules

As a reference for the learned policies, we run rules that prescribe a response to the same neighbor comparisons that the agents observe. For a move to side $x \in \{\text{left}, \text{right}\}$, let $z_\varphi(x) \in \{-1, 0, 1\}$ code whether $\varphi_x - \varphi_i$ falls in the lower, similar, or higher level. Similarly, $z_n(x) \in \{-1, 0, 1\}$ codes whether $n_x - n_i$ falls in the lower, similar, or higher level. For staying both are zero. The rule is

$$\pi(a | s) \propto \exp(\lambda_\varphi z_\varphi(a) - \lambda_n z_n(a)).$$

Three parameter settings were fixed before any run and were not tuned. They are weak resource seeking with $(\lambda_\varphi, \lambda_n) = (1, 0)$, strong resource seeking with $(3, 0)$, and resource seeking with a

Table 6: Replay of distilled rules in the broad scan, given as cell means over all n trained runs of a cell. Rules are replayed from the placement and decision phases of the estimation rollout, with new action draws. Learned denotes the frozen tables. Pooled uses six contexts with left and right merged, Absolute uses 27 contexts, and Symmetrized averages the absolute rule with its mirror image. The columns give clustering I_U , welfare W , speed $|v|$, and the share of runs traveling coherently (trav.). For the core conditions, the columns “no pref.” and “stay 1/3” give the clustering of the pooled rule with equal up and down probabilities and with the stay probability set to 1/3. χ_C is the mean signed left–right bias and $|\chi_C|$ the mean absolute bias. Cells are labeled by α_C/α_D .

α_C/α_D	n	learned				pooled				absolute				symmetrized				no pref.	stay 1/3	χ_C	$ \chi_C $
		I_U	W	$ v $	trav.	I_U	W	$ v $	trav.	I_U	W	$ v $	trav.	I_U	W	$ v $	trav.				
0/0.05	10	0.9	2205	1.85	0.0	1.0	2195	1.75	0.0	1.0	2194	2.05	0.0	1.0	2194	2.03	0.0	1.0	1.1	+0.00	0.00
0.0125/0.0125	3	10.8	1915	0.07	0.0	6.5	2023	0.09	0.0	8.4	1958	0.19	0.0	9.3	1916	0.09	0.0	–	–	-0.00	0.00
0.0125/0.025	3	9.0	1983	0.12	0.0	4.3	2090	0.11	0.0	6.2	2056	0.15	0.0	5.6	2039	0.14	0.0	–	–	-0.01	0.01
0.0125/0.05	10	6.4	2043	0.18	0.0	4.7	2080	0.16	0.0	6.2	2037	0.15	0.0	5.6	2046	0.13	0.0	–	–	-0.00	0.01
0.0125/0.1	3	15.9	1788	0.03	0.0	5.6	2057	0.09	0.0	8.9	1971	0.09	0.0	9.1	1987	0.07	0.0	–	–	+0.00	0.00
0.0125/0.2	3	14.3	1855	0.03	0.0	4.5	2100	0.27	0.0	5.7	2079	0.31	0.0	5.0	2075	0.34	0.0	–	–	+0.00	0.00
0.025/0.0125	10	9.8	1916	0.24	0.2	9.0	1928	0.08	0.0	13.5	1781	0.21	0.2	15.3	1712	0.06	0.0	–	–	-0.03	0.04
0.025/0.025	3	4.6	2099	0.29	0.0	2.4	2138	0.27	0.0	4.1	2062	0.17	0.0	3.8	2100	0.22	0.0	–	–	+0.01	0.01
0.025/0.05	10	9.6	1949	0.09	0.0	4.3	2094	0.21	0.0	5.7	2049	0.19	0.0	5.8	2037	0.17	0.0	–	–	+0.00	0.01
0.025/0.1	3	15.4	1834	0.01	0.0	3.9	2116	0.22	0.0	5.6	2062	0.20	0.0	4.1	2087	0.14	0.0	–	–	-0.00	0.00
0.025/0.2	3	16.1	1799	0.01	0.0	4.1	2099	0.21	0.0	4.7	2093	0.17	0.0	4.8	2085	0.20	0.0	–	–	+0.00	0.00
0.05/0	10	24.7	1760	0.05	0.0	27.6	1674	0.00	0.0	30.3	1617	0.01	0.0	30.6	1620	0.00	0.0	1.0	26.7	-0.00	0.01
0.05/0.0125	10	22.6	1599	0.97	1.0	16.4	1625	0.18	0.0	25.5	1513	0.96	1.0	23.1	1410	0.12	0.0	1.0	12.7	+0.08	0.32
0.05/0.025	10	10.3	1929	0.47	1.0	8.9	1920	0.12	0.0	13.8	1824	0.50	1.0	14.5	1718	0.09	0.0	–	–	+0.06	0.12
0.05/0.05	10	7.9	1976	0.16	0.0	4.9	2059	0.12	0.0	9.8	1905	0.13	0.0	8.4	1946	0.11	0.0	1.0	5.6	-0.01	0.01
0.05/0.1	10	10.4	1933	0.08	0.0	3.7	2107	0.19	0.0	6.1	2048	0.16	0.0	5.6	2052	0.14	0.0	–	–	-0.00	0.01
0.05/0.2	10	12.0	1893	0.18	0.0	3.9	2107	0.43	0.0	4.5	2084	0.38	0.0	4.9	2080	0.34	0.0	–	–	-0.00	0.01
0.1/0.0125	3	27.7	1365	1.09	1.0	7.1	1931	0.17	0.0	34.5	1307	1.04	1.0	24.9	1169	0.13	0.0	–	–	-0.37	0.37
0.1/0.025	3	20.5	1579	1.12	1.0	11.3	1817	0.18	0.0	27.0	1416	1.12	1.0	13.0	1815	0.14	0.0	–	–	+0.37	0.37
0.1/0.05	10	9.9	1894	0.31	0.4	6.9	1989	0.10	0.0	13.9	1753	0.33	0.6	11.5	1804	0.10	0.0	–	–	-0.02	0.07
0.1/0.1	3	10.5	1915	0.11	0.0	7.3	1975	0.06	0.0	14.8	1701	0.11	0.0	11.9	1835	0.08	0.0	–	–	+0.00	0.01
0.1/0.2	3	8.2	1995	0.20	0.0	2.3	2153	0.35	0.0	4.5	2083	0.16	0.0	3.5	2096	0.21	0.0	–	–	+0.00	0.01
0.2/0.0125	3	18.7	1622	1.13	1.0	9.0	1884	0.21	0.0	32.4	1289	1.11	1.0	17.3	1420	0.12	0.0	–	–	-0.11	0.39
0.2/0.025	3	15.9	1733	1.16	1.0	8.2	1894	0.50	0.0	24.0	1477	1.16	1.0	9.1	1863	0.22	0.0	–	–	-0.19	0.40
0.2/0.05	10	14.7	1783	1.06	1.0	8.9	1851	0.20	0.0	19.5	1637	1.03	1.0	8.0	1909	0.14	0.0	1.0	7.9	+0.04	0.33
0.2/0.1	10	11.1	1869	0.20	0.2	11.8	1834	0.10	0.0	15.6	1717	0.19	0.2	19.5	1552	0.09	0.0	–	–	+0.01	0.05
0.2/0.2	3	13.7	1812	0.09	0.0	8.5	1957	0.09	0.0	19.4	1598	0.11	0.0	12.9	1790	0.10	0.0	–	–	-0.00	0.01

crowding penalty, (3, 1). Either the cooperators follow the rule while the defectors move at random, or both types follow it. Environment, decision phases, and measurements are those of the main model. The rollouts are the 50 fresh placements used for the learned policies, and Table 12 gives the results.

Prescribed resource seeking by cooperators alone produces clusters and a welfare loss, as in the classical models that motivate this work. Both are larger than under the learned cooperator-only policies. Clustering reaches $I_U = 39.9$ and 51.3 against 24.6 , and welfare falls to $W = 1378$ and 1105 against 1742 . The benefit B stays near its random-movement value and the loss is carried by crowding, the same decomposition as for the learned policies. The crowding penalty with $\lambda_n = 1$ changes the outcome little when only cooperators follow the rule. When both types follow a strong resource-seeking rule, crowding becomes extreme. None of the six rule populations travels coherently. The rules are mirror-symmetric by construction and contain no directional preference. Aggregation requires only resource seeking, whereas the weaker clustering under co-learning and the traveling bands involve what the two populations learn from each other.

The three settings are a reference, not a search. They were not matched to the learned policies in movement rate or in the strength of the preference. A comparison with the best fixed rule would require such a search on separate validation rollouts, and the statement in the main text is limited to the tested rules. The hand-designed rules, the distilled rules of Section C, and independent learning are three different objects. The first are prescribed, the second summarize learned tables for intervention, and only the third is the adaptation process studied in the paper.

J Mirror-symmetrized original tables

The symmetrized rule of Section C removes the left–right preference from a 27-context summary of the tables. To test the same intervention on the original policies, let $\mathcal{M}$ be the reflection of the ring. For an observation it exchanges the two neighbors, $\mathcal{M}s = (\varphi_i \text{ level}, n_i \text{ level}, \Delta\varphi_R, \Delta\varphi_L, \Delta n_R, \Delta n_L)$, and for an action it exchanges left and right. Every agent j of the chosen type then acts on

$$\pi_j^{\text{sym}}(a \mid s) = \frac{1}{2} [\pi_j(a \mid s) + \pi_j(\mathcal{M}a \mid \mathcal{M}s)],$$

Table 7: Fresh-rollout replay. Rules are estimated from the evaluation rollout of each training seed and replayed on five fresh rollouts per seed. These rollouts have new placements and decision phases and are never used for estimation. The learned tables run on the same fresh rollouts. Entries are means over the ten seed means. The column trav. gives the rollouts with coherent travel out of 50, followed in parentheses by the number of training seeds with at least one such rollout. The column range gives the minimum and maximum I_U over rollouts. Table 4 gives seed-level intervals.

condition	policy	W	I_U	$ v $	trav.	I_U range
only C learns	learned tables	1742	24.6	0.05	0/50 (0)	20.3–28.5
	pooled rule	1689	27.3	0.01	0/50 (0)	21.2–34.6
	pooled, equal up/down	2199	1.0	1.79	0/50 (0)	0.8–1.2
	pooled, stay 1/3	1664	28.0	0.01	0/50 (0)	20.8–39.4
	absolute rule	1613	30.2	0.07	0/50 (0)	21.7–39.7
	symmetrized rule	1635	29.5	0.03	0/50 (0)	21.6–38.7
both learn, (0.05, 0.05)	learned tables	2004	7.4	0.17	0/50 (0)	3.7–14.3
	pooled rule	2046	5.5	0.12	0/50 (0)	2.3–10.8
	pooled, equal up/down	2196	1.0	1.76	0/50 (0)	0.8–1.3
	pooled, stay 1/3	2051	5.4	0.13	0/50 (0)	2.5–11.6
	absolute rule	1910	9.1	0.13	0/50 (0)	3.8–19.8
	symmetrized rule	1897	9.4	0.12	0/50 (0)	3.8–22.6
both learn, (0.2, 0.05)	learned tables	1769	14.8	1.06	49/50 (10)	6.0–32.3
	pooled rule	1880	9.4	0.20	0/50 (0)	3.6–27.9
	pooled, equal up/down	2194	1.0	1.83	0/50 (0)	0.8–1.3
	pooled, stay 1/3	1915	8.5	0.19	0/50 (0)	4.1–21.9
	absolute rule	1595	21.0	1.03	50/50 (10)	8.3–33.8
	symmetrized rule	1886	9.1	0.15	0/50 (0)	4.1–20.1
both learn, (0.05, 0.0125)	learned tables	1551	22.6	0.99	50/50 (10)	12.3–35.5
	pooled rule	1577	17.2	0.17	0/50 (0)	5.4–49.4
	pooled, equal up/down	2194	1.0	1.76	0/50 (0)	0.7–1.4
	pooled, stay 1/3	1681	15.1	0.16	0/50 (0)	4.0–38.1
	absolute rule	1507	25.7	0.94	50/50 (10)	16.1–35.7
	symmetrized rule	1422	20.3	0.13	0/50 (0)	4.7–55.9

Table 8: Crowding toll, per seed. The table gives welfare W , clustering I_U , and the payoffs Π_C and Π_D of populations trained on the original reward (own) and on the reward minus the crowding toll (toll), with random movement for reference. The two runs of a seed share the training placements, the decision phases, and the evaluation placement. W is always computed from the original payoff.

seed	random		only C, own / toll				(0.05, 0.05), own / toll				(0.2, 0.05), own / toll				Π_C / Π_D , only C			
	W	Π_C	W	W	I_U	I_U	W	W	I_U	I_U	W	W	I_U	I_U	own	own	toll	toll
0	2198	3.39	1813	2029	21.9	11.3	1954	2206	9.2	0.8	1799	2171	15.5	2.1	3.30	1.74	3.64	2.07
1	2199	3.38	1792	2020	22.4	10.7	2004	2205	7.3	1.0	1887	2179	9.7	1.7	3.17	1.93	3.55	2.23
2	2199	3.38	1688	2012	27.4	11.0	2141	2203	3.3	1.0	1964	2181	8.5	2.0	3.14	1.46	3.55	2.21
3	2197	3.37	1715	2029	27.5	10.6	1803	2205	13.3	1.0	1564	2185	20.8	2.2	3.18	1.51	3.56	2.26
4	2199	3.39	1801	2082	23.9	8.0	2005	2203	8.3	1.1	1738	2184	15.0	1.6	3.39	1.47	3.63	2.38
5	2200	3.39	1777	2076	24.3	7.9	1851	2194	10.3	1.4	1599	2152	21.9	2.9	3.32	1.51	3.60	2.41
6	2196	3.38	1752	2034	26.4	11.0	2051	2202	5.5	1.1	1731	2177	14.6	2.3	3.13	1.81	3.53	2.36
7	2200	3.38	1829	2030	19.1	11.4	1959	2202	8.5	1.2	1954	2169	8.5	1.9	3.26	1.91	3.62	2.14
8	2199	3.38	1680	2039	27.0	10.2	1938	2203	8.4	1.1	1851	2180	13.4	2.2	3.12	1.46	3.61	2.18
9	2200	3.39	1748	2028	27.3	9.9	2061	2201	4.8	0.9	1739	2180	18.7	1.5	3.28	1.44	3.59	2.20

where π_j is the ε -greedy policy of its own frozen table. The mixture is sampled exactly. At each decision, with probability 1/2, the agent evaluates its table at $\mathcal{M}s$ and takes the mirrored action. All six observation components and all differences between agents are kept. Symmetric individual policies do not by themselves imply that the population cannot move, so the outcome has to be measured.

Table 13 gives the result on the fresh rollouts of the two ratio-4 conditions. With both types symmetrized, coherent travel disappears in 50/50 rollouts at (0.2, 0.05) and in 48/50 at (0.05, 0.0125), where the two remaining rollouts belong to one training seed. The speed falls from about 1 to 0.33 and 0.22, and the cooperators' bias falls to 0.01 and 0.03. Clusters remain, with $I_U = 7.3$ and 20.9 against 14.8 and 22.6 under the learned tables. Symmetrizing only the defectors leaves

Table 9: The 5×5 learning-rate grid with frozen policies after 200 episodes. For each cell the table gives the number of training seeds n and the means over seeds of clustering, welfare, the cooperators’ probabilities of moving up and of staying on a rich patch, speed, main-direction share, and best-shift correlation. It also gives the number of coherently traveling seeds with its 95% Wilson interval for the traveling probability.

α_C	α_D	n	I_U	W	P_{up}^C	$P_{stay rich}^C$	$ v $	dir.	corr	traveling	95% interval
0.0125	0.0125	3	10.8	1915	0.38	0.41	0.07	0.21	0.88	0/3	[0.00, 0.56]
0.0125	0.025	3	9.0	1983	0.38	0.42	0.12	0.33	0.87	0/3	[0.00, 0.56]
0.0125	0.05	10	6.4	2043	0.39	0.39	0.18	0.39	0.77	0/10	[0.00, 0.28]
0.0125	0.1	3	15.9	1788	0.34	0.48	0.03	0.14	0.94	0/3	[0.00, 0.56]
0.0125	0.2	3	14.3	1855	0.35	0.46	0.03	0.11	0.92	0/3	[0.00, 0.56]
0.025	0.0125	10	9.8	1916	0.41	0.35	0.24	0.57	0.86	2/10	[0.06, 0.51]
0.025	0.025	3	4.6	2099	0.41	0.38	0.29	0.44	0.71	0/3	[0.00, 0.56]
0.025	0.05	10	9.6	1949	0.38	0.42	0.09	0.29	0.88	0/10	[0.00, 0.28]
0.025	0.1	3	15.4	1834	0.36	0.45	0.01	0.05	0.94	0/3	[0.00, 0.56]
0.025	0.2	3	16.1	1799	0.37	0.44	0.01	0.06	0.95	0/3	[0.00, 0.56]
0.05	0.0125	10	22.6	1599	0.50	0.28	0.97	1.00	0.90	10/10	[0.72, 1.00]
0.05	0.025	10	10.3	1929	0.43	0.34	0.47	0.97	0.84	10/10	[0.72, 1.00]
0.05	0.05	10	7.9	1976	0.41	0.37	0.16	0.39	0.81	0/10	[0.00, 0.28]
0.05	0.1	10	10.4	1933	0.39	0.40	0.08	0.28	0.88	0/10	[0.00, 0.28]
0.05	0.2	10	12.0	1893	0.38	0.42	0.18	0.26	0.84	0/10	[0.00, 0.28]
0.1	0.0125	3	27.7	1365	0.53	0.25	1.09	1.00	0.89	3/3	[0.44, 1.00]
0.1	0.025	3	20.5	1579	0.52	0.25	1.12	1.00	0.92	3/3	[0.44, 1.00]
0.1	0.05	10	9.9	1894	0.43	0.34	0.31	0.76	0.84	4/10	[0.17, 0.69]
0.1	0.1	3	10.5	1915	0.41	0.36	0.11	0.35	0.86	0/3	[0.00, 0.56]
0.1	0.2	3	8.2	1995	0.41	0.36	0.20	0.46	0.77	0/3	[0.00, 0.56]
0.2	0.0125	3	18.7	1622	0.52	0.24	1.13	0.99	0.86	3/3	[0.44, 1.00]
0.2	0.025	3	15.9	1733	0.54	0.24	1.16	1.00	0.86	3/3	[0.44, 1.00]
0.2	0.05	10	14.7	1783	0.50	0.26	1.06	0.99	0.87	10/10	[0.72, 1.00]
0.2	0.1	10	11.1	1869	0.43	0.34	0.20	0.62	0.86	2/10	[0.06, 0.51]
0.2	0.2	3	13.7	1812	0.41	0.34	0.09	0.32	0.85	0/3	[0.00, 0.56]

coherent travel in all 100 rollouts. Symmetrizing only the cooperators removes it in 44 of 50 rollouts at (0.05, 0.0125) and in 12 of 50 at (0.2, 0.05). In the latter condition the remaining bands are slower, with mean speed 0.46 in the 38 traveling rollouts against 1.06 under the learned tables. At (0.05, 0.0125), symmetrizing only the cooperators also produces very strong stationary clusters, with $I_U = 41.2$ and $W = 899$. The directional preference that carries the bands is a property of the original tables and resides mainly in the cooperators. The defectors’ preference alone can sustain a slower band in one of the two conditions. The defectors’ bias has a similar size in both conditions, $|\chi_D| = 0.15$ and 0.16. What differs is the state of the symmetrized cooperators, which are strongly clustered and stationary at (0.05, 0.0125) and more weakly clustered at (0.2, 0.05).

Added randomness as an alternative explanation. Symmetrization changes the action whenever the mirrored action at the mirrored observation differs from the original action. This happens at a third of the decisions of either type, with disagreement 0.33 in Table 14. The symmetrized policy is also more random, and a more random policy might stop the bands by itself. Two controls keep the original tables, and with them the directional preference, and add uniform exploration instead.

The disagreement rate d_τ is measured on the fresh rollouts of the symmetrized policy itself. All rollouts, including the symmetrized policy and the matched control, execute actions exactly as in the main protocol, with uniform random tie-breaking among maximizing entries. At every decision of type τ , the executed action is compared with a reference action of the original table at the same observation. The reference uses the same exploration draw, so exploration at the rate 0.01 of the original policy counts as agreement. It breaks ties deterministically so that the comparison does not consume the random stream. Deterministic tie-breaking enters only this diagnostic and not the rollout policy. Where the original table has tied maxima, a randomly broken executed action can count as a disagreement. This effect is negligible here, because the learned tables themselves disagree with the reference at a rate of 0.000 for both types.

Table 10: The two ten-seed cells of ratio $\alpha_C/\alpha_D = 2$ that lie off the row and column of Tables 20–25, per seed. The columns give clustering, welfare, the cooperators’ probabilities of moving up and of staying on a rich patch, signed velocity $\bar{v}$, speed $|v|$, main-direction share d , best-shift correlation r , and coherent travel.

α_C / α_D	seed	I_U	W	P_{up}^C	$P_{\text{stay rich}}^C$	$\bar{v}$	$ v $	d	r	trav.
0.025 / 0.0125	0	9.4	1944	0.41	0.35	0.11	0.13	0.546	0.87	
0.025 / 0.0125	1	7.4	1962	0.41	0.36	-0.02	0.10	0.265	0.86	
0.025 / 0.0125	2	9.3	1940	0.41	0.37	-0.43	0.56	0.969	0.83	yes
0.025 / 0.0125	3	7.1	1989	0.43	0.34	-0.05	0.14	0.383	0.82	
0.025 / 0.0125	4	9.7	1923	0.42	0.34	0.00	0.16	0.352	0.85	
0.025 / 0.0125	5	6.7	2026	0.41	0.36	-0.25	0.25	0.816	0.79	
0.025 / 0.0125	6	11.0	1926	0.40	0.36	-0.21	0.24	0.776	0.86	
0.025 / 0.0125	7	15.2	1751	0.41	0.35	-0.48	0.48	1.000	0.91	yes
0.025 / 0.0125	8	9.1	1929	0.41	0.35	0.03	0.20	0.255	0.86	
0.025 / 0.0125	9	13.6	1772	0.40	0.37	-0.04	0.11	0.332	0.91	
0.2 / 0.1	0	9.7	1956	0.42	0.34	0.00	0.10	0.240	0.83	
0.2 / 0.1	1	10.4	1823	0.42	0.35	0.08	0.11	0.434	0.87	
0.2 / 0.1	2	15.6	1733	0.41	0.34	0.00	0.09	0.224	0.91	
0.2 / 0.1	3	10.7	1886	0.43	0.34	0.26	0.26	0.903	0.85	yes
0.2 / 0.1	4	7.7	1939	0.44	0.33	0.36	0.36	0.980	0.82	yes
0.2 / 0.1	5	12.8	1792	0.41	0.34	-0.24	0.25	0.842	0.90	
0.2 / 0.1	6	11.8	1779	0.42	0.33	-0.04	0.10	0.316	0.90	
0.2 / 0.1	7	10.0	1913	0.44	0.33	-0.12	0.17	0.577	0.83	
0.2 / 0.1	8	9.3	1974	0.43	0.34	0.23	0.23	0.827	0.81	
0.2 / 0.1	9	12.8	1891	0.43	0.33	-0.28	0.28	0.893	0.88	

Table 11: Exploration sensitivity of the frozen policies. The saved tables are evaluated with $\varepsilon_{\text{eval}} \in \{0, 0.01, 0.05\}$ on the same five fresh rollouts per training seed. Entries are means over the ten seed means with 95% bootstrap intervals over seeds. The column trav. counts coherently traveling rollouts out of 50, and $|\chi_C|$ is the mean absolute bias.

condition	$\varepsilon_{\text{eval}}$	I_U	W	trav.	$ \chi_C $
only C	0	24.4 [23.5, 25.4]	1755 [1737, 1772]	0/50	0.01
	0.01	24.6 [23.9, 25.2]	1742 [1727, 1756]	0/50	0.01
	0.05	24.0 [23.0, 25.1]	1762 [1739, 1781]	0/50	0.01
(0.05, 0.05)	0	7.9 [6.5, 9.3]	1995 [1955, 2033]	0/50	0.01
	0.01	7.4 [6.2, 8.9]	2004 [1964, 2042]	0/50	0.01
	0.05	6.7 [5.7, 8.0]	2023 [1988, 2054]	0/50	0.01
(0.2, 0.05)	0	15.5 [12.5, 18.6]	1761 [1662, 1851]	50/50	0.35
	0.01	14.8 [11.7, 18.1]	1769 [1675, 1856]	49/50	0.34
	0.05	13.0 [11.1, 15.0]	1833 [1774, 1892]	49/50	0.30
(0.05, 0.0125)	0	22.9 [20.5, 25.3]	1546 [1465, 1630]	49/50	0.34
	0.01	22.6 [19.5, 25.8]	1551 [1460, 1641]	50/50	0.33
	0.05	19.7 [17.1, 22.3]	1657 [1584, 1727]	49/50	0.29

The matched control evaluates the original tables on the same rollouts with $\varepsilon_\tau = 0.01 + 1.5 d_\tau \approx 0.5$, where d_τ is measured per training seed on the symmetrized rollouts. A uniformly random action differs from the original one with probability $2/3$, so the additional exploration $1.5 d_\tau$ replaces the original action at the rate d_τ . For the cooperators, the measured disagreement of the control is 0.334, against 0.333 under symmetrization. The control also stops the bands and leaves 4/50 coherent rollouts in each condition. Unlike symmetrization, it strongly weakens aggregation, to $I_U = 3.0$ and 2.5, which is still above the random-movement value of 1.0. Symmetrization leaves clustering at 7.3 and 20.9.

The dose response shows the order in which uniform randomness removes the two features. At $\varepsilon = 0.3$, which changes 19% of the decisions, the bands still travel coherently in 40/50 and 44/50

Table 12: Hand-designed movement rules on the same 10×5 fresh placements and decision phases as used for the learned policies. In rows marked ‘C’, cooperators follow the rule and defectors move at random. In rows marked ‘C and D’, both types follow it. The learned policies on the same rollouts are shown for comparison. Entries are means over rollouts, and trav. counts coherently traveling rollouts out of 50.

rule	followed by	λ_φ	λ_n	I_U	W	B	$\mathcal{K}$	trav.
random movement	–	–	–	1.0	2199	2998	352	0/50
weak resource seeking	C	1	0	39.9	1378	3047	1221	0/50
	C and D	1	0	19.2	1452	2996	1096	0/50
strong resource seeking	C	3	0	51.3	1105	3032	1478	0/50
	C and D	3	0	65.2	-721	2994	3267	0/50
resource and crowding	C	3	1	47.5	1194	3036	1394	0/50
	C and D	3	1	47.5	237	2995	2310	0/50
learned, only C learns	Q-tables			24.6	1742	3066	876	0/50
learned, (0.05, 0.05)	Q-tables			7.4	2004	3001	549	0/50
learned, (0.2, 0.05)	Q-tables			14.8	1769	3009	792	49/50
learned, (0.05, 0.0125)	Q-tables			22.6	1551	3016	1017	50/50

Table 13: Mirror-symmetrized original tables on the fresh rollouts of the two ratio-4 conditions, with ten training seeds and five rollouts each. Every agent of the indicated type acts on $\frac{1}{2}[\pi_j(a | s) + \pi_j(\mathcal{M}a | \mathcal{M}s)]$ computed from its own frozen table. Entries are means over the ten seed means with 95% bootstrap intervals over seeds. The column trav. counts coherently traveling rollouts out of 50, followed in parentheses by the training seeds with at least one such rollout.

condition	policy	I_U	W	$ v $	trav.	$ \chi_C $
(0.2, 0.05)	learned tables	14.8 [11.7, 18.1]	1769	1.06 [0.93, 1.19]	49/50 (10)	0.34
	C symmetrized	13.4 [8.9, 20.6]	1794	0.41 [0.34, 0.47]	38/50 (9)	0.10
	D symmetrized	19.9 [17.2, 22.9]	1734	1.07 [1.00, 1.15]	50/50 (10)	0.42
	both symmetrized	7.3 [5.3, 9.7]	1973	0.33 [0.26, 0.40]	0/50 (0)	0.01
(0.05, 0.0125)	learned tables	22.6 [19.5, 25.8]	1551	0.99 [0.94, 1.04]	50/50 (10)	0.33
	C symmetrized	41.2 [37.1, 45.0]	899	0.15 [0.10, 0.19]	6/50 (2)	0.06
	D symmetrized	21.9 [20.8, 23.3]	1704	0.91 [0.87, 0.94]	50/50 (10)	0.36
	both symmetrized	20.9 [18.9, 23.1]	1471	0.22 [0.20, 0.24]	2/50 (1)	0.03

rollouts, while clustering has fallen to 5.7 and 7.2. At $\varepsilon = 0.1$ and 0.2, all but one of the 200 rollouts travel. Uniform randomness degrades aggregation before travel, whereas symmetrization removes travel while sparing aggregation. The control matches the mean rate of action changes but not the action entropy or the perturbation in each state, so it does not rule out every account based on randomness. The contrasting effects nevertheless support a specific role for the directional preference beyond a general increase in exploration. A matched control applied only to the cooperators gives the same answer.

K Policy recombination and environment variants

Recombination. Table 15 gives the four pairings of Figure 8. With random defectors, co-trained cooperators cluster less than cooperators trained alone. The paired difference in I_U is -13.7 with interval $[-15.2, -11.9]$, negative in 10/10 seeds. Next to co-trained cooperators, learned defectors reduce I_U further, with a paired change of -3.1 and interval $[-4.6, -1.7]$ in 10/10 seeds. They also reduce the resource benefit B in every seed, with a change of -38 and interval $[-40, -36]$. The change in welfare is not distinguishable from zero. It is -45 with interval $[-96, 4]$ and is negative in 7/10 seeds. Next to cooperators trained alone, the same defector tables raise I_U by $+20.9$ with interval $[11.5, 31.1]$ in 10/10 seeds, and they lower W by 876 with interval $[600, 1180]$. The effects of the two populations are not additive, and we do not report them as shares of a total.

Table 14: Symmetrization compared with added randomness on the fresh rollouts of the two ratio-4 conditions, with ten training seeds and five rollouts each. “Disagreement” is the fraction of a type’s decisions at which the policy’s action differs from the action the original policy would take at the same observation. The matched control keeps the original tables and adds uniform exploration at the rate that reproduces the disagreement of the symmetrized policy. The last three rows add uniform exploration ε to both types. Entries are means over the ten seed means with 95% bootstrap intervals for I_U , and trav. counts coherently traveling rollouts out of 50.

condition	policy	disagr.	C	D	I_U	W	trav.	$ \chi_C $
(0.2, 0.05)	learned tables	0.00	0.00	14.8	[11.7, 18.1]	1769	49/50	0.34
	both symmetrized	0.33	0.32	7.3	[5.3, 9.7]	1973	0/50	0.01
	control, both	0.33	0.32	3.0	[2.7, 3.4]	2136	4/50	0.07
	C symmetrized	0.33	0.00	13.4	[8.9, 20.6]	1794	38/50	0.10
	control, C	0.33	0.00	1.6	[1.5, 1.7]	2177	0/50	0.05
	uniform eps 0.1	0.06	0.06	10.6	[9.2, 12.1]	1904	49/50	0.26
	uniform eps 0.2	0.13	0.13	8.0	[7.0, 9.0]	1979	50/50	0.20
	uniform eps 0.3	0.19	0.19	5.7	[5.1, 6.4]	2052	40/50	0.15
(0.05, 0.0125)	learned tables	0.00	0.00	22.6	[19.5, 25.8]	1551	50/50	0.33
	both symmetrized	0.33	0.32	20.9	[18.9, 23.1]	1471	2/50	0.03
	control, both	0.33	0.32	2.5	[2.2, 2.9]	2154	4/50	0.05
	C symmetrized	0.33	0.00	41.2	[37.1, 45.0]	899	6/50	0.06
	control, C	0.33	0.00	1.3	[1.2, 1.4]	2189	0/50	0.04
	uniform eps 0.1	0.06	0.06	17.2	[15.3, 19.3]	1746	50/50	0.25
	uniform eps 0.2	0.13	0.13	11.5	[10.0, 13.1]	1900	50/50	0.18
	uniform eps 0.3	0.19	0.19	7.2	[6.2, 8.3]	2018	44/50	0.12

Table 15: Policy recombination on the held-out evaluation placements. Entries are means over ten training seeds, with the between-seed standard deviation of I_U and W . “C alone” denotes cooperator tables trained with non-learning defectors, and “C co-trained” the cooperator tables of the equal-rate run of the same seed. Defectors are either untrained and move at random or carry the tables of the equal-rate run.

cooperators	defectors	I_U	(sd)	W	(sd)	B	$\mathcal{K}$	φ_C	φ_D
C alone	random	24.7	2.7	1759	49	3066	858	0.85	0.36
C alone	learned	45.6	16.5	883	495	3029	1698	0.76	0.55
C co-trained	random	11.0	1.0	2022	25	3039	570	0.79	0.48
C co-trained	learned	7.9	2.7	1977	94	3001	576	0.71	0.67

Environment variants. Table 16 repeats the three core conditions and the (0.2, 0.05) condition in four variants, with three seeds each. The ring size is changed at fixed densities and fixed patch geometry. For $M = 32$ we use $L = 4$, $N_C = 224$, and $N_D = 96$, and for $M = 128$ we use $L = 16$, $N_C = 896$, and $N_D = 384$. The spacing $\ell = L/M$, the patch volume Ω , and the mean occupancies stay those of the main model. The other two variants change one parameter of the main model, setting either $D_\varphi = 0.06$ or $r_v = 6.5$. Directional consistency is the main-direction share d of Section B. Coherent travel at (0.2, 0.05) persists in 3/3 seeds on both ring sizes and in 2/3 with doubled diffusion. With $r_v = 6.5$ no seed travels coherently and d lies between 0.63 and 0.83, so the bands are less robust than aggregation. We did not test sensitivity to the numerical step, for example halving Δt at a fixed decision interval $K\Delta t$.

L Per-seed results of the main model

Core conditions. Tables 17–19 give, for each seed, the learned behavior and the clustering, the correlation between cooperators and the public good, and the welfare of the three policies run from the same placement.

Table 16: Environment variants with three seeds each, compared with the main model with ten. Clustering and welfare are listed for cooperator-only, both-type, and defector-only learning. W_{rnd} is random-movement welfare. The last columns give the speed, directional consistency, and number of coherently traveling seeds at (0.2, 0.05).

variant	only C / both / only D			W_{rnd}	$ v $	ratio 4	
	I_U	W				dir.	trav.
$M = 32$	26.6 / 4.4 / 1.0	847 / 1037 / 1102		1099	1.06	1.00	3/3
$M = 128$	24.1 / 8.2 / 1.0	3554 / 3991 / 4410		4399	1.18	1.00	3/3
$D_\varphi = 0.06$	21.5 / 5.5 / 0.8	1801 / 2023 / 2207		2198	0.79	0.81	2/3
$r_v = 6.5$	23.9 / 2.0 / 0.8	1800 / 2238 / 2271		2264	0.37	0.74	0/3
main (10 seeds)	24.7 / 7.9 / 0.9	1760 / 1976 / 2205		2199	1.06	0.99	10/10

Table 17: Only cooperators learn ($\alpha_C = 0.05$, $\alpha_D = 0$), main model, per seed. I_U , $\rho_{U\varphi}$, and W for the no-movement, random-movement, and learned policies from the same initial placement.

seed	P_{up}^C	P_{up}^D	I_U	none	random	learned	ρ	none	random	learned	W	none	random	learned
0	0.42	0.33	0.83	0.94	21.93	0.38	0.33	0.85	2202	2199	1811			
1	0.43	0.33	1.06	0.79	22.40	0.43	0.42	0.82	2205	2199	1792			
2	0.41	0.33	0.90	0.80	27.41	0.27	0.42	0.85	2198	2198	1691			
3	0.35	0.33	0.92	0.95	27.49	0.35	0.28	0.81	2204	2197	1716			
4	0.39	0.33	1.17	1.05	23.85	0.36	0.27	0.85	2193	2199	1800			
5	0.42	0.33	0.85	1.04	24.31	0.28	0.30	0.82	2199	2201	1777			
6	0.43	0.34	0.86	0.91	26.40	0.31	0.28	0.81	2198	2197	1753			
7	0.39	0.33	1.32	1.08	19.12	0.49	0.34	0.82	2195	2200	1829			
8	0.40	0.34	1.07	1.03	26.98	0.41	0.27	0.83	2194	2199	1680			
9	0.40	0.33	0.75	0.85	27.33	0.29	0.29	0.83	2200	2200	1748			

Learning-rate sweep. Tables 20–22 give the frozen-policy statistics of every run on the row and column of the grid through (0.05, 0.05), and Tables 23–25 the motion of the cooperator profile. The sign of $\bar{v}$ is the direction of travel (+ toward increasing patch index).

Longer training. Table 26 gives the checkpoint means of the long-training runs shown in Figure 12 and lists every tenth checkpoint shown in that figure. Table 27 gives the per-seed summaries quoted in the main text, namely coherent checkpoints, median speed, reversals, final bias, and the change in clustering and welfare. Over episodes 1400–1600, the seed means for cooperator-only learning, equal-rate learning, (0.2, 0.05), and (0.05, 0.0125) are $I_U = 24.9$, 20.3, 23.0, and 13.5 and $W = 1731$, 1587, 1537, and 1817. At episode 200 of the same runs, welfare was $W = 1722$, 2055, 1713, and 1664, so the welfare ranking of the four conditions at episode 200 is not preserved. In every long run, W is below the random-movement value of 2197–2199 at every checkpoint from episode 20 onward, with a largest value of 2146.

Welfare decomposition. Tables 28–30 give the decomposition $W = B - N_C c - \mathcal{K}$ per seed for the policy recombination of Section 4.2 of the main text.

M Robustness of the observation

Two variants of the agents’ observation were run with the same learning rule, decision clocks, and protocol, using `run.py -obs relative` and `-obs relative_n`. They do not simply drop components of the main observation, because each has its own discretization. *Neighbor differences only.* The agent observes the four neighbor differences. The resource differences $\varphi_{i\pm 1} - \varphi_i$ have three levels with thresholds ± 0.01 , and the occupancy differences $n_{i\pm 1} - n_i$ have five levels with thresholds -5.5 , -2.5 , 2.5 , and 5.5 . This gives $3 \cdot 3 \cdot 5 \cdot 5 = 225$ states. The agent does not observe its own φ_i or n_i . Tables 31–33 give the results for 10 seeds. The three core conditions give $I_U = 30.4$, 6.0, and 0.94 and $W = 1638$, 2047, and 2205. *Neighbor differences plus own occupancy.* This observation adds n_i in three levels, ≤ 7 , 8–12, and ≥ 13 , which gives $225 \cdot 3 = 675$ states. Tables 34–35 give the results for 5 seeds of cooperator-only and equal-rate learning, with

Table 18: Both learn ($\alpha_C = \alpha_D = 0.05$), main model, per seed. I_U , $\rho_{U\varphi}$, and W for the no-movement, random-movement, and learned policies from the same initial placement.

seed	P_{up}^C	P_{up}^D	I_U none	random	learned	ρ none	random	learned	W none	random	learned
0	0.41	0.41	0.83	0.94	9.17	0.38	0.33	0.88	2202	2199	1953
1	0.42	0.41	1.06	0.79	7.31	0.43	0.42	0.87	2205	2199	2004
2	0.41	0.40	0.90	0.80	3.31	0.27	0.42	0.83	2198	2198	2141
3	0.39	0.40	0.92	0.95	13.25	0.35	0.28	0.93	2204	2197	1803
4	0.41	0.41	1.17	1.05	8.29	0.36	0.27	0.91	2193	2199	2004
5	0.40	0.42	0.85	1.04	10.30	0.28	0.30	0.93	2199	2201	1850
6	0.41	0.41	0.86	0.91	5.48	0.31	0.28	0.85	2198	2197	2050
7	0.41	0.42	1.32	1.08	8.53	0.49	0.34	0.88	2195	2200	1959
8	0.41	0.43	1.07	1.03	8.40	0.41	0.27	0.89	2194	2199	1936
9	0.41	0.41	0.75	0.85	4.76	0.29	0.29	0.87	2200	2200	2061

Table 19: Only defectors learn ($\alpha_C = 0$, $\alpha_D = 0.05$), main model, per seed. I_U , $\rho_{U\varphi}$, and W for the no-movement, random-movement, and learned policies from the same initial placement.

seed	P_{up}^C	P_{up}^D	I_U none	random	learned	ρ none	random	learned	W none	random	learned
0	0.34	0.37	0.83	0.94	0.94	0.38	0.33	0.66	2202	2199	2205
1	0.33	0.38	1.06	0.79	0.79	0.43	0.42	0.64	2205	2199	2206
2	0.34	0.37	0.90	0.80	0.80	0.27	0.42	0.59	2198	2198	2204
3	0.34	0.38	0.92	0.95	0.95	0.35	0.28	0.62	2204	2197	2205
4	0.33	0.37	1.17	1.05	1.05	0.36	0.27	0.62	2193	2199	2205
5	0.33	0.36	0.85	1.04	1.04	0.28	0.30	0.65	2199	2201	2207
6	0.33	0.38	0.86	0.91	0.91	0.31	0.28	0.58	2198	2197	2203
7	0.33	0.37	1.32	1.08	1.08	0.49	0.34	0.59	2195	2200	2206
8	0.33	0.36	1.07	1.03	1.03	0.41	0.27	0.60	2194	2199	2206
9	0.33	0.37	0.75	0.85	0.85	0.29	0.29	0.60	2200	2200	2206

$I_U = 27.0$ and 6.2 and $W = 1712$ and 2059 . With neighbor differences only, the ordering of the three learning conditions is the same as in the main model in every seed. Clustering is highest when only cooperators learn, intermediate when both learn, and lowest when only defectors learn, and welfare follows the reverse order. With own occupancy added, only the two listed conditions were run. In all five seeds, cooperator-only learning clusters more strongly and earns less than equal-rate learning. Keeping only the four three-level difference components of the main observation would give 81 states, and that variant was not run.

N Finer learning-rate sweep, training length, and further toll conditions

Design. Learning rates are taken from the lattice $\alpha = 0.00625 \cdot 2^{k/6}$ with $k = 0, \dots, 42$, which runs from 0.00625 to 0.8 and contains the five rates of the 5×5 grid. The *map* uses every third lattice point for both rates, giving 15×15 rate pairs with ten training seeds each. The *fine lines* use all 43 values of α_C at $\alpha_D = 0.0125, 0.025, 0.05, 0.1$, and 0.2 , with ten training seeds per cell and twenty at $\alpha_D = 0.05$. In total these are 4080 training runs with learning cooperators. Every run follows the main protocol exactly. It uses 200 episodes, the same exploration schedule and stream seeds, and one frozen evaluation of 400 time units from the held-out placement of its seed. The cells that coincide with the 5×5 grid reproduce the per-seed values of Table 9. As in the grid, W is the average of the instantaneous welfare over the second half of the evaluation. The random-movement reference is $W = 2199$, the mean over the same ten evaluation placements.

Map. Figure 4a,b of the main text shows the welfare loss and the clustering of the map, and Figure 13 shows the fraction of coherently traveling seeds and the pattern speed for the same cells. Cell means of W range from 782 at $(0.2, 0.00625)$ to 2125 at $(0.00625, 0.05)$, all below random movement. Cell means of I_U range from 3.5 to 49. The correlation between the cell means of W and I_U is -0.99 across the 225 cells and -0.97 across the 4080 runs. Of the 4080 runs, one has a higher W than random movement on the evaluation placement of its seed. In 69 cells at least half of the seeds travel coherently, and all of them have $\alpha_C \geq 2\alpha_D$ and $\alpha_D \leq 0.1$. No seed travels in a cell

Table 20: Learning-rate sweep, per seed, part 1 of 3. Clustering, welfare, and learned behavior of the frozen policy.

α_C	α_D	seed	I_U	W	P_{up}^C	$P_{\text{stay rich}}^C$	$P_{\text{leave poor}}^C$	P_{up}^D
0.05	0	0	21.9	1811	0.42	0.38	0.85	0.33
0.05	0	1	22.4	1792	0.43	0.38	0.74	0.33
0.05	0	2	27.4	1691	0.41	0.39	0.83	0.33
0.05	0	3	27.5	1716	0.35	0.47	0.76	0.33
0.05	0	4	23.9	1800	0.39	0.40	0.70	0.33
0.05	0	5	24.3	1777	0.42	0.37	0.84	0.33
0.05	0	6	26.4	1753	0.43	0.37	0.83	0.34
0.05	0	7	19.1	1829	0.39	0.42	0.82	0.33
0.05	0	8	27.0	1680	0.40	0.39	0.73	0.34
0.05	0	9	27.3	1748	0.40	0.40	0.83	0.33
0.05	0.0125	0	25.6	1461	0.49	0.27	0.68	0.48
0.05	0.0125	1	31.5	1338	0.53	0.26	0.69	0.51
0.05	0.0125	2	16.1	1793	0.48	0.29	0.69	0.46
0.05	0.0125	3	29.9	1555	0.51	0.27	0.70	0.50
0.05	0.0125	4	18.3	1747	0.47	0.28	0.68	0.46
0.05	0.0125	5	29.3	1340	0.51	0.26	0.70	0.51
0.05	0.0125	6	19.5	1768	0.47	0.31	0.66	0.45
0.05	0.0125	7	23.1	1631	0.53	0.26	0.72	0.52
0.05	0.0125	8	14.8	1800	0.48	0.30	0.70	0.49
0.05	0.0125	9	18.4	1553	0.52	0.26	0.69	0.51
0.05	0.025	0	10.1	1898	0.44	0.34	0.67	0.43
0.05	0.025	1	9.0	1974	0.44	0.33	0.68	0.44
0.05	0.025	2	11.0	1891	0.42	0.34	0.66	0.40
0.05	0.025	3	9.2	1896	0.44	0.33	0.67	0.46
0.05	0.025	4	11.4	1929	0.42	0.34	0.67	0.41
0.05	0.025	5	10.5	1976	0.43	0.34	0.67	0.44
0.05	0.025	6	6.9	2004	0.44	0.35	0.69	0.45
0.05	0.025	7	14.8	1819	0.40	0.34	0.64	0.39
0.05	0.025	8	11.9	1913	0.42	0.36	0.67	0.43
0.05	0.025	9	8.5	1991	0.43	0.33	0.67	0.42
0.05	0.05	0	9.2	1953	0.41	0.41	0.67	0.41
0.05	0.05	1	7.3	2004	0.42	0.37	0.67	0.41
0.05	0.05	2	3.3	2141	0.41	0.35	0.67	0.40
0.05	0.05	3	13.3	1803	0.39	0.40	0.66	0.40
0.05	0.05	4	8.3	2004	0.41	0.35	0.67	0.41
0.05	0.05	5	10.3	1850	0.40	0.39	0.66	0.42
0.05	0.05	6	5.5	2050	0.41	0.36	0.67	0.41

with $\alpha_C \leq \alpha_D$, and at most one seed in ten travels in any cell with $\alpha_D \geq 0.14$. A second region of clustering without any traveling seed lies at large α_D and small α_C , where cell means of I_U reach 18 for $\alpha_D \geq 0.1$ and $\alpha_C \leq 0.035$.

Fine lines. Figure 14 and Table 36 give the fine lines. At $\alpha_D = 0.05$ the number of traveling seeds is 0, 2, 8, 16, and 19 of 20 at $\alpha_C = 0.079, 0.089, 0.1, 0.112$, and 0.126 . At $\alpha_D = 0.0125$ and 0.025 the corresponding rise occurs near $\alpha_C = 0.03$ and 0.05 . At $\alpha_D = 0.1$, at least half of the seeds travel only for α_C between 0.25 and 0.4 , and never more than nine of ten. At $\alpha_D = 0.2$ no seed travels. For the largest α_C the number of traveling seeds falls again at $\alpha_D = 0.025$ and 0.05 . Welfare is not monotone in α_C along these lines. These are properties of frozen policies after 200 episodes. The next paragraph shows that they change with the training budget, so we do not interpret them as thresholds.

Training length. We use 16 values of α_C from 0.035 to 0.2 at $\alpha_D = 0.05$ and 16 values from 0.0125 to 0.071 at $\alpha_D = 0.0125$. For each rate pair we train ten seeds for 800 episodes and evaluate the frozen tables after 50, 100, 200, 400, and 800 episodes, each on the held-out placement of its seed. The exploration schedule is that of the main protocol, decreasing from 0.3 to 0.01 over the first 160 episodes and then staying at 0.01 . The stream seeds are $1000s + e$, which are distinct for $e < 1000$, so the checkpoint at episode 200 is identical to the corresponding run of the sweep above.

Table 21: Learning-rate sweep, per seed, part 2 of 3. Clustering, welfare, and learned behavior of the frozen policy.

α_C	α_D	seed	I_U	W	P_{up}^C	$P_{\text{stay rich}}^C$	$P_{\text{leave poor}}^C$	P_{up}^D
0.05	0.05	7	8.5	1959	0.41	0.37	0.68	0.42
0.05	0.05	8	8.4	1936	0.41	0.37	0.67	0.43
0.05	0.05	9	4.8	2061	0.41	0.37	0.68	0.41
0.05	0.1	0	10.0	1984	0.40	0.42	0.67	0.41
0.05	0.1	1	17.9	1673	0.39	0.39	0.66	0.37
0.05	0.1	2	8.2	2018	0.41	0.38	0.67	0.41
0.05	0.1	3	6.1	2011	0.39	0.39	0.67	0.40
0.05	0.1	4	18.7	1729	0.37	0.43	0.66	0.40
0.05	0.1	5	8.4	1985	0.39	0.42	0.67	0.41
0.05	0.1	6	9.1	1970	0.41	0.37	0.67	0.38
0.05	0.1	7	6.1	2035	0.40	0.39	0.67	0.41
0.05	0.1	8	8.6	2001	0.40	0.39	0.67	0.40
0.05	0.1	9	10.4	1925	0.39	0.41	0.66	0.38
0.05	0.2	0	19.0	1688	0.38	0.42	0.65	0.38
0.05	0.2	1	3.4	2148	0.39	0.41	0.66	0.42
0.05	0.2	2	12.7	1885	0.36	0.46	0.65	0.38
0.05	0.2	3	9.5	1939	0.39	0.42	0.68	0.39
0.05	0.2	4	16.8	1750	0.37	0.44	0.65	0.38
0.05	0.2	5	6.5	2060	0.38	0.43	0.67	0.41
0.05	0.2	6	1.8	2191	0.39	0.35	0.67	0.43
0.05	0.2	7	23.8	1613	0.38	0.41	0.65	0.36
0.05	0.2	8	14.4	1747	0.39	0.39	0.66	0.37
0.05	0.2	9	11.7	1911	0.39	0.42	0.67	0.40
0	0.05	0	0.9	2205	0.34	0.34	0.64	0.37
0	0.05	1	0.8	2206	0.33	0.34	0.69	0.38
0	0.05	2	0.8	2204	0.34	0.32	0.66	0.37
0	0.05	3	0.9	2205	0.34	0.32	0.66	0.38
0	0.05	4	1.0	2205	0.33	0.32	0.66	0.37
0	0.05	5	1.0	2207	0.33	0.36	0.65	0.36
0	0.05	6	0.9	2203	0.33	0.35	0.66	0.38
0	0.05	7	1.1	2206	0.33	0.34	0.62	0.37
0	0.05	8	1.0	2206	0.33	0.35	0.68	0.36
0	0.05	9	0.8	2206	0.33	0.34	0.61	0.37
0.0125	0.05	0	3.7	2142	0.40	0.38	0.67	0.40
0.0125	0.05	1	7.3	2016	0.38	0.41	0.66	0.42
0.0125	0.05	2	4.9	2084	0.39	0.40	0.66	0.41
0.0125	0.05	3	6.9	2016	0.40	0.38	0.66	0.41

Table 37 gives the number of traveling seeds and the clustering at every checkpoint, and Figure 5 of the main text shows the corresponding fractions. Figure 15 shows the clustering and the welfare. After 50 episodes at most one seed in ten travels. Between 100 and 400 episodes the range of α_C with traveling seeds extends to smaller values. At $\alpha_D = 0.05$, at most two seeds in ten travel after 800 episodes at any α_C , and the mean clustering over the line rises from 10.5 at episode 200 to 16.5. At $\alpha_D = 0.0125$, most seeds with $\alpha_C \geq 0.02$ travel after 800 episodes, with fewer at the largest α_C . In all 1600 seed-checkpoints, W is below random movement on the same placement. Together with the long runs of Figure 12, these runs show that traveling bands can appear, persist, weaken, disappear, or reverse under continued training. They do not identify an asymptotic state.

Further toll conditions. Table 38 repeats the toll experiment of the main text at five rate pairs with large untolled losses. As before, the toll $\gamma(n_i - 1)/\Omega$ enters the learning reward and evaluation uses the original payoff. The toll raises welfare in all ten seeds of every pair. Recovery relative to random movement is nearly complete at (0.05, 0.0125) and (0.1, 0.0125) and partial where defectors learn very slowly. At (0.2, 0.00625) the tolled policies still cluster strongly, and eight of ten seeds travel.

Table 22: Learning-rate sweep, per seed, part 3 of 3. Clustering, welfare, and learned behavior of the frozen policy.

α_C	α_D	seed	I_U	W	P_{up}^C	$P_{stay rich}^C$	$P_{leave poor}^C$	P_{up}^D
0.0125	0.05	4	12.2	1887	0.37	0.39	0.65	0.41
0.0125	0.05	5	10.6	1936	0.38	0.41	0.64	0.38
0.0125	0.05	6	3.9	2107	0.40	0.38	0.66	0.41
0.0125	0.05	7	4.0	2122	0.41	0.38	0.67	0.40
0.0125	0.05	8	5.7	2034	0.39	0.38	0.65	0.42
0.0125	0.05	9	4.2	2084	0.39	0.39	0.66	0.41
0.025	0.05	0	11.4	1903	0.38	0.42	0.65	0.37
0.025	0.05	1	14.3	1805	0.38	0.41	0.61	0.35
0.025	0.05	2	10.9	1918	0.38	0.43	0.66	0.41
0.025	0.05	3	8.1	2009	0.39	0.43	0.66	0.42
0.025	0.05	4	7.7	2021	0.38	0.43	0.67	0.44
0.025	0.05	5	8.0	1973	0.37	0.43	0.67	0.42
0.025	0.05	6	7.5	2010	0.39	0.40	0.66	0.42
0.025	0.05	7	10.0	1953	0.37	0.44	0.66	0.40
0.025	0.05	8	10.4	1878	0.37	0.41	0.64	0.35
0.025	0.05	9	7.8	2022	0.39	0.40	0.66	0.41
0.1	0.05	0	12.2	1838	0.41	0.36	0.68	0.41
0.1	0.05	1	12.0	1868	0.43	0.33	0.68	0.43
0.1	0.05	2	8.4	1925	0.43	0.34	0.68	0.44
0.1	0.05	3	6.6	2002	0.42	0.35	0.67	0.42
0.1	0.05	4	11.7	1862	0.44	0.33	0.69	0.45
0.1	0.05	5	5.9	2031	0.42	0.35	0.68	0.42
0.1	0.05	6	8.0	1880	0.43	0.34	0.68	0.46
0.1	0.05	7	10.8	1868	0.43	0.34	0.67	0.43
0.1	0.05	8	8.7	1896	0.43	0.34	0.69	0.43
0.1	0.05	9	14.6	1767	0.42	0.34	0.66	0.42
0.2	0.05	0	15.5	1800	0.47	0.28	0.68	0.46
0.2	0.05	1	9.7	1887	0.48	0.27	0.69	0.54
0.2	0.05	2	8.5	1965	0.48	0.28	0.71	0.52
0.2	0.05	3	20.8	1566	0.56	0.22	0.70	0.59
0.2	0.05	4	15.0	1739	0.52	0.23	0.69	0.58
0.2	0.05	5	21.9	1598	0.54	0.21	0.70	0.57
0.2	0.05	6	14.6	1730	0.53	0.23	0.68	0.58
0.2	0.05	7	8.5	1954	0.45	0.31	0.70	0.48
0.2	0.05	8	13.4	1851	0.46	0.28	0.69	0.51
0.2	0.05	9	18.7	1739	0.53	0.25	0.69	0.52

O Code and reproducibility

Code. The code will be made available upon publication. The simulation is a single Python module (`model.py`, NumPy and Numba) with the environment, the decision clocks, the state encoding, the Q-learning update (with the optional crowding toll), and the evaluation. `rules.py` distills frozen populations into stochastic rules and replays them, and `measures.py` holds the welfare decomposition, the coherent-travel classification, and the interval estimates. Scripts: `run.py` (one condition with baselines, training, and frozen evaluation, saving the Q-tables), `run_all.sh` and `runs_queue.sh` (grid and environment variants), `runs_toll.sh`, `runs_long2.sh`, and `longrun.py` (long training with periodic frozen evaluation), `maintable.py` (Table 2 of the main text and Table 3), `grid.py`, `mechanism.py` (distillation, replay, and ablations of every run), `oos.py` (fresh-rollout replay), `convention.py` (per-agent bias), `anatomy.py`, `toll_summary.py`, `eps_sens.py` (Section H), `handrules.py` (Section I), `mirror.py` and `randmatch.py` (Section J), `recombine.py` (Section K), `seedstats.py` (Table 4), `vstats.py` (defector clustering, Table 2 of the main text), `supp_tables.py` and `figs2.py` (Figures 3 and 6 of the main text and the figures of Section E), `phase.py`, `phase2.py`, `phase_summary.py`, and `supp_tables_phase.py` (Section N), and `figs3.py` (Figures 2, 4, and 5 of the main text and the figures of Section N). `REPRODUCE.md` lists the commands in order.

Table 23: Motion of the cooperator profile, per seed, part 1 of 3. The table gives the mean signed velocity $\bar{v}$ and the mean speed $|v|$ in patches per time unit at lag $\Delta = 5$, the share d of windows in the run’s main direction to three decimals, the correlation r at the best shift, and whether the run travels coherently, that is, whether $r > 0.7$ and $d > 0.9$.

α_C / α_D	seed	$\bar{v}$	$ v $	main dir.	corr	trav.
0.05 / 0	0	-0.01	0.03	0.097	0.93	
0.05 / 0	1	-0.01	0.03	0.112	0.91	
0.05 / 0	2	0.04	0.05	0.245	0.94	
0.05 / 0	3	0.01	0.21	0.107	0.95	
0.05 / 0	4	-0.00	0.01	0.031	0.95	
0.05 / 0	5	0.02	0.03	0.112	0.93	
0.05 / 0	6	-0.01	0.02	0.066	0.92	
0.05 / 0	7	0.01	0.02	0.061	0.94	
0.05 / 0	8	-0.03	0.05	0.204	0.94	
0.05 / 0	9	-0.01	0.03	0.107	0.93	
0.0125 / 0.05	0	-0.04	0.33	0.378	0.58	
0.0125 / 0.05	1	-0.03	0.33	0.423	0.84	
0.0125 / 0.05	2	0.02	0.16	0.291	0.76	
0.0125 / 0.05	3	-0.13	0.17	0.597	0.79	
0.0125 / 0.05	4	0.10	0.14	0.464	0.90	
0.0125 / 0.05	5	0.04	0.06	0.235	0.88	
0.0125 / 0.05	6	-0.09	0.22	0.347	0.70	
0.0125 / 0.05	7	-0.06	0.12	0.342	0.68	
0.0125 / 0.05	8	0.08	0.15	0.444	0.83	
0.0125 / 0.05	9	-0.06	0.14	0.403	0.76	
0.025 / 0.05	0	0.10	0.16	0.163	0.90	
0.025 / 0.05	1	0.01	0.02	0.071	0.93	
0.025 / 0.05	2	0.08	0.10	0.434	0.90	
0.025 / 0.05	3	-0.01	0.07	0.194	0.85	
0.025 / 0.05	4	0.07	0.13	0.464	0.85	
0.025 / 0.05	5	-0.09	0.12	0.474	0.89	
0.025 / 0.05	6	0.03	0.10	0.301	0.85	
0.025 / 0.05	7	-0.07	0.10	0.408	0.90	
0.025 / 0.05	8	-0.00	0.02	0.056	0.91	
0.025 / 0.05	9	0.03	0.12	0.296	0.84	
0.05 / 0.2	0	0.03	0.04	0.194	0.95	
0.05 / 0.2	1	-0.11	0.23	0.505	0.60	
0.05 / 0.2	2	-0.01	0.03	0.102	0.93	
0.05 / 0.2	3	-0.07	0.08	0.342	0.91	
0.05 / 0.2	4	-0.01	0.03	0.092	0.95	
0.05 / 0.2	5	0.06	0.09	0.367	0.85	
0.05 / 0.2	6	0.14	1.15	0.536	0.39	

Seeds. Training seed $s \in \{0, \dots, 9\}$, or $s \in \{0, 1, 2\}$ for three-seed cells, fixes the placements of all training episodes through a NumPy generator seeded with s . It also fixes the random stream of episode e , which is seeded with $1000s + e$ and supplies the decision phases, exploration, and tie-breaking. The evaluation of seed s uses the generator and stream seed $s + 777777$. Fresh rollout j of seed s uses $5000 + 10s + j$ in place of s for the evaluation. The placements and the decision phases are drawn before any action of the episode and from streams that depend only on s and e . They are therefore identical for all runs with the same seed, whatever the learning rates, the reward, or the policies. Toll and no-toll runs of the same seed, and the pairings of the recombination, share the training placements, the decision phases, and the evaluation placement. The exploration and tie-breaking draws come later in the same stream and are consumed differently once the policies differ, so they are not shared. Training and evaluation use separate streams. The 200-episode runs use the stream seed $1000s + e$, which is distinct for every pair (s, e) with $e < 1000$. The long-training runs over 1600 episodes derive the stream seed of episode e from NumPy’s `SeedSequence` of (s, e) , so no stream is shared between seeds or episodes. Their placements are those of the main runs but their streams are not, so their checkpoint at episode 200 differs from the main run of the same seed.

Table 24: Motion of the cooperator profile, per seed, part 2 of 3. The table gives the mean signed velocity $\bar{v}$ and the mean speed $|v|$ in patches per time unit at lag $\Delta = 5$, the share d of windows in the run’s main direction to three decimals, the correlation r at the best shift, and whether the run travels coherently, that is, whether $r > 0.7$ and $d > 0.9$.

α_C / α_D	seed	$\bar{v}$	$ v $	main dir.	corr	trav.
0.05 / 0.2	7	0.04	0.04	0.189	0.96	
0.05 / 0.2	8	-0.03	0.03	0.163	0.94	
0.05 / 0.2	9	-0.01	0.04	0.128	0.91	
0.05 / 0.1	0	-0.04	0.07	0.270	0.86	
0.05 / 0.1	1	0.06	0.06	0.276	0.95	
0.05 / 0.1	2	-0.02	0.13	0.286	0.81	
0.05 / 0.1	3	-0.04	0.10	0.327	0.85	
0.05 / 0.1	4	-0.01	0.03	0.092	0.95	
0.05 / 0.1	5	0.04	0.08	0.291	0.88	
0.05 / 0.1	6	-0.01	0.05	0.143	0.86	
0.05 / 0.1	7	-0.09	0.16	0.510	0.83	
0.05 / 0.1	8	-0.07	0.11	0.393	0.86	
0.05 / 0.1	9	-0.05	0.05	0.245	0.92	
0.05 / 0.05	0	-0.04	0.12	0.332	0.86	
0.05 / 0.05	1	-0.02	0.16	0.372	0.80	
0.05 / 0.05	2	-0.11	0.27	0.439	0.59	
0.05 / 0.05	3	0.05	0.10	0.316	0.91	
0.05 / 0.05	4	-0.16	0.17	0.643	0.81	
0.05 / 0.05	5	0.06	0.13	0.408	0.89	
0.05 / 0.05	6	0.09	0.24	0.459	0.75	
0.05 / 0.05	7	-0.05	0.15	0.372	0.85	
0.05 / 0.05	8	0.01	0.17	0.301	0.86	
0.05 / 0.05	9	-0.01	0.12	0.265	0.78	
0.1 / 0.05	0	-0.12	0.15	0.541	0.88	
0.1 / 0.05	1	-0.37	0.37	0.964	0.86	yes
0.1 / 0.05	2	0.35	0.36	0.893	0.84	
0.1 / 0.05	3	0.14	0.28	0.653	0.78	
0.1 / 0.05	4	-0.32	0.37	0.852	0.83	
0.1 / 0.05	5	-0.10	0.16	0.520	0.78	
0.1 / 0.05	6	-0.38	0.38	0.980	0.86	yes
0.1 / 0.05	7	0.32	0.32	0.903	0.86	yes
0.1 / 0.05	8	0.01	0.10	0.265	0.86	
0.1 / 0.05	9	-0.57	0.57	1.000	0.89	yes
0.05 / 0.025	0	-0.32	0.38	0.944	0.86	yes
0.05 / 0.025	1	0.54	0.54	0.990	0.80	yes
0.05 / 0.025	2	0.45	0.45	0.980	0.86	yes
0.05 / 0.025	3	0.62	0.62	0.995	0.86	yes

Determinism and cost. A run is deterministic given its seed. All trained tables used in this paper were regenerated from the seeds on a second machine and reproduced the stored per-seed statistics exactly. One training run of 200 episodes takes about 15 seconds on one CPU core, and the 172 trained runs take about 45 minutes. Software: Python 3.13, NumPy 2.5, Numba 0.68, Matplotlib 3.11.

Data. The per-seed values behind every table and figure are saved as arrays by the scripts above (results/maintable.npz, grid_seeds.npz, mechanism.npy, oos.npz, toll.npz, eps_sens.npz, handrules.npz, mirror.npz, randmatch.npz, recombine.npz, seedstats.npz, robust_seeds.npz, vstats.npz, long2/) and will be released with the code.

Table 25: Motion of the cooperator profile, per seed, part 3 of 3. The table gives the mean signed velocity $\bar{v}$ and the mean speed $|v|$ in patches per time unit at lag $\Delta = 5$, the share d of windows in the run’s main direction to three decimals, the correlation r at the best shift, and whether the run travels coherently, that is, whether $r > 0.7$ and $d > 0.9$.

α_C / α_D	seed	$\bar{v}$	$ v $	main dir.	corr	trav.
0.05 / 0.025	4	-0.52	0.52	0.985	0.83	yes
0.05 / 0.025	5	0.58	0.58	0.995	0.82	yes
0.05 / 0.025	6	-0.41	0.41	0.903	0.78	yes
0.05 / 0.025	7	0.43	0.43	0.990	0.90	yes
0.05 / 0.025	8	0.39	0.39	0.954	0.86	yes
0.05 / 0.025	9	0.42	0.42	0.985	0.81	yes
0.2 / 0.05	0	0.68	0.91	0.969	0.80	yes
0.2 / 0.05	1	0.99	0.99	1.000	0.87	yes
0.2 / 0.05	2	0.97	0.97	1.000	0.84	yes
0.2 / 0.05	3	-1.30	1.30	1.000	0.90	yes
0.2 / 0.05	4	-1.30	1.30	1.000	0.89	yes
0.2 / 0.05	5	1.29	1.29	1.000	0.92	yes
0.2 / 0.05	6	1.34	1.34	1.000	0.89	yes
0.2 / 0.05	7	0.48	0.49	0.974	0.81	yes
0.2 / 0.05	8	-0.92	0.92	1.000	0.87	yes
0.2 / 0.05	9	-1.06	1.06	1.000	0.86	yes
0.05 / 0.0125	0	-0.92	0.92	1.000	0.94	yes
0.05 / 0.0125	1	-1.06	1.06	1.000	0.94	yes
0.05 / 0.0125	2	0.89	0.89	1.000	0.88	yes
0.05 / 0.0125	3	1.04	1.04	1.000	0.91	yes
0.05 / 0.0125	4	0.79	0.79	0.990	0.80	yes
0.05 / 0.0125	5	1.07	1.07	1.000	0.94	yes
0.05 / 0.0125	6	-0.74	0.79	0.995	0.87	yes
0.05 / 0.0125	7	1.00	1.00	1.000	0.90	yes
0.05 / 0.0125	8	0.77	1.05	0.974	0.90	yes
0.05 / 0.0125	9	-1.04	1.04	1.000	0.92	yes
random movement	0	-0.33	1.74	0.47	0.31	
random movement	1	-0.04	2.18	0.47	0.31	
random movement	2	-0.17	1.47	0.43	0.32	
random movement	3	0.04	1.65	0.48	0.31	
random movement	4	-0.01	1.77	0.43	0.31	
random movement	5	-0.07	2.22	0.48	0.31	
random movement	6	-0.12	0.91	0.40	0.34	
random movement	7	-0.18	2.13	0.50	0.31	
random movement	8	0.18	2.36	0.47	0.31	
random movement	9	-0.24	2.10	0.45	0.31	

Table 26: Longer training, with means over seeds at each checkpoint of the frozen tables. Checkpoints are every 200 episodes of the runs of Figure 12. The columns give speed $|v|$, main-direction share, clustering I_U , welfare W , P_{up}^C , $P_{\text{stay|rich}}^C$, and the mean absolute cooperator bias.

condition	episode	$ v $	dir.	I_U	W	P_{up}^C	$P_{\text{stay rich}}^C$	$ \chi_C $
only C learns, (0.05, 0) (3 seeds)	100	0.04	0.07	25.2	1739	0.35	0.47	0.00
	300	0.03	0.08	26.6	1714	0.40	0.40	0.00
	500	0.02	0.06	24.7	1759	0.41	0.39	0.00
	700	0.04	0.13	23.2	1764	0.40	0.41	0.00
	900	0.02	0.09	27.7	1722	0.38	0.42	0.01
	1100	0.01	0.05	25.4	1757	0.43	0.38	0.01
	1300	0.05	0.19	25.0	1739	0.39	0.41	0.01
	1500	0.03	0.09	23.9	1723	0.38	0.42	0.01
both learn, (0.05, 0.05) (3 seeds)	100	0.17	0.53	5.5	2051	0.41	0.38	0.02
	300	0.12	0.38	8.8	1929	0.41	0.36	0.01
	500	0.12	0.43	12.0	1897	0.42	0.36	0.02
	700	0.13	0.44	15.4	1735	0.44	0.33	0.02
	900	0.26	0.31	17.2	1723	0.46	0.31	0.01
	1100	0.18	0.33	16.5	1703	0.45	0.32	0.01
	1300	0.35	0.45	18.1	1665	0.46	0.30	0.03
	1500	0.07	0.25	28.1	1323	0.46	0.30	0.02
both learn, (0.2, 0.05) (5 seeds)	100	0.49	0.85	10.1	1843	0.44	0.34	0.15
	300	1.16	1.00	11.0	1883	0.50	0.25	0.32
	500	0.80	0.99	11.1	1851	0.47	0.29	0.23
	700	0.19	0.56	16.4	1695	0.44	0.32	0.04
	900	0.17	0.61	16.3	1685	0.44	0.33	0.04
	1100	0.07	0.24	23.3	1481	0.44	0.33	0.01
	1300	0.09	0.40	19.8	1614	0.45	0.32	0.02
	1500	0.10	0.42	27.3	1452	0.45	0.33	0.03
both learn, (0.05, 0.0125) (5 seeds)	100	0.19	0.51	17.7	1666	0.40	0.38	0.05
	300	1.20	1.00	26.8	1519	0.54	0.23	0.39
	500	1.14	1.00	15.4	1724	0.53	0.24	0.38
	700	1.08	1.00	13.7	1845	0.50	0.25	0.30
	900	0.71	0.81	13.1	1828	0.49	0.28	0.21
	1100	1.21	1.00	24.8	1477	0.56	0.22	0.42
	1300	1.42	1.00	19.9	1613	0.58	0.20	0.44
	1500	1.31	1.00	12.3	1865	0.52	0.23	0.36

Table 27: Longer training, per seed, for the runs of Figure 12 with 81 frozen checkpoints every 20 episodes. Coherent counts the checkpoints at or after episode 200 that travel coherently, out of 71. The table also gives the median $|v|$ over the same checkpoints and the number of reversals, which are sign changes of $\bar{v}$ along the sequence of coherent checkpoints at or after episode 200. The last columns give $|\chi_C|$ at episode 1600, and I_U and W at episode 200 and averaged over episodes 1400–1600.

condition	seed	coherent	median $ v $	reversals	$ \chi_C _{1600}$	I_U^{200}	$I_U^{1400-1600}$	W^{200}	$W^{1400-1600}$
only C learns, (0.05, 0)	0	0/71	0.03	0	0.00	24.0	24.4	1782	1757
	1	0/71	0.03	0	0.00	25.7	24.8	1678	1728
	2	0/71	0.03	0	0.01	23.3	25.5	1706	1707
both learn, (0.05, 0.05)	0	0/71	0.11	0	0.00	7.5	20.4	2042	1564
	1	1/71	0.12	0	0.01	4.7	21.1	2120	1588
	2	0/71	0.13	0	0.04	9.7	19.4	2004	1610
both learn, (0.2, 0.05)	0	23/71	0.16	5	0.04	17.8	23.4	1637	1554
	1	23/71	0.15	6	0.15	12.3	23.3	1921	1525
	2	21/71	0.17	4	0.00	18.7	25.6	1597	1467
	3	23/71	0.19	3	0.01	21.2	20.4	1592	1611
	4	26/71	0.19	4	0.00	14.8	22.3	1818	1527
both learn, (0.05, 0.0125)	0	65/71	1.17	1	0.35	17.1	12.8	1840	1854
	1	65/71	1.16	1	0.40	25.4	17.7	1412	1669
	2	64/71	1.20	1	0.38	21.5	15.9	1653	1757
	3	67/71	1.18	1	0.20	12.5	11.5	1820	1875
	4	68/71	1.21	1	0.26	19.2	9.7	1593	1931

Table 28: Welfare decomposition per seed, cooperators co-trained, defectors random: $W = B - N_{Cc} - K$.

seed	W	B	K	Π_C	Π_D	φ_C	φ_D	n_C	n_D
0	2019	3038	571	3.47	2.42	0.79	0.49	21.2	10.1
1	2040	3037	549	3.47	2.53	0.78	0.51	20.0	10.4
2	2033	3035	554	3.48	2.47	0.78	0.50	20.3	10.3
3	1978	3048	622	3.45	2.24	0.80	0.46	23.4	10.2
4	2063	3040	529	3.58	2.41	0.79	0.48	19.3	9.9
5	2018	3039	573	3.48	2.39	0.79	0.48	21.3	10.0
6	2028	3039	563	3.47	2.46	0.79	0.49	20.7	10.3
7	1986	3043	609	3.47	2.25	0.80	0.46	22.9	10.0
8	2009	3040	583	3.52	2.26	0.80	0.46	21.6	10.2
9	2041	3034	545	3.49	2.49	0.78	0.50	19.9	10.2

Table 29: Welfare decomposition per seed, cooperators co-trained, defectors learned: $W = B - N_{Cc} - K$.

seed	W	B	K	Π_C	Π_D	φ_C	φ_D	n_C	n_D
0	1954	3002	600	2.95	3.29	0.71	0.67	20.6	14.5
1	2004	3000	548	3.04	3.34	0.71	0.68	18.4	14.2
2	2141	2998	410	3.27	3.53	0.70	0.69	13.3	11.7
3	1803	3005	754	2.71	3.08	0.72	0.66	26.3	17.2
4	2005	2999	547	3.05	3.33	0.71	0.67	18.3	14.2
5	1851	3003	703	2.79	3.13	0.71	0.66	24.3	16.6
6	2051	2999	500	3.12	3.41	0.71	0.68	16.6	13.4
7	1959	3002	594	2.98	3.26	0.71	0.67	20.2	14.8
8	1938	3001	616	2.94	3.23	0.71	0.67	20.8	15.5
9	2061	3002	493	3.14	3.40	0.71	0.67	16.5	12.8

Table 30: Welfare decomposition per seed, only cooperators learn: $W = B - N_{Cc} - K$.

seed	W	B	K	Π_C	Π_D	φ_C	φ_D	n_C	n_D
0	1813	3062	800	3.30	1.74	0.84	0.37	31.6	9.7
1	1792	3054	814	3.17	1.93	0.82	0.41	31.8	10.5
2	1688	3070	933	3.14	1.46	0.86	0.33	37.2	10.4
3	1715	3072	909	3.18	1.51	0.86	0.34	36.2	10.3
4	1801	3069	821	3.39	1.47	0.86	0.33	32.4	9.8
5	1777	3072	847	3.32	1.51	0.86	0.33	33.7	9.6
6	1752	3060	861	3.13	1.81	0.83	0.40	33.6	11.2
7	1829	3055	778	3.26	1.91	0.83	0.40	30.4	10.2
8	1680	3071	943	3.12	1.46	0.86	0.33	37.6	10.5
9	1748	3072	876	3.28	1.44	0.86	0.32	34.9	9.8

Table 31: Robustness, relative-only observation (225 states), only cooperators learn, per seed.

seed	P_{up}^C	P_{up}^D	I_U	random	learned	ρ	random	learned	W	random	learned
0	0.34	0.33		0.94	28.89		0.33	0.81		2199	1682
1	0.36	0.34		0.79	23.54		0.42	0.83		2199	1761
2	0.32	0.33		0.80	33.50		0.42	0.81		2198	1622
3	0.38	0.33		0.95	25.03		0.28	0.83		2197	1742
4	0.33	0.33		1.05	31.50		0.27	0.79		2199	1647
5	0.35	0.33		1.04	35.26		0.30	0.80		2201	1560
6	0.36	0.34		0.91	33.93		0.28	0.78		2197	1505
7	0.36	0.33		1.08	34.94		0.34	0.79		2200	1542
8	0.35	0.33		1.03	28.93		0.27	0.82		2199	1651
9	0.36	0.33		0.85	28.62		0.29	0.80		2200	1668

Table 32: Robustness, relative-only observation (225 states), both learn, per seed.

seed	P_{up}^C	P_{up}^D	I_U	random	learned	ρ	random	learned	W	random	learned
0	0.42	0.42		0.94	4.08		0.33	0.85		2199	2107
1	0.42	0.41		0.79	3.91		0.42	0.81		2199	2125
2	0.42	0.41		0.80	4.91		0.42	0.91		2198	2084
3	0.42	0.43		0.95	4.33		0.28	0.85		2197	2088
4	0.41	0.41		1.05	7.19		0.27	0.90		2199	2030
5	0.41	0.42		1.04	5.72		0.30	0.90		2201	2024
6	0.42	0.40		0.91	6.08		0.28	0.88		2197	2046
7	0.42	0.42		1.08	5.45		0.34	0.90		2200	2033
8	0.41	0.42		1.03	8.24		0.27	0.92		2199	1994
9	0.41	0.42		0.85	9.67		0.29	0.93		2200	1938

Table 33: Robustness, relative-only observation (225 states), only defectors learn, per seed.

seed	P_{up}^C	P_{up}^D	I_U	random	learned	ρ	random	learned	W	random	learned
0	0.34	0.37		0.94	0.94		0.33	0.66		2199	2205
1	0.33	0.38		0.79	0.79		0.42	0.65		2199	2206
2	0.33	0.38		0.80	0.80		0.42	0.62		2198	2204
3	0.33	0.38		0.95	0.95		0.28	0.60		2197	2205
4	0.33	0.37		1.05	1.05		0.27	0.65		2199	2205
5	0.33	0.39		1.04	1.04		0.30	0.62		2201	2206
6	0.33	0.38		0.91	0.91		0.28	0.67		2197	2203
7	0.34	0.38		1.08	1.08		0.34	0.67		2200	2206
8	0.33	0.38		1.03	1.03		0.27	0.67		2199	2206
9	0.33	0.37		0.85	0.85		0.29	0.55		2200	2206

Table 34: Robustness, neighbor differences plus own occupancy (675 states), both learn, per seed.

seed	P_{up}^C	P_{up}^D	I_U	random	learned	ρ	random	learned	W	random	learned
0	0.40	0.40		0.94	8.65		0.33	0.89		2199	1968
1	0.42	0.42		0.79	4.22		0.42	0.84		2199	2118
2	0.39	0.41		0.80	8.98		0.42	0.91		2198	2005
3	0.42	0.42		0.95	4.29		0.28	0.83		2197	2116
4	0.42	0.42		1.05	4.88		0.27	0.92		2199	2090

Table 35: Robustness, neighbor differences plus own occupancy (675 states), only cooperators learn, per seed.

seed	P_{up}^C	P_{up}^D	I_U	random	learned	ρ	random	learned	W	random	learned
0	0.37	0.33		0.94	31.31		0.33	0.81		2199	1621
1	0.37	0.33		0.79	28.54		0.42	0.79		2199	1664
2	0.37	0.33		0.80	23.80		0.42	0.85		2198	1781
3	0.38	0.33		0.95	27.79		0.28	0.80		2197	1719
4	0.37	0.33		1.05	23.79		0.27	0.84		2199	1775

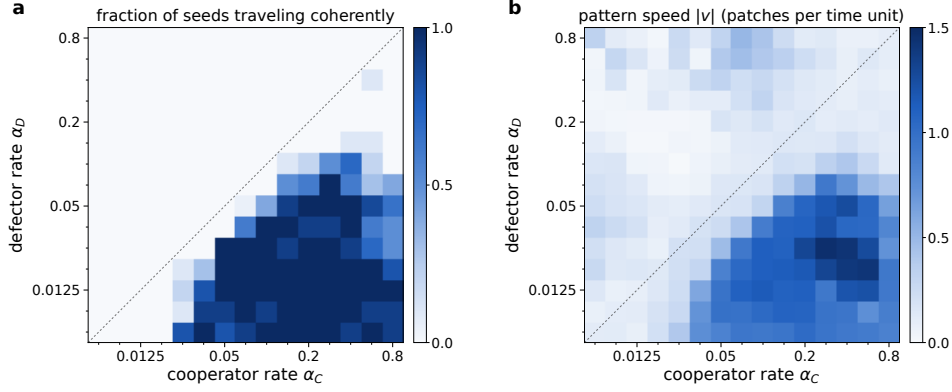


Figure 13: The 15×15 learning-rate map after 200 training episodes, with ten training seeds per cell, twenty for $\alpha_D = 0.05$, and one frozen-policy evaluation per seed. (a) Fraction of seeds that travel coherently. (b) Mean pattern speed $|v|$. The dashed line is $\alpha_C = \alpha_D$. Figure 4 of the main text shows the welfare loss and clustering of the same cells.

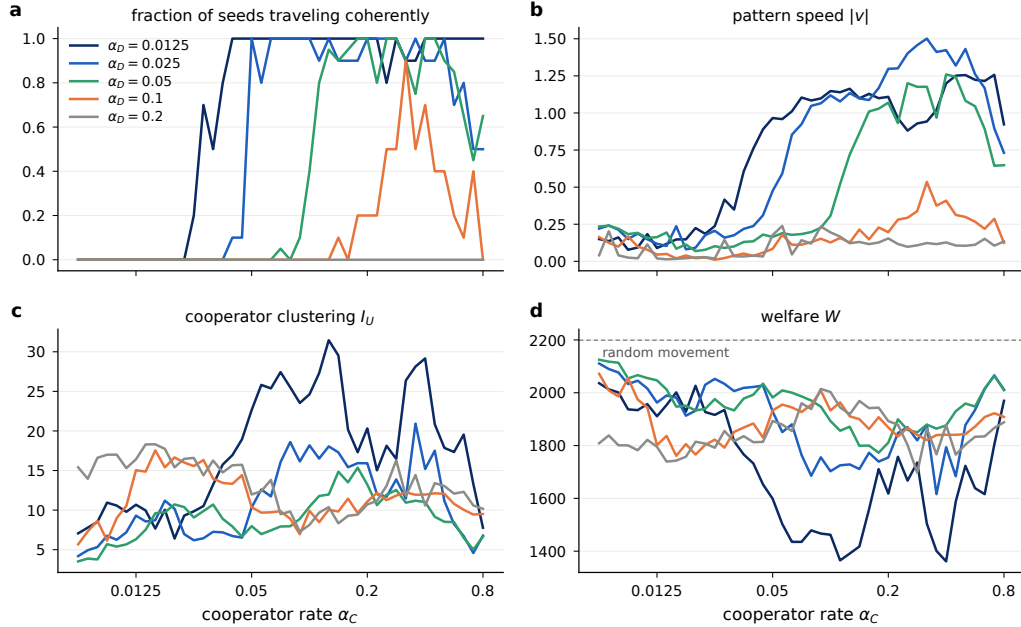


Figure 14: Fine sweeps of α_C at five fixed values of α_D after 200 training episodes, averaged over ten training seeds and over twenty for $\alpha_D = 0.05$. The panels show the fraction of coherently traveling seeds, pattern speed, clustering, and welfare. Dashed lines mark random movement.

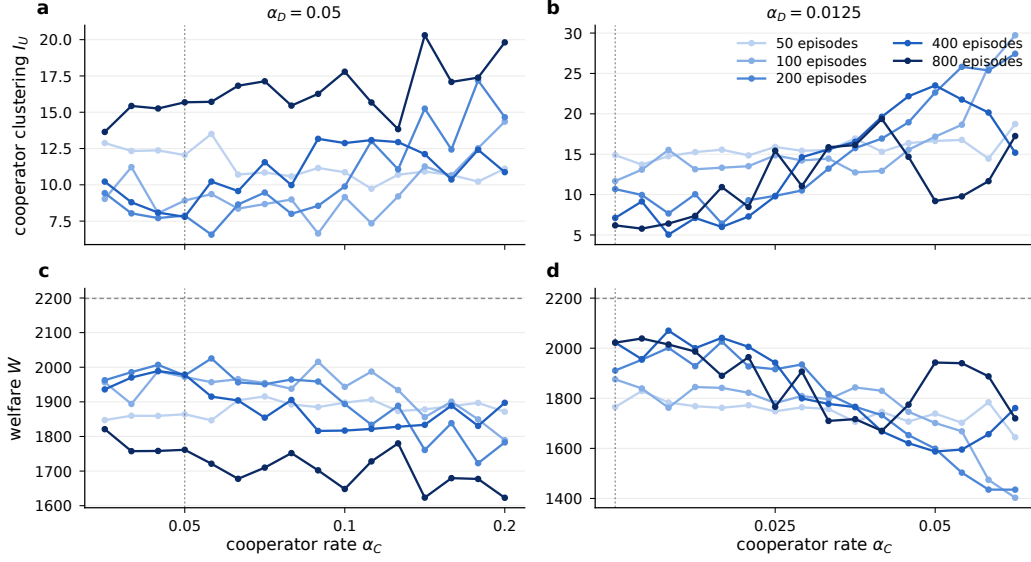


Figure 15: Training length. Clustering (a,b) and welfare (c,d) of the frozen policies after 50 to 800 training episodes, averaged over ten training seeds. The dotted line marks $\alpha_C = \alpha_D$ and the dashed line random movement.

Table 36: Finer learning-rate sweep with frozen policies after 200 episodes and one evaluation per training seed. The table gives the number of coherently traveling seeds, the mean clustering I_U , and the mean welfare W for 43 values of α_C at five fixed values of α_D . Each cell has ten training seeds, and twenty for $\alpha_D = 0.05$.

α_C	traveling seeds, by α_D						I_U , by α_D					W , by α_D				
	0.0125	0.025	0.05	0.1	0.2		0.0125	0.025	0.05	0.1	0.2	0.0125	0.025	0.05	0.1	0.2
0.00625	0/10	0/10	0/20	0/10	0/10		7.1	4.2	3.5	5.7	15.4	2036	2111	2125	2072	1809
0.007015	0/10	0/10	0/20	0/10	0/10		7.8	4.9	3.9	7.3	13.9	2013	2090	2118	2009	1838
0.007875	0/10	0/10	0/20	0/10	0/10		8.5	5.3	3.8	8.6	16.6	2001	2077	2114	1986	1801
0.008839	0/10	0/10	0/20	0/10	0/10		10.9	6.8	5.7	6.1	17.0	1937	2033	2054	2055	1801
0.009921	0/10	0/10	0/20	0/10	0/10		10.6	6.2	5.4	9.0	17.0	1934	2046	2067	1974	1782
0.01114	0/10	0/10	0/20	0/10	0/10		9.8	7.2	5.7	10.5	15.3	1957	2016	2056	1944	1822
0.0125	0/10	0/10	0/20	0/10	0/10		10.7	9.3	6.3	15.0	16.4	1911	1963	2047	1801	1795
0.01403	0/10	0/10	0/20	0/10	0/10		10.0	8.6	7.5	14.9	18.3	1954	1990	2012	1837	1739
0.01575	0/10	0/10	0/20	0/10	0/10		7.7	8.7	9.6	17.5	18.3	2001	1982	1947	1761	1743
0.01768	0/10	0/10	0/20	0/10	0/10		10.0	11.2	9.7	15.4	17.7	1928	1913	1951	1806	1758
0.01984	0/10	0/10	0/20	0/10	0/10		6.4	10.2	10.7	16.7	15.4	2026	1932	1933	1766	1815
0.02227	0/10	0/10	0/20	0/10	0/10		9.3	7.0	10.4	16.0	16.5	1927	2030	1939	1802	1807
0.025	2/10	0/10	0/20	0/10	0/10		9.8	6.2	9.1	15.6	16.6	1916	2053	1976	1823	1792
0.02806	7/10	0/10	0/20	0/10	0/10		10.5	6.4	9.9	16.3	14.4	1935	2034	1946	1792	1855
0.0315	5/10	0/10	0/20	0/10	0/10		13.2	7.3	10.7	14.0	16.3	1816	2006	1933	1852	1816
0.03536	8/10	0/10	0/20	0/10	0/10		15.8	7.2	8.9	13.4	14.8	1766	2019	1978	1868	1836
0.03968	10/10	1/10	0/20	0/10	0/10		16.9	6.7	7.9	13.3	15.7	1732	2022	1993	1884	1813
0.04454	10/10	1/10	0/20	0/10	0/10		18.9	6.5	6.6	14.4	15.7	1653	2027	2035	1830	1814
0.05	10/10	10/10	0/20	0/10	0/10		22.6	10.3	8.0	10.4	12.0	1599	1929	1982	1933	1893
0.05612	10/10	8/10	0/20	0/10	0/10		25.8	12.6	7.0	9.7	12.4	1503	1851	2009	1955	1879
0.063	10/10	10/10	0/20	0/10	0/10		25.4	11.7	7.4	9.7	13.8	1435	1880	2000	1945	1855
0.07071	10/10	10/10	1/20	0/10	0/10		27.4	16.1	7.9	9.9	9.5	1435	1765	1986	1927	1960
0.07937	10/10	10/10	0/20	0/10	0/10		25.5	18.6	8.0	8.9	9.8	1479	1686	1971	1955	1938
0.08909	10/10	10/10	2/20	0/10	0/10		23.5	16.1	8.9	6.9	7.3	1467	1756	1947	2008	2014
0.1	10/10	10/10	8/20	0/10	0/10		24.6	18.2	10.4	9.9	8.1	1462	1703	1893	1933	2003
0.1122	10/10	9/10	16/20	0/10	0/10		27.3	16.5	11.8	8.5	9.7	1365	1725	1856	1964	1944
0.126	10/10	10/10	19/20	0/10	0/10		31.5	18.1	12.0	10.0	10.4	1391	1729	1872	1911	1919
0.1414	10/10	9/10	18/20	1/10	0/10		29.5	17.3	14.8	9.8	8.3	1418	1711	1799	1900	1969
0.1587	10/10	9/10	19/20	0/10	0/10		20.2	15.4	13.5	11.5	9.3	1558	1773	1800	1863	1942
0.1782	10/10	9/10	20/20	2/10	0/10		17.3	15.9	15.4	9.6	9.4	1711	1739	1773	1907	1944
0.2	10/10	10/10	20/20	2/10	0/10		20.3	15.9	13.2	11.1	10.7	1618	1755	1811	1869	1893
0.2245	10/10	10/10	16/20	2/10	0/10		15.0	12.0	10.6	12.2	11.2	1757	1848	1899	1834	1879
0.252	8/10	10/10	20/20	5/10	0/10		18.1	11.7	11.9	11.3	13.1	1667	1870	1859	1867	1802
0.2828	10/10	10/10	20/20	5/10	0/10		16.5	13.9	12.5	11.8	16.3	1736	1820	1850	1840	1697
0.3175	9/10	9/10	18/20	9/10	0/10		26.4	11.5	10.9	12.2	11.8	1504	1878	1879	1820	1864
0.3564	9/10	10/10	15/20	5/10	0/10		28.1	20.9	11.2	11.9	14.4	1401	1616	1864	1840	1767
0.4	10/10	9/10	20/20	7/10	0/10		29.2	15.2	11.0	12.0	10.6	1361	1794	1876	1841	1877
0.449	10/10	9/10	20/20	4/10	0/10		20.8	17.5	9.2	12.1	13.4	1588	1684	1930	1841	1766
0.504	10/10	10/10	18/20	4/10	0/10		17.9	11.1	8.5	12.1	13.0	1723	1878	1959	1843	1803
0.5657	10/10	7/10	17/20	2/10	0/10		17.3	8.2	8.5	10.8	12.1	1639	1935	1948	1872	1833
0.635	10/10	8/10	13/20	1/10	0/10		19.5	6.7	6.5	10.0	12.3	1616	2014	2016	1908	1835
0.7127	10/10	5/10	9/20	4/10	0/10		13.3	4.6	5.0	9.4	10.6	1804	2066	2064	1922	1867
0.8	10/10	5/10	13/20	0/10	0/10		7.8	6.8	6.6	9.5	10.2	1969	2010	2013	1909	1888

Table 37: Training length. The table gives the number of training seeds, out of ten, whose frozen policies travel coherently at the checkpoints after 50, 100, 200, 400, and 800 episodes of one 800-episode run per seed. It also gives the mean clustering I_U at the same checkpoints.

α_C	$\alpha_D = 0.05$										α_C	$\alpha_D = 0.0125$									
	traveling seeds					I_U						traveling seeds					I_U				
	50	100	200	400	800	50	100	200	400	800		50	100	200	400	800	50	100	200	400	800
0.03536	0	0	0	0	0	12.9	9.0	9.4	10.2	13.6	0.0125	0	0	0	0	0	14.9	11.7	10.7	7.1	6.2
0.03968	0	0	0	0	0	12.3	11.2	8.0	8.8	15.4	0.01403	0	0	0	0	0	13.7	13.1	10.0	9.2	5.8
0.04454	0	0	0	0	0	12.4	8.0	7.7	8.1	15.3	0.01575	0	0	0	0	3	14.8	15.5	7.7	5.0	6.4
0.05	0	0	0	0	0	12.0	8.9	7.9	7.8	15.7	0.01768	0	0	0	1	3	15.3	13.1	10.0	7.1	7.4
0.05612	0	0	0	0	0	13.5	9.4	6.6	10.2	15.7	0.01984	0	0	0	0	7	15.6	13.3	6.4	6.0	10.9
0.063	0	0	0	0	1	10.7	8.4	8.6	9.6	16.8	0.02227	0	0	0	3	8	14.8	13.5	9.3	7.3	8.5
0.07071	0	0	1	1	0	10.8	8.7	9.5	11.6	17.1	0.025	0	0	2	9	9	15.9	14.9	9.8	9.8	15.4
0.07937	0	0	0	2	0	10.6	9.0	8.0	10.0	15.5	0.02806	0	0	7	10	9	15.4	14.2	10.5	14.6	11.1
0.08909	0	0	1	8	0	11.2	6.6	8.6	13.2	16.3	0.0315	0	0	5	10	10	15.5	14.5	13.2	15.6	15.9
0.1	0	0	4	7	0	10.9	9.2	9.9	12.9	17.8	0.03536	0	0	8	10	9	16.9	12.7	15.8	16.5	16.1
0.1122	0	1	8	6	1	9.7	7.3	13.0	13.1	15.7	0.03968	0	0	10	10	10	15.3	12.9	16.9	19.6	19.4
0.126	0	1	9	8	2	10.7	9.2	11.1	12.9	13.8	0.04454	0	3	10	10	10	16.4	15.6	18.9	22.2	14.7
0.1414	0	4	10	8	1	10.9	11.3	15.2	12.1	20.3	0.05	0	3	10	10	8	16.6	17.2	22.6	23.5	9.2
0.1587	0	6	10	8	1	10.7	10.6	12.4	10.4	17.1	0.05612	0	4	10	10	8	16.8	18.6	25.8	21.8	9.8
0.1782	0	6	10	8	2	10.2	12.5	17.2	12.4	17.4	0.063	0	6	10	10	6	14.4	25.9	25.4	20.2	11.7
0.2	1	5	10	5	2	11.1	14.4	14.7	10.9	19.8	0.07071	0	8	10	10	5	18.7	29.7	27.4	15.2	17.2

Table 38: Crowding toll at further rate pairs. All runs use 200 episodes and ten training seeds and are evaluated with the original payoff on the held-out placement of each seed, with W averaged over snapshots as in Table 8. The first row repeats the equal-rate condition of the main text. ΔW is the paired difference with its 95% bootstrap interval over seeds. Recovered is $(W_{\text{toll}} - W)/(W_{\text{random}} - W)$ with $W_{\text{random}} = 2199$.

(α_C, α_D)	original reward			with toll			ΔW	95% interval	recovered
	W	I_U	traveling	W	I_U	traveling			
(0.05, 0.05)	1977	7.9	0/10	2203	1.06	0/10	226	[170, 285]	102%
(0.05, 0.0125)	1599	22.6	10/10	2193	1.45	0/10	594	[491, 701]	99%
(0.2, 0.00625)	781	49.2	10/10	1617	20.83	8/10	837	[598, 1053]	59%
(0.1, 0.00625)	893	45.1	10/10	2042	6.50	3/10	1150	[960, 1330]	88%
(0.1414, 0.008839)	1106	35.9	10/10	2020	7.34	4/10	914	[731, 1114]	84%
(0.1, 0.0125)	1463	24.6	10/10	2182	1.86	0/10	718	[574, 854]	98%