
The Symbol of the Surrogate: Measuring Numerical Provenance in Neural PDE Solvers

Ridham Patel

Computer Science & Engineering
Indian Institute of Technology Gandhinagar
Gandhinagar, India
ridham.patel@iitgn.ac.in

Abstract

Neural PDE surrogates are trained on numerical solver outputs that contain both physical evolution and solver-specific discretization errors. Because surrogates are also evaluated against held-out trajectories from the same solver, standard benchmarks cannot distinguish fidelity to the exact evolution from imitation of the numerical scheme. We introduce an empirical Fourier-symbol diagnostic that probes a trained surrogate’s linearized one-step operator with individual Fourier modes and compares it with both exact-evolution and training-scheme references. To address architectural spectral bias, we train identical networks on schemes with orthogonal dissipative and dispersive signatures and compare their learned operators. In linear advection, the learned surrogates reproduce the training schemes’ amplitude and phase errors, with the twin-scheme difference reaching more than 99.8% of the analytically predicted full-imitation ceiling. The same behavior occurs for a non-local Fourier neural operator and at the operator level for nonlinear Burgers dynamics. These results show that agreement with solver-generated test data does not by itself establish fidelity to the exact evolution. Fourier-symbol measurements provide a direct diagnostic of numerical provenance.

1 Introduction

Neural surrogates for partial differential equations (PDEs) are often trained on trajectories produced by a numerical solver and, in the prevailing protocol, evaluated against held-out trajectories from the same solver. Benchmarks are constructed this way as a matter of course: PDEBench and PDEArena distribute solver-generated trajectories as targets, and standard neural-operator and autoregressive simulator studies evaluate against numerical rollouts (Takamoto et al., 2022; Gupta and Brandstetter, 2022; Li et al., 2021; Brandstetter et al., 2022; Sanchez-Gonzalez et al., 2020).

Solver output is not the physical evolution. Every consistent scheme introduces a discretization error whose wavenumber dependence is classically characterized: first-order upwind adds artificial diffusion that damps high wavenumbers, while centered and Crank–Nicolson discretizations of advection conserve amplitude but propagate high wavenumbers at the wrong speed (LeVeque, 2007). A surrogate trained on such data is therefore exposed to two superimposed signals, the physical evolution and the solver’s numerical signature, and the training objective does not separate them.

This creates an ambiguity that the standard protocol cannot resolve. If the test targets are generated by the same scheme as the training targets, then the benchmark rewards agreement with the scheme, and a surrogate that has reproduced the scheme’s numerical signature can score as well as, or better than, a surrogate that has learned the underlying evolution. A low error against held-out solver trajectories therefore does not establish fidelity to the exact evolution; it establishes fidelity to the solver, of which

fidelity to the exact evolution is only one possible cause. This ambiguity is adjacent to prior work on solver-aware learning, low-fidelity supervision and learned correction of numerical solver errors (Suriyanarayanan et al., 2026; Koehler and Thuerey, 2025; Um et al., 2020; Howard et al., 2023).

The closest spectral diagnostic does not close this gap. Gao et al. (2026) measure how far a learned operator sits from the exact operator, which quantifies error but does not attribute it: the two candidate targets, the exact evolution and the training scheme, are never compared side by side. What is missing is an instrument that reports which of the two a learned operator is near.

We use the surrogate’s *empirical Fourier symbol* as that instrument. Following the single-mode probing primitive of Gao et al. (2026), we apply the trained surrogate to one Fourier mode and read the corresponding output coefficient in one forward pass, with no gradients. The same object exists in closed form for both references: $G_{\text{exact}}(k)$ for the exact evolution and $G_{\text{scheme}}(k)$, the von Neumann amplification factor, for the scheme. Provenance then becomes a projection: a scalar $\alpha(k)$ that is 1 when the learned symbol coincides with the scheme and 0 when it coincides with the exact reference.

One confound stands in the way of reading α directly. Neural networks are biased toward low frequencies for architectural reasons (Rahaman et al., 2019; Tancik et al., 2020; Khodakarami et al., 2026), and that bias damps high wavenumbers, which is the same qualitative effect a dissipative scheme has. A single surrogate trained on a dissipative scheme would report $\alpha > 0$ even if it had learned no scheme-specific behaviour at all.

Our identification strategy removes this confound by construction. We train identical networks on two schemes whose errors are orthogonal (upwind, whose error is almost purely dissipative, and Crank–Nicolson, whose error is purely dispersive) on one shared mesh and time step, with every other experimental factor held fixed (LeVeque, 2007). Under those conditions, the scheme-independent component of the architectural contribution is suppressed in the difference of the two learned symbols. Target-dependent approximation and optimization effects need not cancel, while the scheme contributions separate onto orthogonal axes. Spectral bias alone predicts a twin-scheme difference of zero; scheme imitation predicts a specific, analytically computable value.

The measurements that follow are consistent with scheme imitation and not with the alternatives. On linear advection the twin-scheme difference recovers over 99.8% of its full-imitation ceiling on both axes; the same holds for a non-local Fourier neural operator that demonstrably fits the exact evolution when trained on exact data; on nonlinear Burgers the learned operator remains aligned with its training scheme by 5–27 $\times$ on its own states, including under common-input evaluation; and fine-tuning on 25 exact samples moves α to approximately 0 without removing the architecture-dependent accuracy floor.

We make three contributions.

- We turn the empirical Fourier symbol of a trained surrogate, a measurement primitive introduced for operator networks by Gao et al. (2026), into a provenance test, by resolving the symbol into dissipation and dispersion coordinates and projecting it onto the axis joining the exact reference to the training scheme.
- We introduce twin-scheme differencing, an identification strategy in which two identical networks trained on schemes with orthogonal error signatures suppress the common architectural contribution, giving a falsifiable prediction that spectral bias alone cannot reproduce.
- We apply the diagnostic to standard surrogates and find scheme-consistent symbols for a local CNN and a non-local FNO on linear advection, at the operator level on nonlinear Burgers with the input distribution held fixed, and we show that provenance and accuracy respond on different scales under high-accuracy fine-tuning.

2 Method

2.1 Problem setup

We consider a periodic PDE on $[0, L)$ discretized on N equispaced points with spacing $\Delta x = L/N$, and a fixed time step Δt . Three one-step maps on the discrete state $u \in \mathbb{R}^N$ are relevant:

- the *exact reference* $\mathcal{E}$, the true evolution over Δt sampled on the grid;

- the *scheme reference* $\mathcal{S}^{(s)}$, one step of numerical scheme s ;
- the *learned operator* f_θ , a network trained on pairs $(u, \mathcal{S}^{(s)}u)$ generated by scheme s .

Training data are generated by $\mathcal{S}^{(s)}$ and standard evaluation compares f_θ to $\mathcal{S}^{(s)}$ on held-out inputs. The question we ask of f_θ is different: is the operator it learned closer to $\mathcal{E}$ or to $\mathcal{S}^{(s)}$, and by how much? Appendix A gives a schematic of the measurement pipeline.

2.2 The empirical Fourier symbol

On a periodic grid, a linear one-step map that commutes with translations acts on each discrete Fourier mode by multiplication by a complex number: its *symbol* (LeVeque, 2007; Gao et al., 2026). We measure that number for a trained surrogate directly. For each resolved wavenumber $k \in \{1, \dots, N/2 - 1\}$ we build the probe field

$$u_j^{(k)} = \varepsilon \cos(2\pi k x_j / L), \quad j = 0, \dots, N - 1, \quad (1)$$

apply the surrogate’s one-step map once, take the discrete Fourier transform of the output, and divide its k -th coefficient by the k -th coefficient of the input:

$$\hat{G}_\theta(k) = \frac{[\mathcal{F}f_\theta(u^{(k)})]_k}{[\mathcal{F}u^{(k)}]_k}, \quad \varepsilon \rightarrow 0. \quad (2)$$

This costs one forward pass per wavenumber and requires no gradients and no access to model internals. We use $\varepsilon = 10^{-2}$ throughout.

Equation (2) is a symbol only if the probe stays in the linear regime, so we certify rather than assume it. Sweeping $\varepsilon \in [10^{-4}, 1]$, the recovered $\hat{G}_\theta$ is ε -independent to 1.0×10^{-2} in relative terms across $\varepsilon \in [10^{-4}, 10^{-1}]$ and departs only at $\varepsilon \sim 1$, where the GELU nonlinearity (Hendrycks and Gimpel, 2016) is no longer probed locally (Appendix L). Applied to the numerical solvers themselves, the same procedure returns their analytic symbols to 2×10^{-16} , which fixes the zero of the instrument.

For nonlinear problems, the one-step map is not generally a Fourier multiplier. Around a nonconstant base state $\bar{u}$, the Jacobian $Df_\theta|_{\bar{u}}$ need not commute with translations, so a single Fourier input can generate responses in other modes. In this case (2) should be read as the same-mode, diagonal Fourier response $\langle e_k, Df_\theta|_{\bar{u}} e_k \rangle / \langle e_k, e_k \rangle$, not as a full scalar symbol. We take $\bar{u}$ from the solver’s own forced steady states, the distribution the surrogate was trained on. This matches the frozen-coefficient viewpoint behind linearized von Neumann analysis of nonlinear schemes (LeVeque, 2007): both operators are queried about the same occupied state rather than about an unrelated distribution.

2.3 The two reference symbols

Linear advection $u_t + cu_x = 0$ makes the two references explicit. Write $\sigma = c\Delta t/\Delta x$ for the Courant number and $\varphi_k = 2\pi k/N$ for the phase advance per cell of mode k . The exact evolution translates each mode without changing its amplitude,

$$G_{\text{exact}}(k) = e^{-i\sigma\varphi_k}, \quad |G_{\text{exact}}| = 1, \quad (3)$$

whereas a consistent scheme applies a different multiplier, known in closed form. For the two schemes used throughout,

$$G_{\text{scheme}}^{\text{up}}(k) = 1 - 2\sigma \sin^2 \frac{\varphi_k}{2} - i\sigma \sin \varphi_k, \quad G_{\text{scheme}}^{\text{CN}}(k) = \frac{1 - ia_k/2}{1 + ia_k/2}, \quad a_k = \sigma \sin \varphi_k, \quad (4)$$

for explicit first-order upwind and Crank–Nicolson with centered differences, respectively (LeVeque, 2007). The two schemes err in complementary ways. Upwind damps: $|G_{\text{scheme}}^{\text{up}}| < 1$, and at the Courant number used here, $\sigma = 1/2$, it factors as $G_{\text{scheme}}^{\text{up}} = e^{-i\varphi_k/2} \cos(\varphi_k/2)$, so its phase agrees with G_{exact} exactly and its entire error is a modulus deficit. Crank–Nicolson is unitary, $|G_{\text{scheme}}^{\text{CN}}| = 1$, and its entire error is a phase error. At this Courant number the two scheme errors therefore separate exactly into a modulus component and a phase component, which is the property the identification strategy of Sec. 2.6 exploits; away from $\sigma = 1/2$ the upwind error acquires a phase component as well and the separation becomes approximate.

2.4 Dissipation and dispersion coordinates

Because $|G_{\text{exact}}| = 1$, multiplying by the complex conjugate $\overline{G_{\text{exact}}}$ rotates the complex plane so that the exact reference sits at 1 and the error $\hat{G}_\theta - G_{\text{exact}}$ decomposes into a radial and a tangential part:

$$\begin{aligned}\Delta_{\text{diss}}(k) &= \text{Re}[(\hat{G}_\theta - G_{\text{exact}})\overline{G_{\text{exact}}}] \approx |\hat{G}_\theta| - 1, \\ \Delta_{\text{disp}}(k) &= \text{Im}[(\hat{G}_\theta - G_{\text{exact}})\overline{G_{\text{exact}}}] \approx \arg \hat{G}_\theta - \arg G_{\text{exact}}.\end{aligned}\tag{5}$$

The left-hand sides are the quantities we report; the right-hand approximations hold to first order in the deviation and give them their names. Δ_{diss} is an amplitude error: negative means the mode is damped relative to the exact evolution. Δ_{disp} is a phase error: positive means the mode is under-rotated, i.e. it propagates more slowly than the true wave, which is the classical lagging-phase error of a centered discretization. Modified-equation theory places each scheme on one of these axes: upwind, whose leading error term is an even derivative, is radial; Crank–Nicolson, whose leading error term is odd and which is unitary, is tangential (LeVeque, 2007).

2.5 The provenance coefficient

All the quantities needed to attribute the learned symbol are now defined. In the rotated frame the exact reference sits at the origin of the error plane and the training scheme sits at $G_{\text{scheme}} - G_{\text{exact}}$. We report where the learned symbol falls along the line joining them:

$$\alpha(k) = \frac{\text{Re}[(\hat{G}_\theta - G_{\text{exact}})\overline{(G_{\text{scheme}} - G_{\text{exact}})}]}{|G_{\text{scheme}} - G_{\text{exact}}|^2}.\tag{6}$$

This is the least-squares projection of the learned error onto the scheme error direction, treating $\mathbb{C}$ as $\mathbb{R}^2$; the conjugate is required for the numerator to be a real inner product. Three values orient the scale:

- $\alpha = 1$: the learned symbol has the same component along the scheme-error direction as the training scheme. This does not rule out an additional component orthogonal to that direction.
- $\alpha = 0$: the learned symbol is *consistent with the exact reference* in the scheme-error direction. It does not by itself certify that the network has learned the physics; it says the scheme’s error direction is absent from the learned symbol.
- $\alpha < 0$: the learned symbol lies beyond the exact reference in the direction opposite to the scheme, the regime in which an emulator is more accurate than the solver that trained it (Koehler and Thuerey, 2025).

The corresponding orthogonal residual is

$$r_\perp(k) = \left| \hat{G}_\theta(k) - G_{\text{exact}}(k) - \alpha(k)(G_{\text{scheme}}(k) - G_{\text{exact}}(k)) \right|.\tag{7}$$

For the linear experiments, the modulus and phase summaries together with Figure 1 show that this residual is negligible relative to the scheme displacement.

2.6 Twin-scheme identification

A single value of α is not sufficient evidence, because the learned symbol carries an architectural contribution as well as a scheme contribution. Model the symbol learned from scheme s as

$$\hat{G}_\theta^{(s)}(k) = G_{\text{exact}}(k) + \alpha_s(k)[G_{\text{scheme}}^{(s)}(k) - G_{\text{exact}}(k)] + B(k) + \eta,\tag{8}$$

where $\alpha_s(k)$ is the scheme-imitation coefficient that (6) is meant to estimate, $B(k)$ is the architecture-intrinsic spectral bias (the displacement the network would exhibit from its inductive bias and optimization alone), and η collects seed-to-seed noise. Applying (6) to $\hat{G}_\theta^{(s)}$ returns $\alpha_s(k)$ plus the projection of $B(k)$ onto the scheme-error direction, so the estimator is unbiased only when that projection vanishes. It does not vanish for a dissipative scheme: spectral bias damps high wavenumbers, so $B(k)$ points radially inward, and so does the upwind error. A network with

$B(k) \neq 0$ that had learned nothing scheme-specific would therefore still report $\alpha_{\text{up}} > 0$. This is the confound a single-scheme study cannot escape.

Two features of the design break the tie. First, $G_{\text{scheme}}^{\text{CN}} - G_{\text{exact}}$ is tangential and therefore orthogonal to a radial $B(k)$, so α_{CN} is not contaminated by spectral bias. Second, and more robustly, if the architecture, mesh, time step, input distribution, optimizer, schedule, sample count and seed sequence are held fixed across the two schemes, then the scheme-independent component of $B(k)$ is suppressed in the difference of the two learned symbols. Target-dependent approximation and optimization effects need not cancel, so this is an identification strategy rather than an exact causal decomposition. We therefore report

$$\Delta_{\text{twin}}(k) = [\hat{G}_{\theta}^{\text{up}}(k) - \hat{G}_{\theta}^{\text{CN}}(k)] \overline{G_{\text{exact}}(k)}, \quad (9)$$

where $\overline{G_{\text{exact}}(k)}$ is again the complex conjugate, so that the real and imaginary parts of Δ_{twin} are the twin difference in the dissipation and dispersion coordinates of (5). Under $\alpha_{\text{up}} = \alpha_{\text{CN}} = 1$ and exact cancellation of B , (8) gives a *full-imitation ceiling* that is computable from the analytic symbols alone, $\Delta_{\text{twin}}^{\text{max}} = (G_{\text{scheme}}^{\text{up}} - G_{\text{scheme}}^{\text{CN}}) \overline{G_{\text{exact}}}$, which supplies the scale against which a measured Δ_{twin} is meaningful.

The geometry gives the design its falsifiable content. Because the upwind error is radial and the Crank–Nicolson error tangential, scheme imitation displaces the two learned symbols along orthogonal directions, forming a right angle in the $(\Delta_{\text{diss}}, \Delta_{\text{disp}})$ plane (exactly so while the deviations are small, approximately so at the largest wavenumbers, where the Crank–Nicolson phase error approaches 1 radian and its symbol curves along the unit circle), and produces a Δ_{twin} with both components nonzero and matching the ceiling. Spectral bias alone predicts both symbols displaced radially, no tangential separation, and $\Delta_{\text{twin}} = 0$ in both components however large the individual displacements are. Consistency with the exact reference predicts both symbols at the origin. Appendix B tabulates these predictions explicitly.

3 Experimental setup

The identification argument requires the solver to be the only source of variation, so within each experiment the architecture, initialization seed sequence, optimizer, learning-rate schedule, batch size, epoch count, sample count, mesh, time step and distribution of input fields are identical across corpora; only the solver that generated the targets differs.

For linear advection ($u_t + u_x = 0$ on $[0, 1]$, $N = 64$, $\sigma = 0.5$) we generate three corpora of 4000 input/target pairs from random band-limited fields with approximately flat spectra: upwind, Crank–Nicolson, and an exact spectral control. Surrogates are a periodic five-layer CNN and, for the architecture control of Sec. 4.2, an FNO retaining all $N/2$ resolved modes (Li et al., 2021); both are trained with Adam (Kingma and Ba, 2015) and cosine annealing (Loshchilov and Hutter, 2017) over 400 epochs and three seeds. For forced viscous Burgers ($u_t + uu_x = \nu u_{xx} + f$ on $[0, 2\pi]$, $N = 128$, $\nu = 0.04$) we use three method-of-lines RK4 solvers that share mesh, time step, viscosity and forcing and differ only in the convection discretization: dealiased spectral (used as the high-fidelity reference), first-order upwind, and second-order centered (LeVeque, 2007; Boyd, 2001). Surrogates learn the $M = 15$ substep map. Full architectures, hyperparameters, data-generation details and the seed protocol are given in Appendix K.

4 Results

4.1 Linear advection: direct evidence of numerical provenance

The question this experiment answers is whether the operator learned from solver-generated data carries the training scheme’s numerical signature, and whether that signature can be distinguished from architectural spectral bias. Three corpora (upwind, Crank–Nicolson, and an exact control) are used to train identical CNNs, and the symbol of each is read by single-mode probing.

Table 1 reports the result. The upwind-trained surrogate reproduces the upwind scheme’s amplitude deficit to three decimals ($|\hat{G}_{\theta}| = 0.395$ against a scheme value of 0.395) while leaving the phase almost untouched, which is what the upwind scheme itself does at this Courant number. The Crank–Nicolson-trained surrogate remains unitary to three decimals and reproduces the scheme’s phase error

Table 1: Linear advection: the learned symbol matches the training scheme rather than the exact reference. Values are means over the upper half of the resolved spectrum, $\pm$ s.d. over 3 seeds. “Learned $|\hat{G}_\theta|$ ” is the modulus of the measured symbol (exact reference: 1) and “learned lag” is Δ_{disp} , the phase error relative to the exact reference (exact reference: 0); each is paired with the value the training scheme itself takes, so that the deviations in the table are read as scheme values reproduced rather than as surrogate errors. The upwind scheme has exactly zero phase error at $\sigma = 1/2$ (Sec. 2.3), and the Crank–Nicolson scheme is exactly unitary. α is the provenance coefficient of (6); it is undefined for the exact control, which has no scheme to attribute to.

model	reproduced dissipation		reproduced dispersion		α
	learned $ \hat{G}_\theta $	scheme $ G_{\text{scheme}} $	learned lag	scheme lag	
upwind	0.395 ± 0.000	0.395	0.003 ± 0.003	0 (exact)	1.000 ± 0.000
Crank–Nicolson	1.000 ± 0.000	1.000	0.824 ± 0.000	0.824	1.000 ± 0.000
exact (control)	0.987 ± 0.006	–	0.025 ± 0.003	–	–

Table 2: Architecture control on linear advection (mean $\pm$ s.d., 3 seeds). Final MSE is against the corpus the model was trained on; $|\hat{G}_\theta|$ and lag are the measured symbol statistics of Table 1; α is the provenance coefficient against the training scheme. The non-local FNO reproduces its training scheme as strongly as the local CNN. The exact-trained control (third row of each block) separates the architectures: the CNN cannot fit the non-local exact evolution, whereas the FNO fits it to 3.6×10^{-8} and lands at the exact reference, which is what makes the FNO’s behaviour on scheme corpora a consequence of the training data rather than of its hypothesis class.

	corpus	final MSE	mean $ \hat{G}_\theta $	mean lag	α
CNN (local)	upwind	1.2×10^{-7}	0.395 ± 0.000	0.003 ± 0.003	1.000 ± 0.000
	Crank–Nicolson	3.6×10^{-8}	1.000 ± 0.000	0.824 ± 0.000	1.000 ± 0.000
	exact (control)	3.3×10^{-3}	0.987 ± 0.006	0.025 ± 0.003	–
FNO (non-local)	upwind	2.9×10^{-8}	0.395 ± 0.000	0.004 ± 0.001	1.000 ± 0.000
	Crank–Nicolson	6.5×10^{-9}	1.000 ± 0.000	0.825 ± 0.000	1.001 ± 0.000
	exact (control)	3.6×10^{-8}	0.999 ± 0.000	0.001 ± 0.000	–
<i>scheme value</i> (upwind / CN)		–	0.395 / 1.000	0.000 / 0.824	1

(0.824 against 0.824). For both, $\alpha = 1.000 \pm 0.000$: the learned symbols are scheme-consistent, not exact-reference-consistent. The exact-trained control sits near, but not at, the exact reference ($|\hat{G}_\theta| = 0.987$, lag 0.025), which is the architectural displacement $B(k)$ made visible.

Figure 1(c) shows the geometry the identification strategy predicts. In the $(\Delta_{\text{diss}}, \Delta_{\text{disp}})$ plane the upwind surrogate lies along the dissipation axis, the Crank–Nicolson surrogate rises along the dispersion axis, and the exact control sits near the origin. The tangential arm is the component that the spectral-bias-only model of (8) cannot produce, since $B(k)$ is scheme-independent and radial.

The twin-scheme difference makes this quantitative. Measured over the upper spectrum, $\text{Re } \Delta_{\text{twin}} = -0.2406 \pm 0.0001$ and $\text{Im } \Delta_{\text{twin}} = -0.6841 \pm 0.0008$. These numbers are only interpretable against a scale, and Sec. 2.6 supplies one: the full-imitation ceiling computed from the analytic symbols is -0.2406 radial and -0.6845 tangential on this grid. The measurement therefore recovers 100.0% of the available dissipation signal and 99.9% of the available dispersion signal. The twin difference is not merely nonzero in the predicted direction; it is saturated on both axes independently.

4.2 A non-local architecture: ruling out locality and capacity

The locality observation suggests an alternative explanation for Sec. 4.1: a CNN represents local finite-difference stencils easily, and the two schemes *are* local finite-difference stencils, so the agreement might reflect the architecture’s hypothesis class rather than anything about training on solver data. Under that explanation the effect should weaken or disappear for an architecture that can represent the exact evolution.

We therefore repeat the twin-scheme experiment with an FNO (Li et al., 2021), which is non-local by construction and retains all $N/2$ resolved modes. Its spectral convolution has the Fourier degrees of freedom needed for the exact advection multiplier, and the exact-trained run serves as the empirical capacity check (Appendix D). Corpora, optimizer, schedule, sample count and seeds are unchanged.

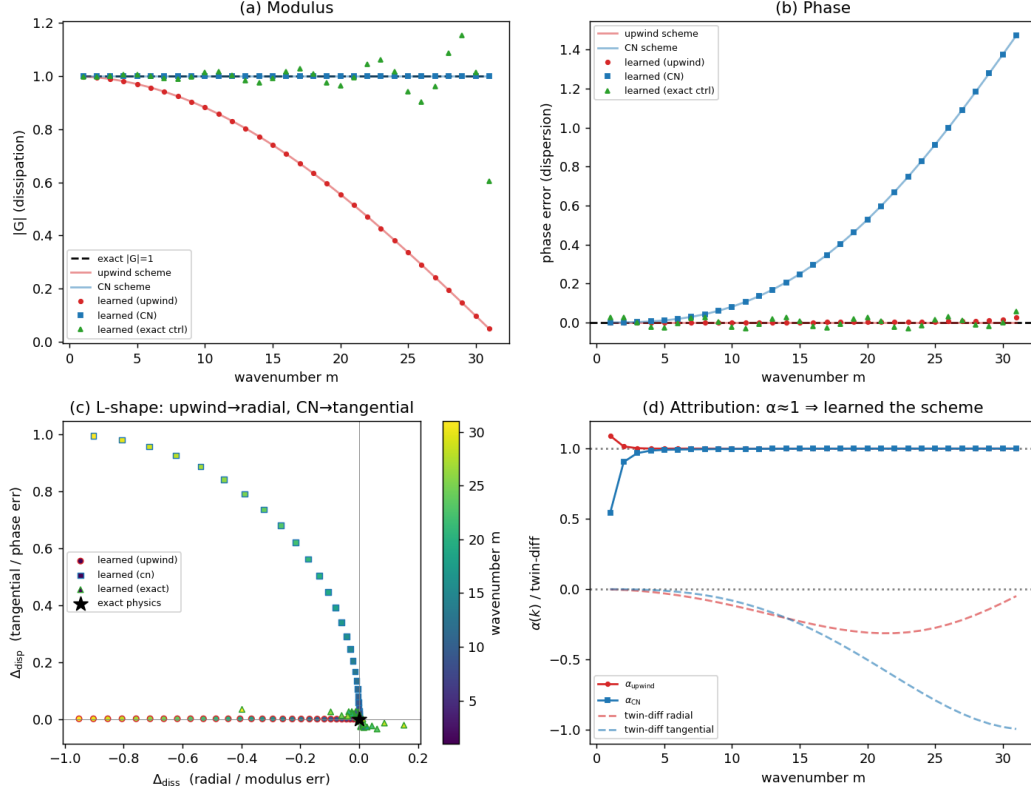


Figure 1: Linear advection, per wavenumber m (single seed; Table 1 aggregates over seeds). **(a)** modulus of the measured symbol against wavenumber: the upwind-trained surrogate (red dots) lies on the upwind scheme curve (red line) across the spectrum, while the Crank–Nicolson-trained surrogate (blue squares) stays at $|\hat{G}_\theta| = 1$ like its unitary scheme; the exact-trained control (green triangles) scatters about 1 at high m . **(b)** phase error Δ_{disp} against wavenumber: only the Crank–Nicolson surrogate departs from zero, and it tracks the Crank–Nicolson scheme curve. **(c)** the two error coordinates plotted against each other, colour-coded by wavenumber: the upwind surrogate moves along the dissipation axis, the Crank–Nicolson surrogate along the dispersion axis, and the exact control stays near the origin (star). This orthogonal separation is the takeaway: each surrogate deviates from the exact reference in the direction its own training scheme deviates, and the tangential arm is what spectral bias cannot produce. (The Crank–Nicolson arm bends leftward at the highest wavenumbers, where the phase error approaches 1 radian and the first-order reading $\Delta_{\text{diss}} \approx |\hat{G}_\theta| - 1$ of (5) no longer applies.) **(d)** the provenance coefficient $\alpha(k) \approx 1$ for both surrogates across the resolved spectrum, and the two components of the twin-scheme difference.

Table 2 rules out the tested locality/capacity explanation. The FNO reproduces upwind’s amplitude deficit and Crank–Nicolson’s phase error with provenance coefficients statistically indistinguishable from the CNN’s, and its twin difference reaches 99.9% radial and 99.9% tangential of the ceiling against the CNN’s 100.0% and 99.9% (Appendix C). At the same time the exact-trained control separates the two architectures where the locality account says it should: trained on exact data the CNN cannot fit the non-local evolution (MSE 3.3×10^{-3}), while the FNO fits it easily (MSE 3.6×10^{-8}). The observed numerical provenance therefore cannot be explained solely by insufficient capacity or CNN locality in this experiment; an architecture that represents the exact evolution when shown exact data reproduces the scheme when shown solver data.

The FNO’s exact-trained run also serves as a positive control for the instrument. A diagnostic that returned “scheme” for every model would carry no information. Trained on exact data, the FNO’s symbol sits at the origin of the $(\Delta_{\text{diss}}, \Delta_{\text{disp}})$ plane ($|\hat{G}_\theta| = 0.999 \pm 0.000$ against a true value of 1, mean lag 0.001 ± 0.000 radians), which realizes the “consistent with exact reference” row of Table 4 in a trained network. The same probe on the same band returns $\alpha \approx 1$ when the training target is a scheme and ≈ 0 when it is the exact evolution; what changes is the training data, not the measurement.

Table 3: Forced Burgers, one-step operator fingerprint evaluated on each surrogate’s own training-scheme steady states. D_{scheme} is the spectral distance between the surrogate’s output and its own solver’s next state; D_{exact} is the distance between the surrogate’s output and the dealiased spectral reference operator applied to the same inputs; “scheme artifact” is the corresponding distance between the two reference operators, i.e. the size of the discretization error available to be imitated. The learned operator is 5–27 $\times$ closer to its training scheme than to the dealiased spectral reference.

surrogate	D_{scheme} (vs. own solver)	D_{exact} (vs. spectral ref.)	ratio	scheme artifact
upwind	0.564	3.02	5.4 $\times$	3.48
centered	0.127	3.40	26.8 $\times$	3.46

4.3 Nonlinear Burgers: provenance beyond linear dynamics

Linear advection admits an exact symbol for every operator involved, which is what makes it the cleanest setting; the question here is whether numerical provenance survives when the dynamics are nonlinear and the one-step map is not a Fourier multiplier. On forced viscous Burgers the three solvers show the expected stationary-spectrum separation: the fraction of energy above $k = N/4$ is 8.2×10^{-7} for upwind, 3.3×10^{-6} for the physical spectral solver and 1.3×10^{-5} for centered. There is therefore a scheme signature present to be imitated.

We evaluate the surrogate’s one-step *operator* action on the solver’s own forced steady states, with no rollout, and compare its output spectrum both to the solver’s true next-state spectrum (D_{scheme}) and to the dealiased spectral reference applied to the same inputs (D_{exact}), each measured as the mean $|\Delta \log E(k)|$ over the upper spectrum.

Table 3 shows the same preference found in the linear case, on an operator that is not a linear stencil: each surrogate reproduces its scheme’s spectral action while diverging from the dealiased spectral reference, and the discretization error it could imitate is large relative to that agreement.

We also repeat the comparison with a common input distribution, so that only the operator varies (Appendix H). The learned operator remains substantially closer to its training scheme’s action than to the dealiased spectral reference action: 50.2 $\times$ for upwind and Two additional checks clarify the scope of the diagnostic. First, autoregressive Burgers rollout adds a scheme-independent over-smoothing that dominates the attractor-level spectrum, so provenance must be measured at the operator level (Appendix I). Second, fine-tuning a scheme-trained CNN on exact-evolution samples moves α from 1 to approximately 0 with as few as 25 samples, while exact-reference MSE remains at the architecture-dependent floor (Appendix J). Thus provenance and predictive error are distinct quantities that can respond on different scales.

5 Conclusion

Solver-generated training data carry numerical provenance: the discretization error of the scheme that produced them. Conventionally trained surrogates can reproduce that provenance, so accuracy measured against solver-generated test sets does not by itself establish fidelity to the exact evolution. The empirical Fourier symbol makes this provenance measurable, and twin-scheme differencing makes the attribution robust to architectural spectral bias. The signature is present for a local CNN, for a non-local FNO that can represent the exact evolution, and at the operator level for nonlinear Burgers. Provenance and benchmark accuracy are distinct quantities that can respond on different scales.

References

- John P. Boyd. *Chebyshev and Fourier Spectral Methods*. Dover, second edition, 2001.
- Johannes Brandstetter, Daniel E. Worrall, and Max Welling. Message passing neural PDE solvers. In *International Conference on Learning Representations (ICLR)*, 2022. URL <https://mlanthology.org/iclr/2022/brandstetter2022iclr-message/>.
- Zhiwei Gao, Liu Yang, and George Em Karniadakis. Spectral audit of in-context operator networks. *arXiv preprint arXiv:2606.02427*, 2026.

- Jayesh K. Gupta and Johannes Brandstetter. Towards multi-spatiotemporal-scale generalized PDE modeling. *arXiv preprint arXiv:2209.15616*, 2022.
- Dan Hendrycks and Kevin Gimpel. Gaussian error linear units (GELUs). *arXiv preprint arXiv:1606.08415*, 2016.
- Amanda A. Howard, Mauro Perego, George Em Karniadakis, and Panos Stinis. Multifidelity deep operator networks for data-driven and physics-informed problems. *Journal of Computational Physics*, 493:112462, 2023.
- Siavash Khodakarami, Vivek Oommen, Nazanin Ahmadi Daryakenari, Maxim Beekenkamp, and George Em Karniadakis. Spectral bias in physics-informed and operator learning: analysis and mitigation guidelines. *arXiv preprint arXiv:2602.19265*, 2026.
- Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations (ICLR)*, 2015. URL <https://mlanthology.org/iclr/2015/kingma2015iclr-adam/>.
- Felix Koehler and Nils Thuerey. Neural emulator superiority: When machine learning for PDEs surpasses its training data. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2025.
- Randall J. LeVeque. *Finite Difference Methods for Ordinary and Partial Differential Equations: Steady-State and Time-Dependent Problems*. SIAM, 2007. von Neumann and modified-equation analysis.
- Zongyi Li, Nikola Borislavov Kovachki, Kamyar Azizzadenesheli, Burigede Liu, Kaushik Bhattacharya, Andrew M. Stuart, and Anima Anandkumar. Fourier neural operator for parametric partial differential equations. In *International Conference on Learning Representations (ICLR)*, 2021. URL <https://mlanthology.org/iclr/2021/li2021iclr-fourier/>.
- Phillip Lippe, Bastiaan S. Veeling, Paris Perdikaris, Richard E. Turner, and Johannes Brandstetter. PDE-refiner: Achieving accurate long rollouts with neural PDE solvers. In *Proceedings of the 37th International Conference on Neural Information Processing Systems, NIPS '23*, Red Hook, NY, USA, 2023. Curran Associates Inc.
- Zichao Long, Yiping Lu, Xianzhong Ma, and Bin Dong. PDE-net: Learning PDEs from data. In *International Conference on Machine Learning (ICML)*, pages 3208–3216, 2018.
- Ilya Loshchilov and Frank Hutter. SGDR: Stochastic gradient descent with warm restarts. In *International Conference on Learning Representations (ICLR)*, 2017. URL <https://mlanthology.org/iclr/2017/loshchilov2017iclr-sgdr/>.
- Nasim Rahaman, Aristide Baratin, Devansh Arpit, Felix Draxler, Min Lin, Fred Hamprecht, Yoshua Bengio, and Aaron Courville. On the spectral bias of neural networks. In *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 5301–5310. PMLR, 2019.
- Alvaro Sanchez-Gonzalez, Jonathan Godwin, Tobias Pfaff, Rex Ying, Jure Leskovec, and Peter W. Battaglia. Learning to simulate complex physics with graph networks. In *International Conference on Machine Learning (ICML)*, pages 8459–8468, 2020.
- Ashwin Suriyanarayanan, Dibyajyoti Chakraborty, and Romit Maulik. Deep learning of solver-aware turbulence closures from nudged LES dynamics. *arXiv preprint arXiv:2604.23874*, 2026.
- Makoto Takamoto, Timothy Praditia, Raphael Leiteritz, Daniel MacKinlay, Francesco Alesiani, Dirk Pflüger, and Mathias Niepert. PDEBench: An extensive benchmark for scientific machine learning. In *Advances in Neural Information Processing Systems*, volume 35, pages 1596–1611. Curran Associates, Inc., 2022.
- Matthew Tancik, Pratul Srinivasan, Ben Mildenhall, Sara Fridovich-Keil, Nithin Raghavan, Utkarsh Singhal, Ravi Ramamoorthi, Jonathan Barron, and Ren Ng. Fourier features let networks learn high frequency functions in low dimensional domains. In *Advances in Neural Information Processing Systems*, volume 33, pages 7537–7547. Curran Associates, Inc., 2020.

A Measurement schematic

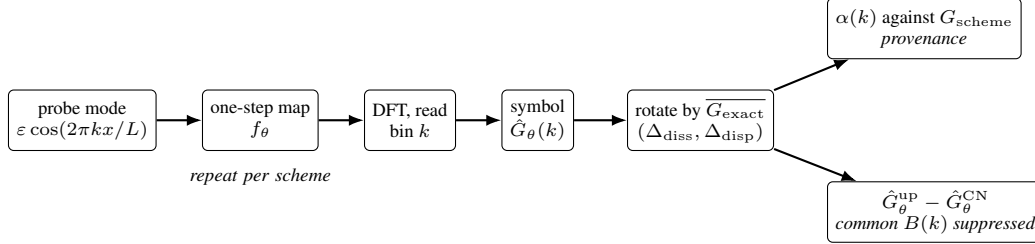


Figure 2: The measurement pipeline. One forward pass per wavenumber returns the empirical symbol $\hat{G}_\theta(k)$ of the trained surrogate’s linearized one-step map (Sec. 2.2). Multiplying the residual $\hat{G}_\theta - G_{\text{exact}}$ by the complex conjugate $\overline{G_{\text{exact}}}$ rotates it into the frame of the exact reference, whose real and imaginary parts are the dissipation and dispersion coordinates (Sec. 2.4). Projecting onto the direction $G_{\text{scheme}} - G_{\text{exact}}$ gives the provenance coefficient $\alpha(k)$ (Sec. 2.5); differencing the symbols learned from two schemes suppresses the common component of the architecture-intrinsic term $B(k)$ (Sec. 2.6).

B Observable predictions

Table 4: What each account of surrogate error predicts, and what is observed. Columns are the provenance coefficients of the two surrogates ((6)) and the two components of the twin-scheme difference ((9)); the last column asks whether the two learned symbols separate along orthogonal directions in the $(\Delta_{\text{diss}}, \Delta_{\text{disp}})$ plane. The full-imitation ceiling is computed from the analytic symbols on this grid; the observed row is the linear-advection CNN experiment of Sec. 4.1, mean $\pm$ s.d. over 3 seeds. Only scheme imitation predicts a nonzero tangential twin difference.

account	α_{up}	α_{CN}	$\text{Re } \Delta_{\text{twin}}$	$\text{Im } \Delta_{\text{twin}}$	right angle?
exact-reference-consistent	0	0	0	0	no (both at origin)
spectral bias only	> 0 (<i>spurious</i>)	≈ 0	0	0	no (both radial)
scheme imitation	1	1	< 0	< 0	yes
emulator superiority	< 0	< 0	> 0	> 0	no (past exact reference)
<i>full-imitation ceiling</i>	1	1	−0.241	−0.685	–
observed	1.00 ± 0.00	1.00 ± 0.00	−0.241	−0.684	yes

C Twin-scheme architecture comparison

Table 5: Twin-scheme difference $\Delta_{\text{twin}} = (\hat{G}_\theta^{\text{up}} - \hat{G}_\theta^{\text{CN}})\overline{G_{\text{exact}}}$ on linear advection, averaged over the upper spectrum, mean $\pm$ s.d. over 3 seeds, against the ceiling it would reach under full scheme imitation ($\hat{G}_\theta^{(s)} = G_{\text{scheme}}^{(s)}$, at which the learned symbols have no residual $B(k)$). Both architectures saturate both axes; the tangential axis, which a scheme-independent radial $B(k)$ cannot produce, is as saturated as the radial one. The two architectures have very different architectural displacements (their exact-trained controls differ by five orders of magnitude in MSE, Table 2) yet agree here to 4×10^{-4} , as expected if what survives the difference is the scheme term.

	radial (dissipation)	% of ceiling	tangential (dispersion)	% of ceiling
CNN (local)	-0.2406 ± 0.0001	100.0%	-0.6841 ± 0.0008	99.9%
FNO (non-local)	-0.2402 ± 0.0001	99.9%	-0.6837 ± 0.0003	99.9%
<i>full-imitation ceiling</i>	−0.2406	–	−0.6845	–

D FNO representation of the advection step

The capacity claim used in Sec. 4.2 is constructive at the level of the spectral convolution. On a periodic grid, one exact step of $u_t + cu_x = 0$ is diagonal in the Fourier basis: $\hat{u}_k(t + \Delta t) = e^{-i2\pi kc\Delta t/L} \hat{u}_k(t)$. An FNO spectral convolution that retains all resolved modes can assign this complex multiplier to each Fourier coefficient. In a real-valued implementation, the complex multiplication is the corresponding 2×2 rotation/scaling block on the real and imaginary parts of each mode. For the full implemented network, which also contains pointwise maps and nonlinearities, this argument is a capacity guide rather than a formal exact-representation theorem; the exact-trained run in Table 2 is therefore the operative control, showing that optimization finds an essentially exact symbol when the FNO is trained on exact data.

E Additional discussion and limitations

The diagnostic measures relative alignment with two references, the exact evolution and the training scheme. It does not decide whether a network has “learned physics” in an absolute sense: $\alpha \approx 0$ only says that the scheme’s error direction is absent from the measured symbol. The evidence here covers one-dimensional periodic advection and forced Burgers at modest resolution, two architectures and three seeds. For Burgers, the “exact” comparator is a dealiased spectral numerical reference, not a continuum oracle.

The identification argument requires $B(k)$ to be scheme-independent, and it is only approximately so: the two corpora have different spectral content, so the optimization trajectories are not identical. This is why we rely on out-of-distribution single-mode probing and on differencing rather than on subtracting an exact-trained control, whose $B(k)$ is target-dependent. The architecture control gives some direct evidence that the cancellation works: the CNN and the FNO have very different architectural displacements, since their exact-trained controls differ by five orders of magnitude in MSE (Table 2), yet their twin differences agree to 4×10^{-4} on both axes (Table 5), which is what one expects if the quantity that survives the difference is the scheme term.

The linear result is clean in part because a convolutional network represents a local stencil almost exactly, and that is a genuine mechanism rather than an artifact: local architectures carry an inductive bias toward discretization-like operators. The FNO control shows that this mechanism is not the explanation, since removing locality does not remove the effect, and the FNO’s exact-trained run shows that the exact evolution was inside its hypothesis class the whole time.

On Burgers we measure the learned one-step operator, linearized about states drawn from a stated distribution, and we control the input distribution explicitly. We do not claim a per-mode von Neumann correspondence there, and the α values above unity on off-distribution pools should be read as extrapolation along the scheme direction rather than as a sharper measurement of imitation. The dealiased spectral Burgers solver is used as a high-fidelity numerical reference; it is not an exact continuum oracle.

Autoregressive rollout adds a scheme-independent over-smoothing that compounds with step count and dominates the attractor-level spectrum (Appendix I), consistent with reported long-rollout failures (Lippe et al., 2023). It is a distinct failure mode with its own literature; our claim about numerical provenance is a claim about the learned operator.

An emulator can in principle be more accurate than the solver that trained it (Koehler and Thuerey, 2025), which in our coordinates means $\alpha < 0$. Our instrument reports where a given model lands, and under standard training it lands at $\alpha \approx 1$. We do observe the negative region once: the Crank–Nicolson-trained model fine-tuned on the smallest budgets sits at $\alpha = -0.021$ to -0.027 (Table 7), consistently across seeds but at a magnitude close to our resolution. We report it as an observation rather than as evidence for emulator superiority.

For one-step and short-horizon protocols scored against held-out solver output, the argument is direct: the learned operator carries the scheme’s symbol, the test targets carry the same symbol, and the score rewards the agreement, so a high score does not establish fidelity to the exact evolution. For long-rollout protocols the scheme signature is not what dominates; the surrogate’s own over-smoothing does. In both cases a solver-referenced score does not decompose into a physical component and a

numerical one, whereas the symbol does. Which term dominates depends on the horizon, which is why the two are reported separately.

F Related work

Von Neumann analysis gives, for a linear scheme on a periodic grid, the exact per-mode amplification factor $G_{\text{scheme}}(k)$, and modified-equation analysis identifies which differential operator the scheme’s leading error imitates: even-derivative terms produce amplitude error (dissipation), odd-derivative terms produce phase error (dispersion) (LeVeque, 2007). Fourier pseudospectral methods and aliasing control, including the two-thirds rule used in our Burgers reference solver, are standard numerical-analysis tools (Boyd, 2001). This literature supplies the reference objects we attribute against. It does not, by itself, identify what a learned operator has inherited from its training solver.

Neural operators such as the FNO learn solution operators from solver-generated data (Li et al., 2021); learned simulators and neural PDE solvers are commonly trained and evaluated by autoregressive comparison to numerical rollouts (Sanchez-Gonzalez et al., 2020; Brandstetter et al., 2022). Benchmarks such as PDEBench and PDEArena standardize this practice across datasets and architectures (Takamoto et al., 2022; Gupta and Brandstetter, 2022). These protocols make large-scale comparison possible, but their targets are numerical outputs, not separate measurements of exact-evolution fidelity and scheme fidelity.

Neural networks fit low frequencies first and represent high frequencies poorly (Rahaman et al., 2019; Tancik et al., 2020), and the effect persists in physics-informed and operator learning (Khodakarami et al., 2026; Lippe et al., 2023). This is a property of the architecture and optimization rather than of the training targets, which is precisely what makes it a confound here: it displaces a learned symbol in the same direction a dissipative scheme does. Our design treats it as a nuisance term to be cancelled rather than as the effect under study.

Suriyanarayanan, Chakraborty, and Maulik (Suriyanarayanan et al., 2026) show that learned turbulence closures inherit the discretization error of the solver used to generate their training data, and condition the model on the solver to exploit this. The evidence there is aggregate: energy spectra that differ by scheme, without a per-mode amplification factor, without separating amplitude from phase error, and without a scheme-free reference operator to attribute against. Related work learns correction terms inside differentiable solvers (Um et al., 2020), learns stencil-like differential operators (Long et al., 2018), or combines low- and high-fidelity operator data (Howard et al., 2023). Koehler and Thuerey analyze theoretically when an emulator can be more accurate than the low-fidelity solver that trained it, the regime we label $\alpha < 0$, but assess trained networks through aggregate error and rollout rather than through their learned symbols. Our question is complementary: after ordinary supervised training on a fixed solver corpus, where does the learned one-step operator lie relative to the exact reference and to the training scheme?

Gao et al. (2026) extract the per-mode gain and phase of a trained operator network’s Jacobian and compare them to the exact advection symbol. We adopt that measurement primitive. The difference is what the symbol is compared against: they compare to the exact operator only, and so measure error, whereas we compare to the exact operator *and* to the training scheme, label the two error directions, and difference two schemes to remove the architectural contribution. Among the closest diagnostics and solver-aware methods above, we are not aware of one that attributes a learned operator to a specific training discretization by comparing its Fourier response to both the exact and scheme references.

Long autoregressive rollouts of neural PDE surrogates degrade in characteristic ways, and correcting that degradation is an active area (Sanchez-Gonzalez et al., 2020; Brandstetter et al., 2022; Lippe et al., 2023). Noise injection, pushforward training and refinement-based methods all target the distribution shift and frequency loss that appear when a one-step model is used autoregressively. Our rollout measurements are consistent with this literature and are the reason we report provenance on the one-step operator: rollout introduces a distortion that belongs to the surrogate rather than to either reference operator, and it can dominate the attractor-level spectrum.

G Additional linear-advection checks

Deliberately restricting the surrogate (small width, few epochs, red-spectrum training data) to induce a larger architectural displacement leaves the twin-scheme difference essentially unchanged (radial -0.240 , tangential -0.686), whereas subtracting an exact-trained control is fragile because $B(k)$ depends on the training target. Twin differencing is therefore the estimator we rely on. The restricted scheme-trained surrogates themselves remain faithful to their schemes, because upwind and Crank–Nicolson are local finite-stencil operators that a convolutional network represents easily (Long et al., 2018; Brandstetter et al., 2022). The exact-trained control is the run that degrades, and it degrades at full capacity too, plateauing four orders of magnitude above the scheme corpora (Table 2).

H Burgers common-input control

For the common-input control, on a common pool X we apply the surrogate, its own scheme’s M -step operator, and the dealiased spectral reference operator to the same inputs. Because the inputs coincide, the outputs are comparable pointwise, and we report the same projection used in the linear case,

$$\alpha = \frac{\langle Y_{\text{surr}} - Y_{\text{spec}}, Y_{\text{solv}} - Y_{\text{spec}} \rangle}{\|Y_{\text{solv}} - Y_{\text{spec}}\|^2}, \quad (10)$$

now in field space rather than per mode. A projection of this form cannot be inflated merely because the input pool makes every operator move a great deal.

Table 6: Forced Burgers, one-step operator with the input distribution held fixed and only the operator varying. α is the field-space projection (10), with 1 meaning the learned operator reproduces its training scheme and 0 meaning it reproduces the dealiased spectral reference; brackets are 95% bootstrap confidence intervals over trajectories. D_{scheme} , D_{exact} , ratio and artifact are as in Table 3, now computed on the common pool. The first block recomputes the protocol of Table 3; the lower blocks evaluate every operator on spectral-reference states and on a mixture of all three solvers’ states. Fixing the input distribution does not remove the preference for the training scheme.

input pool	surrogate	α	D_{scheme}	D_{exact}	ratio	artifact
own scheme’s states	upwind	1.032 [1.023, 1.040]	0.564	3.02	5.4×	3.48
	centered	0.946 [0.937, 0.954]	0.127	3.40	26.8×	3.46
spectral-reference states	upwind	2.845 [2.827, 2.867]	0.754	37.87	50.2×	38.11
	centered	2.835 [2.777, 2.906]	0.720	37.72	52.4×	37.00
mixed (all three)	upwind	2.836 [2.782, 2.896]	0.987	3.50	3.5×	3.87
	centered	1.968 [1.869, 2.070]	0.142	3.46	24.4×	3.43

I Rollout: a second, scheme-independent distortion

The measurements in the main paper are all one-step. The question here is whether the same signature is visible when the surrogate is run autoregressively to its own statistical steady state, which is how surrogates are often assessed.

It is not. Rolled out autoregressively, all three Burgers surrogates over-damp: their high- k spectral slopes fall to between -7.4 and -7.9 against solver slopes of -5.1 to -6.7 , their high- k energy lies below that of every solver, and the ordering by scheme visible in the solvers is lost (Figure 3). This over-smoothing is scheme-independent and compounds with the number of steps, and at the attractor it dominates the scheme signature that Sec. 4.3 finds in the same models’ one-step operators.

The scope of the diagnostic follows from this. Numerical provenance is a property of the learned operator and must be measured there; an attractor-level spectrum mixes it with a distortion that belongs to the surrogate’s autoregressive use rather than to either reference operator. This is also why we report the operator and the rollout separately rather than combining them into a single score.

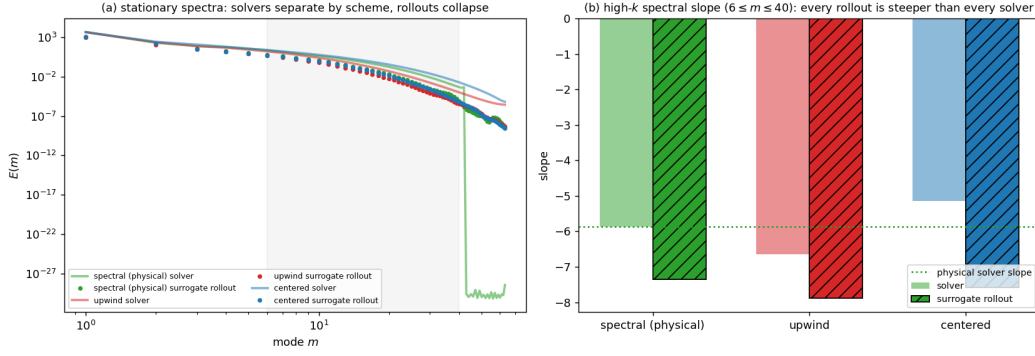


Figure 3: Forced Burgers: operator-level provenance is not visible at the attractor. **(a)** stationary energy spectra $E(m)$ against mode m (log-log). Solid lines are the three solvers, which separate by scheme as modified-equation theory predicts (centered above the spectral reference above upwind at high m); dots are the corresponding surrogates run autoregressively to their own steady state, which collapse onto one another and fall below every solver. The shaded band is the fitting range for panel (b). **(b)** high- k spectral slope fitted over $6 \leq m \leq 40$: the solvers straddle the spectral-reference slope (dotted line), while every surrogate rollout is steeper than every solver, i.e. autoregressive over-smoothing dominates the scheme differences. The scheme signature these same models carry in their one-step operators (Tables 3 and 6) is therefore not recoverable from rollout statistics.

J High-accuracy fine-tuning: provenance and accuracy respond on different scales

The practical question the diagnostic raises is what it would take to move a surrogate’s provenance off its training scheme. We train to convergence on a scheme corpus, so that $\alpha \approx 1$ at the start, then fine-tune on a budget of exact-evolution samples, sweeping the budget, and re-measure the symbol. Because α is read from the symbol rather than from the loss, it reports which of the two references the model is converging to, which the loss curve alone does not.

Table 7: Provenance under high-accuracy fine-tuning (mean $\pm$ s.d., 3 seeds). Budget is the number of exact-evolution samples used for fine-tuning, against an original scheme corpus of 4000 samples. α is measured against the *original* training scheme: 1 means still scheme-consistent, 0 means the scheme’s error direction is no longer present. $\text{MSE}_{\text{exact}}$ and $\text{MSE}_{\text{scheme}}$ are one-step errors against the exact evolution and against the original training scheme; together they show that the model does not interpolate between the two operators but changes target, since error against the exact evolution falls while error against the original scheme rises by six orders of magnitude. Accuracy against the exact evolution saturates at 3.5×10^{-3} , the same floor the exact-trained CNN reaches in Table 2.

budget	upwind-trained			CN-trained		
	α	$\text{MSE}_{\text{exact}}$	$\text{MSE}_{\text{scheme}}$	α	$\text{MSE}_{\text{exact}}$	$\text{MSE}_{\text{scheme}}$
0	1.000 ± 0.000	1.1×10^{-1}	1.4×10^{-7}	1.000 ± 0.000	1.8×10^{-1}	4.1×10^{-8}
25	0.008 ± 0.006	5.7×10^{-3}	1.0×10^{-1}	-0.021 ± 0.010	6.6×10^{-3}	1.8×10^{-1}
50	0.006 ± 0.001	5.6×10^{-3}	1.0×10^{-1}	-0.026 ± 0.005	6.5×10^{-3}	1.8×10^{-1}
100	0.007 ± 0.005	5.6×10^{-3}	1.0×10^{-1}	-0.027 ± 0.006	6.5×10^{-3}	1.8×10^{-1}
250	0.013 ± 0.000	4.4×10^{-3}	1.0×10^{-1}	0.003 ± 0.005	4.9×10^{-3}	1.8×10^{-1}
500	0.005 ± 0.003	3.6×10^{-3}	1.0×10^{-1}	0.007 ± 0.001	3.9×10^{-3}	1.8×10^{-1}
1000	0.007 ± 0.004	3.5×10^{-3}	1.0×10^{-1}	0.000 ± 0.002	3.5×10^{-3}	1.8×10^{-1}
4000	0.007 ± 0.002	3.5×10^{-3}	1.0×10^{-1}	-0.001 ± 0.000	3.5×10^{-3}	1.8×10^{-1}

Table 7 shows two things that move differently. Provenance changes at the smallest budget tested: 25 exact samples, under one percent of the original training set, take α from 1.000 to 0.008 for the upwind-trained model and -0.021 for the Crank–Nicolson-trained model, and every larger budget leaves it there. The change is a change of target rather than a blend, since error against the original scheme rises from 1.4×10^{-7} to 1.0×10^{-1} over the same step.

Accuracy does not follow. Error against the exact evolution improves but saturates at 3.5×10^{-3} , which is the floor the exact-trained CNN reaches in Table 2 and is therefore a property of the architecture rather than of the data budget. The two coordinates come apart: α reports that the surrogate no longer carries its solver’s error direction, while the loss reports that it still cannot represent the exact operator. Neither implies the other. We state this as a result about this setting, in which a small high-fidelity budget changed provenance and the loss curve alone would not have shown it, rather than as a general claim that 25 samples remove inherited numerics.

K Training details and the identical-conditions requirement

The twin-scheme argument requires $B(k)$ to be scheme-independent, and $B(k)$ is a property of the architecture and of the optimization. Everything below is therefore held identical across the schemes within an experiment: architecture, initialization seed sequence, optimizer, learning-rate schedule, batch size, epoch count, sample count, and the distribution of input fields. The corpora differ only in the solver that generated the targets.

$u_t + u_x = 0$ on $[0, 1]$, $N = 64$, $\sigma = c\Delta t/\Delta x = 0.5$. Training inputs are random band-limited fields with approximately flat spectra, $u(x) = \sum_{m=1}^{N/2-1} a_m \cos(2\pi m x + \phi_m)$ with $a_m \sim \mathcal{N}(0, 1/\sqrt{N/2})$ and $\phi_m \sim \mathcal{U}[0, 2\pi)$; targets are one solver step. 4000 samples, no validation split, since the symbol probe is the evaluation. *CNN*: five periodic Conv1d layers, kernel 5, width 64, GELU (Hendrycks and Gimpel, 2016), residual output $u + \text{net}(u)$; receptive field ± 10 cells. *FNO*: 1×1 lifting to width 32, four spectral-convolution blocks retaining all $N/2$ resolved modes (Li et al., 2021) with a 1×1 bypass, GELU, two-layer 1×1 projection, same residual form. Both: Adam (Kingma and Ba, 2015), $\eta_0 = 2 \times 10^{-3}$, cosine annealing (Loshchilov and Hutter, 2017) over 400 epochs, batch 128, MSE loss. Three seeds (0–2); all reported figures are mean $\pm$ s.d. over seeds. Symbol statistics are averaged over the upper half of the resolved spectrum, $k \geq N/4$.

$u_t + uu_x = \nu u_{xx} + f$ on $[0, 2\pi]$, $N = 128$, $\nu = 0.04$, $\Delta t = 1.5 \times 10^{-3}$, steady forcing $f = 0.3(\sin x + \sin(2x + 1) + \frac{1}{2}\sin(3x + 2))$. All three solvers are method-of-lines with RK4 and share mesh, Δt , ν and f , differing only in the convection operator (dealiased spectral with the 2/3 rule (Boyd, 2001); first-order upwind; second-order centered (LeVeque, 2007)). The surrogate learns the $M = 15$ substep map. Data: 16 trajectories, 2500 warmup steps, then 200 collected states, formed into $(t, t + M)$ pairs taken from the stable trajectory rather than by re-stepping sampled snapshots, which diverges for the centered scheme. *Net*: six periodic Conv1d layers, kernel 5, width 96, GELU, residual. Adam, $\eta_0 = 5 \times 10^{-4}$, cosine annealing over 250 epochs, batch 64, gradient-norm clipping at 1.0, and input noise of $0.03 \text{ std}(X)$ injected each step, which is standard practice for autoregressive stability (Sanchez-Gonzalez et al., 2020; Brandstetter et al., 2022).

Models trained to convergence on a scheme corpus are fine-tuned on budgets of 25–4000 exact-evolution samples drawn from the same input distribution, with the symbol re-measured after fine-tuning and α evaluated against the original training scheme. Three seeds throughout.

L Linearity of the symbol probe

Equation (2) defines a symbol only in the linear regime of the probe amplitude ε . Table 8 reports the relative change of the recovered symbol as ε is swept over the tested range, relative to the value at the operating point $\varepsilon = 10^{-2}$. The worst case over all models and amplitudes in $[10^{-4}, 10^{-1}]$ is 1.0×10^{-2} , and the probe departs from linearity only as $\varepsilon \rightarrow 1$, where the GELU nonlinearity is no longer probed locally.

M Numerical reproducibility notes

Two implementation issues produced silently incorrect results during this work and are recorded here because both yield plausible output rather than an error.

Our first FNO runs did not train, stalling just below the loss of the identity map. The cause was not the model but the backward pass through a complex-valued einsum on the MPS backend, which we measured to be wrong by $\sim 140\%$ relative error in $\partial\mathcal{L}/\partial W$ against a CPU reference, while rfft/irfft autograd agreed to 2×10^{-7} . Rewriting the mode-wise multiplication in real

Table 8: Linearity of the symbol probe: $\max_k |\hat{G}_\theta(\varepsilon) - \hat{G}_\theta(10^{-2})|/|\hat{G}_\theta(10^{-2})|$ over the resolved spectrum, for each architecture/corpus combination. The column at 10^{-2} is the reference point. The recovered symbol is stable over the tested 10^{-4} – 10^{-1} range, with worst-case relative change 1%.

model	10^{-4}	10^{-3}	10^{-2}	10^{-1}
cnn/cn	5.7×10^{-5}	7.3×10^{-6}	–	7.1×10^{-6}
cnn/exact	1.8×10^{-4}	10.0×10^{-5}	–	1.0×10^{-2}
cnn/upwind	3.4×10^{-4}	5.0×10^{-5}	–	2.4×10^{-3}
fno/cn	6.2×10^{-5}	4.8×10^{-6}	–	2.5×10^{-5}
fno/exact	9.1×10^{-5}	1.2×10^{-5}	–	7.7×10^{-5}
fno/upwind	9.7×10^{-4}	1.2×10^{-4}	–	7.5×10^{-4}

arithmetic restores agreement with the CPU reference to 4×10^{-7} . The failure mode matters for the conclusions of Sec. 4.2: an untrained FNO can produce a conclusion that is numerically plausible and scientifically incorrect, namely that non-local architectures do not reproduce their training scheme. Any new architecture here is checked against the identity-map loss before its symbols are read.

Iterating RK4 over a large batch in a single array corrupted values when the total number of elements in the batched state array exceeded 2^{15} , either producing NaNs (with a finite-difference right-hand side) or, more dangerously, staying finite while drifting several percent (with a spectral right-hand side). Integration is now chunked well below that threshold and verified at run time against a per-row reference. The Burgers reference operators are recomputed under this fix; a field error of a few percent had translated into a factor of about two in mean $|\Delta \log E(k)|$ over high wavenumbers, so upstream perturbations of this kind cannot be assumed small in the derived spectral statistics. All affected Burgers results reported in this paper were regenerated after the correction and verified against the per-row reference. The linear-advection results are unaffected, as those solvers are applied per sample.