



Phase 1: Initilization Pahse

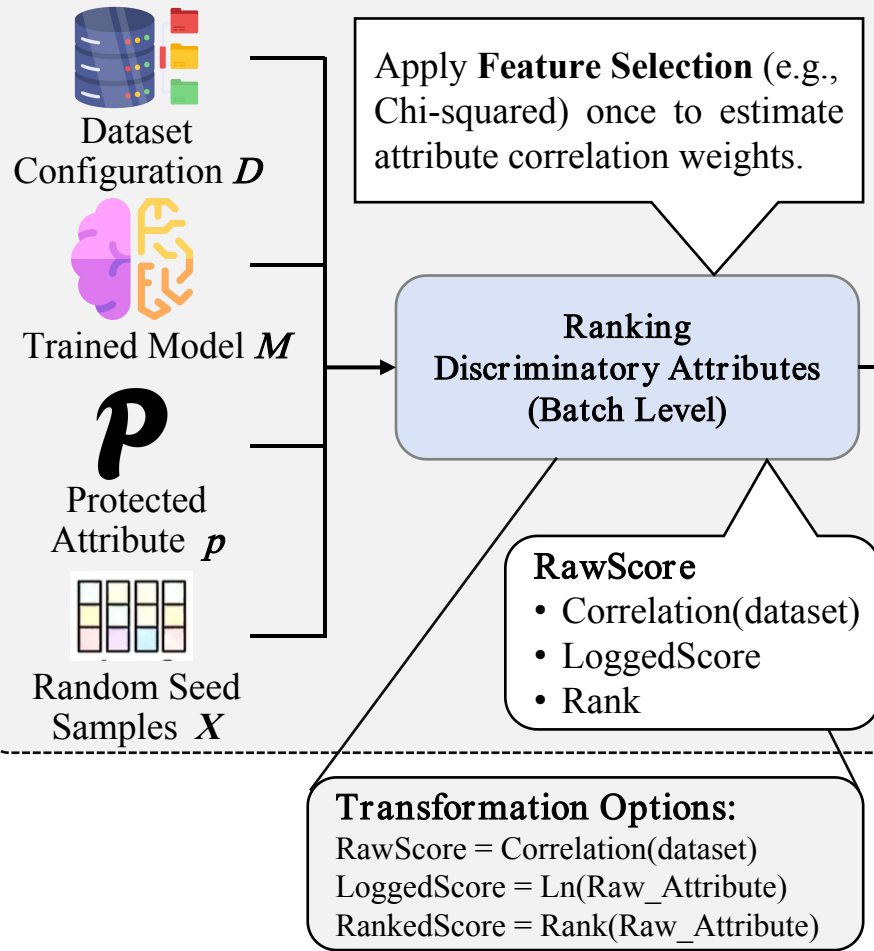

Efficiency Gain: ChiGA avoids repeated calls to “Local Interpreters” (e.g., LIME, SHAP) during generation replacing them with a single “Batch Attribute Ranking” step


Result Set:
Generated Individual Discriminatory Samples (IDSs) & Performance Logs

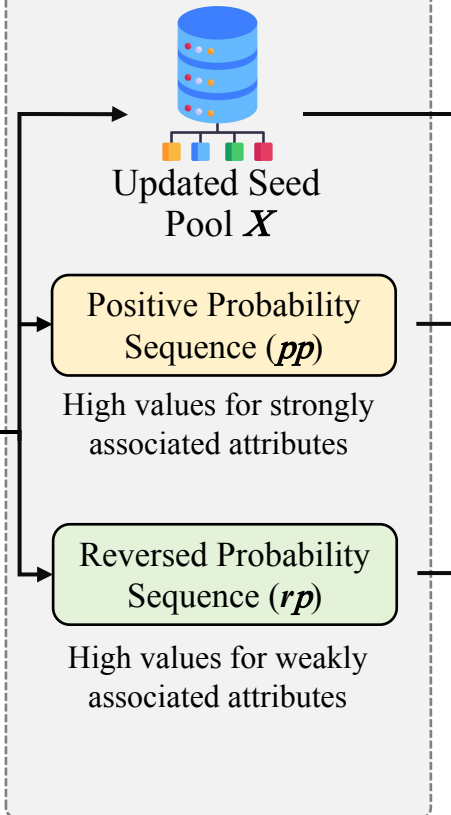


Phase 2: Generation Phase

Iterate until Budget (Time / Iteration) ←

A: Selection Stage

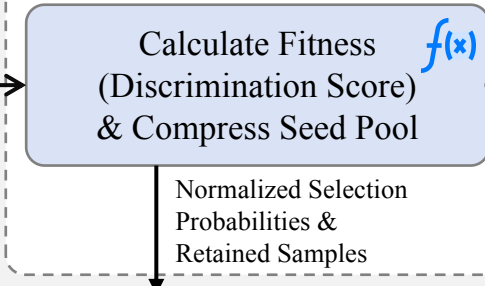

B: Crossover Stage

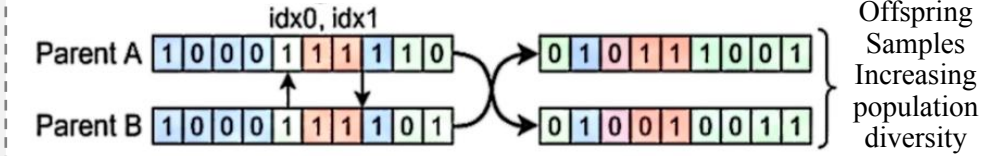

C: Mutation Stage

