


云服务器部署如何12306项目？

准备云服务器

部署 12306 项目前，需要准备一个可被公网访问的云服务器。在这里我推荐阿里云或者腾讯云的轻量云服务器，新用户购买个2C4G的配置，一年大概 300 多元。


咱们这里以阿里云为例。

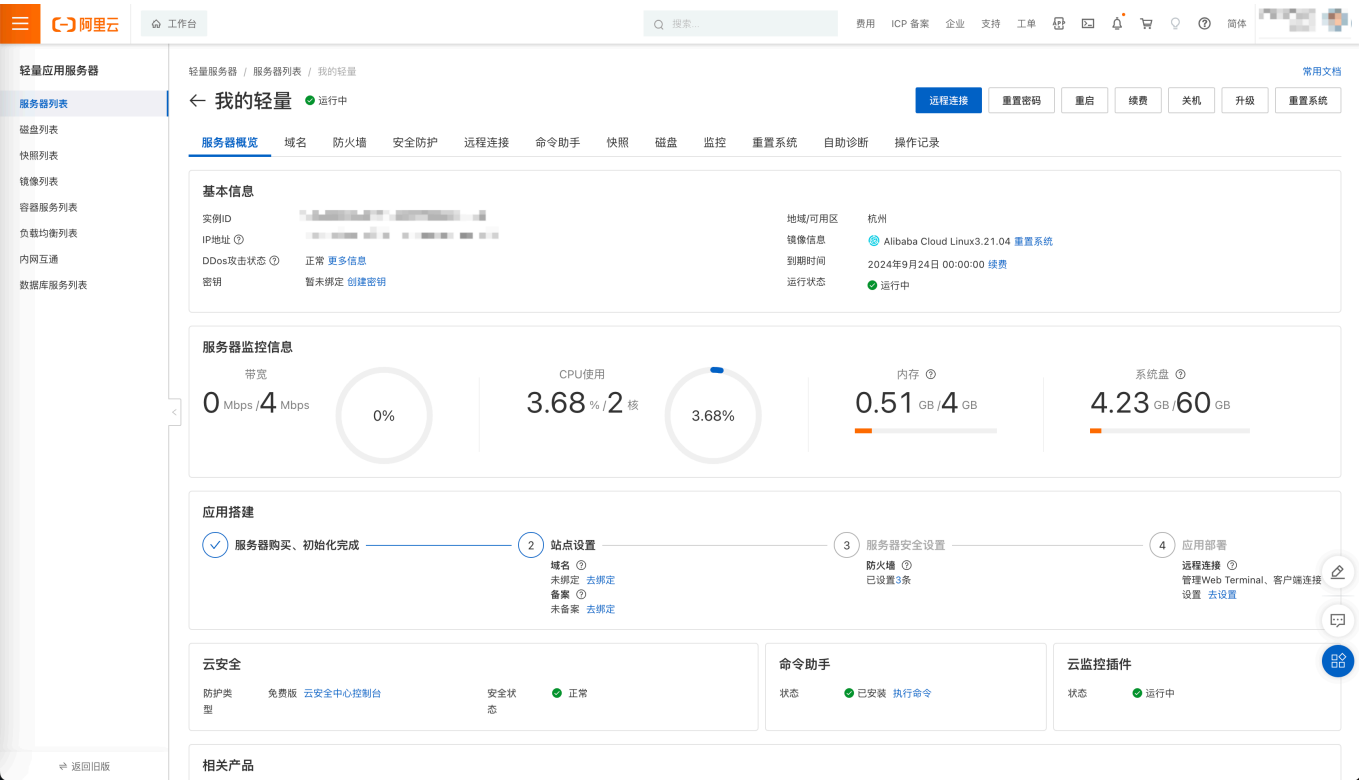

如果没有云服务器用户，可以选择购买阿里云服务器，购买轻量云服务器地址：[返利地址购买](#)。因为我是老用户，新用户通过我这个地址购买会给我返利，你购买后告诉我一声，返利的钱如数奉还。

开放防火墙端口

需要保证云服务器的 80、3306、9000 端口对所有地址开放，因为我们会使用这些端口进行转发访问相关资源。

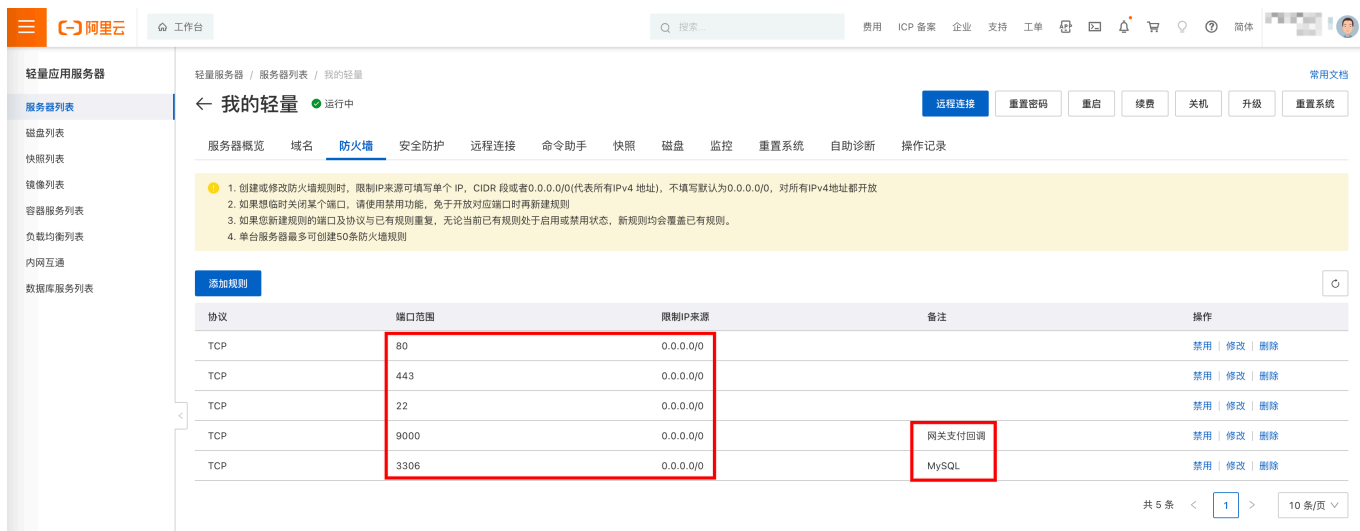


云服务器环境安装



JDK 环境

使用夸克网盘下载 JDK17，并上传到云服务器，链接：
<<https://pan.quark.cn/s/944c4a4d373f>>。

进入 `/usr/local` 目录，创建 java 文件夹。并将 JDK17 上传到 java 目录下。

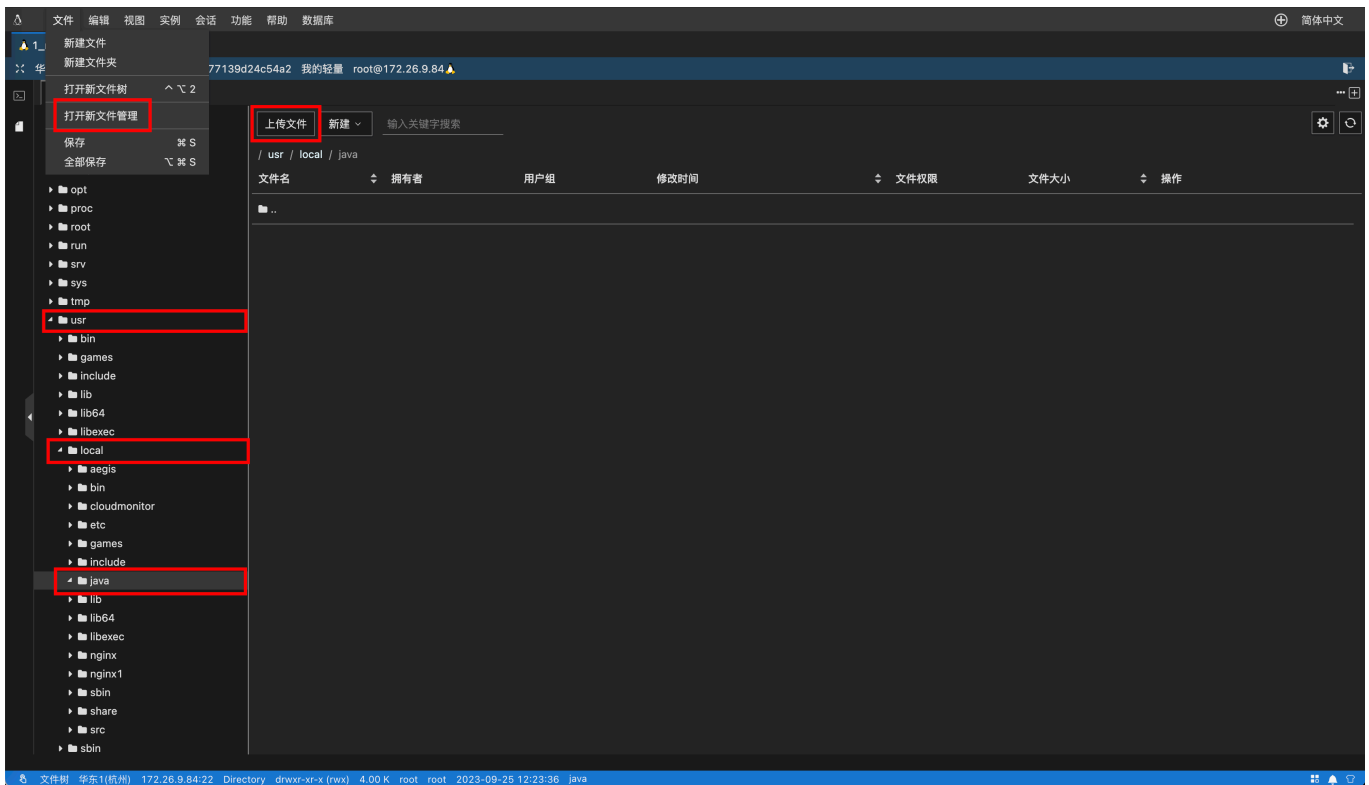

上传成功后，解压 JDK17 压缩包，命令 `unzip zulu17.44.53-ca-jdk17.0.8.1-linux_x64.zip`。

如果报错说 `unzip` 命令不存在，安装该命令：`yum install -y unzip zip`。

解压后的目录如下：

```
[root@iZbp1aakkxs6o3hg8vexnsZ java]# ll
total 197704
drwxr-xr-x 10 root root      4096 Aug 23 21:03 zulu17.44.53-ca-jdk17.0.8.1-linux_x64
-rw-r--r--  1 root root 202439735 Sep 25 13:53 zulu17.44.53-ca-jdk17.0.8.1-linux_x64.zip
[root@iZbp1aakkxs6o3hg8vexnsZ java]#
```

为了简单，就不配置环境变量了，直接拿实际引用执行 Java 相关命令。

Nginx 软件


更新系统软件包列表。

```
sudo yum update
```

```
sudo yum install nginx
```

```
sudo systemctl start nginx
```

```
sudo systemctl enable nginx
```

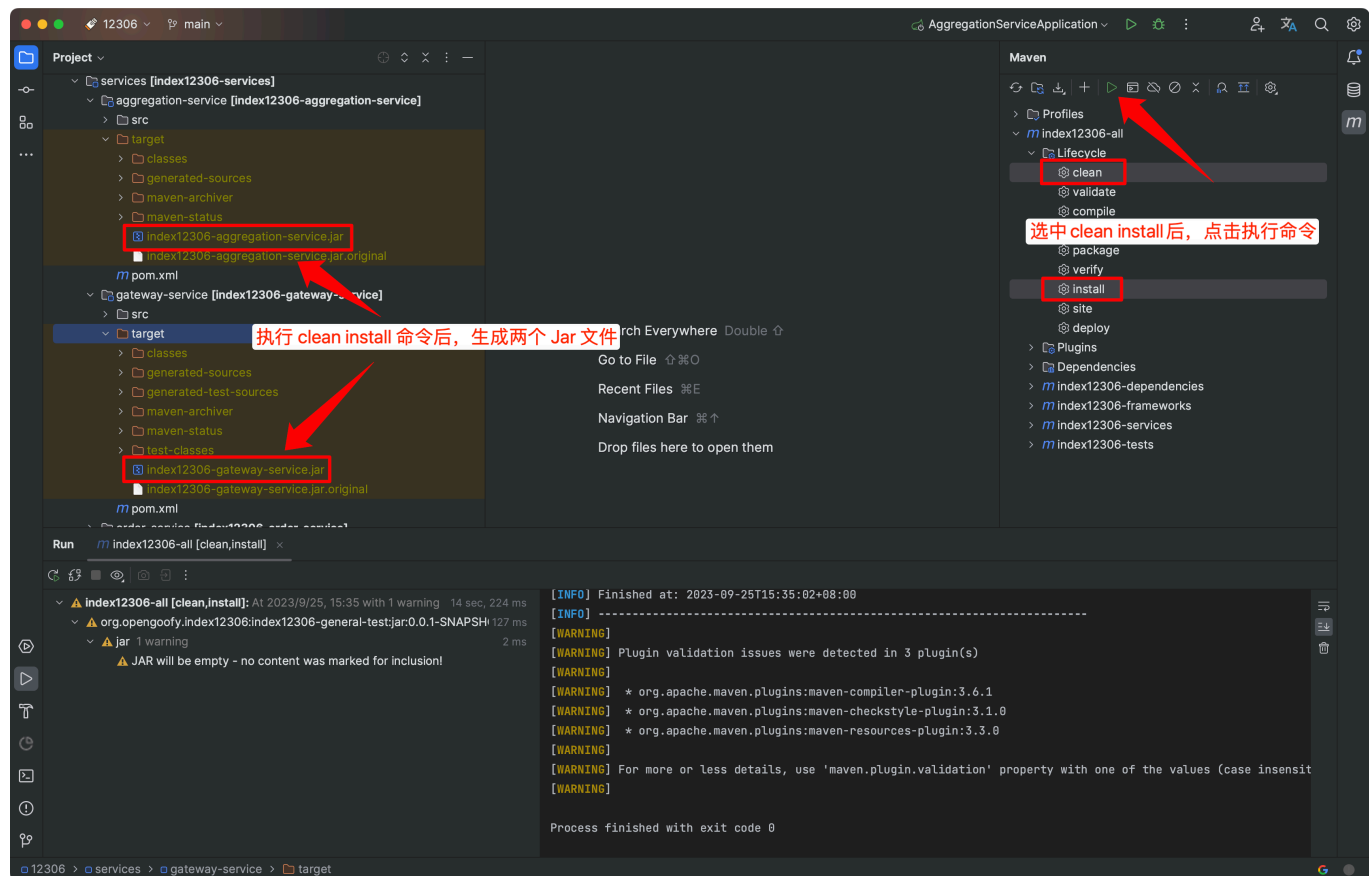

通过命令创建 /home/12306 文件夹。

```
mkdir -p /home/12306
```


将 `index12306-aggregation-service.jar`、`index12306-gateway-service.jar` 上传到云服务器 `/home/12306` 文件夹下。

上传后的目录如下：

```
[root@iZ2zebvuybolis5qr7cm2Z 12306]# ll
total 247760
-rw-r--r-- 1 root root 205562743 Sep 25 17:07 index12306-aggregation-service.jar
-rw-r--r-- 1 root root 48133092 Sep 25 16:25 index12306-gateway-service.jar
[root@iZ2zebvuybolis5qr7cm2Z 12306]#
```

前端项目

进入到 `console-vue` 目录下，执行 `yarn build` 命令。如果是 Windows 系统用户，记得去 CMD 命令行里执行。

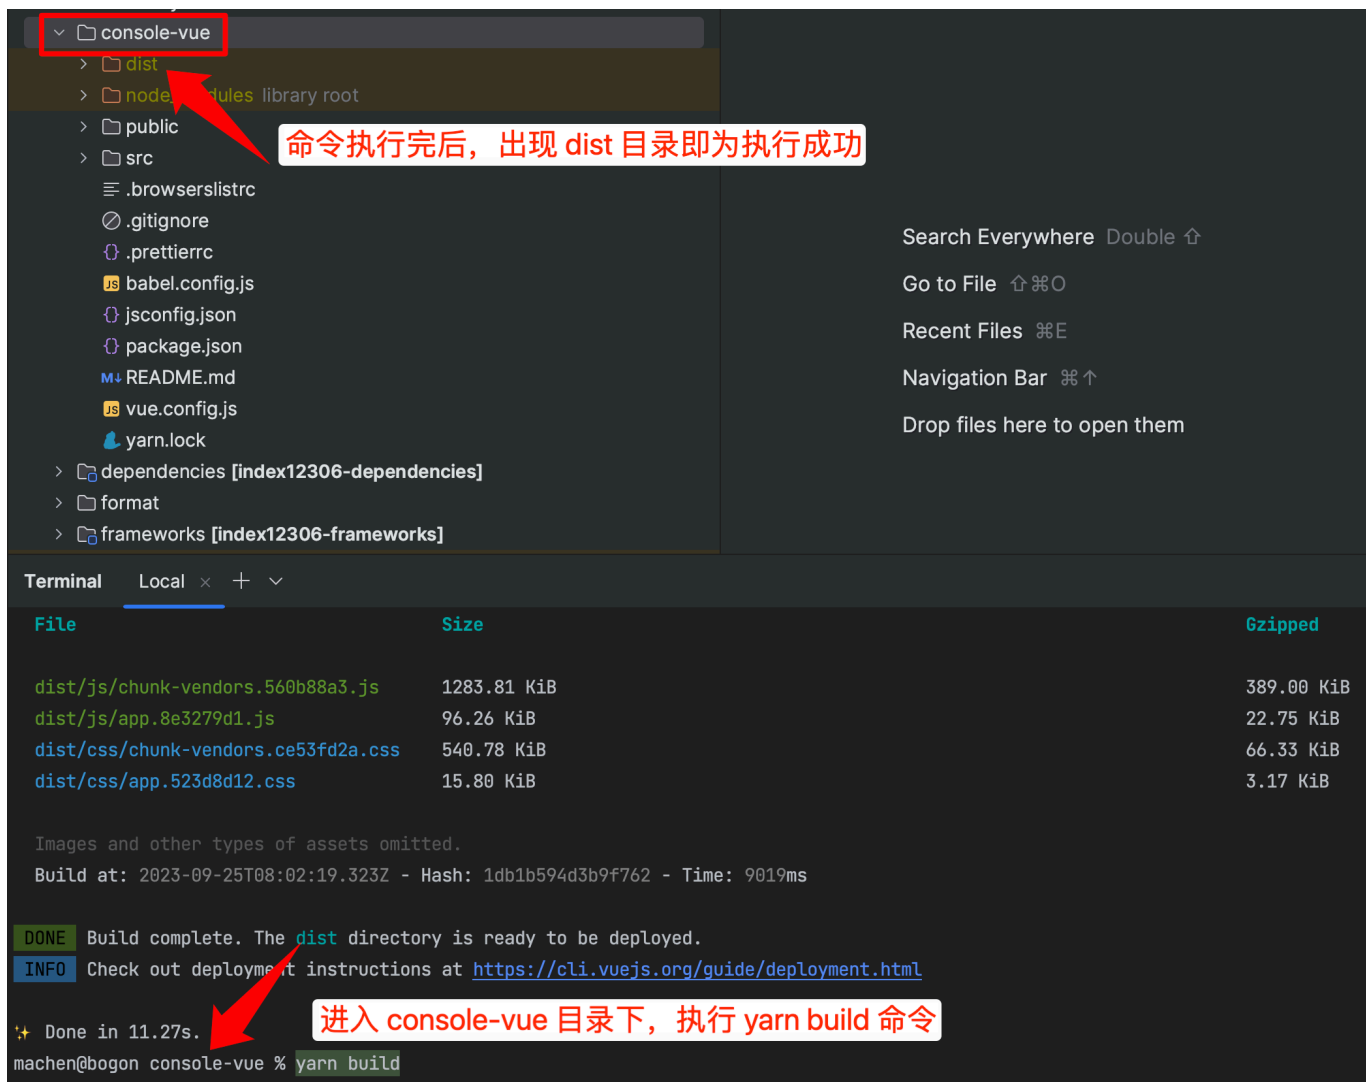

将该 dist 目录上传到云服务器 /home/12306 目录下。上传前记得压缩下 dist 目录，上传方便些，上传成功后再解压。

上传后的目录如下：

```
[root@iZ2zeebvuybolis5qr7cm2Z 12306]# ll
total 249668
-rw-r--r-- 1 root root 1950889 Sep 25 17:18 dist.zip
-rw-r--r-- 1 root root 205562743 Sep 25 17:07 index12306-aggregation-service.jar
-rw-r--r-- 1 root root 48133092 Sep 25 16:25 index12306-gateway-service.jar
[root@iZ2zeebvuybolis5qr7cm2Z 12306]#
```

执行解压缩命令：unzip dist.zip 完成压缩包解压。

安装中间件环境

和咱们本地启动模式一样，只有 MySQL 是大家必须安装的，这里采用极简模式，让大家其它中间件使用星球云中间件环境。

MySQL 服务安装以及数据库初始化参考：[手摸手之初始数据库表信息](#)。

启动项目

启动后端项目

在 12306 目录下创建 logs 文件夹。

```
mkdir -p /home/12306/logs
```

进入 `/home/12306` 文件夹下，开始启动后端项目。

先启动聚合服务。下面需要替换的配置项从 [安装中间件环境](#) 文章中获取。

```
nohup /usr/local/java/zulu17.44.53-ca-jdk17.0.8.1-linux_x64/bin/java \  
-Xms2048m -Xmx2048m \  
-Dunique-name=-xxx \  
-Dframework.cache.redis.prefix=xxx: \  
- \  
Dspring.data.redis.password=Sm9sVXB0YjJlI030b5tz0trjpzvZzRhtZmEbv0u0ImcD1wEDOPfeaqNU4PxHob  
/Wp \  
-Dspring.data.redis.port=19389 \  
-Dspring.data.redis.host=xxx \  
-Drocketmq.name-server=xxx \  
-Dspring.cloud.nacos.discovery.server-addr=xxx \  
-Dpay.alipay.notify-url=http://服务器外网IP:9000/api/pay-service/callback/alipay \  
-jar /home/12306/index12306-aggregation-service.jar > logs/index12306-aggregation-  
service.file 2>&1 &
```

执行 `tail -f logs/index12306-aggregation-service.file` 命令查看日志是否启动成功。

```

2023-09-25T21:55:43.929+08:00 INFO 79734 --- [main] org.quartz.impl.StdSchedulerFactory : Quartz scheduler 'quartzScheduler' initialized from an externally provided properties instance.
2023-09-25T21:55:43.929+08:00 INFO 79734 --- [main] org.quartz.impl.StdSchedulerFactory : Quartz scheduler version: 2.3.2
2023-09-25T21:55:43.929+08:00 INFO 79734 --- [main] org.quartz.core.QuartzScheduler : JobFactory set to: org.springframework.scheduling.quartz.SpringBeanJobFactory@40d848f9
2023-09-25T21:55:44.563+08:00 INFO 79734 --- [main] o.s.b.a.e.web.EndpointLinksResolver : Exposing 21 endpoint(s) beneath base path '/actuator'
2023-09-25T21:55:44.757+08:00 INFO 79734 --- [main] o.s.b.w.embedded.tomcat.TomcatWebServer : Tomcat started on port(s): 9005 (http) with context path ''
2023-09-25T21:55:44.763+08:00 INFO 79734 --- [main] com.alibaba.nacos.client.naming : initializer namespace from ans.namespace attribute : null
2023-09-25T21:55:44.763+08:00 INFO 79734 --- [main] com.alibaba.nacos.client.naming : initializer namespace from ALIBABA_ALIWARE_NAMESPACE attribute : null
2023-09-25T21:55:44.764+08:00 INFO 79734 --- [main] com.alibaba.nacos.client.naming : initializer namespace from namespace attribute : null
2023-09-25T21:55:44.765+08:00 INFO 79734 --- [main] c.a.n.p.a.s.c.ClientAuthPluginManager : [ClientAuthPluginManager] Load ClientAuthService com.alibaba.nacos.client.auth.impl.NacosClientAuthServiceImpl successfully
2023-09-25T21:55:44.785+08:00 INFO 79734 --- [main] c.a.n.p.a.s.c.ClientAuthPluginManager : [ClientAuthPluginManager] Load ClientAuthService com.alibaba.nacos.client.auth.impl.NacosClientAuthServiceImpl successfully
2023-09-25T21:55:44.903+08:00 INFO 79734 --- [main] com.alibaba.nacos.common.remote.client : [RpcClientFactory] create a new rpc client of 6ee41731-64c0-49bc-9fa8-ced875694d98
2023-09-25T21:55:44.948+08:00 INFO 79734 --- [main] com.alibaba.nacos.common.remote.client : [6ee41731-64c0-49bc-9fa8-ced875694d98] RpcClient init, ServerListFactory = com.alibaba.nacos.client.naming.core.ServerListManager
2023-09-25T21:55:44.948+08:00 INFO 79734 --- [main] com.alibaba.nacos.common.remote.client : [6ee41731-64c0-49bc-9fa8-ced875694d98] Registry connection listener to current client:com.alibaba.nacos.client.naming.remote.gprc.redo.NamingGprcRedoService
2023-09-25T21:55:44.949+08:00 INFO 79734 --- [main] com.alibaba.nacos.common.remote.client : [6ee41731-64c0-49bc-9fa8-ced875694d98] Register server push request handler:com.alibaba.nacos.client.naming.remote.gprc.NamingPushRequestHandler
2023-09-25T21:55:44.952+08:00 INFO 79734 --- [main] com.alibaba.nacos.common.remote.client : [6ee41731-64c0-49bc-9fa8-ced875694d98] Try to connect to server on start up, server: {serverIp = 'common-nacos-dev.magestack.cn', server main port = 8848}
2023-09-25T21:55:44.956+08:00 INFO 79734 --- [main] c.a.n.c.remote.client.gprc.GrpcClient : grpc client connection server:common-nacos-dev.magestack.cn ip,serverPort:9848,grpcTslConfig:{"sslProvider":"","PNSsl","enableTls":false,"mutualAuthenable":false,"trustAll":false}
2023-09-25T21:55:44.958+08:00 INFO 79734 --- [main] com.alibaba.nacos.common.remote.client : [6ee41731-64c0-49bc-9fa8-ced875694d98] Success to connect to server [common-nacos-dev.magestack.cn:8848] on start up, connectionId = 1695650145836.8.140.243.152.35404
2023-09-25T21:55:46.060+08:00 INFO 79734 --- [t.remote.worker] com.alibaba.nacos.common.remote.client : [6ee41731-64c0-49bc-9fa8-ced875694d98] Notify connected event to listeners.
2023-09-25T21:55:46.060+08:00 INFO 79734 --- [t.remote.worker] com.alibaba.nacos.client.naming : [6ee41731-64c0-49bc-9fa8-ced875694d98] Register server push request handler:com.alibaba.nacos.common.remote.client.RpcClientConnectResetRequestHandler
2023-09-25T21:55:46.060+08:00 INFO 79734 --- [main] com.alibaba.nacos.common.remote.client : [6ee41731-64c0-49bc-9fa8-ced875694d98] Register server push request handler:com.alibaba.nacos.common.remote.client.RpcClientConnectResetRequestHandler
2023-09-25T21:55:46.060+08:00 INFO 79734 --- [main] com.alibaba.nacos.common.remote.client : [6ee41731-64c0-49bc-9fa8-ced875694d98] Register server push request handler:com.alibaba.nacos.common.remote.client.RpcClientConnectResetRequestHandler
2023-09-25T21:55:46.063+08:00 INFO 79734 --- [main] com.alibaba.nacos.client.naming : [REGISTER-SERVICE] public registering service index12306-aggregation-machen123-service with instance Instance{instanceId='null', ip='172.17.97.178', port=9005, weight=1.0, healthy=true, enabled=true, ephemeral=true, clusterName='DEFAULT', serviceName='null', metadata={IPV6=null, preserved,register.source=SPRING_CLOUD}}
2023-09-25T21:55:46.082+08:00 INFO 79734 --- [main] c.a.c.n.registry.NacosServiceRegistry : nacos registry, DEFAULT_GROUP index12306-aggregation-machen123-service 172.17.97.178:9005 register finished
2023-09-25T21:55:46.082+08:00 INFO 79734 --- [main] o.s.s.quartz.SchedulerFactoryBean : Starting Quartz Scheduler now
2023-09-25T21:55:46.083+08:00 INFO 79734 --- [main] org.quartz.core.QuartzScheduler : Scheduler quartzScheduler & NOW_CLUSTEREN started
2023-09-25T21:55:46.124+08:00 INFO 79734 --- [main] o.o.i.b.a.AggregationServiceApplication : Started AggregationServiceApplication in 17.943 seconds (process running for 19.13)
2023-09-25T21:55:46.185+08:00 INFO 79734 --- [main] nio-9005-exec-1 o.s.s.quartz.SchedulerFactoryBean : Starting Quartz Scheduler now
2023-09-25T21:55:46.186+08:00 INFO 79734 --- [main] nio-9005-exec-1 o.s.s.quartz.SchedulerFactoryBean : Starting Quartz Scheduler now
2023-09-25T21:55:46.192+08:00 INFO 79734 --- [main] usAutoConfigurations$InitializationLogger : Initialized crane4j components.....
2023-09-25T21:55:46.200+08:00 INFO 79734 --- [nio-9005-exec-1] o.a.c.c.%(Tomcat).localhost[/] : Initializing Spring DispatcherServlet 'dispatcherServlet'
2023-09-25T21:55:46.200+08:00 INFO 79734 --- [nio-9005-exec-1] o.s.web.servlet.DispatcherServlet : Initializing Servlet 'dispatcherServlet'
2023-09-25T21:55:46.283+08:00 INFO 79734 --- [nio-9005-exec-1] o.s.web.servlet.DispatcherServlet : Completed initialization in 3 ms
INFO: Sentinel log output type is: file
INFO: Sentinel log charset is: utf-8
INFO: Sentinel log base directory is: /root/logs/csp/
INFO: Sentinel log name use pid is: false
INFO: Sentinel log level is: INFO
2023-09-25T21:55:46.587+08:00 INFO 79734 --- [nio-9005-exec-1] Initialize DispatcherServlet : Initialized the dispatcherServlet to improve the first response time of the interface...

```

依次启动网关项目。

```

nohup /usr/local/java/zulu17.44.53-ca-jdk17.0.8.1-linux_x64/bin/java \
-Xms2048m -Xmx2048m \
-Dunique-name=-xxx \
-Dframework.cache.redis.prefix=xxx: \
-Dspring.data.redis.password=Sm9sVXB0YJjI030b5tz0trjpzvZzRhtZmEbv0u0ImcD1wEDOPfeaqNU4PxHob/Wp \
-Dspring.data.redis.port=19389 \
-Dspring.data.redis.host=xxx \
-Dspring.cloud.nacos.discovery.server-addr=xxx \
-jar /home/12306/index12306-gateway-service.jar > logs/index12306-gateway-service.file 2>&1 &

```

执行 `tail -f logs/index12306-gateway-service.file` 命令查看网关服务是否启动成功。


```
[root@iZ2zeebvuybolis5qr7cm2Z 12306]# tail -f logs/index12306-gateway-service.file
2023-09-25T21:59:00.385+08:00 INFO 80243 --- [main] o.s.c.g.r.RouteDefinitionRouteLocator : Loaded RoutePredicateFactory [Host]
2023-09-25T21:59:00.385+08:00 INFO 80243 --- [main] o.s.c.g.r.RouteDefinitionRouteLocator : Loaded RoutePredicateFactory [Method]
2023-09-25T21:59:00.385+08:00 INFO 80243 --- [main] o.s.c.g.r.RouteDefinitionRouteLocator : Loaded RoutePredicateFactory [Path]
2023-09-25T21:59:00.385+08:00 INFO 80243 --- [main] o.s.c.g.r.RouteDefinitionRouteLocator : Loaded RoutePredicateFactory [Query]
2023-09-25T21:59:00.385+08:00 INFO 80243 --- [main] o.s.c.g.r.RouteDefinitionRouteLocator : Loaded RoutePredicateFactory [ReadBody]
2023-09-25T21:59:00.386+08:00 INFO 80243 --- [main] o.s.c.g.r.RouteDefinitionRouteLocator : Loaded RoutePredicateFactory [RemoteAddr]
2023-09-25T21:59:00.386+08:00 INFO 80243 --- [main] o.s.c.g.r.RouteDefinitionRouteLocator : Loaded RoutePredicateFactory [XForwardedRemoteAddr]
2023-09-25T21:59:00.386+08:00 INFO 80243 --- [main] o.s.c.g.r.RouteDefinitionRouteLocator : Loaded RoutePredicateFactory [Weight]
2023-09-25T21:59:00.386+08:00 INFO 80243 --- [main] o.s.c.g.r.RouteDefinitionRouteLocator : Loaded RoutePredicateFactory [CloudFoundryRouteService]
2023-09-25T21:59:00.783+08:00 INFO 80243 --- [main] o.s.b.a.e.web.EndpointLinksResolver : Exposing 18 endpoint(s) beneath base path '/actuator'
2023-09-25T21:59:01.102+08:00 WARN 80243 --- [main] i.g.ratonsLoadBalancerCaffeineWarmLogger : Spring Cloud LoadBalancer is currently working with the default cache. While this cache implementation is useful for development and tests, it's recommended to use Caffeine cache in production. You can switch to using Caffeine cache, by adding it and org.springframework.cache.caffeine.CaffeineCacheManager to the classpath.
2023-09-25T21:59:01.284+08:00 INFO 80243 --- [main] o.s.b.w.embedded.netty.NettyWebServer : Netty started on port 9000
2023-09-25T21:59:01.300+08:00 WARN 80243 --- [main] c.a.nacos.client.logging.NacosLogging : Load Logback Configuration of Nacos fail, message: Could not initialize Logback Nacos logging from classpath:nacos-logback.xml
2023-09-25T21:59:01.300+08:00 INFO 80243 --- [main] com.alibaba.nacos.client.naming : initializer namespace from ans.namespace attribute : null
2023-09-25T21:59:01.301+08:00 INFO 80243 --- [main] com.alibaba.nacos.client.naming : initializer namespace from ALIBABA_ALIWARE_NAMESPACE attribute : null
2023-09-25T21:59:01.302+08:00 INFO 80243 --- [main] com.alibaba.nacos.client.naming : initializer namespace from namespace attribute : null
2023-09-25T21:59:01.339+08:00 INFO 80243 --- [main] c.alibaba.nacos.client.utils.ParamUtil : [settings] [req-serv] nacos-server port:8848
2023-09-25T21:59:01.340+08:00 INFO 80243 --- [main] c.alibaba.nacos.client.utils.ParamUtil : [settings] [http-client] connect timeout:1000
2023-09-25T21:59:01.341+08:00 INFO 80243 --- [main] c.alibaba.nacos.client.utils.ParamUtil : PER_TASK_CONFIG_SIZE: 3000.0
2023-09-25T21:59:01.345+08:00 INFO 80243 --- [main] c.a.n.p.a.s.c.ClientAuthPluginManager : [ClientAuthPluginManager] Load ClientAuthService com.alibaba.nacos.client.auth.impl.NacosClientAuthServiceImpl successfully
2023-09-25T21:59:01.345+08:00 INFO 80243 --- [main] c.a.n.p.a.s.c.ClientAuthPluginManager : [ClientAuthPluginManager] Load ClientAuthService com.alibaba.nacos.client.auth.impl.NacosClientAuthServiceImpl successfully
2023-09-25T21:59:01.348+08:00 INFO 80243 --- [main] c.a.n.p.a.s.c.identify.CredentialWatcher : null No credential found
2023-09-25T21:59:01.363+08:00 INFO 80243 --- [main] com.alibaba.nacos.common.remote.client : [RpcClientFactory] create a new rpc client of e02a7c32-ea43-44e0-a278-6908a98aeab5
2023-09-25T21:59:01.389+08:00 INFO 80243 --- [main] com.alibaba.nacos.common.remote.client : [e02a7c32-ea43-44e0-a278-6908a98aeab5] RpcClient init, ServerListFactory = com.alibaba.nacos.client.naming.core.ServerListManager
2023-09-25T21:59:01.390+08:00 INFO 80243 --- [main] com.alibaba.nacos.common.remote.client : [e02a7c32-ea43-44e0-a278-6908a98aeab5] Registry connection listener to current client:com.alibaba.nacos.client.naming.core.ServerListManager
2023-09-25T21:59:01.390+08:00 INFO 80243 --- [main] com.alibaba.nacos.common.remote.client : [e02a7c32-ea43-44e0-a278-6908a98aeab5] Register server push request handler:com.alibaba.nacos.client.naming.core.ServerListManager
2023-09-25T21:59:01.390+08:00 INFO 80243 --- [main] com.alibaba.nacos.common.remote.client : [e02a7c32-ea43-44e0-a278-6908a98aeab5] Try to connect to server on start up, server: {serverIp = 'common-nacos-dev-magestack.cn', server main port = 8848}
2023-09-25T21:59:01.430+08:00 INFO 80243 --- [main] com.alibaba.nacos.common.remote.client : [e02a7c32-ea43-44e0-a278-6908a98aeab5] Try to connect to server on start up, server: {serverIp = 'common-nacos-dev-magestack.cn', server main port = 8848}
2023-09-25T21:59:02.212+08:00 INFO 80243 --- [main] c.a.n.c.remote.client.grpc.GrpcClient : grpc client connection server:common-nacos-dev-magestack.cn ip,serverPort:9848,grpcTlsConfig:{'sslProvider':"OPENSLL", 'enableTls':false, 'mutualAuthEnabled':false, 'trustAll':false}
2023-09-25T21:59:02.213+08:00 INFO 80243 --- [main] com.alibaba.nacos.common.remote.client : [e02a7c32-ea43-44e0-a278-6908a98aeab5] Success to connect to server [common-nacos-dev-magestack.cn:8848] on start up, connectionId = 1695650341979.8.140.243.152.57738
2023-09-25T21:59:02.213+08:00 INFO 80243 --- [t.remote.worker] com.alibaba.nacos.common.remote.client : [e02a7c32-ea43-44e0-a278-6908a98aeab5] Notify connected event to listeners.
2023-09-25T21:59:02.214+08:00 INFO 80243 --- [t.remote.worker] com.alibaba.nacos.client.naming : Grpc connection connect
2023-09-25T21:59:02.214+08:00 INFO 80243 --- [main] com.alibaba.nacos.common.remote.client : [e02a7c32-ea43-44e0-a278-6908a98aeab5] Register server push request handler:com.alibaba.nacos.common.remote.client.RpcClientConnectResetRequestHandler
2023-09-25T21:59:02.214+08:00 INFO 80243 --- [main] com.alibaba.nacos.common.remote.client : [e02a7c32-ea43-44e0-a278-6908a98aeab5] Register server push request handler:com.alibaba.nacos.common.remote.client.RpcClientConnectResetRequestHandler
2023-09-25T21:59:02.214+08:00 INFO 80243 --- [main] com.alibaba.nacos.common.remote.client : [e02a7c32-ea43-44e0-a278-6908a98aeab5] Register server push request handler:com.alibaba.nacos.common.remote.client.RpcClientConnectResetRequestHandler
2023-09-25T21:59:02.215+08:00 INFO 80243 --- [main] com.alibaba.nacos.client.naming : [REGISTER-SERVICE] public registering service index12306-gateway-machen123-service with instance Instance{instanceId: null, ip=172.17.0.178, port=9000, weight=1.0, healthy=true, enabled=true, ephemeral=true, clusterName='DEFAULT', serviceName='null', metadata={IPV6=null, preserved.register.sources=SPRING_CLOUD}}
2023-09-25T21:59:02.233+08:00 INFO 80243 --- [main] c.a.c.n.registry.NacosServiceRegistry : [REGISTER-SERVICE] public registering service index12306-gateway-machen123-service with instance Instance{instanceId: null, ip=172.17.0.178, port=9000, weight=1.0, healthy=true, enabled=true, ephemeral=true, clusterName='DEFAULT', serviceName='null', metadata={IPV6=null, preserved.register.sources=SPRING_CLOUD}}
2023-09-25T21:59:02.395+08:00 INFO 80243 --- [main] o.o.i.b.g.GatewayServiceApplication : Started GatewayServiceApplication in 6.173 seconds (process running for 7.037)
```

Nginx 挂载前端项目

修改 Nginx 的配置，让前端可以访问。

```
sudo vim /etc/nginx/nginx.conf
```

将默认 Nginx http/server 配置改为下述配置：

```
http {
    # 只要保证 server 里的配置在 nginx 的 http 配置下就好
    server {
        listen      80;
        server_name localhost;

        location / {
            root     /home/12306/dist;
            index    index.html index.htm;
            try_files $uri $uri/ /index.html;
        }

        location /api {
            proxy_read_timeout 10s;
            proxy_pass http://127.0.0.1:9000/api;
        }
    }
}
```

```
}  
}
```

```
# Load dynamic modules. See /usr/share/doc/nginx/README.dynamic.  
include /usr/share/nginx/modules/*.conf;  
  
events {  
    worker_connections 1024;  
}  
  
http {  
    log_format main '$remote_addr - $remote_user [$time_local] "$request" ' '  
        '$status $body_bytes_sent "$http_referer" ' '  
        '"$http_user_agent" "$http_x_forwarded_for"';  
  
    access_log /var/log/nginx/access.log main;  
  
    sendfile            on;  
    tcp_nopush          on;  
    tcp_nodelay         on;  
    keepalive_timeout  65;  
    types_hash_max_size 4096;  
  
    include              /etc/nginx/mime.types;  
    default_type         application/octet-stream;  
  
    # Load modular configuration files from the /etc/nginx/conf.d directory.  
    # See http://nginx.org/en/docs/nginx_core_module.html#include  
    # for more information.  
    include /etc/nginx/conf.d/*.conf;  
  
    server {  
        listen      80;  
        listen      [::]:80;  
        server_name _;  
        root        /home/12306/dist;  
        index index.html index.htm;  
        # Load configuration files for the default server block.  
        include /etc/nginx/default.d/*.conf;  
  
        location / {  
            root /home/12306/dist;  
            index index.html index.htm;  
            try_files $uri $uri/ /index.html;  
        }  
  
        location /api {  
            proxy_read_timeout 10s;  
            proxy_pass http://127.0.0.1:9000/api;  
        }  
  
        error_page 404 /404.html;  
            location = /40x.html {  
        }  
  
        error_page 500 502 503 504 /50x.html;  
            location = /50x.html {  
        }  
    }  
}
```

最主要的是这两个配置
其它可忽略

保存退出文件编辑状态，重载 Nginx 的配置。

```
sudo systemctl reload nginx
```

如果前端访问不生效，检查配置文件中这个配置是否被注释，没有的话需要注释掉。

```
##  
# Virtual Host Configs  
##
```

```
#include /etc/nginx/conf.d/*.conf;  
#include /etc/nginx/sites-enabled/*;
```

公网访问

浏览器访问：`http://公网IP` 即可看到对应的前端页面。

车票查询

出发地: 北京 目的地: 杭州 出发日: 2023-09-25 查询

09-25 周一 09-26 09-27 09-28 09-29 09-30 10-01 10-02 10-03 10-04 10-05 10-06 10-07 10-08 10-09

车次类型: 全部 ☐ GC-高铁城际 ☐ D-动车 ☐ 复兴号
出发车站: 全部 ☐ 北京南 ☐ 北京
到达车站: 全部 ☐ 杭州东 ☐ 杭州
车次席别: 全部 ☐ 商务座 ☐ 一等座 ☐ 二等座 ☐ 二等包座 ☐ 一等卧 ☐ 二等卧 ☐ 软卧 ☐ 硬卧 ☐ 硬座 ☐ 无座
发车时间: 00:00-24:00

北京 → 杭州 (09月25日 周一) 共计4个车次

车次	出发站 到达站	出发时间 到达时间	历时	商务座 特等座	一等座	二等座 二等包座	动卧	高级...	软卧 一等卧	硬卧 二等卧	软座	硬座	无座	其他	备注
+ G35	北京南 杭州东	09:56 14:26	04:30	8	有	有	--	--	--	--	--	--	--	--	预定
+ Z284	北京南 杭州东	18:56 18:56	00:00	--	--	--	--	--	无	无	--	无	无	--	预定
+ G39	北京南 杭州东	19:04 23:22	04:18	10	有	有	--	--	--	--	--	--	--	--	预定
+ D717	北京 杭州	19:16 09:00	13:44	--	--	有	--	--	有	有	--	--	无	--	预定

如果查询结果中没有满足需求的车次,您还可以使用中转换乘功能。查询途中换乘一次的部分列车余票情况。
显示的卧铺票价均为上铺票价,供您参考。具体票价以您确认支付时实际购买的铺别票价为准。如因运力原因或者其他不可控因素导致列车调度调整时,当前车型可能会发生变动

更新: 2023-10-14 10:03:22

原文: <<https://www.yuque.com/magestack/12306/bxcSDLnrsgzqtmnd>>