

Relational Database Design

Relational Database Design

Anomalies can be removed from relation designs by decomposing them until they are in a normal form.

Several problems should be investigated regarding a decomposition.

A decomposition of a relation scheme, R , is a set of relation schemes $\{R_1, \dots, R_n\}$ such that $R_i \subseteq R$ for each i , and $\bigcup_{i=1}^n R_i = R$

Note that in a decomposition $\{R_1, \dots, R_n\}$, the intersect of each pair of R_i and R_j does not have to be empty.

Example: $R = \{A, B, C, D, E\}$, $R_1 = \{A, B\}$, $R_2 = \{A, C\}$, $R_3 = \{C, D, E\}$

A naive decomposition: each relation has only attribute.

A good decomposition should have the following two properties.

Dependency Preserving

Definition: Two sets F and G of FD's are equivalent if $F^+ = G^+$.

Given a decomposition $\{R_1, \dots, R_n\}$ of R :

$$F_i = \{X \rightarrow Y : X \rightarrow Y \in F \& X \in R_i, Y \in R_i\}.$$

The decomposition $\{R_1, \dots, R_n\}$ of R is dependency preserving with respect to F if

$$F^+ = \left(\bigcup_{i=1}^n F_i \right)^+.$$

Examples

$F = \{ A \rightarrow BC, D \rightarrow EG, M \rightarrow A \}, R = (A, B, C, D, E, G, M)$

1) Given $R_1 = (A, B, C, M)$ and $R_2 = (C, D, E, G)$,

$F_1 = \{ A \rightarrow BC, M \rightarrow A \}, F_2 = \{ D \rightarrow EG \}$

$F = F_1 \cup F_2$. thus, dependency preserving

2) Suppose that $F' = F \cup \{ M \rightarrow D \}$. R_1 and R_2 remain the same.

Thus, F_1 and F_2 remain the same.

We need to verify if $M \rightarrow D$ is inferred by $F_1 \cup F_2$.

Since $M^+ \mid_{F_1 \cup F_2} = \{M, A, B, C\}$, $M \rightarrow D$ is not inferred by $F_1 \cup F_2$.

Thus, R_1 and R_2 are not dependency preserving regarding F' .

3) $F'' = \{ A \rightarrow BC, D \rightarrow EG, M \rightarrow A, M \rightarrow C, C \rightarrow D, M \rightarrow D \}$

$F_1 = \{ A \rightarrow BC, M \rightarrow A, M \rightarrow C \}, F_2 = \{ D \rightarrow EG, C \rightarrow D \}$

It can be verified that $M \rightarrow D$ is inferred by F_1 and F_2 .

Thus, $F''^+ = (F_1 \cup F_2)^+$

Hence, R_1 and R_2 are dependency preserving regarding F'' .

Lossless Join Decomposition

A second necessary property for decomposition:

A decomposition $\{R_1, \dots, R_n\}$ of R is a *lossless join* decomposition with respect to a set F of FD's if for every relation instance r that satisfies F :

$$r = \pi_{R_1}(r) \bowtie \dots \bowtie \pi_{R_n}(r).$$

If $r \subset \pi_{R_1}(r) \bowtie \dots \bowtie \pi_{R_n}(r)$, the decomposition is *lossy*.

Lossless Join Decomposition_(cont)

Example 2:

Suppose that we decompose the following relation:

STUDENT_ADVISOR		
Name	Department	Advisor
Jones	Comp Sci	Smith
Ng	Chemistry	Turner
Martin	Physics	Bosky
Dulles	Decision Sci	Hall
Duke	Mathematics	James
James	Comp Sci	Clark
Evan	Comp Sci	Smith
Baxter	English	Bronte

With dependencies $\{Name \rightarrow Department, Name \rightarrow Advisor, Advisor \rightarrow Department\}$, into two relations:

Lossless Join Decomposition_(cont)

STUDENT_DEPARTMENT

Name	Department
Jones	Comp Sci
Ng	Chemistry
Martin	Physics
Duke	Mathematics
Dulles	Decision Sci
James	Comp Sci
Evan	Comp Sci
Baxter	English


DEPARTMENT_ADVISOR

Department	Advisor
Comp Sci	Smith
Chemistry	Turner
Physics	Bosky
Decision Sci	Hall
Mathematics	James
Comp Sci	Clark
English	Bronte

If we join these decomposed relations we get:

Lossless Join Decomposition_(cont)

Name	Department	Advisor
Jones	Comp Sci	Smith
Jones	Comp Sci	Clark*
Ng	Chemistry	Turner
Martin	Physics	Bosky
Dulles	Decision Sci	Hall
Duke	Mathematics	James
James	Comp Sci	Smith*
James	Comp Sci	Clark
Evan	Comp Sci	Smith
Evan	Comp Sci	Clark*
Baxter	English	Bronte

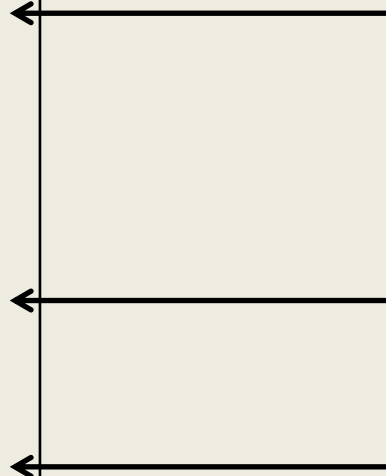

This is not the same as the original relation (the tuples marked with * have been added). Thus the decomposition is lossy.

Useful theorem: The decomposition $\{R_1, R_2\}$ of R is lossless iff the common attributes $R_1 \cap R_2$ form a superkey for either R_1 or R_2 .

Lossless Join Decomposition_(cont)

Example 3: Given $R(A,B,C)$ and $F = \{A \rightarrow B\}$. The decomposition into $R_1(A,B)$ and $R_2(A,C)$ is lossless because $A \rightarrow B$ is an FD over R_1 , so the common attribute A is a key of R_1 .

Testing for the lossless join property

Algorithm TEST LJ

Step 1: Create a matrix S , each element $s_{i,j} \in S$ corresponds the relation R_i and the attribute A_j , such that:

$$s_{j,i} = a \text{ if } A_i \in R_j, \text{ otherwise } s_{j,i} = b.$$

Step 2: Repeat the following process till S has no change or one row is made up entirely of “a” symbols.

Step 2.1: For each $X \rightarrow Y$, choose the rows where the elements corresponding to X take the value a.

Step 2.2: In those chosen rows (must be at least two rows), the elements corresponding to Y also take the value a if one of the chosen rows take the value a on Y .

Testing for the lossless join property_(cont)

The decomposition is *lossless* if one row is entirely made up by “a” values.

The algorithm can be found as the Algorithm 15.2 in E/N book.

Note: The correctness of the algorithm is based on the assumption that no null values are allowed for the join attributes.

If and only if exists an order such that $R_i \cap M_{i-1}$ forms

a superkey of R_i or M_{i-1} , where M_{i-1} is the join on $R_1, R_2, \dots R_{i-1}$

Testing for the lossless join property_(cont)

Example: $R = (A, B, C, D)$, $F = \{A \rightarrow B, A \rightarrow C, C \rightarrow D\}$.

Let $R_1 = (A, B, C)$, $R_2 = (C, D)$.

Initially, S is

	A	B	C	D
R_1	a	a	a	b
R_2	b	b	a	a

Note: rows 1 and 2 of S agree on $\{C\}$, which is the left hand side of $C \rightarrow D$.
Therefore, change the D value on rows 1 to a, matching the value from row 2.

Now row 1 is entirely a 's, so the decomposition is lossless.

(Check it.)

Testing for the lossless join property_(cont)

Example 2: $R = (A, B, C, D, E)$,

$F = \{AB \rightarrow CD, A \rightarrow E, C \rightarrow D\}$. Let $R_1 = (A, B, C)$,

$R_2 = (B, C, D)$ and $R_3 = (C, D, E)$.

	A	B	C	D	E
R_1	a	a	a	b	b
R_2	b	a	a	a	b
R_3	b	b	a	a	a

	A	B	C	D	E
R_1	a	a	a	X	b ←
R_2	b	a	a	a	b
R_3	b	b	a	a	a ←

Not lossless join

Testing for the lossless join property_(cont)

Example 3: $R = (A, B, C, D, E, G)$,

$F = \{C \rightarrow DE, A \rightarrow B, AB \rightarrow G\}$. Let $R_1 = (A, B)$,

$R_2 = (C, D, E)$ and $R_3 = (A, C, G)$.

	A	B	C	D	E	G		A	B	C	D	E	G		A	B	C	D	E	G			
R ₁	a	a	b	b	b	b		R ₁	a	a	b	b	b	b		R ₁	a	a	b	b	b	b	←
R ₂	b	b	a	a	a	b		R ₂	b	b	a	a	a	b	←	R ₂	b	b	a	a	a	b	
R ₃	a	b	a	b	b	a		R ₃	a	b	a	b	b	a	←	R ₃	a	b	a	a	a	a	←
											a	a							a				

Lossless decomposition into BCNF

Algorithm TO_BCNF

$D := \{R_1, R_2, \dots, R_n\}$

While \exists a $R_i \in D$ and R_i is not in BCNF **Do**

 { find a $X \rightarrow Y$ in R_i that violates BCNF; replace R_i in D by $(R_i - Y)$ and $(X \cup Y)$; }

$F = \{A \rightarrow B, A \rightarrow C, A \rightarrow D, C \rightarrow E, E \rightarrow D, C \rightarrow G\},$

$R_1 = (C, D, E, G), R_2 = (A, B, C, D)$

$R_{11} = (C, E, G), R_{12} = (E, D)$ due $E \rightarrow D$

$R_{21} = (A, B, C), R_{22} = (C, D)$ because of $C \rightarrow D$

Lossless decomposition into BCNF

Algorithm TO_BCNF

$D := \{R_1, R_2, \dots, R_n\}$

While \exists a $R_i \in D$ and R_i is not in BCNF **Do**

 { find a $X \rightarrow Y$ in R_i that violates BCNF; replace R_i in D by $(R_i - Y)$ and $(X \cup Y)$; }

Since a $X \rightarrow Y$ violating BCNF is not always in F , the main difficulty is to verify if R_i is in BCNF; see the approach below:

1. For each subset X of R_i , compute X^+ .
2. $X \rightarrow (X^+|_{R_i} - X)$ violates BCNF, if $X^+|_{R_i} - X \neq \emptyset$ and $R_i - X^+ \neq \emptyset$.

Here, $X^+|_{R_i} - X = \emptyset$ means that each F.D with X as the left hand side is trivial;

$R_i - X^+ = \emptyset$ means X is a superkey of R_i

Lossless decomposition into BCNF_(cont)

Example: (From Desai 6.31)

Find a BCNF decomposition of the relation scheme below:

SHIPPING(*Ship* , *Capacity* , *Date* , *Cargo* , *Value*)

F consists of:

$Ship \rightarrow Capacity$

$\{Ship, Date\} \rightarrow Cargo$

$\{Cargo, Capacity\} \rightarrow Value$

Lossless decomposition into BCNF_(cont)

From $Ship \rightarrow Capacity$, we decompose *SHIPPING* into

$R_1(Ship, Date, Cargo, Value)$

Key: $\{Ship, Date\}$

A nontrivial FD in F^+ violates BCNF:

$\{Ship, Cargo\} \rightarrow Value$

and

$R_2(Ship, Capacity)$

Key: $\{Ship\}$

Only one nontrivial FD in F^+ : $Ship \rightarrow Capacity$

$Ship \rightarrow Capacity$

$\{Ship, Date\} \rightarrow Cargo$

$\{Cargo, Capacity\} \rightarrow Value$

Lossless decomposition into BCNF_(cont)

R_1 is not in BCNF so we must decompose it further into

$R_{11}(Ship, Date, Cargo)$

Key: $\{Ship, Date\}$

$Ship \rightarrow Capacity$

$\{Ship, Date\} \rightarrow Cargo$

$\{Cargo, Capacity\} \rightarrow Value$

Only one nontrivial FD in F^+ with single attribute on the right side: $\{Ship, Date\} \rightarrow Cargo$

and

$R_{12}(Ship, Cargo, Value)$

Key: $\{Ship, Cargo\}$

Only one nontrivial FD in F^+ with single attribute on the right side:
 $\{Ship, Cargo\} \rightarrow Value$

This is in BCNF and the decomposition is lossless but not dependency preserving (the FD $\{Capacity, Cargo\} \rightarrow Value$ has been lost).

Lossless decomposition into BCNF_(cont)

Or we could have chosen $\{Cargo, Capacity\} \rightarrow Value$, which would give us:

$R_1 (Ship, Capacity, Date, Cargo)$

Key: $\{Ship, Date\}$

A nontrivial FD in F^+ violates BCNF:

$Ship \rightarrow Capacity$

$Ship \rightarrow Capacity$

$\{Ship, Date\} \rightarrow Cargo$

$\{Cargo, Capacity\} \rightarrow Value$

and

$R_2 (Cargo, Capacity, Value)$

Key: $\{Cargo, Capacity\}$

Only one nontrivial FD in F^+ with single attribute on the right side: $\{Cargo, Capacity\} \rightarrow Value$

and then from $Ship \rightarrow Capacity$,

$R_{11}(Ship, Date, Cargo)$

Key: $\{Ship, Date\}$

Only one nontrivial FD in F^+ with single attribute

on the right side: $\{Ship, Date\} \rightarrow Cargo$

And


$R_{12}(Ship, Capacity)$

Key: $\{Ship\}$

Only one nontrivial FD in F^+ : $Ship \rightarrow Capacity$

This is in BCNF and the decomposition is both lossless and dependency preserving.

However, there are relation schemes for which there is no lossless, dependency preserving decomposition into BCNF.

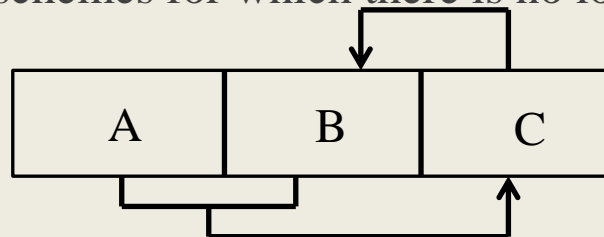

$Ship \rightarrow Capacity$ $\{Ship, Date\} \rightarrow Cargo$ $\{Cargo, Capacity\} \rightarrow Value$
--

Lossless and dependency-preserving decomposition into 3NF

A lossless and dependency-preserving decomposition into 3NF is always possible.

More definitions regarding FD's are needed.

A set F of FD's is minimal if

1. Every FD $X \rightarrow Y$ in F is **simple**: Y consists of a single attribute,

2. Every FD $X \rightarrow A$ in F is **left-reduced**: there is no proper subset

$Y \subset X$ such that $X \rightarrow A$ can be replaced with $Y \rightarrow A$.

that is, there is no $Y \subset X$ such that

$$((F - \{X \rightarrow A\}) \cup \{Y \rightarrow A\})^+ = F^+$$

↗ Iff $F \models Y \rightarrow A$

3. No FD in F can be removed; that is, there is no FD $X \rightarrow A$ in F

such that

$$(F - \{X \rightarrow A\})^+ = F^+.$$

↗ Iff $X \rightarrow A$ is inferred
From $F - \{X \rightarrow A\}$

Computing a minimum cover

F is a set of FD's.

A *minimal cover* (or *canonical cover*) for F is a minimal set of FD's F_{min} such that $F^+ = F_{min}^+$.

Algorithm Min Cover

Input: a set F of functional dependencies.

Output: a minimum cover of F.

Step 1: **Reduce right side**. Apply Algorithm Reduce right to F.

Step 2: **Reduce left side**. Apply Algorithm Reduce left to the output of Step 2.

Step 3: **Remove redundant FDs**. Apply Algorithm Remove_redundancy to the output of Step 2. The

output is a minimum cover.

Below we detail the three Steps.

Computing a minimum cover_(cont)

Algorithm Reduce_right

INPUT: F .

OUTPUT: right side reduced F' .

For each FD $X \rightarrow Y \in F$ where $Y = \{A_1, A_2, \dots, A_k\}$, we use all $X \rightarrow \{A_i\}$ (for $1 \leq i \leq k$) to replace $X \rightarrow Y$.

Algorithm Reduce_left

INPUT: right side reduced F .

OUTPUT: right and left side reduced F' .

For each $X \rightarrow \{A\} \in F$ where $X = \{A_i : 1 \leq i \leq k\}$, do the following. For $i = 1$ to k , replace X with $X - \{A_i\}$ if $A \in (X - \{A_i\})^+$.

Algorithm Reduce_redundancy

INPUT: right and left side reduced F .

OUTPUT: a minimum cover F' of F .

For each FD $X \rightarrow \{A\} \in F$, remove it from F if: $A \in X^+$ with respect to $F - \{X \rightarrow \{A\}\}$.

Example:

$$R = (A, B, C, D, E, G)$$

$$F = \{A \rightarrow BCD, B \rightarrow CDE, AC \rightarrow E\}$$

$$\text{Step 1: } F' = \{A \rightarrow B, A \rightarrow C, A \rightarrow D, B \rightarrow C, B \rightarrow D, B \rightarrow E, AC \rightarrow E\}$$

$$\text{Step 2: } AC \rightarrow E$$

$$C^+ = \{C\}; \text{ thus } C \rightarrow E \text{ is not inferred by } F'.$$

Hence, $AC \rightarrow E$ cannot be replaced by $A \rightarrow E$.

$$A^+ = \{A, B, C, D, E\}; \text{ thus, } A \rightarrow E \text{ is inferred by } F'.$$

Hence, $AC \rightarrow E$ can be replaced by $A \rightarrow E$.

$$F'' = \{A \rightarrow B, A \rightarrow C, A \rightarrow D, A \rightarrow E, B \rightarrow C, B \rightarrow D, B \rightarrow E\}$$

$$\text{Step 3: } A^+|_{F'' - \{A \rightarrow B\}} = \{A, C, D, E\}; \text{ thus } A \rightarrow B \text{ is not inferred by } F'' - \{A \rightarrow B\}.$$

That is, $A \rightarrow B$ is not redundant.

$$A^+|_{F'' - \{A \rightarrow C\}} = \{A, B, C, D, E\}; \text{ thus, } A \rightarrow C \text{ is redundant.}$$

Thus, we can remove $A \rightarrow C$ from F'' to obtain F''' .

Iteratively, we can $A \rightarrow D$ and $A \rightarrow E$ but not the others.

$$\text{Thus, } F_{\min} = \{A \rightarrow B, B \rightarrow C, B \rightarrow D, B \rightarrow E\}.$$

3NF decomposition algorithm

Algorithm 3NF decomposition

1. Find a minimum cover F' of F .

2. For each left side X that appears in F' , do:

create a relation schema $X \cup A_1 \cup A_2 \dots \cup A_m$ where $X \rightarrow \{A_1\}, \dots, X \rightarrow \{A_m\}$ are all the dependencies in F' with X as left side.

3. if none of the relation schemas contains a key of R ,

create one more relation schema that contains attributes that form a key for R .

See E/N Algorithm 15.4.

Example:

$R = (A, B, C, D, E, G)$

$F_{\min} = \{A \rightarrow B, B \rightarrow C, B \rightarrow D, B \rightarrow E\}.$

Candidate key: (A, G)

$R_1 = (A, B), R_2 = (B, C, D, E)$

$R_3 = (A, G)$

3NF decomposition algorithm_(cont)

Example: (From Desai 6.31)

Beginning again with the *SHIPPING* relation. The functional dependencies already form a canonical cover.

- From $Ship \rightarrow Capacity$, derive $R_1(\underline{Ship}, Capacity)$,

- From $\{Ship, Date\} \rightarrow Cargo$, derive

$R_2(\underline{Ship}, \underline{Date}, Cargo)$,

- From $\{Capacity, Cargo\} \rightarrow Value$, derive

$R_3(\underline{Capacity}, \underline{Cargo}, Value)$.

- There are no attributes not yet included and the original key $\{Ship, Date\}$ is included in R_2 .

3NF decomposition algorithm_(cont)

Another Example: Apply the algorithm to the LOTS example given earlier.

A minimal cover is

$$\begin{aligned} &\{ \textit{Property_Id} \rightarrow \textit{Lot_No}, \\ &\quad \textit{Property_Id} \rightarrow \textit{Area}, \{ \textit{City}, \textit{Lot_No} \} \rightarrow \textit{Property_Id}, \\ &\quad \textit{Area} \rightarrow \textit{Price}, \textit{Area} \rightarrow \textit{City}, \textit{City} \rightarrow \textit{Tax_Rate} \}. \end{aligned}$$

This gives the decomposition:

$R_1(\underline{\textit{Property_Id}}, \textit{Lot_No}, \textit{Area})$

$R_2(\underline{\textit{City}}, \textit{Lot_No}, \textit{Property_Id})$

$R_3(\underline{\textit{Area}}, \textit{Price}, \textit{City})$

$R_4(\underline{\textit{City}}, \textit{Tax_Rate})$

Exercise 1: Check that this is a lossless, dependency preserving decomposition into 3NF.

Exercise 2: Develop an algorithm for computing a key of a table R with respect to a given F of FDs.

Summary

Data redundancies are undesirable as they create the potential for update anomalies,

One way to remove such redundancies is to normalise a design, guided by FD's.

BCNF removes all redundancies due to FD's, but a dependency preserving decomposition cannot always be found,

A dependency preserving, lossless decomposition into 3NF can always be found, but some redundancies may remain,

Even where a dependency preserving, lossless decomposition that removes all redundancies can be found, it may not be possible, for efficiency reasons, to remove all redundancies.