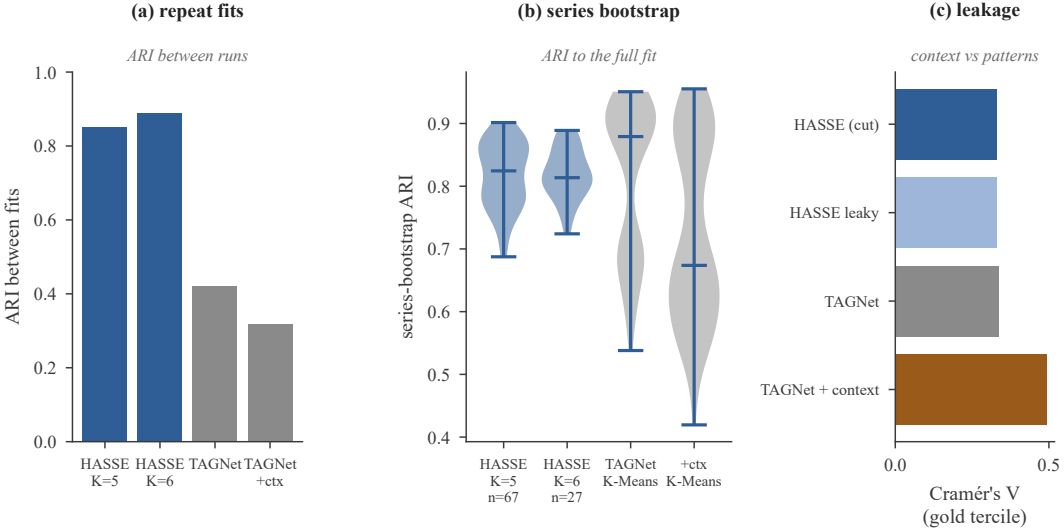

(a) repeat fits
ARI between runs
ARI between fits
1.0
0.8
0.6
0.4
0.2
0.0
HASSE K=5
HASSE K=6
TAGNet
TAGNet +ctx
(b) series bootstrap
ARI to the full fit
series-bootstrap ARI
0.9
0.8
0.7
0.6
0.5
0.4
HASSE K=5 n=67
HASSE K=6 n=27
TAGNet K-Means
+ctx K-Means
(c) leakage
context vs patterns
HASSE (cut)
HASSE leaky
TAGNet
TAGNet + context
0.0
0.5
Cramér's V (gold tercile)