

Identification of Raphael' s paintings from the forgeries

Liang Zhicong

[School of Mathematics, Sun Yet-Sen University](#)

liangzhc3@mail2.sysu.edu.cn

Abstract

Given 28 paintings, 11 of which are known as Raphael' s and 10 are known as non-Raphael' s, our task is to predict the authorship of another 7 disputed paintings. This project can be divided into two parts: (1) feature extraction and (2) classification.

For the first part, I applied the geographic tight frame method [1]. For the second part, I try different methods :(1) Distance Discriminant Analysis [1] and (2) Neural Network and (3) my Combined Method.

After looking into the misclassified paintings of distance discriminant analysis, I surprisingly found that all the misclassified paintings belong to Raphael, which means that we got a pretty large False Negative Rate (FNR). According to this fact, after applying Distance Discriminant Analysis, I applied Neural Network to re-predict the "outliers" . If a painting is predicted as outlier but has a probability large than 70% to be Raphael in Neural Network, we still classified it as Raphael' s. We named this method as Combined Model.

In leave-one-out cross validation test, Distance Discriminant Analysis reaches an accuracy of 80%, Neural Network reaches about 92.5% while Combined Model reaches about 96.5%.

And we are confident that the 7/10/25/26th are Raphael' s , 20/23th are non-Raphael' s while the 1st is still under uncertainty.

All the codes of this project could be found on my Github repository: [Identification-of-Raphael' s-Paintings](#) [2].

Processing Data

Firstly, I transform all the 27 RGB paintings into gray-scale images by $pixel = (R * 299 + G * 587 + B * 114) // 1000$ and then cut out the edges of them. For some reasons, the 28th painting could not be read in, so it is abandoned.

Feature Extraction

I applied the 18 geometric tight frame filters [1], using a neighbor size of 5*5:

$$\begin{aligned} \tau_0 &= \frac{1}{16} \begin{bmatrix} 1 & 2 & 1 \\ 2 & 4 & 2 \\ 1 & 2 & 1 \end{bmatrix}, & \tau_1 &= \frac{1}{16} \begin{bmatrix} 1 & 0 & -1 \\ 2 & 0 & -2 \\ 1 & 0 & -1 \end{bmatrix}, & \tau_2 &= \frac{1}{16} \begin{bmatrix} 1 & 2 & 1 \\ 0 & 0 & 0 \\ -1 & -2 & -1 \end{bmatrix}, \\ \tau_3 &= \frac{\sqrt{2}}{16} \begin{bmatrix} 1 & 1 & 0 \\ 1 & 0 & -1 \\ 0 & -1 & -1 \end{bmatrix}, & \tau_4 &= \frac{\sqrt{2}}{16} \begin{bmatrix} 0 & 1 & 1 \\ -1 & 0 & 1 \\ -1 & -1 & 0 \end{bmatrix}, & \tau_5 &= \frac{\sqrt{7}}{24} \begin{bmatrix} 1 & 0 & -1 \\ 0 & 0 & 0 \\ -1 & 0 & 1 \end{bmatrix}, \\ \tau_6 &= \frac{1}{48} \begin{bmatrix} -1 & 2 & -1 \\ -2 & 4 & -2 \\ -1 & 2 & -1 \end{bmatrix}, & \tau_7 &= \frac{1}{48} \begin{bmatrix} -1 & -2 & -1 \\ 2 & 4 & 2 \\ -1 & -2 & -1 \end{bmatrix}, & \tau_8 &= \frac{1}{12} \begin{bmatrix} 0 & 0 & -1 \\ 0 & 2 & 0 \\ -1 & 0 & 0 \end{bmatrix}, \\ \tau_9 &= \frac{1}{12} \begin{bmatrix} -1 & 0 & 0 \\ 0 & 2 & 0 \\ 0 & 0 & -1 \end{bmatrix}, & \tau_{10} &= \frac{\sqrt{2}}{12} \begin{bmatrix} 0 & 1 & 0 \\ -1 & 0 & -1 \\ 0 & 1 & 0 \end{bmatrix}, & \tau_{11} &= \frac{\sqrt{2}}{16} \begin{bmatrix} -1 & 0 & 1 \\ 2 & 0 & -2 \\ -1 & 0 & 1 \end{bmatrix}, \\ \tau_{12} &= \frac{\sqrt{2}}{16} \begin{bmatrix} -1 & 2 & -1 \\ 0 & 0 & 0 \\ 1 & -2 & 1 \end{bmatrix}, & \tau_{13} &= \frac{1}{48} \begin{bmatrix} 1 & -2 & 1 \\ -2 & 4 & -2 \\ 1 & -2 & 1 \end{bmatrix}, & \tau_{14} &= \frac{\sqrt{2}}{12} \begin{bmatrix} 0 & 0 & 0 \\ -1 & 2 & -1 \\ 0 & 0 & 0 \end{bmatrix}, \\ \tau_{15} &= \frac{\sqrt{2}}{24} \begin{bmatrix} -1 & 2 & -1 \\ 0 & 0 & 0 \\ -1 & 2 & -1 \end{bmatrix}, & \tau_{16} &= \frac{\sqrt{2}}{12} \begin{bmatrix} 0 & -1 & 0 \\ 0 & 2 & 0 \\ 0 & -1 & 0 \end{bmatrix}, & \tau_{17} &= \frac{\sqrt{2}}{24} \begin{bmatrix} -1 & 0 & -1 \\ 2 & 0 & 2 \\ -1 & 0 & -1 \end{bmatrix}, \end{aligned}$$

Then we got 18 feature-images of each painting. We calculate 3 statistics of each feature-image: (1) the mean (2) the standard deviation (std) (3) and the proportion of pixels that are more than one standard deviation away from the mean (tail). So, we have 18*3=54 features for every painting.

Distance Discriminant Analysis

Before distance discriminant analysis, we will first select some most discriminating features. We hope that under these features, Raphael's paintings concentrate in a circle around their mean while the non-Raphael's lay as outliers. Mathematically, we define the best features as those with largest AUC.

In experience, I found that normalizing the features or not will give different results. If we normalize the features first, then the best choice would be [6,33,2], which represent the mean of τ_2, τ_{12} and the tail of τ_0 , respectively. If not normalize, then the best choice would be [18,24], the mean of τ_6 and τ_9 .

Main result of Distance Discriminant Analysis

Normalized	Features	Accuracy	1st	7th	10th	20th	23th	25th	26th
✓	[6,33,2]	80%	×	×	✓	×	×	✓	✓
×	[18,24]	80%	✓	✓	✓	✓	×	✓	✓

Note: 1st, 7th,26th represent the 7 disputed paintings, × means it is forgery while ✓ means it is authentic. "Accuracy" is the accuracy of the leave-one-out cross validation test.

Misclassified Paintings in Cross Validation Test

Normalized	Features	Misclassification
✓	[6,33,2]	2(R), 5(R), 22(R), 27(R)
×	[18,24]	4(R), 11(N), 13(N), 19(N)

"R" means this painting is Raphael's while "N" means non-Raphael's

According to the two tables above, a very important point should be proposed is that all the misclassified paintings in normalized model belong to Raphael, which means this model has a large False Negative Rate (FNR) while a perfect True Positive Rate (TPR). We can improve it by re-predict those paintings that are classified as outliers and try to lower the FNR, which will be discussed in section "Combined Model" .

Four Paintings Misclassified as Forgeries



2nd (Raphael)



5th (Raphael)




22nd (Raphael)




27th (Raphael)

Here, we will visualize the two methods. The radius of the circle in the second figure is the best threshold of classification on all the data (instead of leave-one-out cross validation):

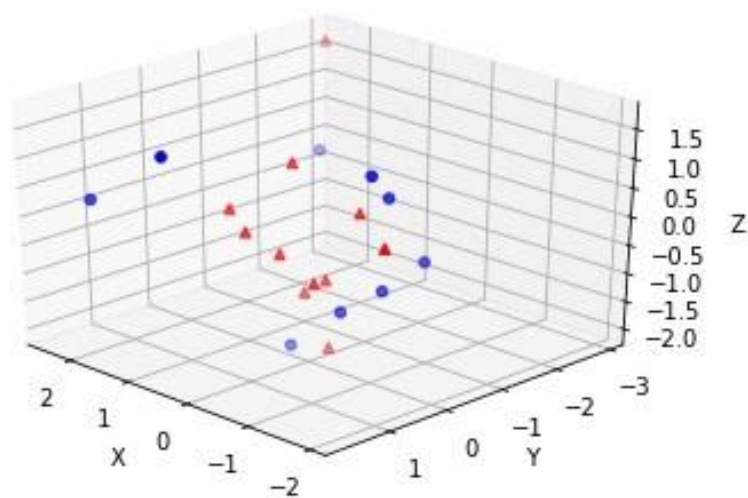

Normalized: Red points are Raphael's while blue ones are Non-Raphael's.

As we can see, a few Raphael's paintings spread as outliers, too.

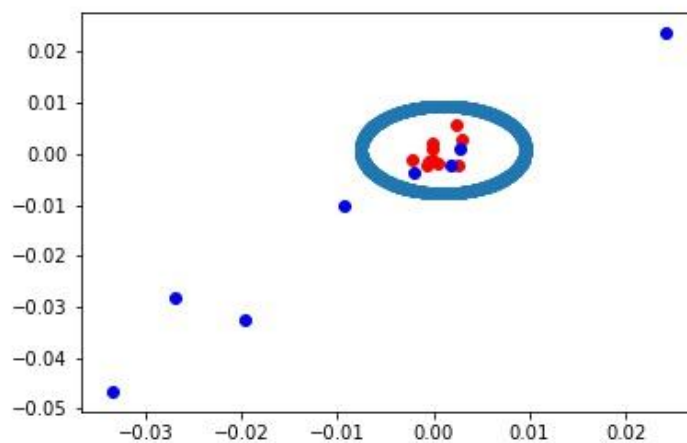

Non-Normalized: Red points are Raphael's while blue ones are Non-Raphael's


The circle is the classification threshold.

Neural Network

I use a neural network, with 54 input units (all features used) and one hidden layer of 7 units, as my second classification method and reach an accuracy of about 92.5%. Model summary is as follow:

Layer (type)	Output Shape	Param #
dense_2 (Dense)	(None, 7)	385
activation_1 (Activation)	(None, 7)	0
dense_3 (Dense)	(None, 1)	8
activation_2 (Activation)	(None, 1)	0
Total params: 393		
Trainable params: 393		
Non-trainable params: 0		

Activation_1 is tanh and Activation_2 is sigmoid

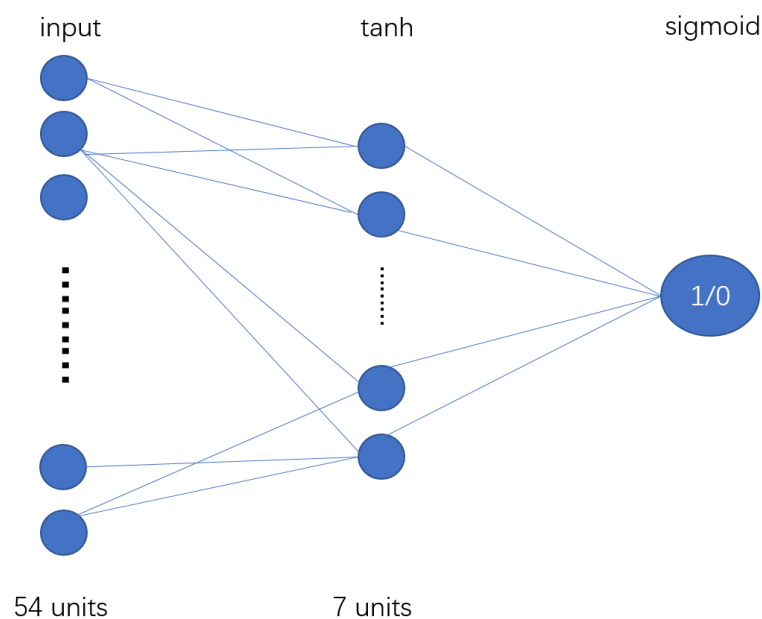

Main result of Neural Network

Features	Average Accuracy	1st	7th	10th	20th	23th	25th	26th
All 54 features	92.5%	✓	✓	✓	✓	x	x	✓
Average Probability		0.95	0.83	0.56	0.76	0.15	0.4	0.63
Misclassification		6(R), 13(N)						

R" means this painting is Raphael' s while "N" means non-Raphael' s

Combined Model

As we have mentioned above, the normalized Distance Discriminant Analysis model gives a pretty good True Positive Rate (TPR) while a bad False Negative Rate (FNR). In this section, I try to re-predict those paintings that are first considered as non-Raphael' s using the same Neural Network above, with all 54 features used.

And the classification rule will be:


- (1) If a painting is considered as Raphael' s in Distance Discriminant Analysis, then we accept it as Raphael' s;
- (2) If a painting is considered as non-Raphael in Distance Discriminant Analysis but has a probability larger than 70% to be Raphael' s in Neural Network, we accept is as Raphael' s;
- (3) All the other cases will be rejected to be Raphael' s.

Main result of Combined Model

Accuracy	1st	7th	10th	20th	23th	25th	26th
96.5%	✓	✓	✓	✗	✗	✓	✓
Frequency	0.5333	0.7	1	0.2667	0	1	1

"Accuracy" is the accuracy of the leave-one-out cross validation test.

"Frequency" is the frequency of a particular painting classified as Raphael' s under 30 repeated experiments.

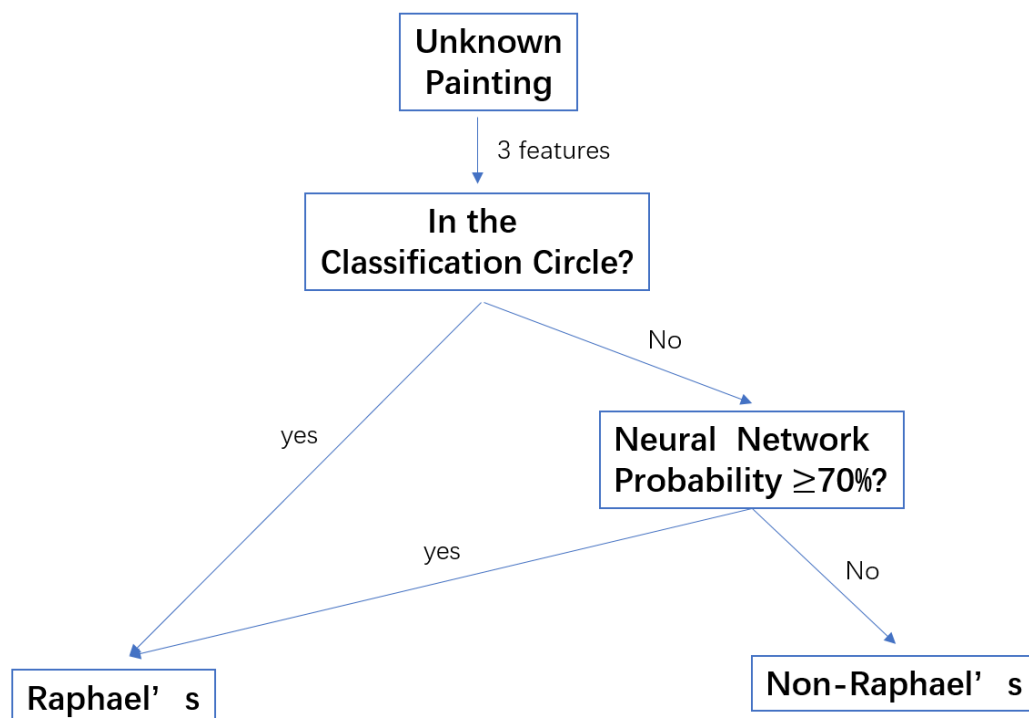

Basic Procedure of Combined Model

Analysis

In the first model, Distance Discriminant Analysis, we select 3 features under which Raphael's paintings will be concentrated around a specific circle while non-Raphael's ones will spread as outliers.

However, this hypothesis seems too strong that we may misclassify some Raphael's paintings as Non-Raphael's. This case is very likely to happen since we only choose such a small number of features: it is difficult even for Raphael to perform consistently on a small set of particular features. A re-classification process seems reasonable since even a painting lies as outlier under several features, it is still possible to be Raphael's if other features resemble those of Raphael's ones.

In Combined Model, we first classify paintings using the circle hypothesis, then we re-predict the outliers based on a non-circle model, trying to capture as more information as we can.

Conclusion

From the result of the two classification methods we discuss above, we are confident that the 7/10/25/26th are Raphael's, 20/23th are non-Raphael's while the 1st is still under uncertainty.



1st (Uncertain)

Link:

[1] Haixia Liu, Raymond H. Chan, Yuan Yao, Geometric tight frame based stylometry for art authentication of van Gogh paintings :<https://doi.org/10.1016/j.acha.2015.11.005>

[2] ZhicongLiang Github: <https://github.com/ZhicongLiang/Identification-of-Raphael-Paintings>