

Semantic Runtime Protocol: Governing Semantic Runtime State through Validated Boundaries and Evidence-Controlled Optimization

SRP Authors

Abstract

This package skeleton is derived from the primary manuscript source and preserves the current release boundary without duplicating the manuscript body.

Packaging Note

This arXiv package skeleton is intentionally thin. The manuscript body is imported from `paper/SRP_ARXIV_DRAFT_V1.md` during the packaging conversion step.

The package includes figure assets, a bibliography file, and an appendix shell so the submission bundle has a clear structure without duplicating the manuscript source.

A Artifact Attachment Package

This appendix shell documents the submission-facing packaging boundary. Curated evidence bundles live under `artifacts/`, and the manifest is `artifacts/MANIFEST.md`.


B Figure Assets

The package stores vector figure assets in `figures/`. The assets are packaging aids derived from the manuscript’s existing governance narrative and do not add new claims.

References

- [1] Joshua Achiam, David Held, Aviv Tamar, and Pieter Abbeel. Constrained policy optimization. *arXiv preprint arXiv:1705.10528*, 2017. URL <https://arxiv.org/abs/1705.10528>.
- [2] Carlos E. Alchourron, Peter Gärdenfors, and David Makinson. On the logic of theory change: Partial meet contraction and revision functions. *The Journal of Symbolic Logic*, 1985. URL <https://www.jstor.org/stable/2274239>.
- [3] et al. Chhikara. Mem0: Building production-ready ai agents with scalable long-term memory. *arXiv preprint arXiv:2504.19413*, 2025. URL <https://arxiv.org/abs/2504.19413>.
- [4] Theo Haerder and Andreas Reuter. Principles of transaction-oriented database recovery. *ACM Computing Surveys*, 1983. URL <https://dl.acm.org/doi/10.1145/289.291>.
- [5] Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Anton Kättner, Nazanin Gholipour, Wen-Tau Cui, Armen Aghajanyan, et al. Retrieval-augmented generation for knowledge-intensive nlp tasks. *arXiv preprint arXiv:2005.11401*, 2020. URL <https://arxiv.org/abs/2005.11401>.


SRP Governance Pipeline

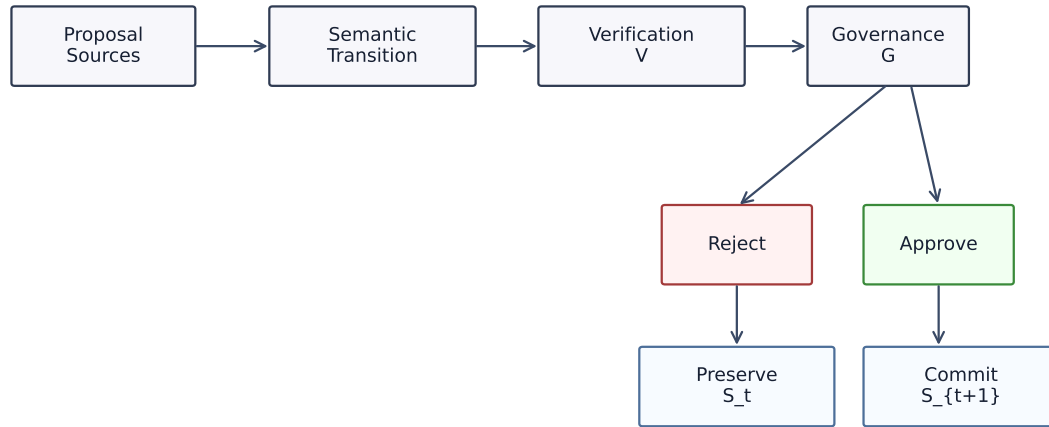

Evidence improves verification; governance controls mutation.

Figure 1: SRP governance pipeline preview for submission packaging.

SRP Positioning by Transition Authority

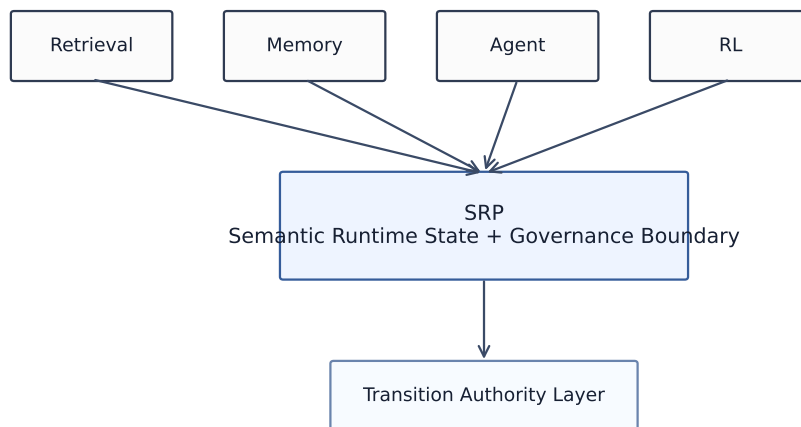

SRP occupies the transition governance layer, not the retrieval or action layer.

Figure 2: SRP positioning preview for submission packaging.

- [6] Charles Packer et al. Memgpt: Towards llms as operating systems. *arXiv preprint arXiv:2310.08560*, 2023. URL <https://arxiv.org/abs/2310.08560>.
- [7] et al. Rasmussen. Zep: A temporal knowledge graph architecture for agent memory. *arXiv preprint arXiv:2501.13956*, 2025. URL <https://arxiv.org/abs/2501.13956>. Graphiti is the temporal knowledge graph engine used by Zep.
- [8] et al. Sanchez. A survey of challenges for runtime verification from advanced application domains (beyond software). *Formal Methods in System Design*, 2019. URL <https://link.springer.com/article/10.1007/s10703-019-00337-w>.
- [9] Timo Schick et al. Toolformer: Language models can teach themselves to use tools. *arXiv preprint arXiv:2302.04761*, 2023. URL <https://arxiv.org/abs/2302.04761>.
- [10] Tomohiro Wachi et al. A survey of constraint formulations in safe reinforcement learning. *arXiv preprint arXiv:2402.02025*, 2024. URL <https://arxiv.org/abs/2402.02025>.
- [11] Guanzhi Wang et al. Voyager: An open-ended embodied agent with large language models. *arXiv preprint arXiv:2305.16291*, 2023. URL <https://arxiv.org/abs/2305.16291>.
- [12] Shunyu Yao et al. React: Synergizing reasoning and acting in language models. *arXiv preprint arXiv:2210.03629*, 2022. URL <https://arxiv.org/abs/2210.03629>.