


大模型RAG进阶实战营 – 基础篇

Cursor的安装、使用和配置

黄佳

新加坡科技局资深AI工程师






目录


1. Cursor的安装
2. 使用Cursor的基本功能
3. 配置DeepSeek(和其它)模型

Cursor的安装


下载Cursor

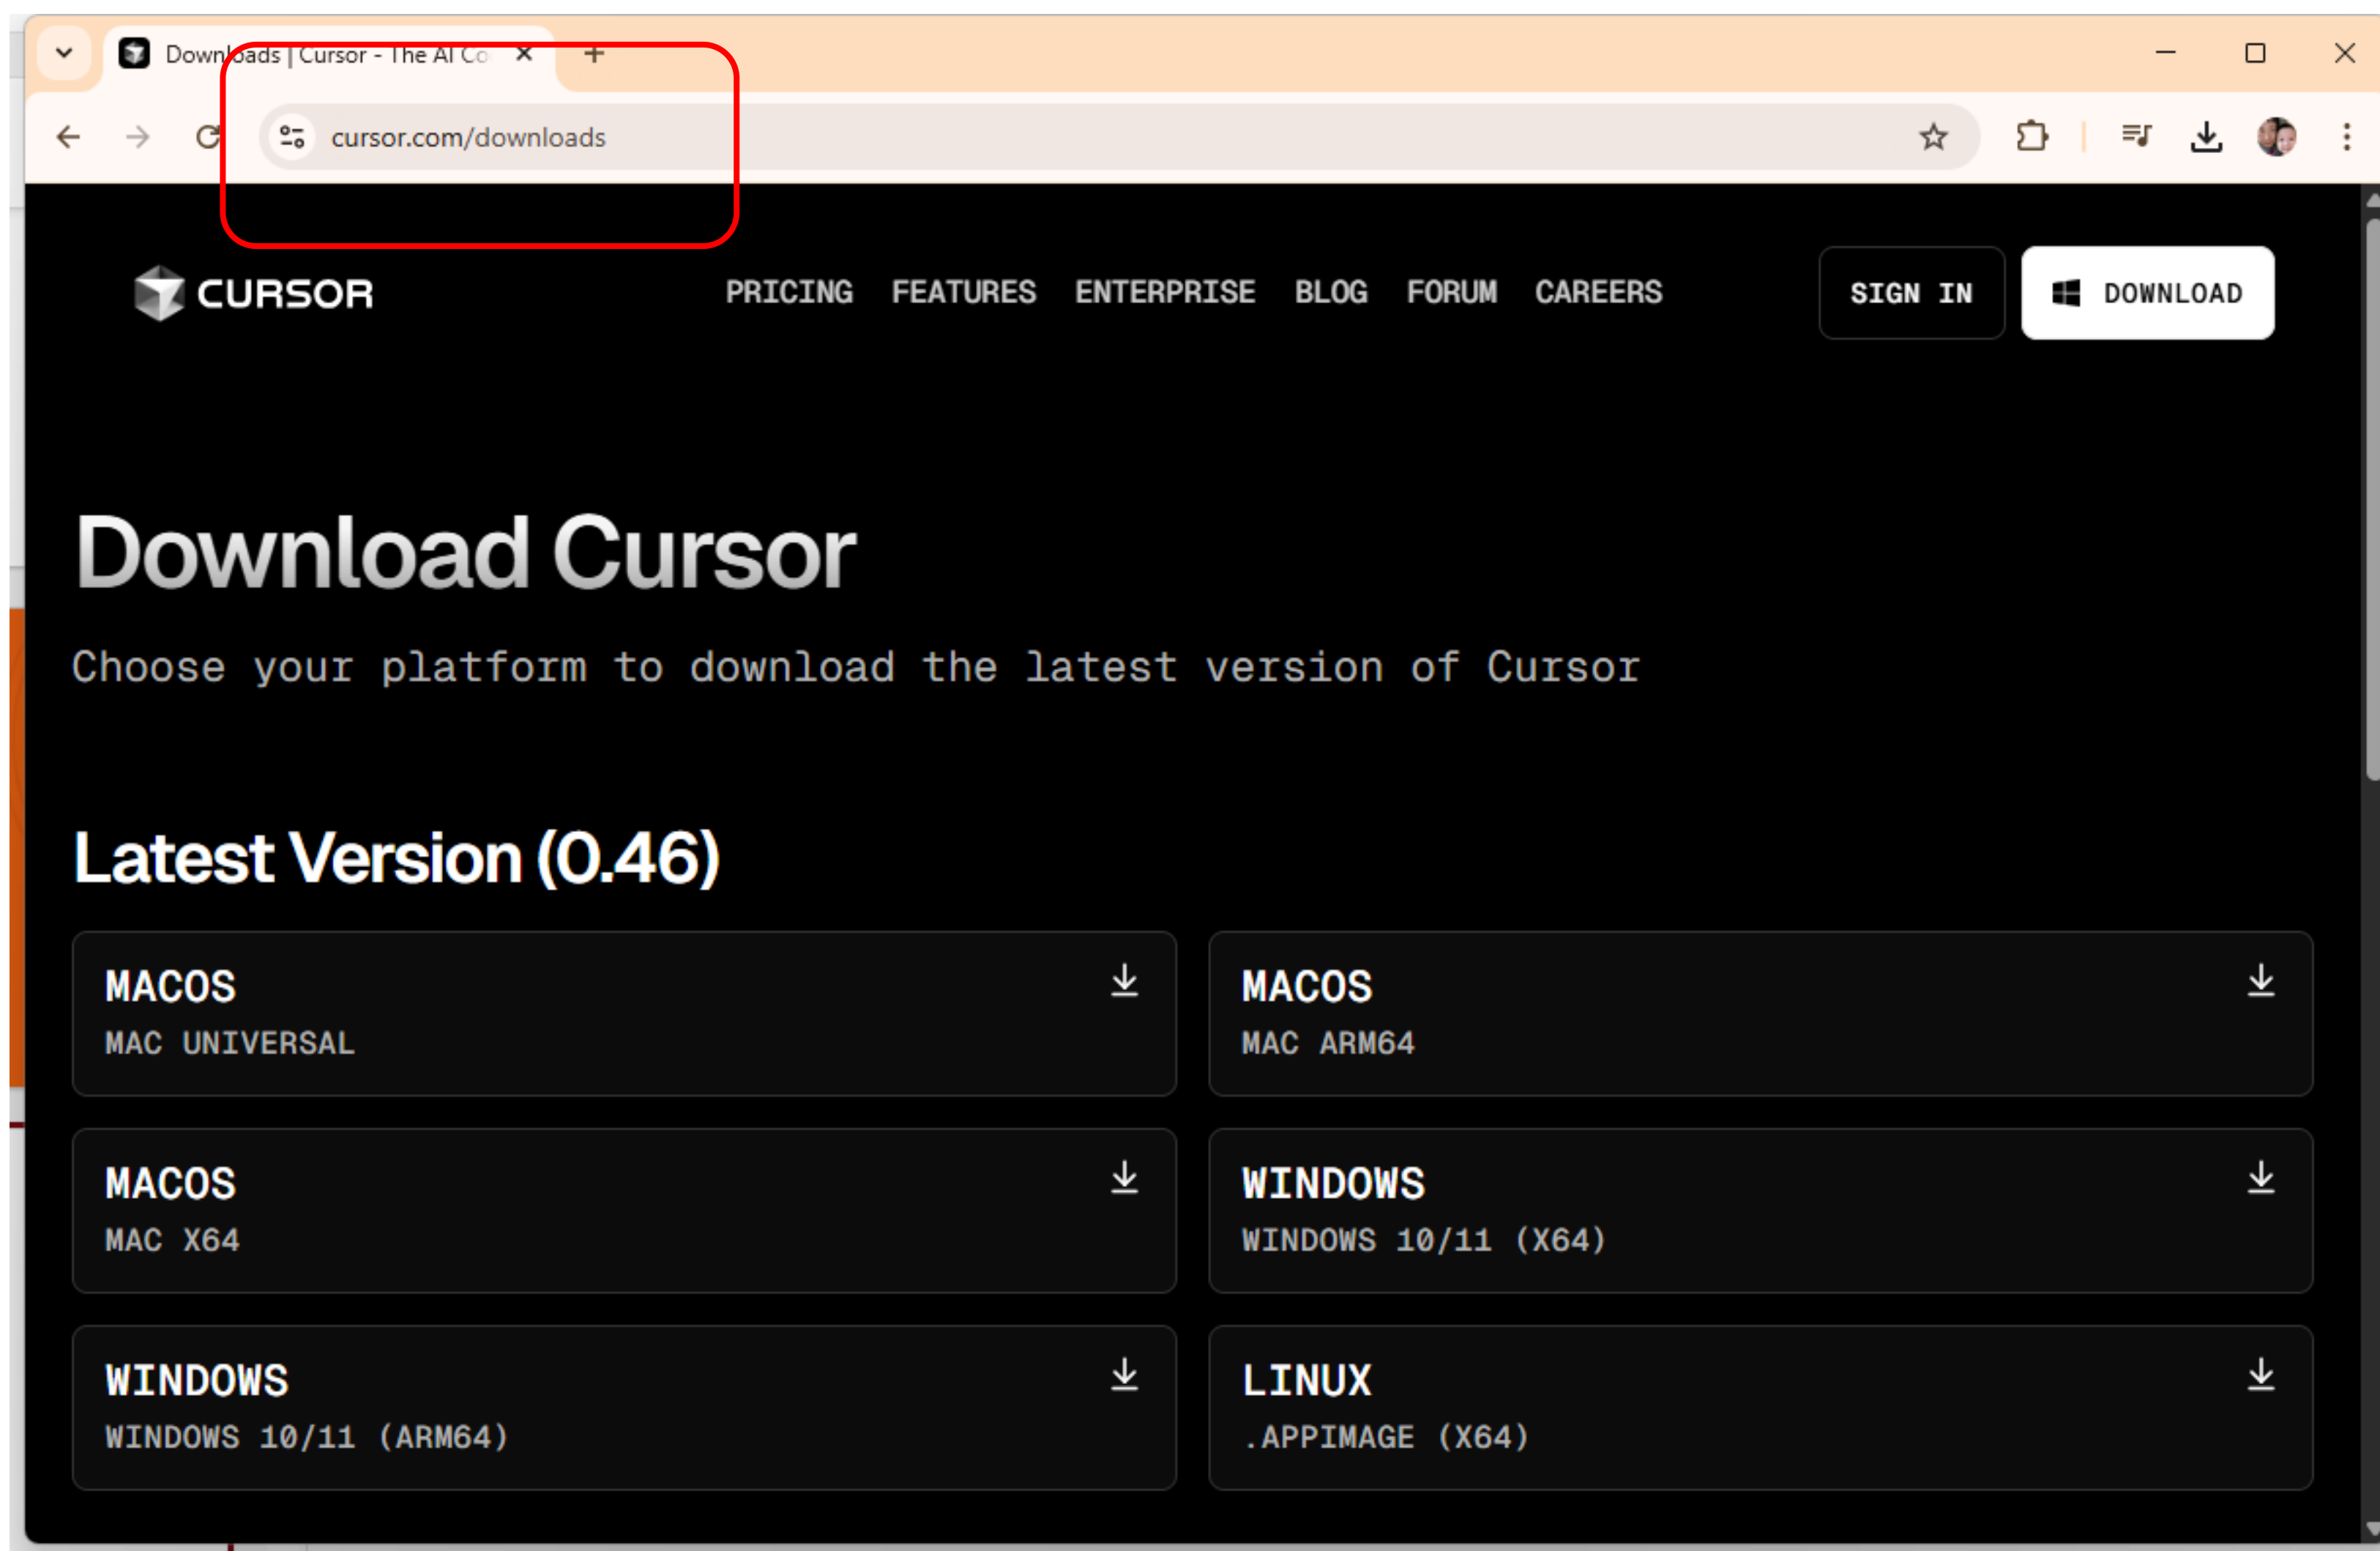


注册一个Cursor账号

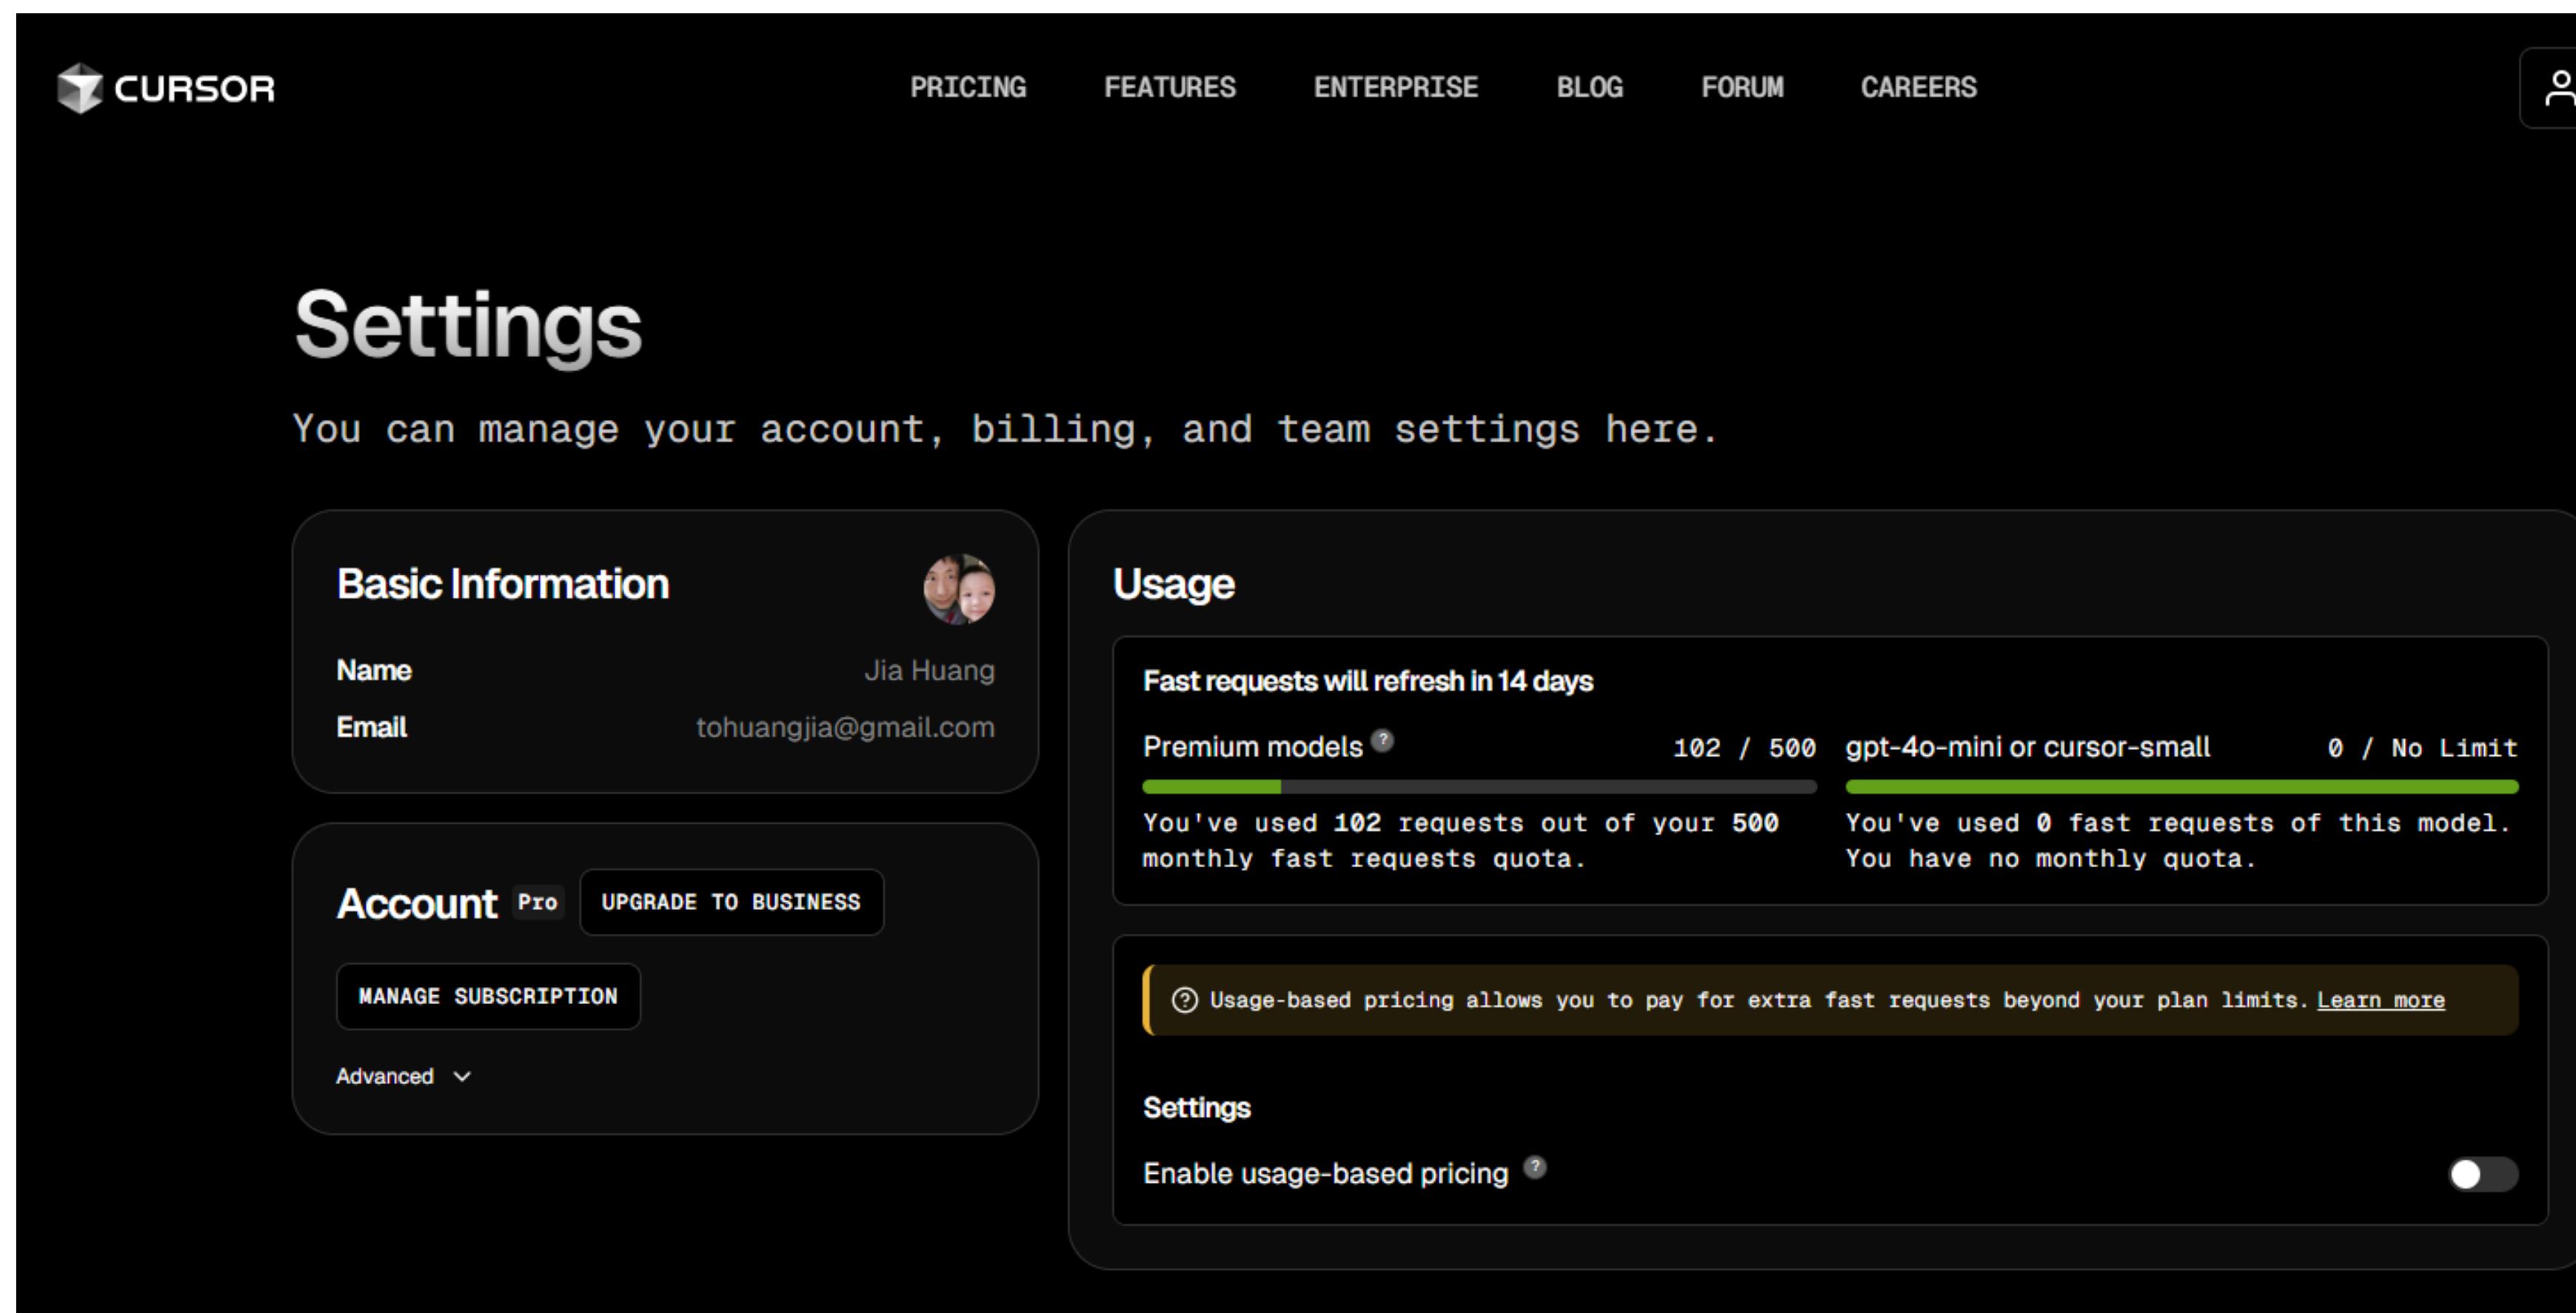

安装并使用Cursor

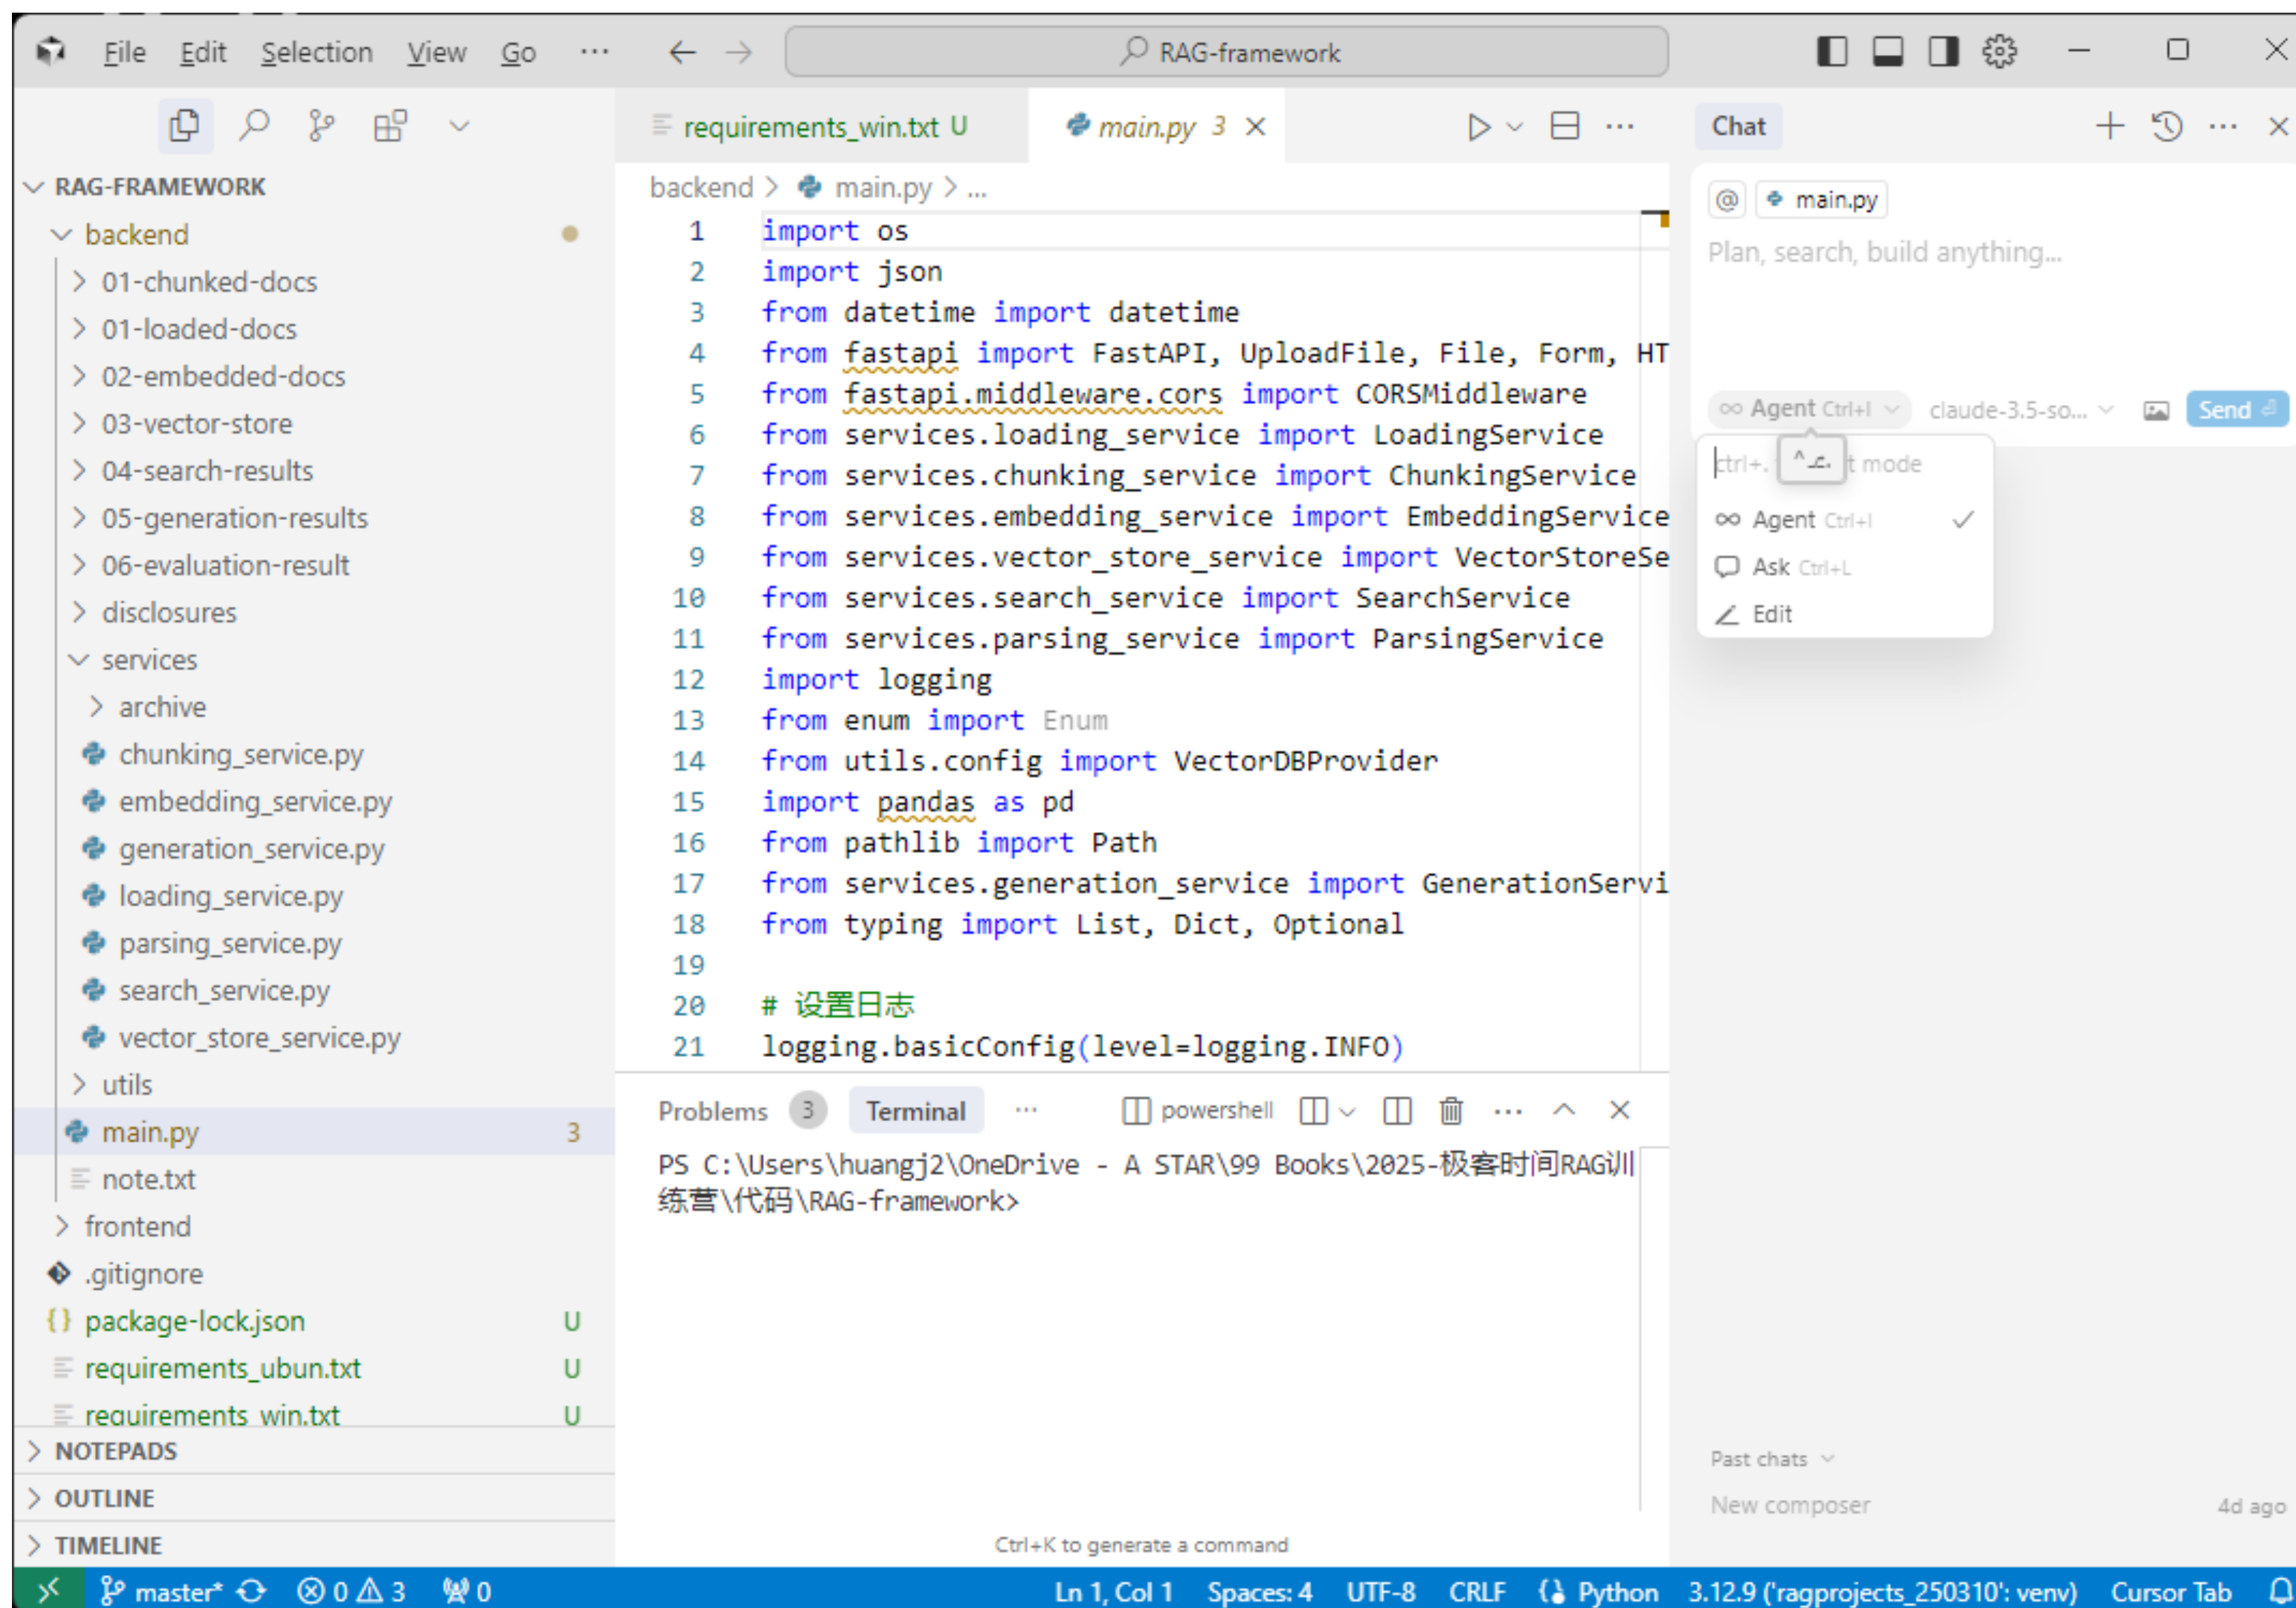

安装Python和简体中文包

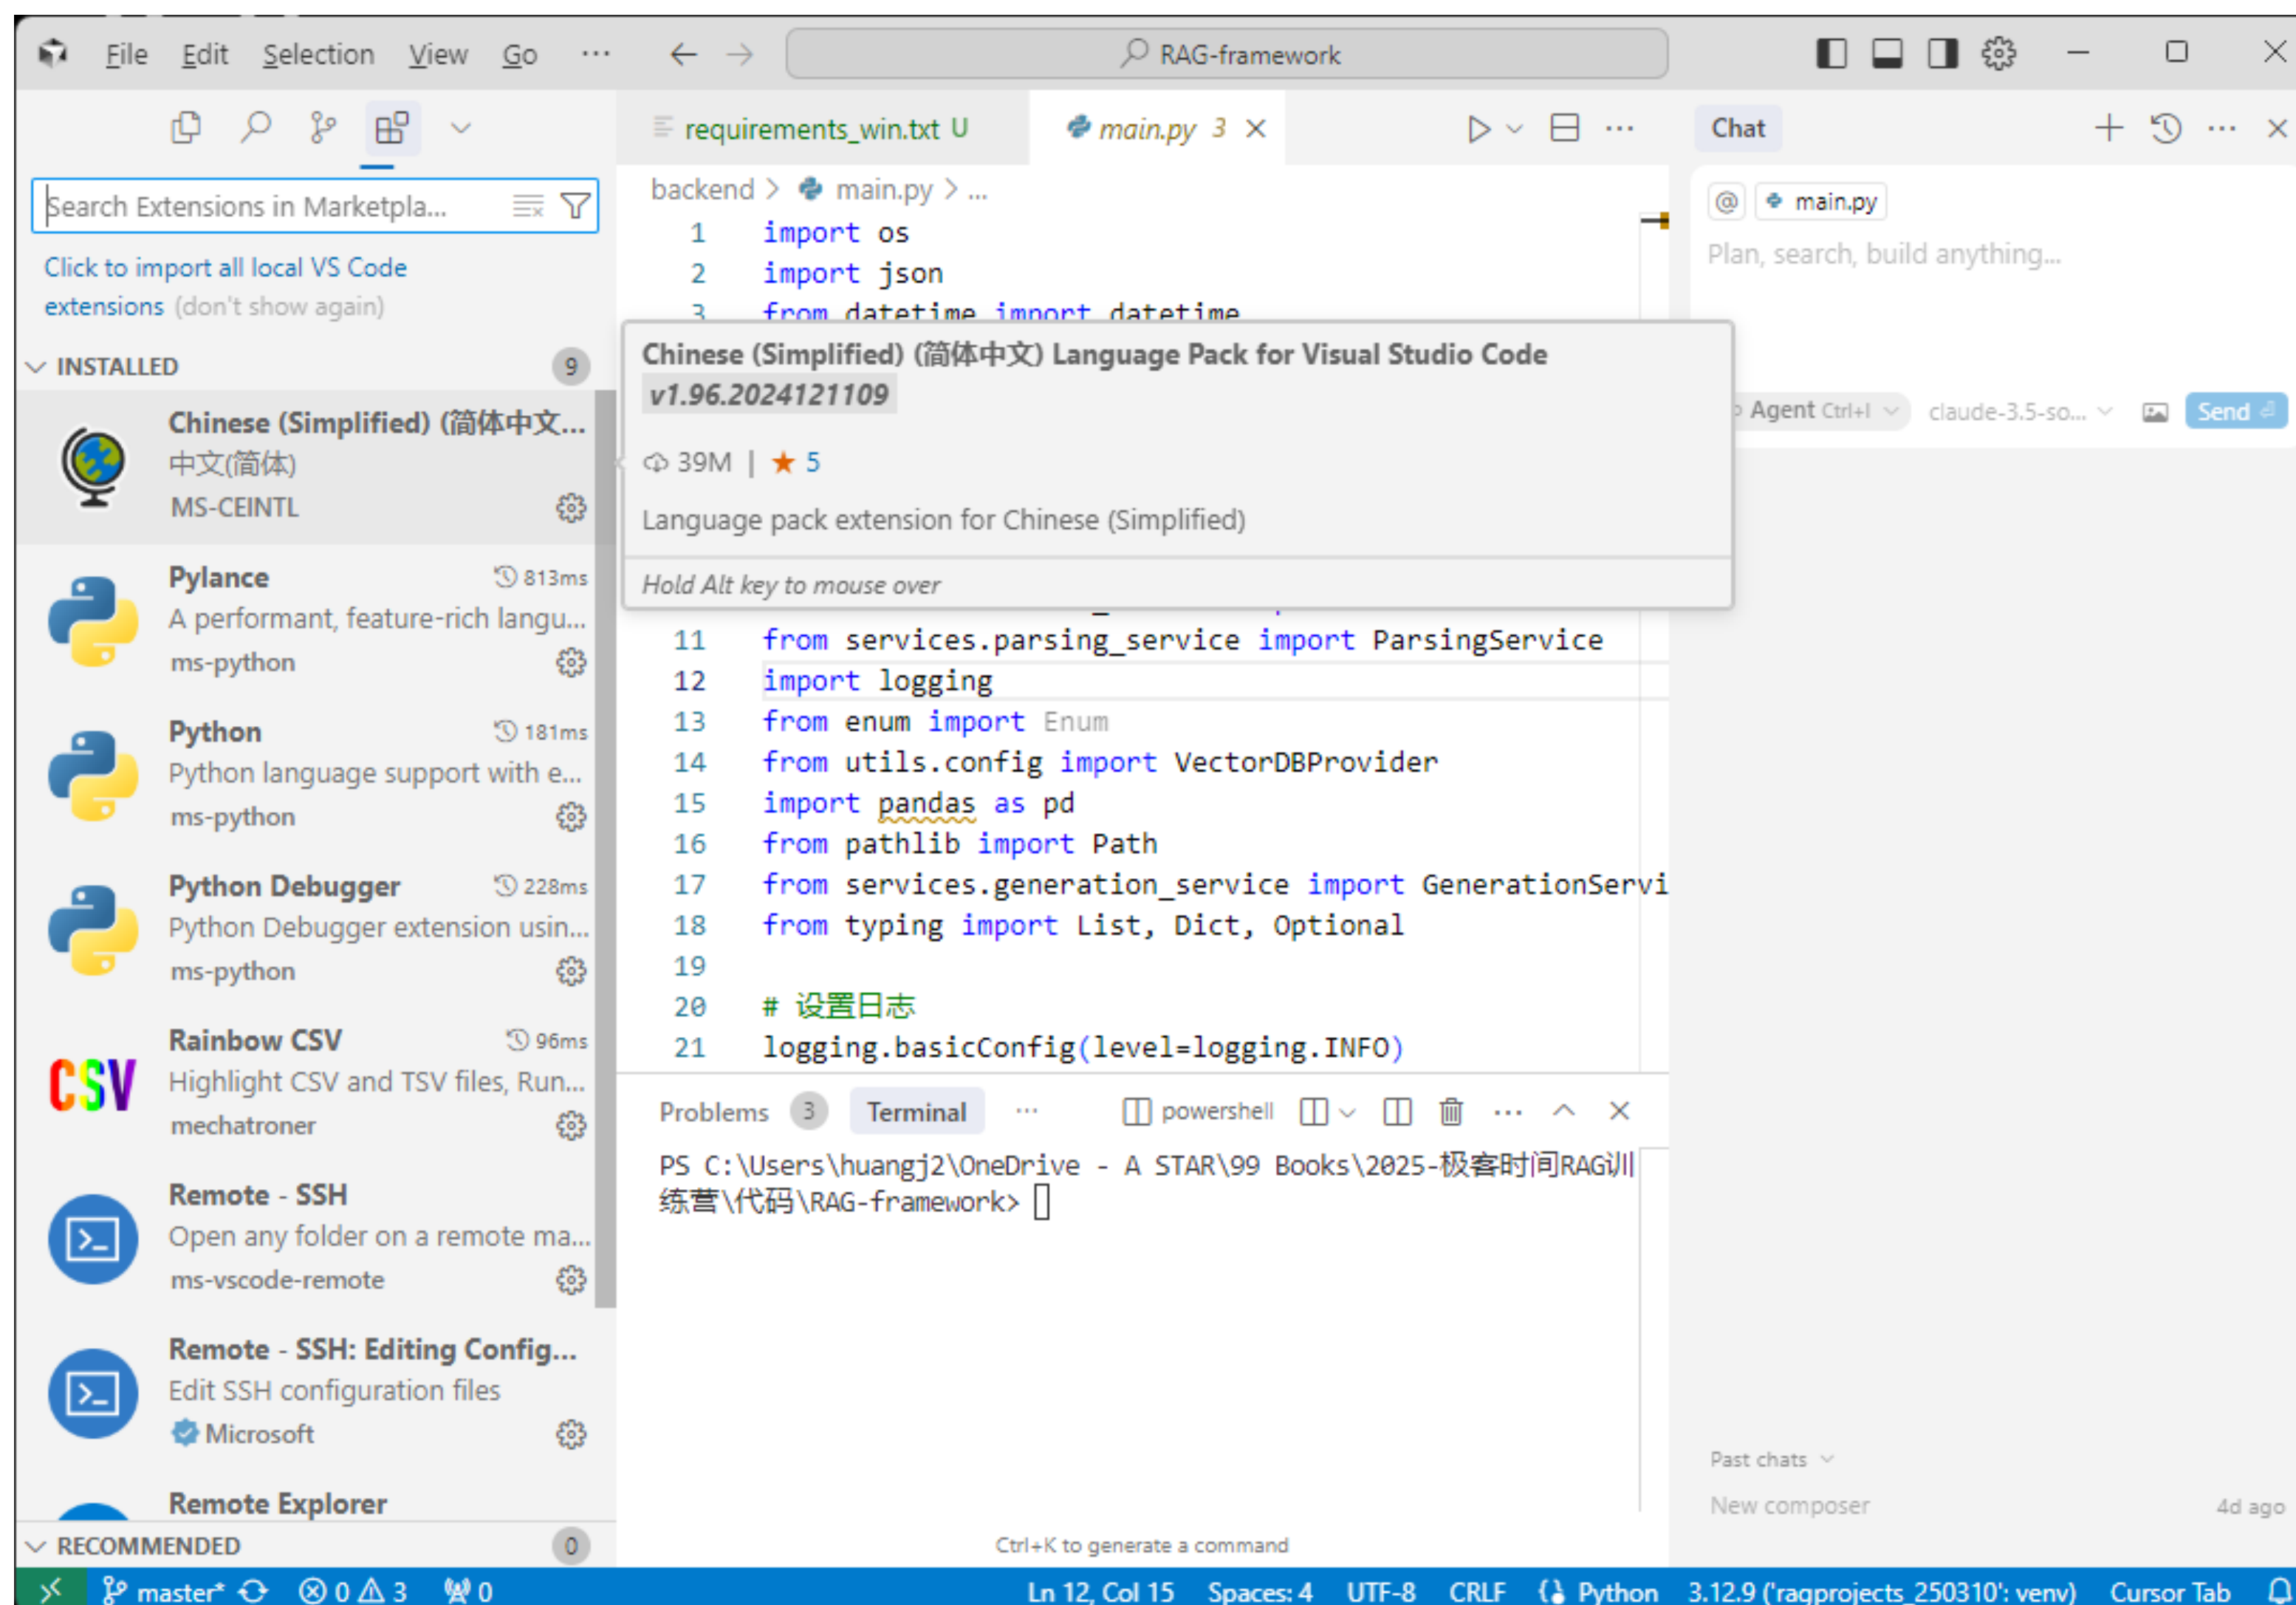

使用Cursor的基本功能

Tab

Cursor includes a powerful autocomplete that predicts your next edit. Once enabled, it is always on and will suggest edits to your code across multiple lines, taking into account your

```
22
23 You, 9 seconds ago - 1 Author (You) 0 implementations
24 pub struct EncodedMessageQueue {
25     pub queue: Vec<(EncodedMessage, ClientFilter)>,
26
27     sender: Arc<Sender<Vec<(EncodedMessage, ClientFilter)>>>,
28     receiver: Arc<Receiver<Vec<(EncodedMessage, ClientFilter)>>>,
29 }
30
31 impl EncodedMessageQueue { You, 8 seconds ago - Uncommitted changes
32     pub fn new() -> Self {
33         let (sender, receiver) = crossbeam_channel::unbounded();
34         Self {
35             queue: vec![],
36             sender: Arc::new(sender),
37             receiver: Arc::new(receiver),
38         }
39     }
40 }
```

Ctrl K

Ctrl K lets you edit and write code with the AI. To edit, try selecting some code, click "Edit," and describe how the code should be changed. To generate completely new code, just type Ctrl K without selecting anything.

add an inside case

⌘↵ Submit Edit ⌘↵ quick question ⌘↵ edit codebase ⌘↵ K to toggle

```
let buffer = "";
let state: "outside" | "newline" = "outside";
let state: "outside" | "newline" | "inside" = "outside";
for await (const datum of stream) {
    const newToken = datum.content;
    for (const char of newToken) {
        if (state === "inside") {
            if (char === " ") {
                state = "outside";
                buffer = "";
            } else {
                buffer += char;
            }
        }
        buffer += char;
        if (char === "\"\" && state === "newline") {
```

Ctrl + L

Chat

Chat lets you talk with an AI that sees your codebase. The chat can always see your current file and cursor, so you can ask it things like: "Is there a bug here?". You can add particular blocks of code to the context with Ctrl+Shift+L or "@." You can chat with your entire codebase with Ctrl+Enter.

CHAT MORE

do you see an issue with @local_construction.rs ?

gpt-4 @ Mention no context chat codebase

Yes, I notice a potential issue in the delete_file method. When deleting a file, it only removes the direct file node but doesn't handle nested directories or files that might be children of the deleted node. This could lead to orphaned entries in the files BTreeMap.

Here's a fix that removes all child entries from the files map:

local_construction.rs Ask Apply Copy

```
async fn delete_file(
    &mut self,
    file_path: String,
) -> Result<(), anyhow::Error> {
```

Ctrl + I

Agent

Cursor's agent mode can complete tasks end to end. It does this quickly, while keeping programmers in the loop. Try

CHAT COMPOSER

We should show a strikethrough in the Tab status element when the user has run out of free credit

I'll help you implement the strikethrough styling for the Tab status element when users have run out of free credits. Let me first search for relevant code.

> Searched codebase "Tab status element credits display" • 25 results

Let me search for more specific code related to the Tab status element and credits.

> Searched codebase "Tab status element credits remaining display" • 25 results

Let me search for more specific code related to the credits display.

Tab – 代码补全

```
through(true) BlockBuilder
reduce(true) BlockBuilder
rent_standalone(true) BlockBuilder
...
me: "Orange Concrete Block").id(5006).bu
me: "Blue Concrete Block").id(5007).buil
me: "Red Concrete Block").id(5008).build
me: "White Concrete Block").id(5009).bui
me: "Ivory").id(5012).build(),
ame: "Oak Stairs", id: 5013),
ame: "Ivory Stairs", id: 5013),
```

Multi-Line Edits

Cursor can suggest multiple edits at once, saving you time.

```
const debug = new Debug(document.body, {
  dataStyles: {
    top 10px left 10px fixed
    zIndex: '1000',
    color: '#fff',
    backgroundColor: 'var(--color-ove
    padding: '8px',
```

```
dataStyles: {
  top: '10px',
  left: '10px',
  position: 'fixed',
  zIndex: '1000',
```

Smart Rewrites

Type carelessly, and Cursor will fix your mistakes.

```
// no clue why but this seems to work
const unbindF5 = inputs.bind("F5", ()
  identifier: Perspective.INPUT_IDE
  checkType: "code",
});

this.inputs = inputs;

return () => {
  try {
    unbindKeyC()
    unbindF5();
  } catch (e) {
    // Ignore.
  }
};
```

Cursor Prediction

Cursor predicts your next cursor position so you can seamlessly navigate your code.

Ctrl+K - 内嵌对话

Ctrl K

Ctrl K lets you edit and write code with the AI. To edit, try selecting some code, click "Edit," and describe how the code should be changed. To generate completely new code, just type Ctrl K without selecting anything.

OUTPUT **TERMINAL**

zsh + v

→ portal-website git:(ian-features)

On branch ian-features

Changes not staged for commit:

(use "git add <file>..." to update what will be committed)

(use "git restore <file>..." to discard changes in working directory)

reset the last commit

↩ Submit Edit

⌘↩ quick question

v gpt-4 ⌘K to ⌘

Terminal Ctrl K

Use Ctrl K in the terminal to write terminal commands in plain english. Cursor will convert them into the terminal command you need.

do you know why it's -100?

↩ Generate

⌘↩ quick question


v gpt-4 ⌘K to ⌘

```
def get_ending_tensor (orig_tensor: torch.tensor
    assert orig_tensor.shape[:2] = sequence_ids.
    # print(f'orig tensor - {orig_tensor.shape}')
    # print(f'sequence ids - {sequence_ids.})
```

Quick Questions

If you have any quick questions about certain parts of your code, you can select and click on "quick question" to get your answer right away.

Chat (Ctrl+L) – 对话（并生成代码...）

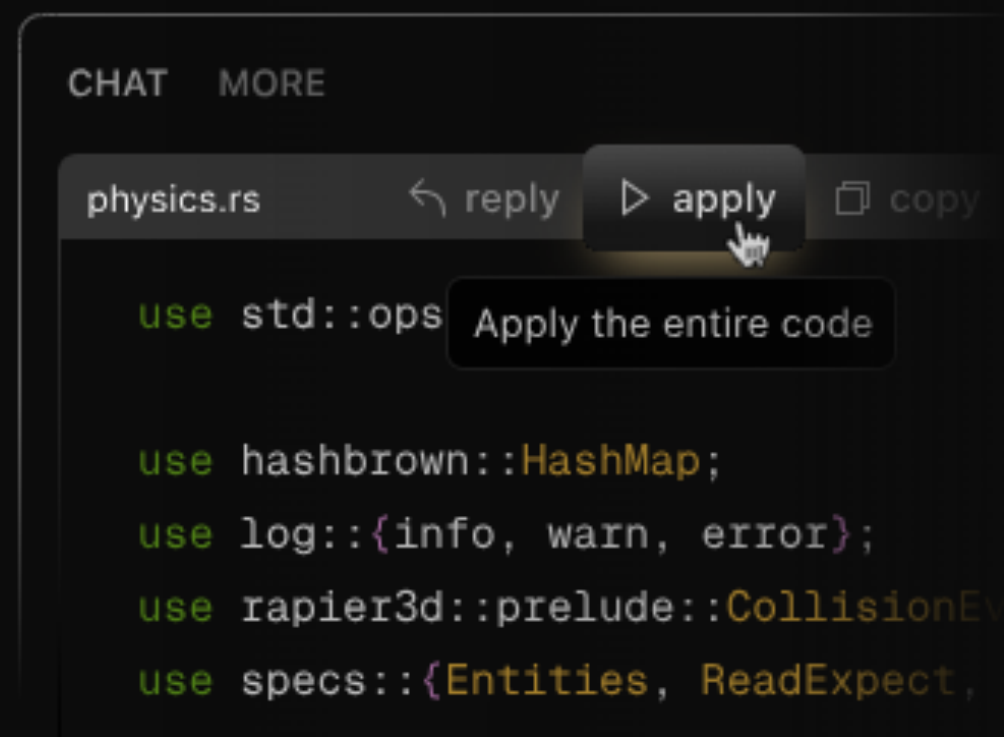

Instant Apply

Apply the code suggestions from chat back into your codebase by clicking the play button on top of any chat codeblock.

How do I configure the physics of a rigid

USING...

🔗 Codebase

Reading files...

TS control.ts packages/core/src/core

TS rigid-body.ts packages/physics-engine

JS index.js packages/physics-engine/ex

Codebase Answers

Use @Codebase or Ctrl Enter to ask questions about your codebase. Cursor will search your codebase to find relevant code to your query.

How do I create an @InlineDiffViewZone

gpt-4 @ Ment

TS inlineDiffViewZone.ts ...s

renderInlineDiffViewZone

JS promptBarViewZone.css

TS promptBarViewZone.ts ...

renderPromptBarViewZor

Show Commits & PRs

Reference your Code

Reference code with @ symbols to be used as context for the AI. Just type @ to see a list of all the files and code symbols in your folder.

Chat (Ctrl+L) – 对话（并生成代码...）

How do I implement a similar UI for this?

gpt-4 @ Mention Image

Image Screenshot 2024-10-10 at 2.38.23 AM

Image Screenshot 2024-10-10 at 2.37.30 AM

Image Screen Recording 2024-10-10 at 2.35.30

Image Screen Recording 2024-10-10 at 2.35.20

Use Images

Hit the image button under chat or drag an image into the input box to include visual context into chat.

@Web What's new in the latest NextJS

USED

index.tsx Current file

WEB PAGES

Next.js 15 RC Releases - vercel/next.js

Next.js 14 on Vercel - Vercel Next.js by Vercel

Release v12 1.7-canary.8 - ver...

Ask the Web

Get up-to-date information from the internet with @Web. Cursor will search the web for you and use the latest information to answer your question.

Add new doc

ENTRYPOINT

https://threejs.org/docs/

PREFIX

https://threejs.org/docs/

@ NAME

Three.js

Use Documentation

Reference popular libraries using @LibraryName, or add your own using @Docs → Add new doc.

Agent(Ctrl+I) – 以前叫Composer

Add tailwindcss to this project

I'll help you add Tailwind CSS to your project. First, let me check if this is a Vite project and examine the current configuration

Listed directory Current directory 22 results

.git
README.md
public
.next
TS ts
node
package.json
package-lock.json
Read file package.json

I see this is a Next.js project. Let's install Tailwind CSS and its dependencies, then configure it. I'll first check the current package.json to ensure we don't have any conflicts.

Finds Context

Using custom retrieval models, Cursor can understand a codebase. This reduces the need to manually add context.

Now I'll install Tailwind CSS and its dependencies. I'll run the necessary commands to set it up.

```
$ pnpm add _D tailwindcss postcss autoprefixer
```

Skip Run Command ⌘↵

Waiting for approval.

Runs Commands

Cursor can automatically write and run terminal commands. By default, you'll be asked to confirm all commands.

Property 'testCppConfig' does not exist on type 'I
Property 'testCppConfig' does not exist on type 'I

I see that there are some linter errors because the type

> Searched codebase "CppConfigResponse type definition or

Based on the search results I can see that the CppCo doesn't have a testCppConfig field. Let me modify the

TS ComposerViewsService.ts +12 -4

```
printCppConfig(): void {  
  const cppConfig = this.reactiveStorageService.get('cppConfig')  
  if (cppConfig?.testCppConfig !== undefined) {  
    console.log('Test CPP Config:', cppConfig.testCppConfig)  
  }  
}
```

Loops on Errors

Cursor can detect lint errors automatically and apply fixes, reducing the need for manual debugging.

配置DeepSeek(和其它)模型

Cursor Settings

⚙️ General

🔧 Features

📊 Models

1

📄 Rules

📑 MCP

🧪 Beta

☐ o1

×

☐ o3-mini

×

☐ qwen/qwen-2.5-coder-32b-instruct

×

☒ qwen/qwq-32b:free

×

+ Add model

OpenAI API Key

With your Cursor Pro subscription, you do not need to use your own OpenAI key unless you're using custom models.

Dismiss

Turn Off OpenAI Key

You can put in [your OpenAI key](#) to use Cursor at public API costs. Note: this can cost more than pro and won't work for custom model features.

.....

Verify →

Override OpenAI Base URL ▾

https://openrouter.ai/api/v1

Save

Reset to default

添加新功能

从头开始构建框架

THANKS

 极客时间 | 训练营