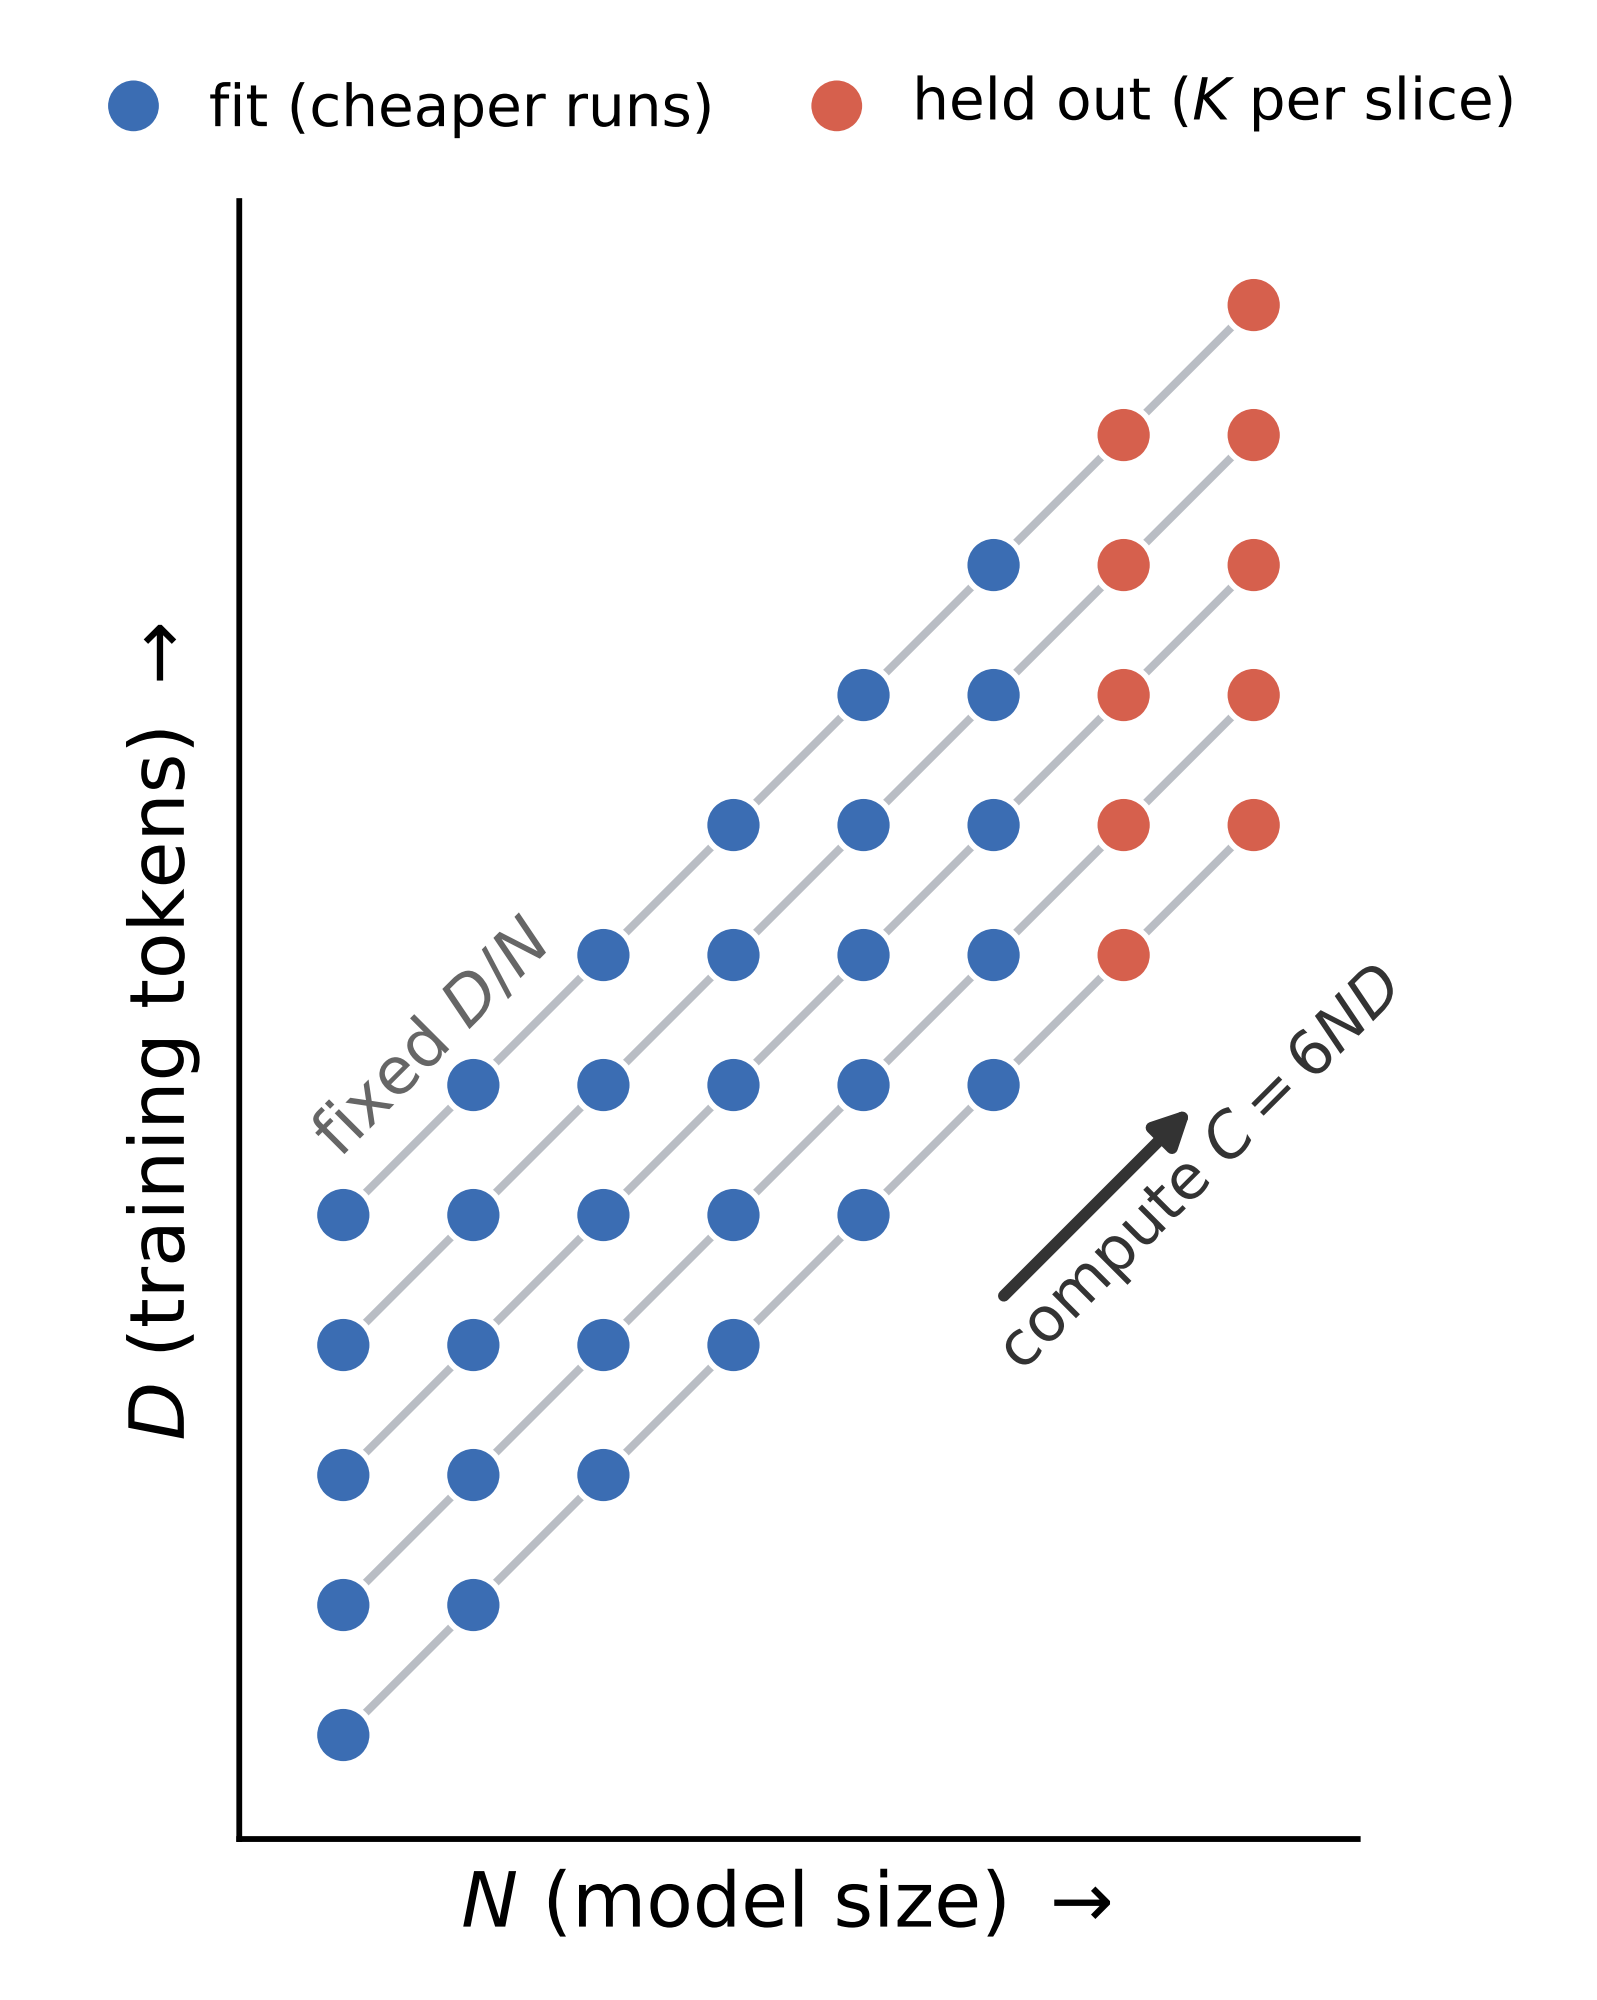
fit (cheaper runs)
held out (K per slice)
D (training tokens) →
N (model size) →
fixed D/N
compute C = 6ND