ARABIC FONT RECOGNITION SYSTEM

Team 4 - CMPS450

CMPS451 - Big Data

Team Members

Ahmed Emad Reda	1190180	Hla Hany Mohamed	1190344	
Nada Tarek	1180504	Ziad Ahmed Hamed	4200002	

Problem Description

Objective: Develop a system to classify Arabic paragraphs into four font categories based on input images.


Challenges: Characterizing unique font features; handling variations in writing styles, spacing, and noise.

Font Code	Font Name	
0	Scheherazade New	
1	Marhey	
2	Lemonada	
3	IBM Plex Sans Arabic	

Project Pipeline



Preprocessing Module

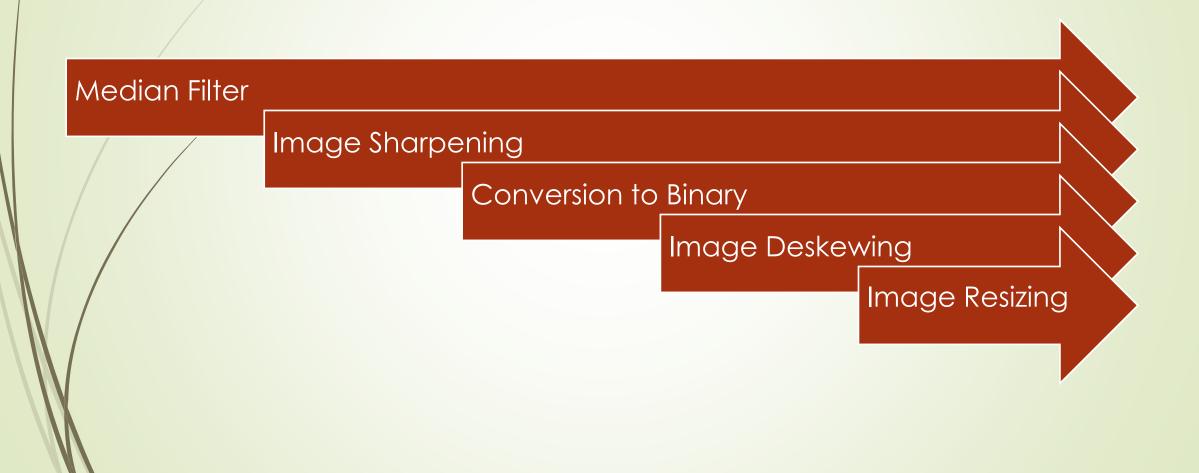


Feature Extraction & Selection Modules



Unsuccessful Trials

Edge Direction Matrix (EDM):


- Features from EDM1 & EDM2:
 - ✓ Edges Direction
 - ✓ Homogeneity
 - ✓ Pixel Regularity
 - Edges Regularity



135°	90°	45°			135°	90°	4
4	2.	2			2	0	
4	12	4	o°	180°	3	12	
2	2	4	•		1	0	
225°	270°	315°	EDM_1		225°	270°	3
	135° 4 4 2 225°	4 2 4 12 2 2	4 2 2 4 12 4 2 2 4	4 2 2 4 12 4 0° 2 2 4	4 2 2 4 12 4 0° 180° 2 2 4	135 90 45 4 2 2 4 12 4 0° 180° 3 1 225°	$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$

Accuracy obtained: 85%

Performance Analysis

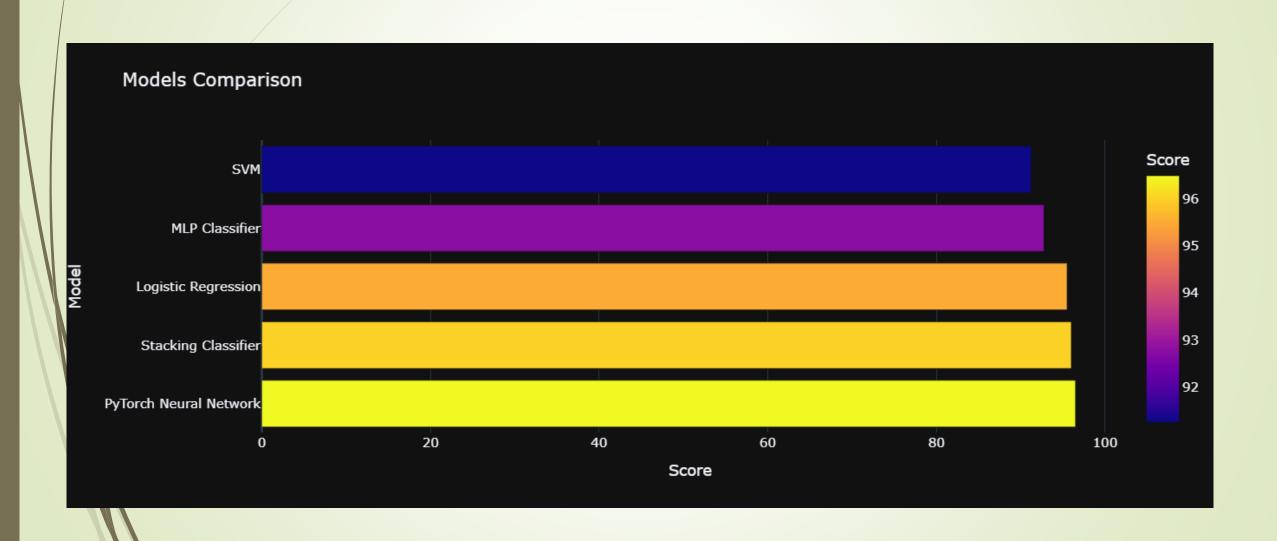

Model Development





Model Architecture Summary:

- Input layer processes feature vectors.
- 2 hidden layers learn complex patterns with ReLU activation.
- Output layer generates class probabilities with softmax activation.



Accuracy obtained: 96.5%

Workload Distribution

Team member	Tasks
Ahmed Emad	Preprocessing, Model Development, API
Hla Hany	EDM, Model Development, Deployment
Nada Tarek	HOG, SIFT, PCA
Ziad Ahmed	Preprocessing, Model Development, API

Thank you!

