
Method 3 · Hybrid RRF


Architecture

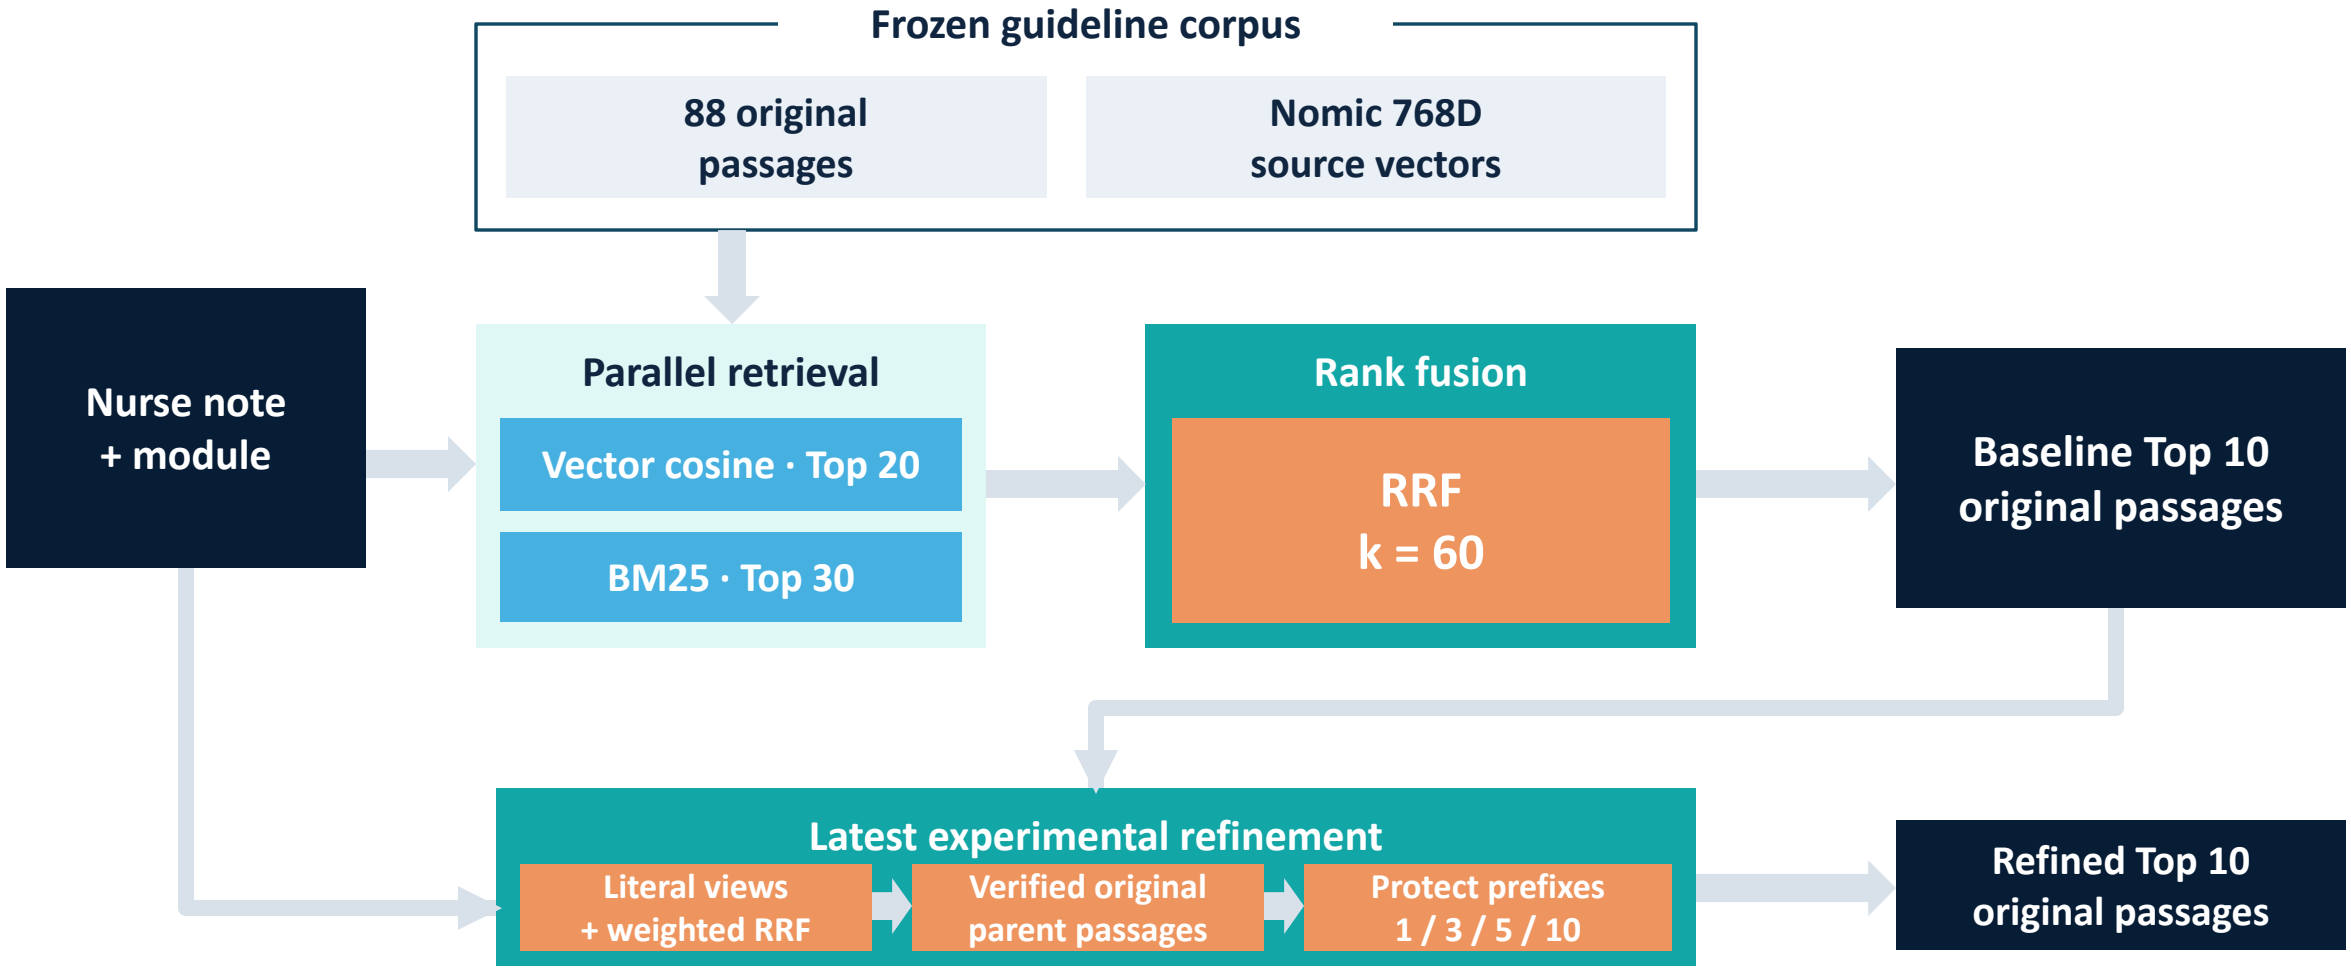

The preserved core fuses vector and BM25 ranks. The lower layer is the latest experimental refinement.

Method 3 · Hybrid RRF

Logic flow

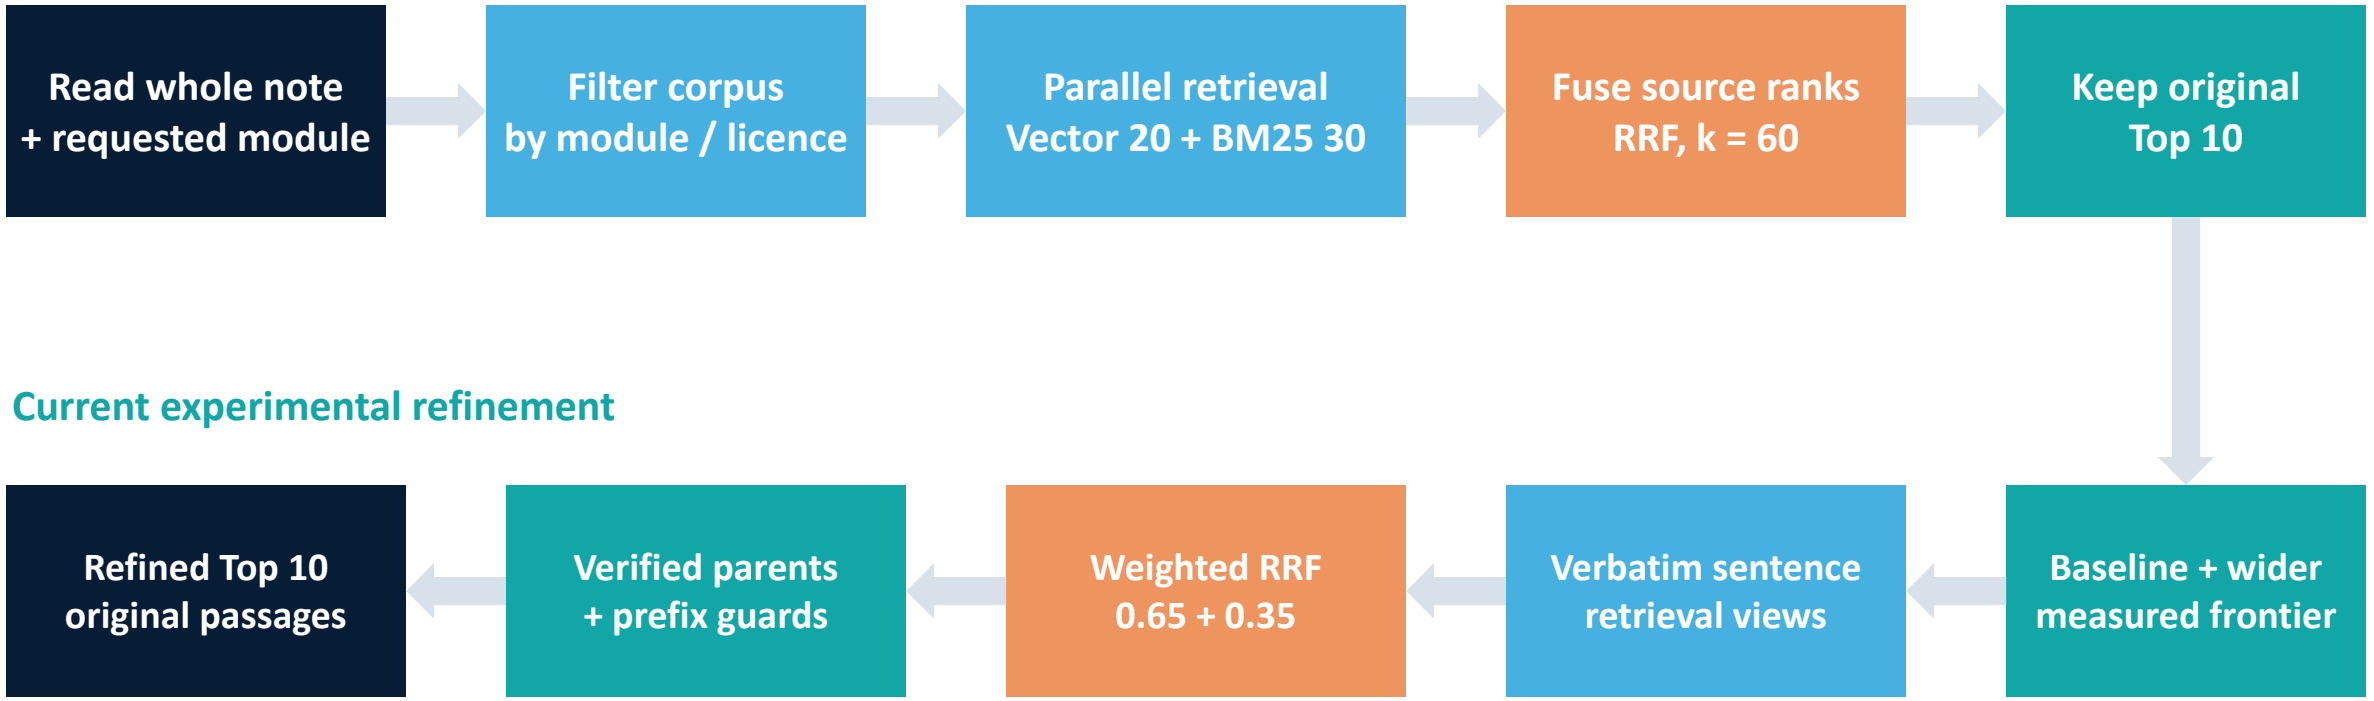


Current experimental refinement

RRF(source) = Σ 1 / (60 + engine rank)

Literal sentence views retain negation, uncertainty, subject and timing. They do not become verified clinical facts.

Method 4 · Source graph-assisted retrieval


Architecture

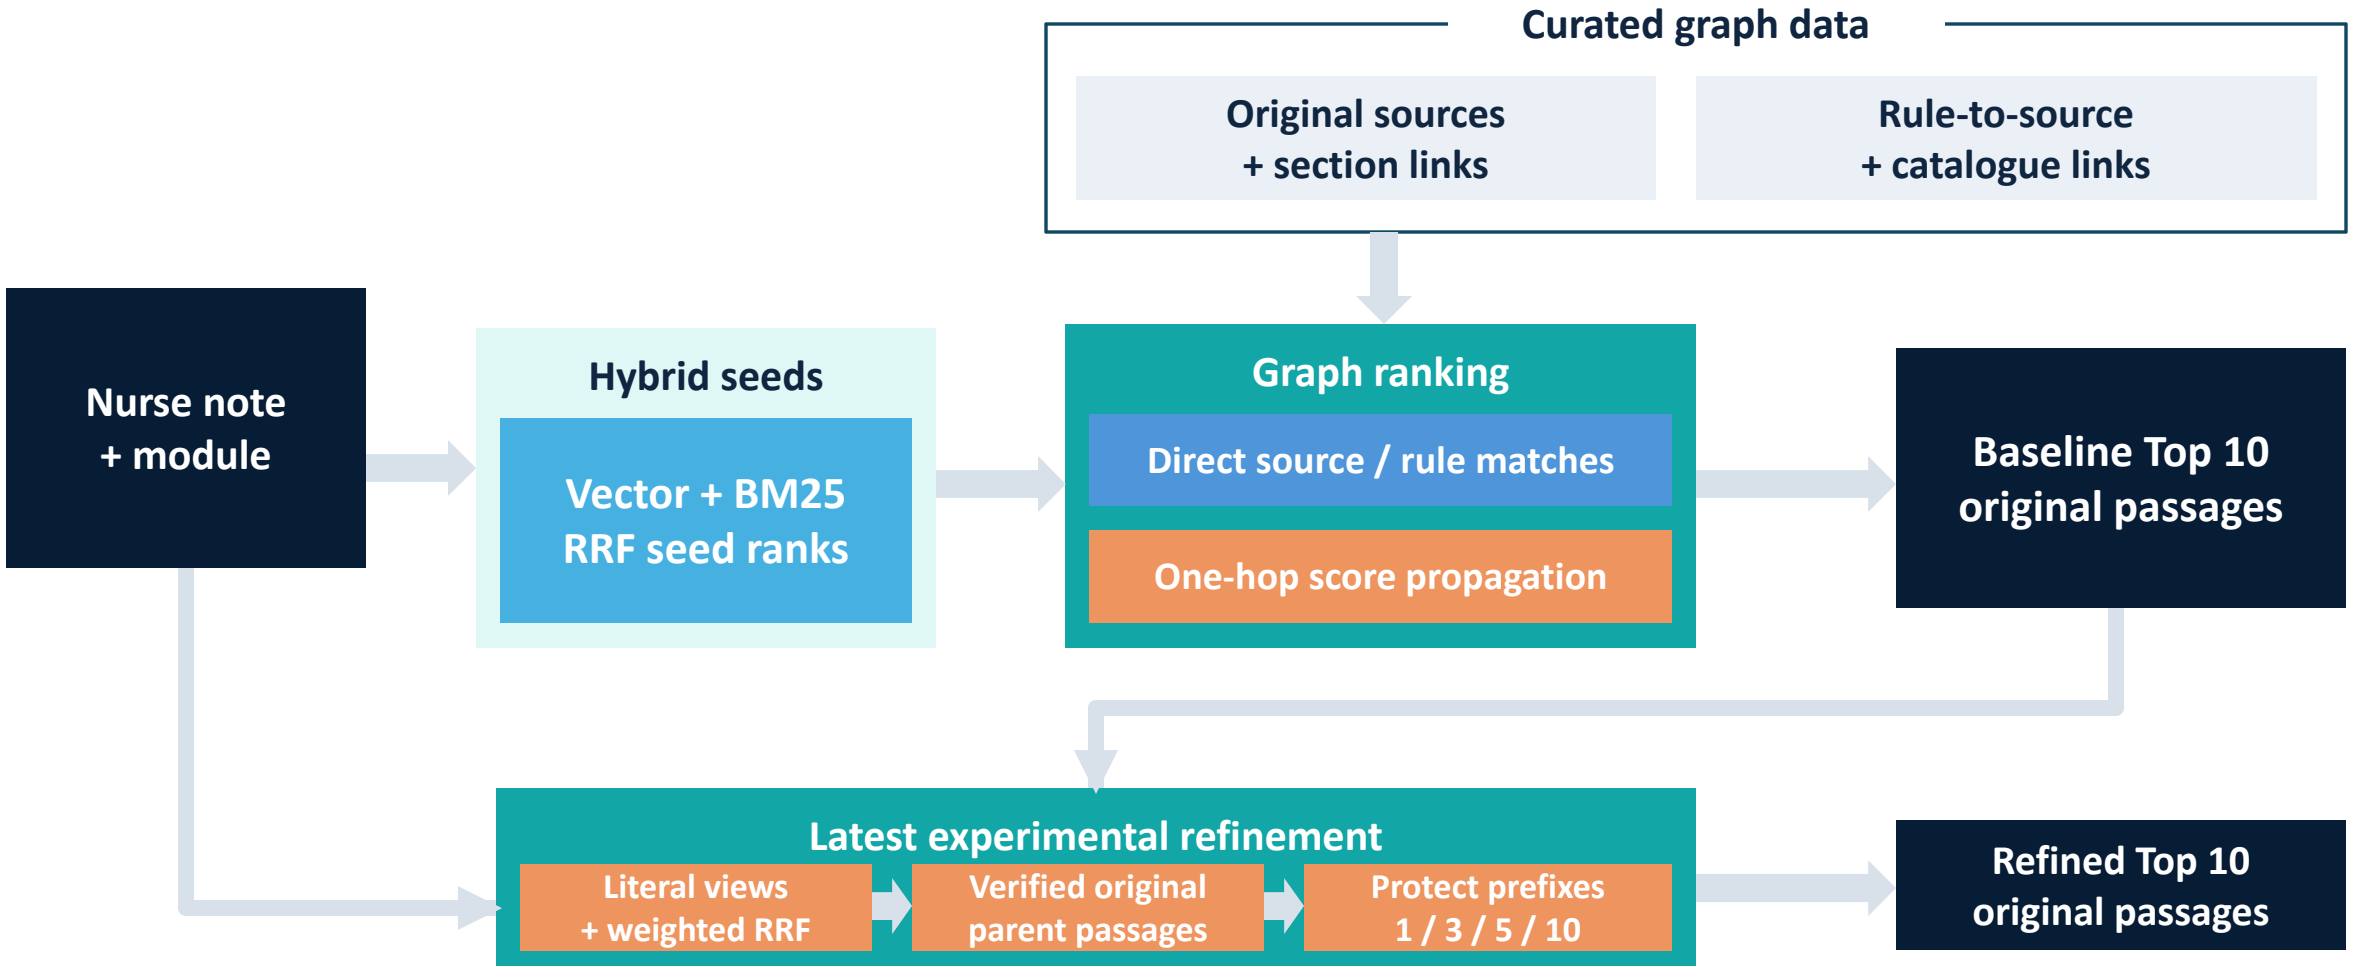

This is a curated source / rule / section graph. It has no extracted entity graph or community-summary stage.

Method 4 · Source graph-assisted retrieval

Logic flow

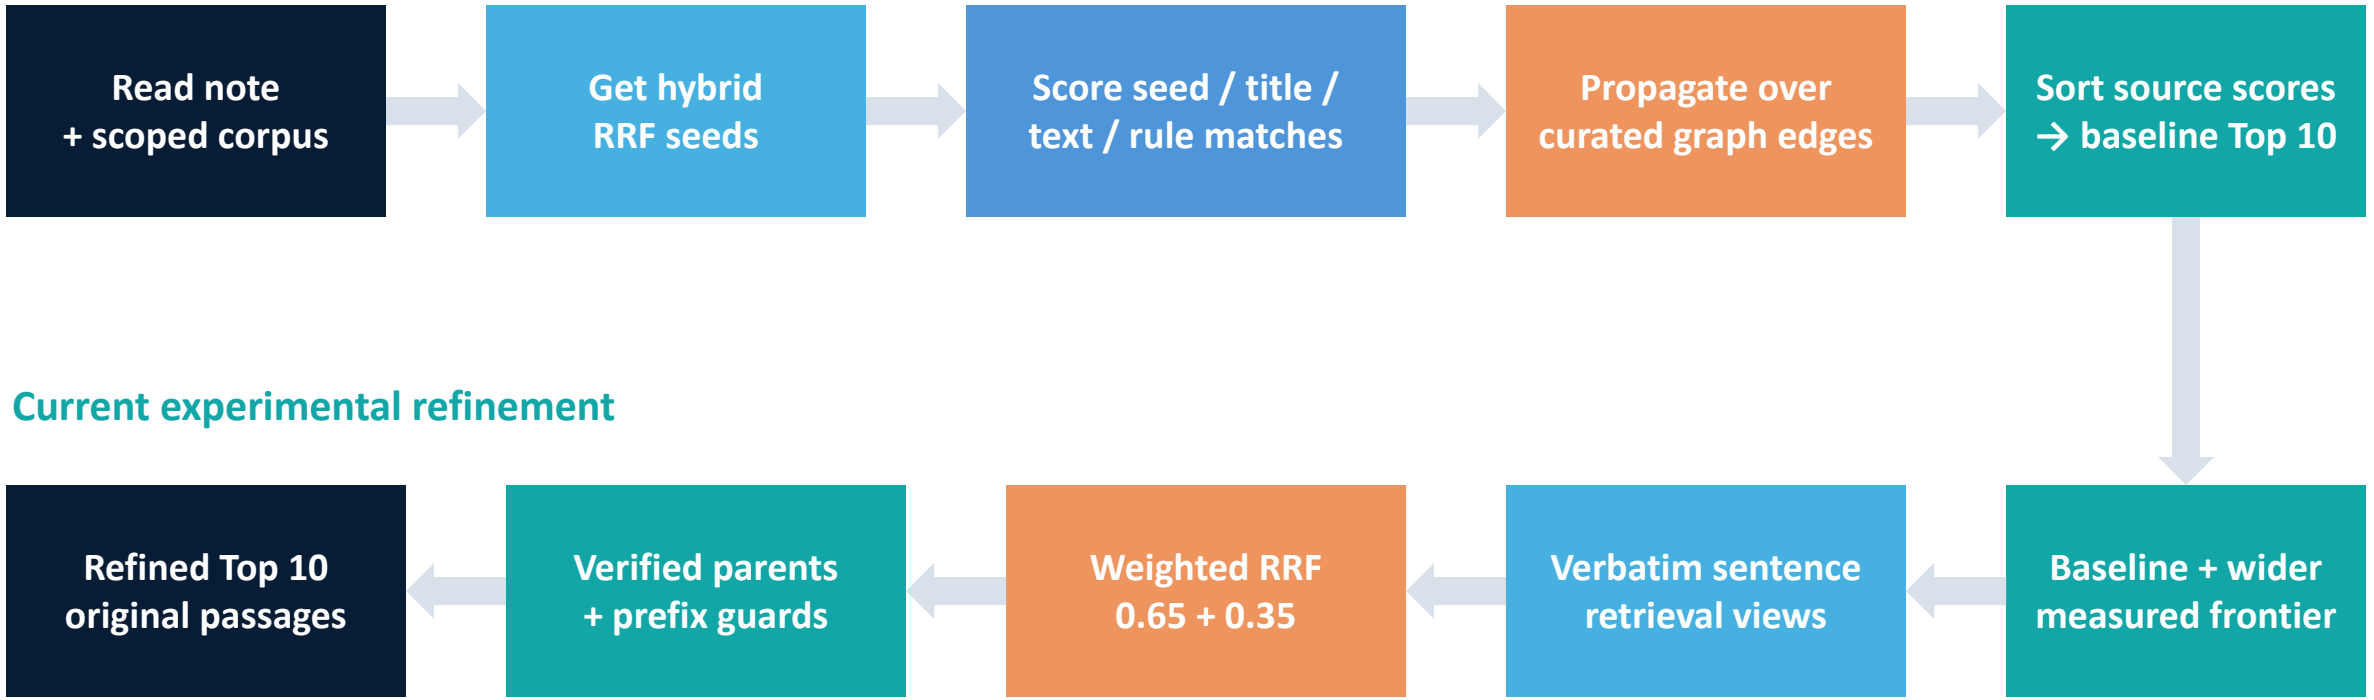

Current experimental refinement


Graph edge weights

Shared rule 0.70 | **Catalogue reference 0.90** | **Same section 0.22**

One propagation round: score(neighbour) += 0.12 × edge weight × direct source score. Clinical rule outcomes are not evaluated here.

Method 7 · Criterion coverage allocation V6


Architecture

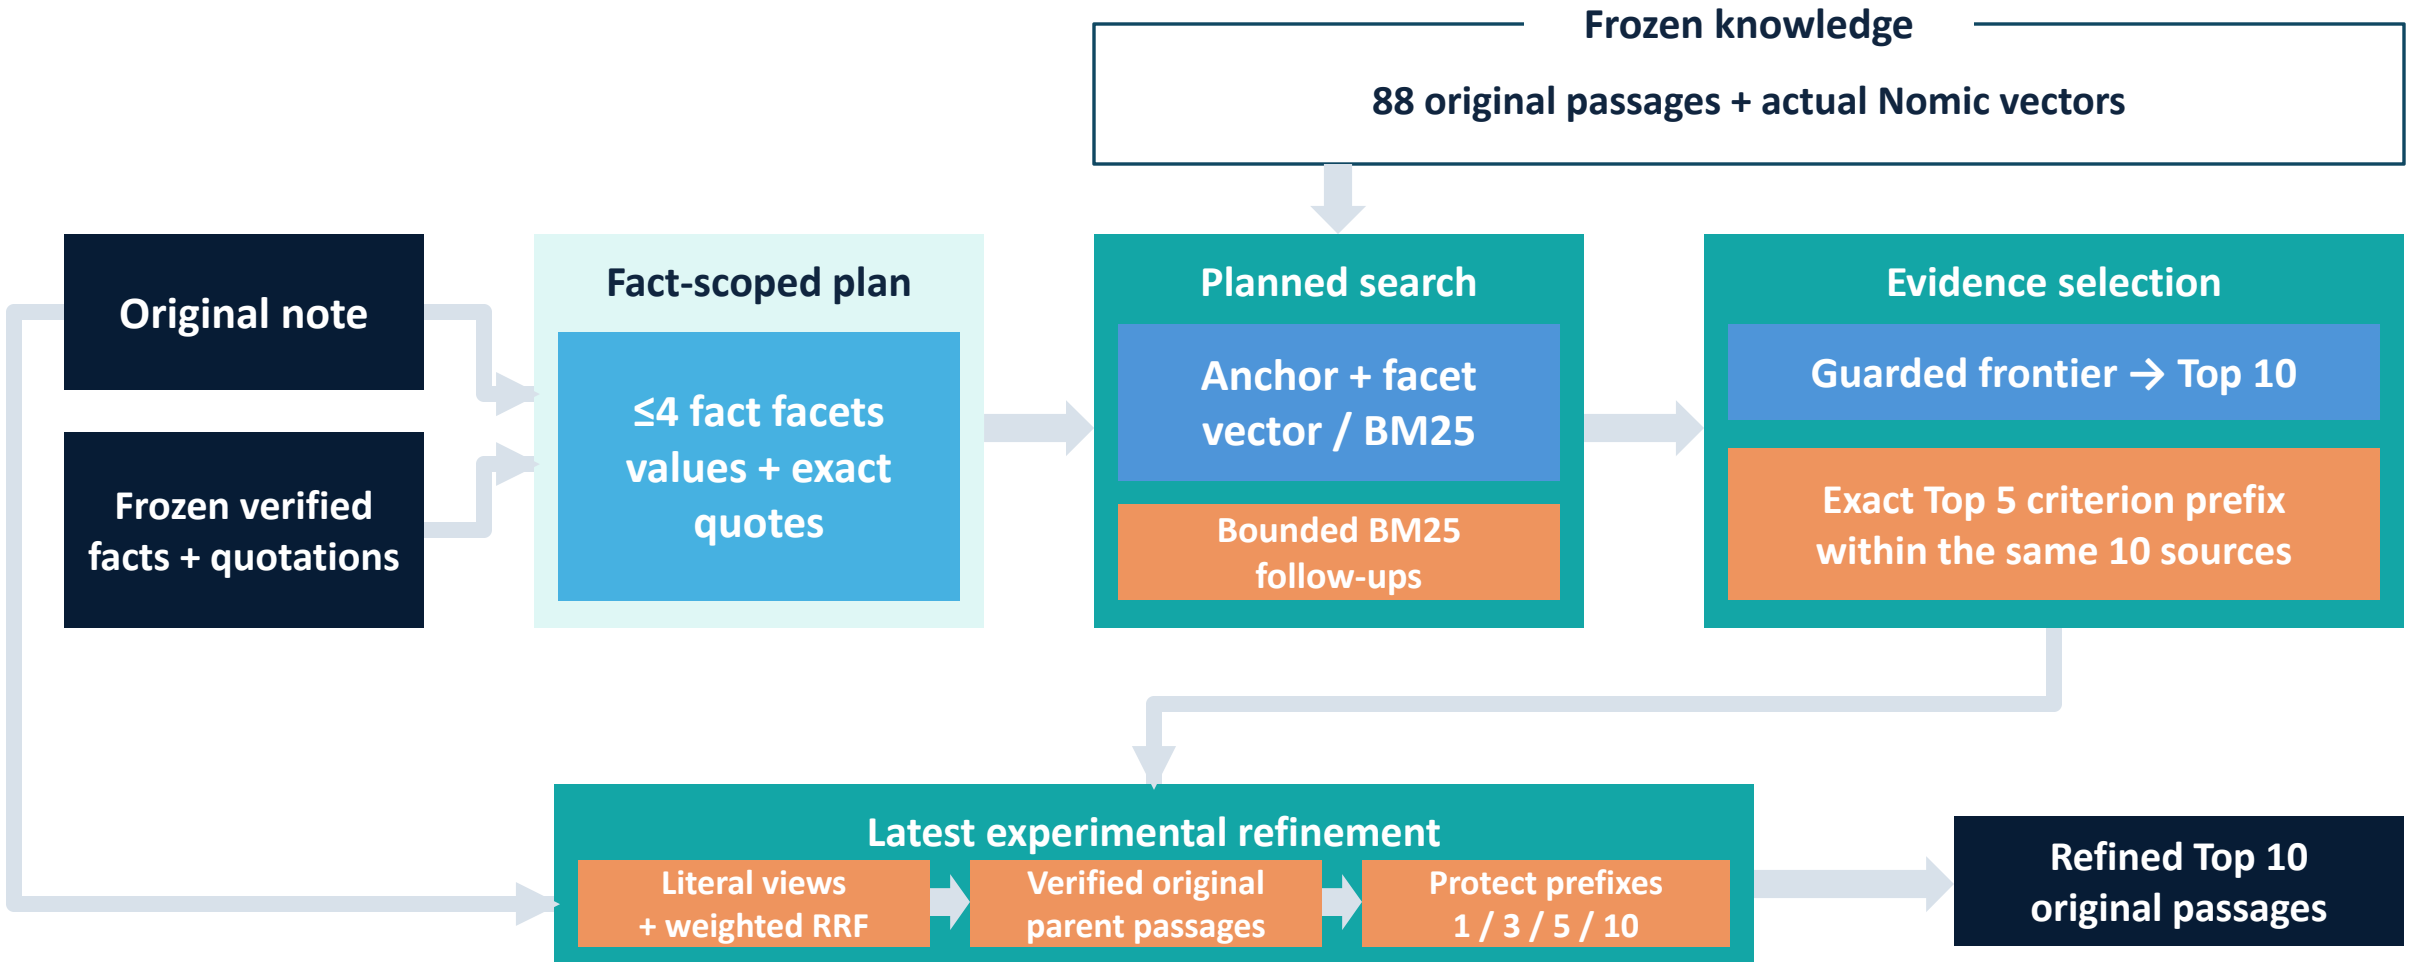

Criterion coverage describes retrieved source metadata; it does not mean that a patient satisfies a clinical criterion.

Method 7 · Criterion coverage allocation V6


Logic flow

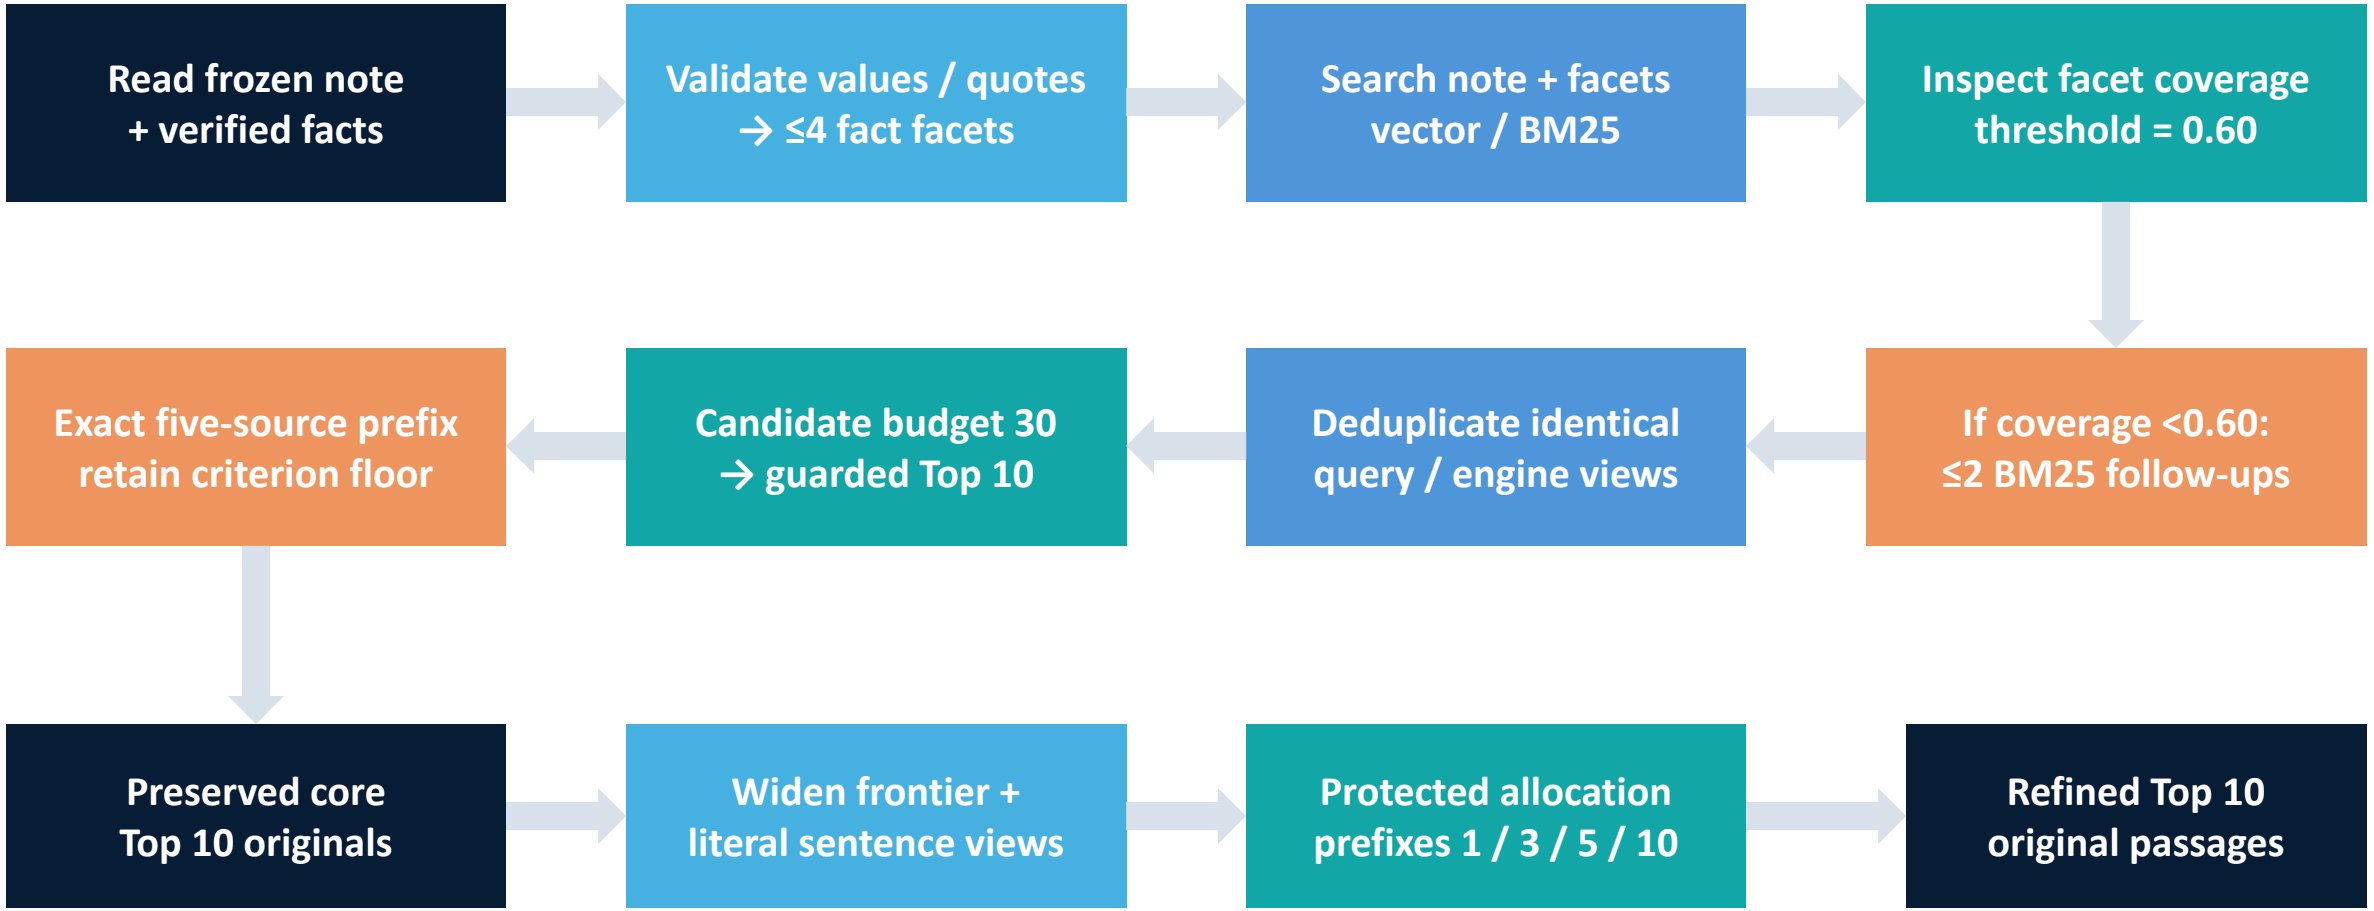

Unknown facts remain unknown. The original V6 preserves its ten-source inventory; the latest refinement can use the wider measured frontier.

Method 9 · Neo4j frontier and criterion transfer


Architecture

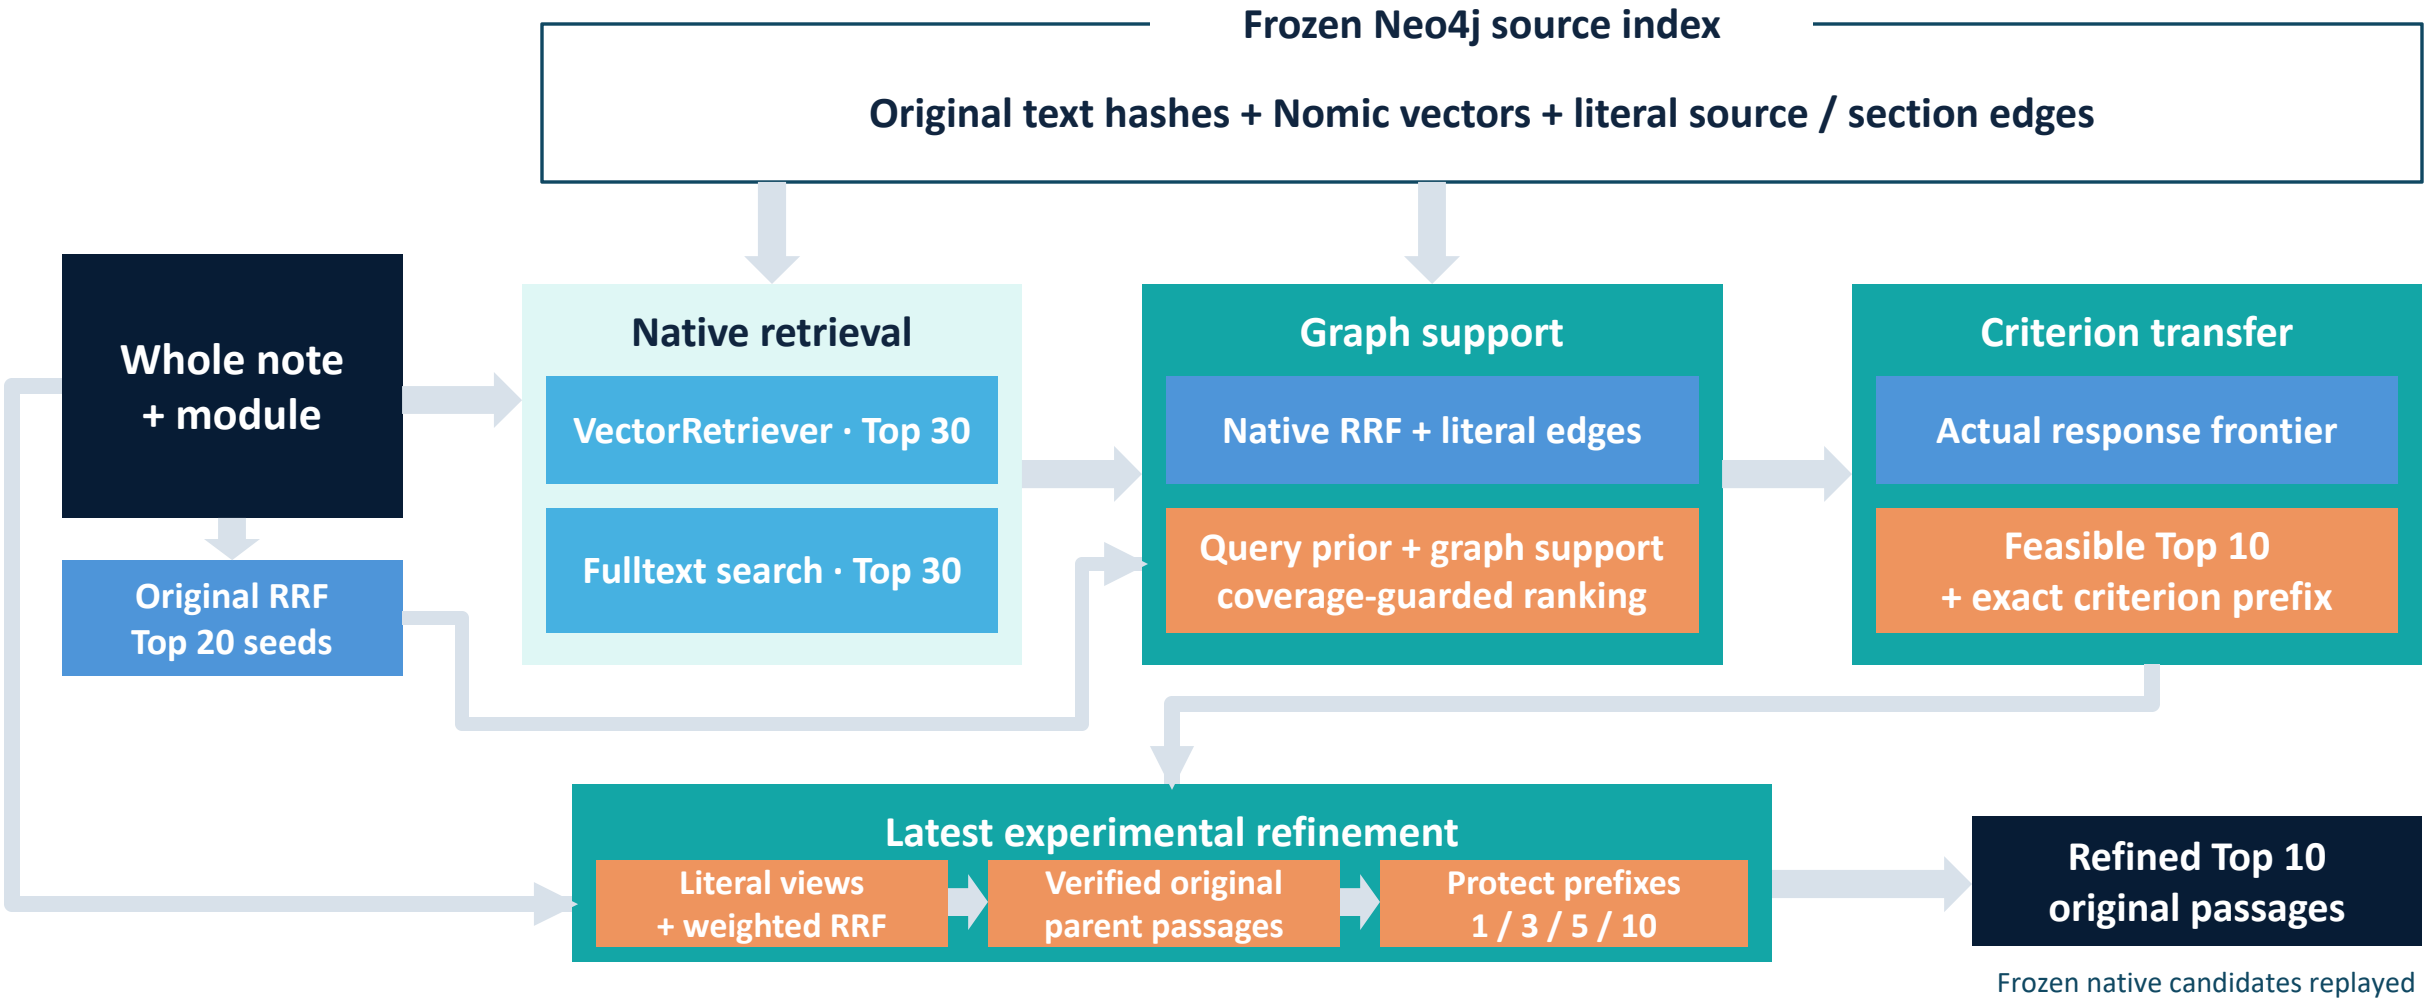

Original native Neo4j searches are preserved. The latest refinement replays their recorded response frontier; it makes no new native calls.

Method 9 · Neo4j frontier and criterion transfer


Logic flow

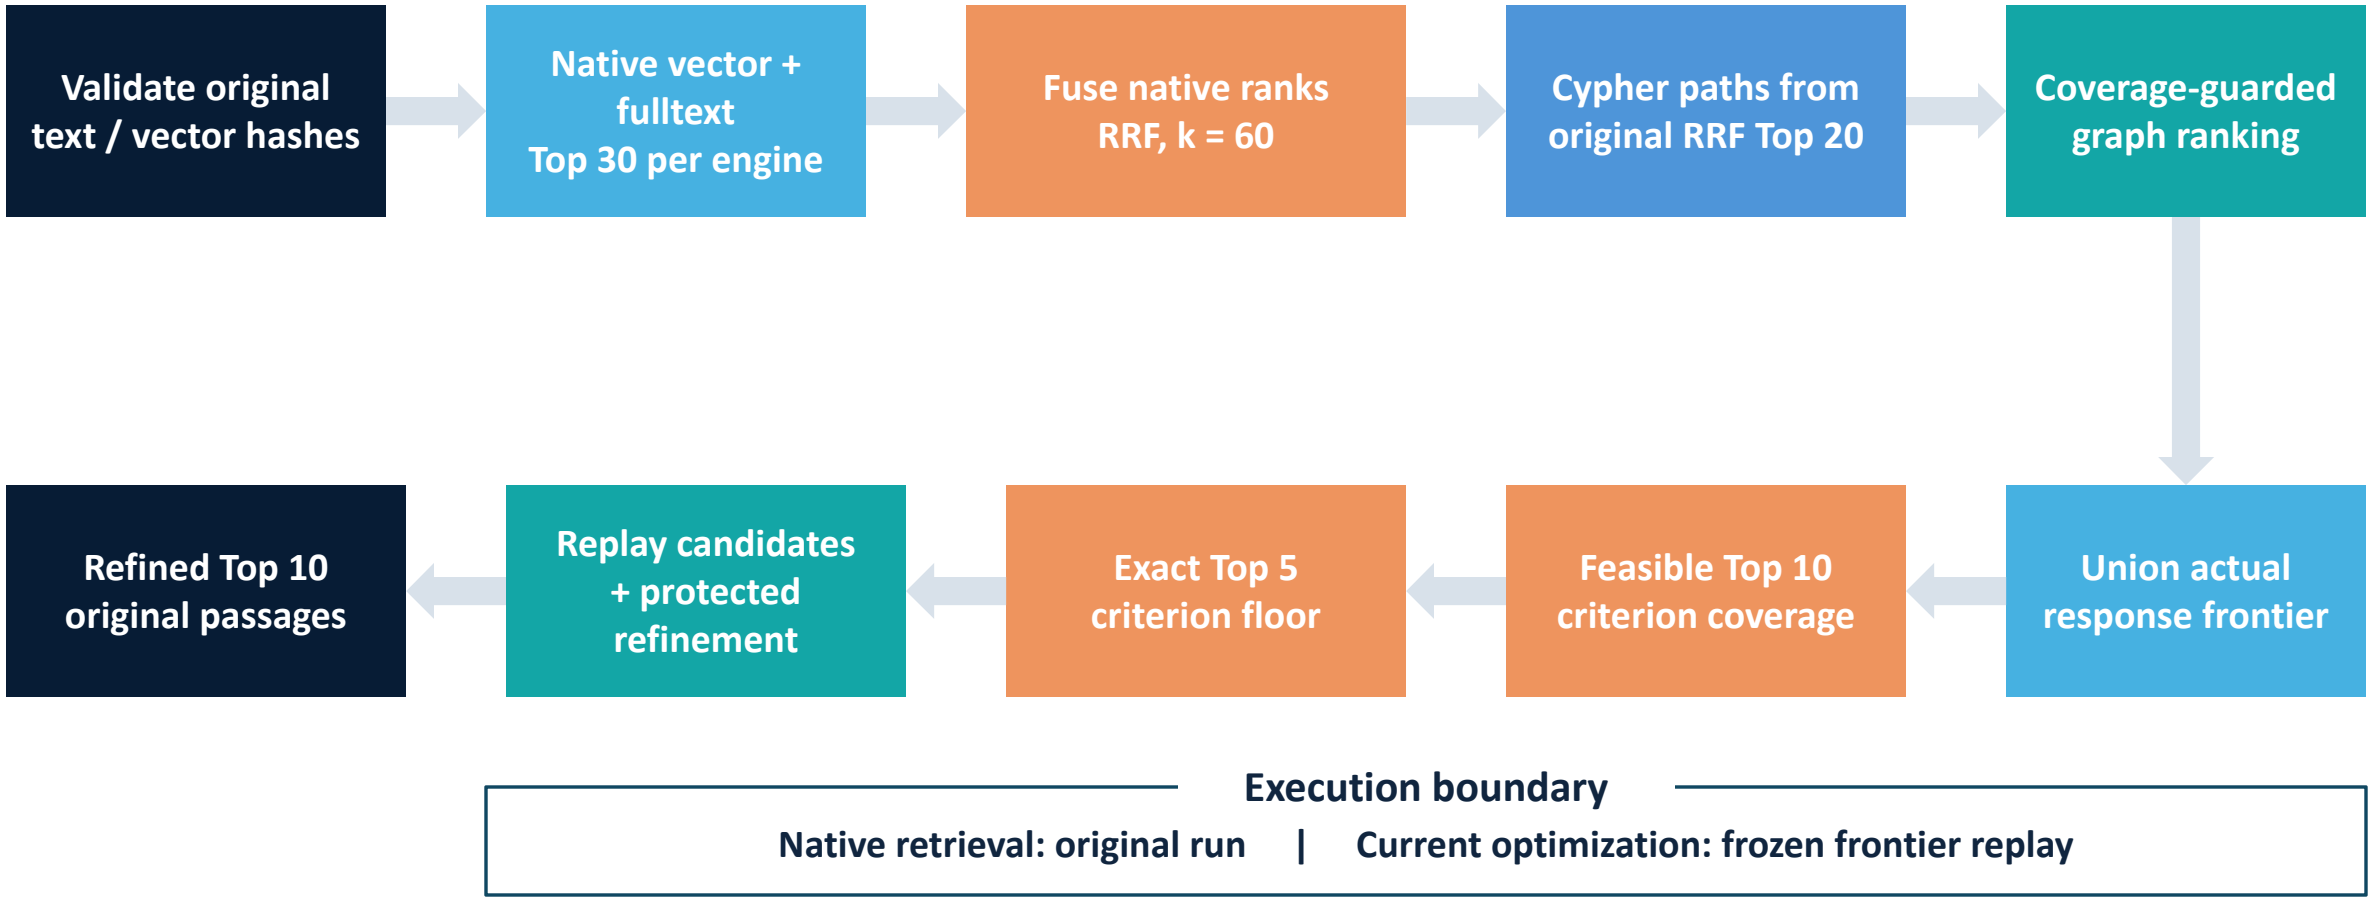

Cypher follows only complete literal containment and explicit section references. Candidate source IDs and text hashes remain auditable.

Method 10 · PageIndex and RRF predicate navigation


Architecture

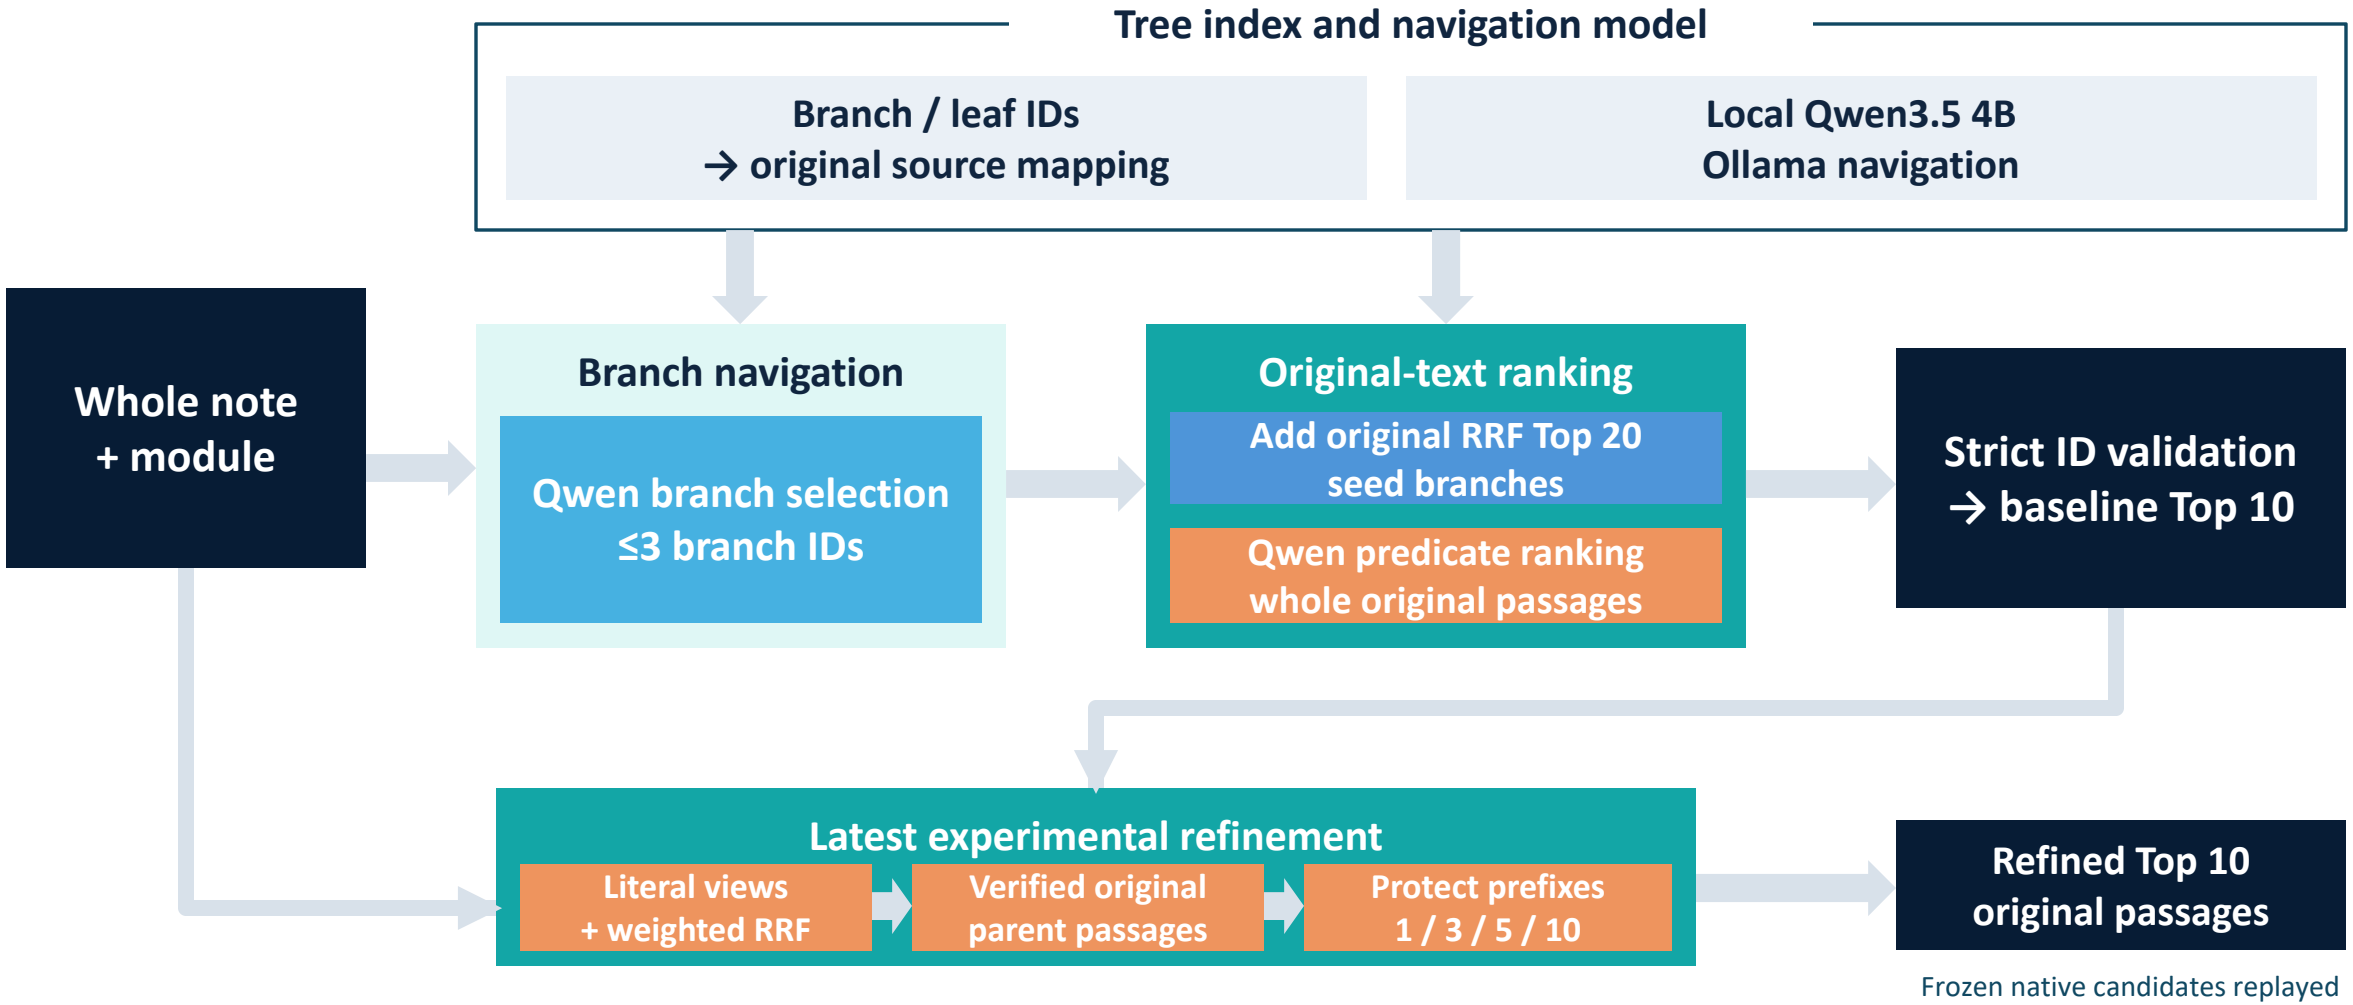

A first-party navigator uses an actual PageIndex tree and local Qwen. Its summaries and branch labels never replace original guideline text.

Method 10 · PageIndex and RRF predicate navigation

Logic flow

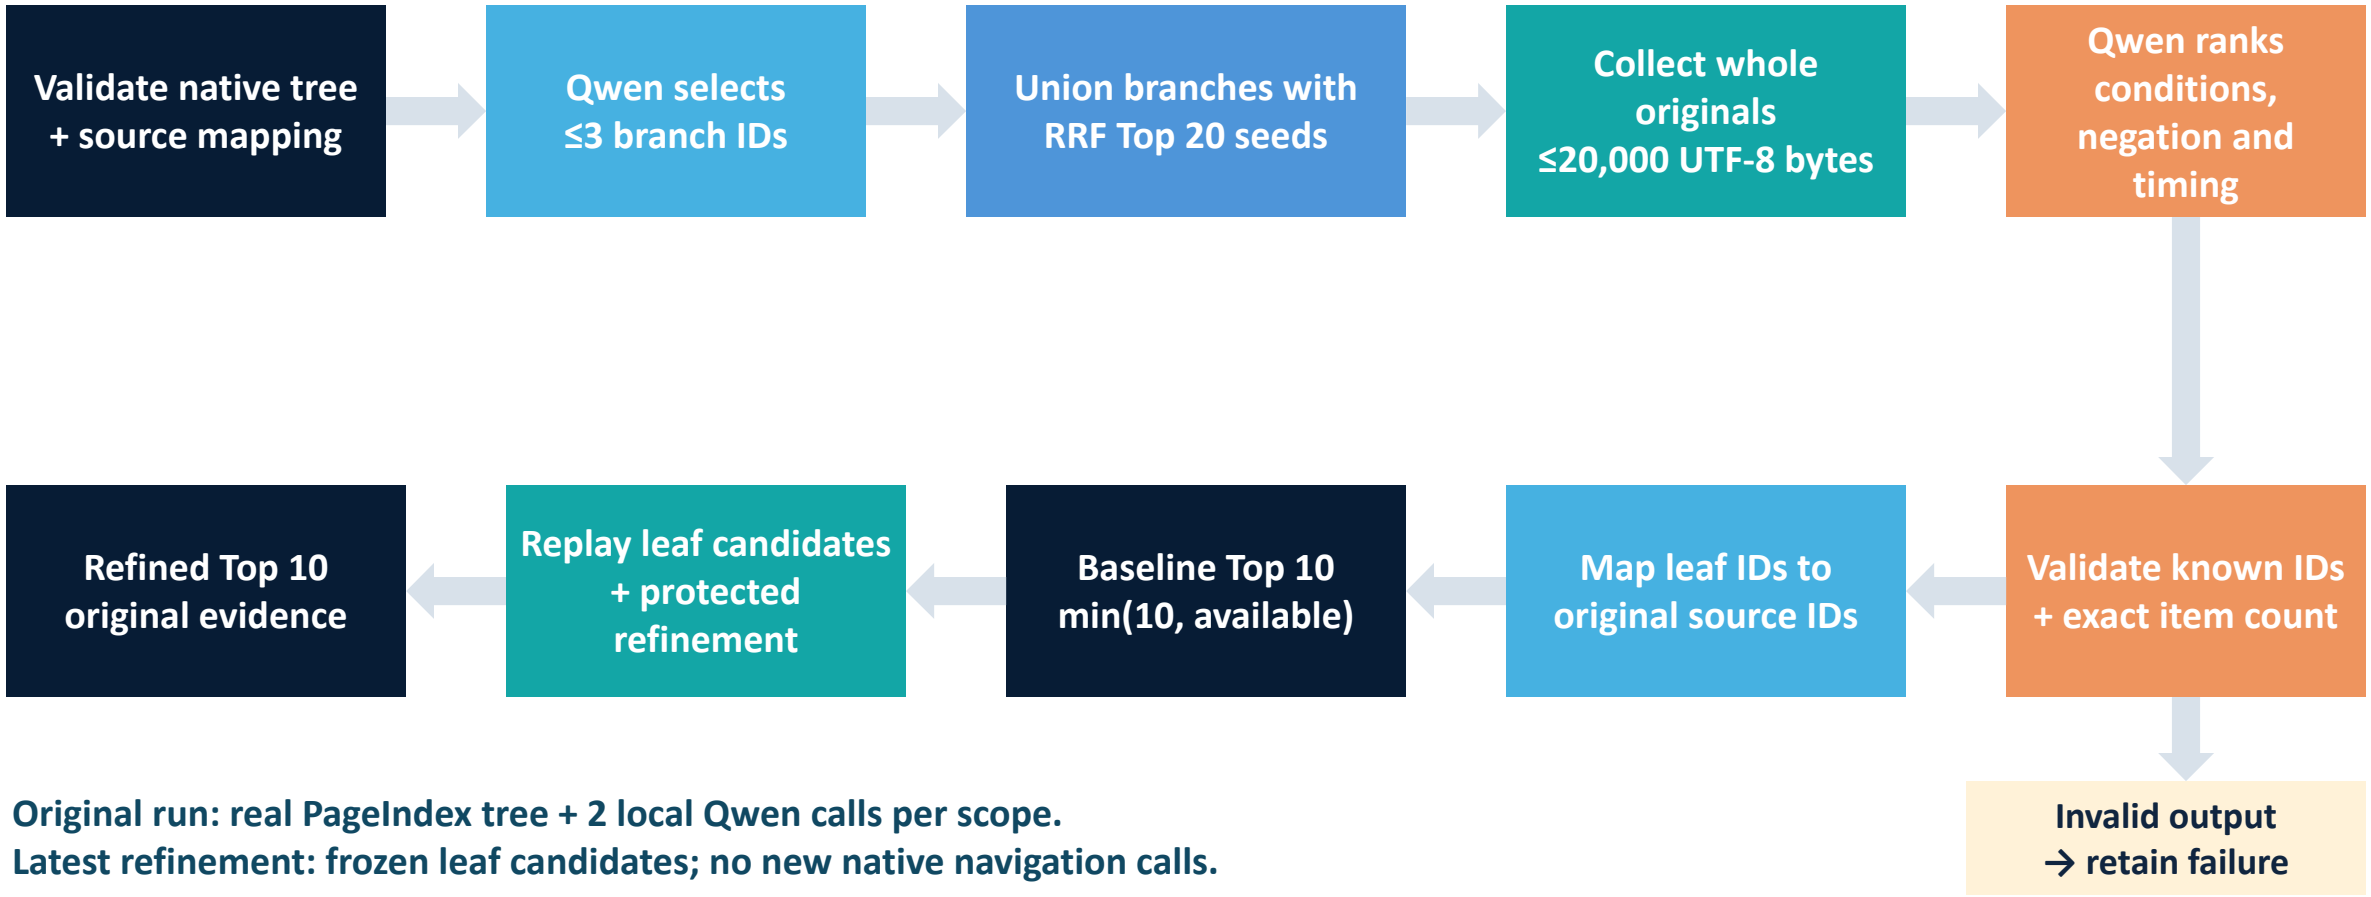


Original run: real PageIndex tree + 2 local Qwen calls per scope.
Latest refinement: frozen leaf candidates; no new native navigation calls.

Qwen ranking considers documented predicates, negation and temporal state. Native tree IDs are mapped back to unchanged original passages.

Current experiment · Protected evidence allocation

Shared refinement logic

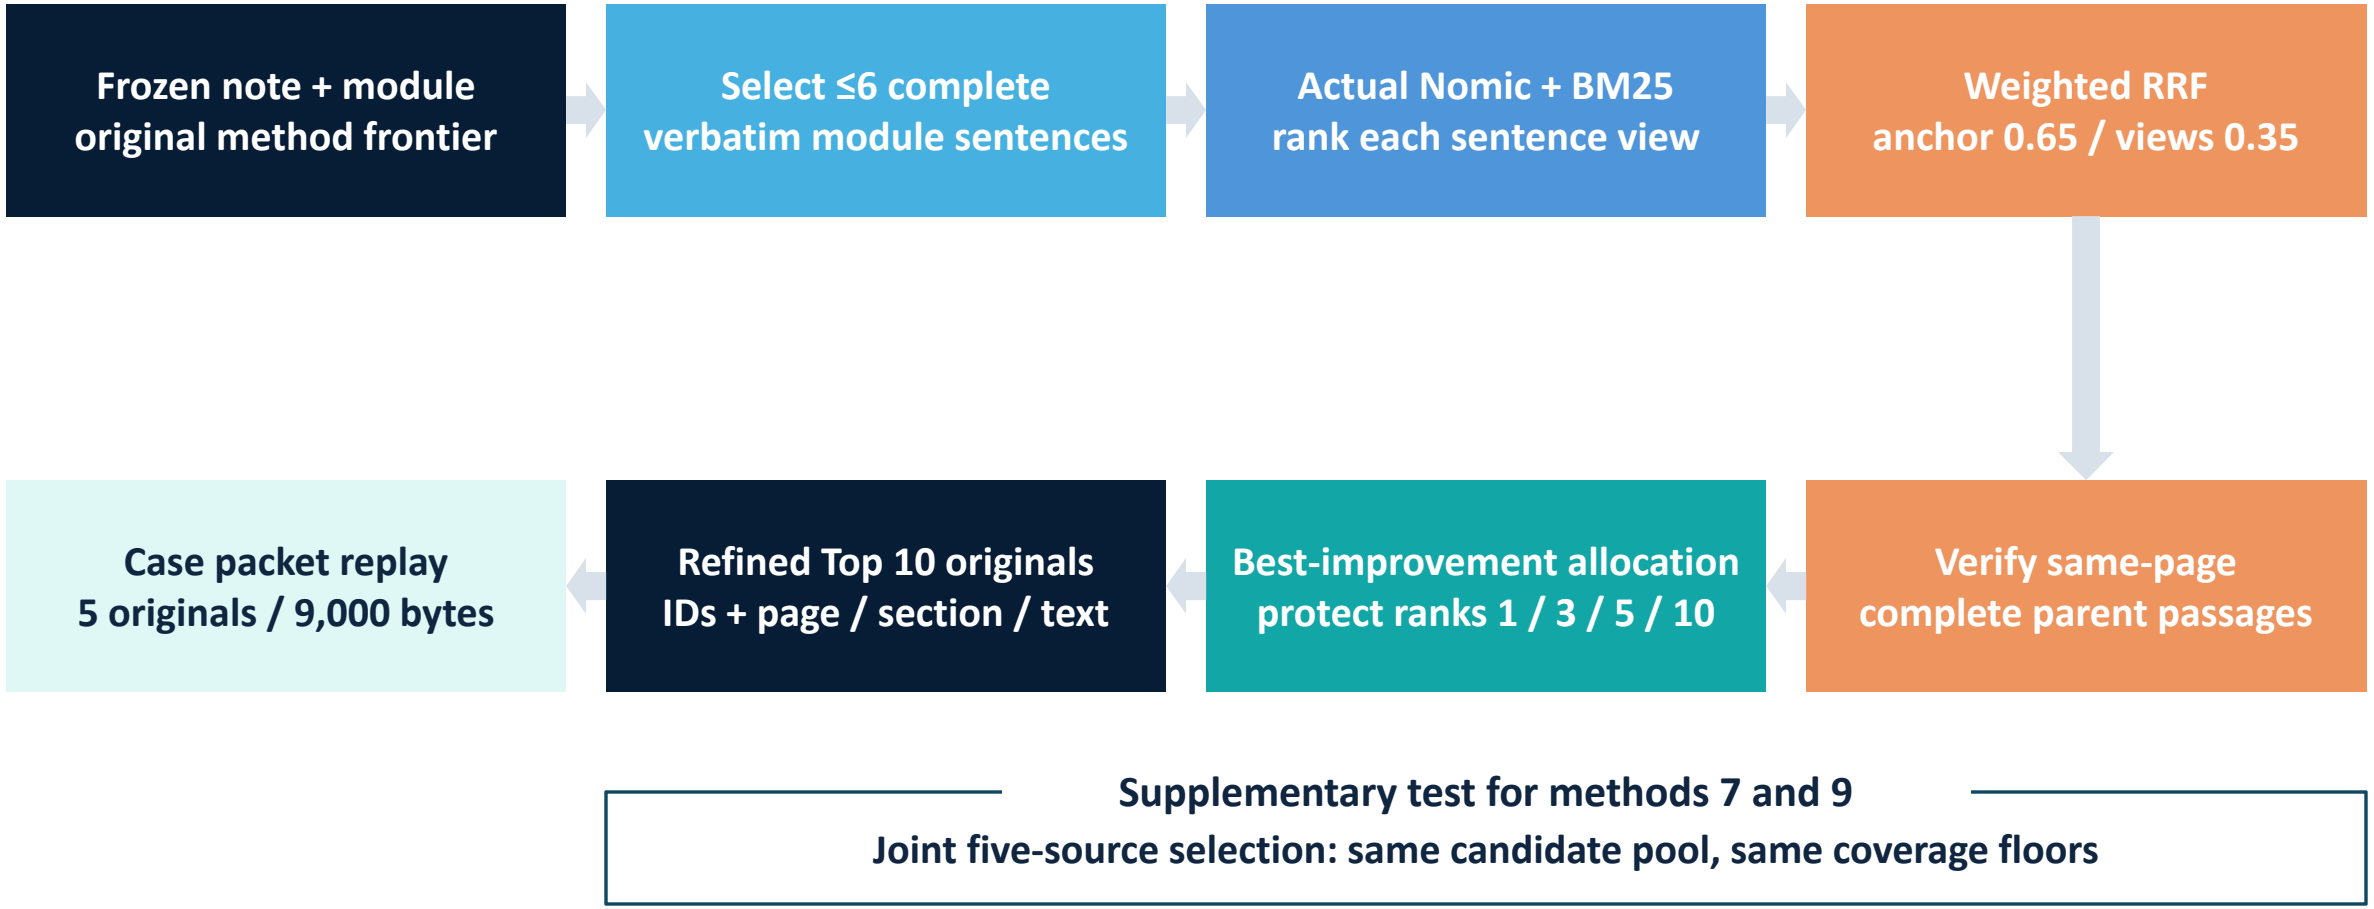

Reference labels are opened only after ranking. This layer returns evidence; it does not decide fitness to drive.

Code references for the five methods

Implementation map

3 · Hybrid RRF	tools/run_shared_retrieval.py :: rank_method() retrieval/fusion.py :: reciprocal_rank_fusion()
4 · Source graph	retrieval/graph_local.py :: expand_local_graph() Sources + rule links + same-section neighbours
7 · Criterion V6	evaluation/planned_hybrid.py + guarded_hybrid.py evaluation/prefix_allocation.py :: allocate_prefix()
9 · Neo4j frontier	tools/complex_native_worker.py :: neo() evaluation/neo4j_strategies.py + neo4j_criterion_transfer.py
10 · PageIndex + RRF	tools/complex_native_worker.py :: tree() tools/run_scope88_tree.py :: ranking_body(), call()

Latest shared refinement

tools/refine_complex_retrieval.py → evaluation/retrieval_refinement.py

Architecture content is derived from these first-party implementations; the supplied PDF contributes visual style only.