


PILOT CARD				
Ship name	Oil tanker (Dis.77100t) TRANSAS 2.31.51.0 *			Date
IMO Number	N/A	Call Sign	N/A	Year built
Load Condition	Full load			
Displacement	77100 tons	Draft forward	12.5 m / 41 ft 1 in	
Deadweight	67980 tons	Draft forward extreme	12.5 m / 41 ft 1 in	
Capacity		Draft after	12.5 m / 41 ft 1 in	
Air draft	50.47 m / 166 ft 0 in	Draft after extreme	12.5 m / 41 ft 1 in	

Ship's Particulars			
Length overall	242.8 m	Type of bow	Bulbous
Breadth	32.2 m	Type of stern	V-shaped
Anchor(s) (No./types)	2 (PortBow / StbdBow)		
No. of shackles	15 / 15		(1 shackle =25 m / 13.7 fathoms)
Max. rate of heaving, m/min	18 / 18		

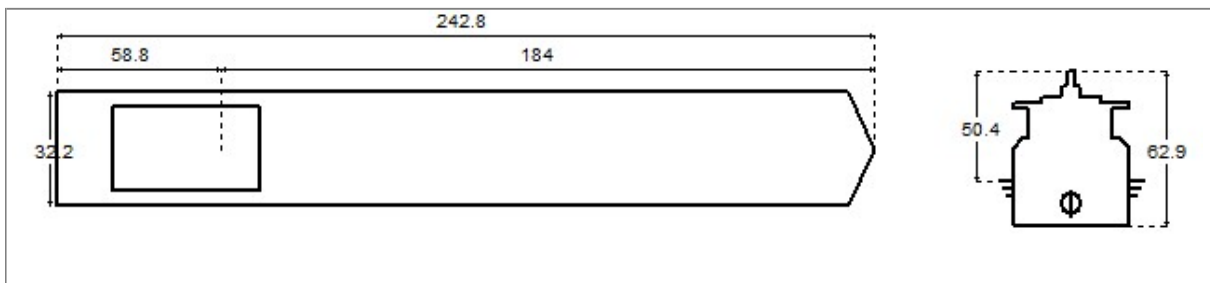

Steering characteristics			
Steering device(s) (type/No.)	Semisuspended / 1	Number of bow thrusters	N/A
Maximum angle	35	Power	N/A
Rudder angle for neutral effect	0.87 degrees	Number of stern thrusters	N/A
Hard over to over(2 pumps)	30 seconds	Power	N/A
Flanking Rudder(s)	0	Auxiliary Steering Device(s)	N/A

Stopping			Turning circle	
Description	Full Time	Head reach	Ordered Engine: 100%, Ordered rudder: 35 degrees	
FAH to FAS	398.6 s	7.7 cbls	Advance	4.24 cbls
HAH to HAS	383.6 s	5.75 cbls	Transfer	1.87 cbls
SAH to SAS	480.6 s	5.18 cbls	Tactical diameter	4.98 cbls

Main Engine(s)			
Type of Main Engine	Low speed diesel	Number of propellers	1
Number of Main Engine(s)	1	Propeller rotation	Right
Maximum power per shaft	1 x 13610 kW	Propeller type	FPP
Astern power	56 % ahead	Min. RPM	30
Time limit astern	N/A	Emergency FAH to FAS	1.1 seconds

Engine Telegraph Table				
Engine Order	Speed, knots	Engine power, kW	RPM	Pitch ratio
"FSAH"	15	12280	109.2	0.75
"FAH"	13.8	9558	100.2	0.75
"HAH"	11	4908	80	0.75
"SAH"	8.2	2118	59.8	0.75
"DSAH"	5.5	681	40	0.75
"DSAS"	-2.7	598	-39.8	0.75
"SAS"	-4.1	2007	-60.6	0.75
"HAS"	-5.2	4429	-80.2	0.75
"FAS"	-5.9	6378	-90.5	0.75