

**Carrie**

Posted on 9 окт. 2024 г.



8



5



4



4



4

SafeLine WAF: Step-by-Step Guide to Secure Your Web Environment

#cybersecurity #docker #linux #websecurity

Online Installation (Recommended!!!)

If your server has internet access, we recommend this installation method. Just copy and run the following command:

```
bash -c "$(curl -fsSLk https://waf.chaitin.com/release/latest/setup.sh)"
```

See the [official documentation](#) for additional installation details.

Log in

1. Open the management page in your browser: <https://:9443>.
2. Enter the initial admin password, which will be displayed automatically in the shell after installation.

```
Container safeline-mgt is healthy
[SafeLine] Initial username: admin
[SafeLine] Initial password: m1MfeNDx
[SafeLine] Done
```

If you forget the password, you can reset it manually with this command:

```
docker exec safeline-mgt resetadmin
```

Configuring Your Site

Domain: domain name of your original website, or hostname, or ip address, for example: www.chaitin.com

Port: port that SafeLine will listen, such as 80 or 443. (for https websites, please check

the SSL option)

Upstream: real address of your original website, through which SafeLine will forward traffic to it

1. Configuring SafeLine on a Dedicated Server (Recommended!!!)


Environment:

Web Server: IPA, port 80, domain 'example.com'

SafeLine Server: IPB

Steps:

1. Redirect the original website traffic to SafeLine's IPB (this is required). For example, modify the DNS to point the domain to IPB.
2. Refer to the configuration below.
3. Block access to the web server except through SafeLine. You can achieve this by setting up a firewall.

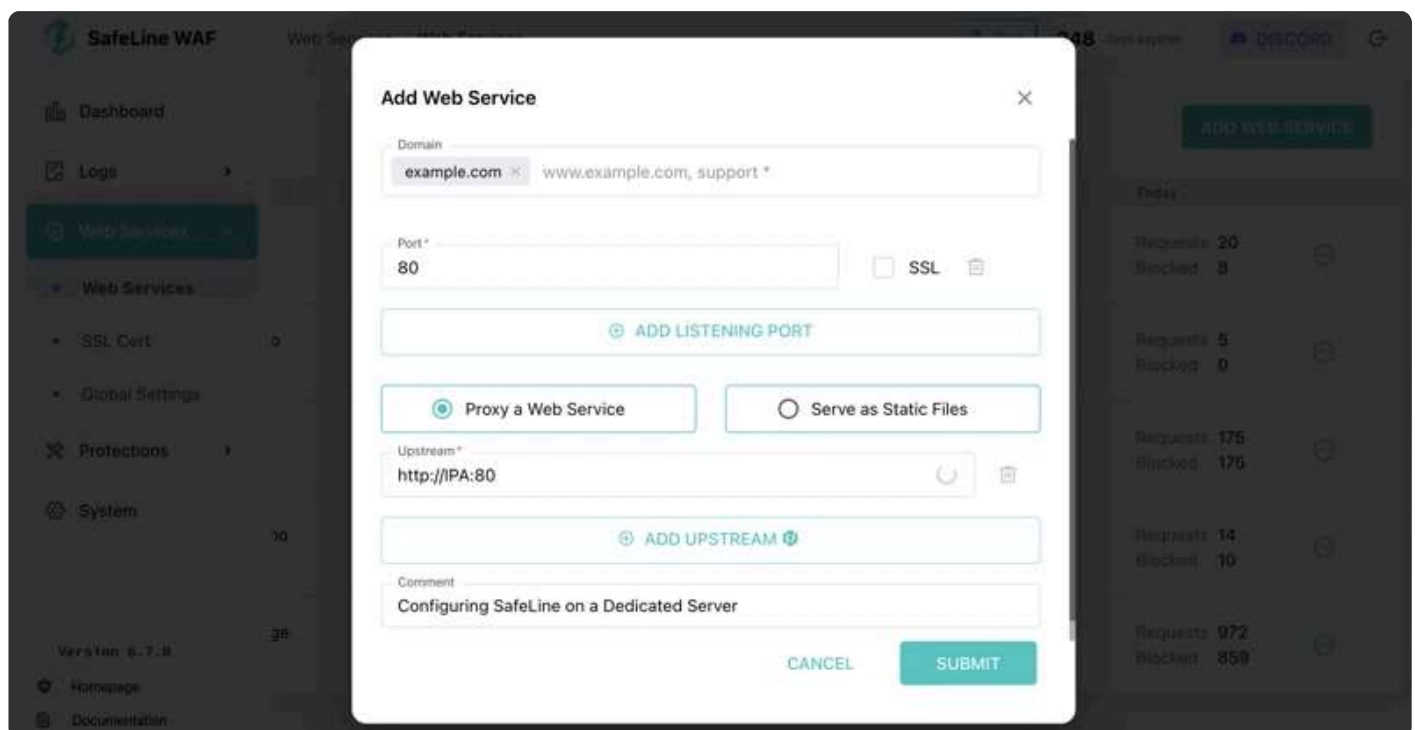


If you can access your website at `example.com:80` and the "Requests" count increases on the statistics page, the configuration was successful.

2. Configuring SafeLine on the Web Server (Not Recommended)

Note: This is not recommended as it increases the load on a single server, making it more prone to downtime and making upgrades and troubleshooting more difficult.

Environment:

- 1. **Web Server:** IPA, port 80, domain 'example.com' **Steps:**
- 2. Change the original website's listening port to another port, freeing up port 80 for configuration.
- 3. Refer to the configuration below.

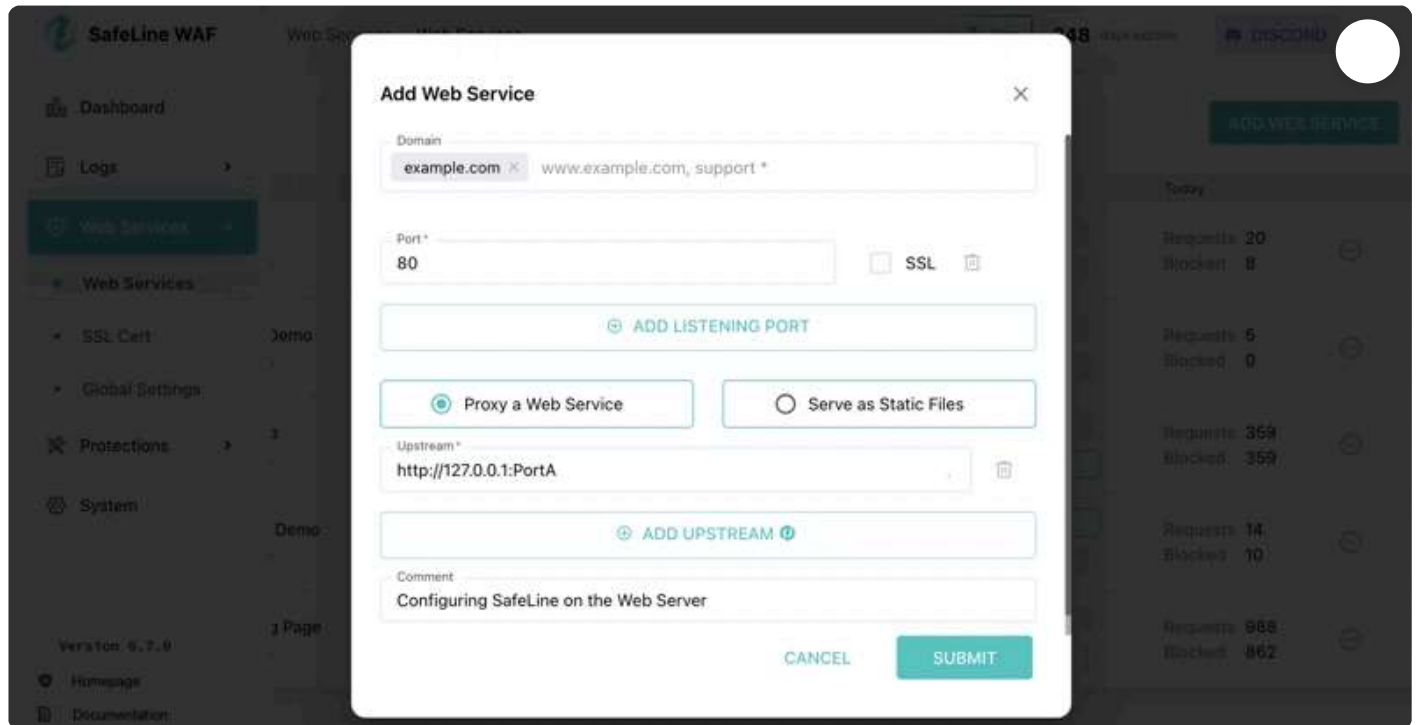

If you can access your website at example.com:80 and the "Requests" count increases on the statistics page, the configuration was successful.

3. Configuring SafeLine with Other Reverse Proxy Devices

SafeLine can act as a reverse proxy and can be placed anywhere in the main traffic flow. Point the traffic at the connection point to SafeLine and enter the next-hop server address in the "Upstream" field in SafeLine.

Environment:

Web Server: IPA

SafeLine Server: IPB


Upstream Server: IPC, port C

Downstream Server: IPD, domain 'example.com'

Steps:

1. Redirect the downstream Nginx traffic to SafeLine's IPC and set the port to 80.

2. Refer to the configuration below.

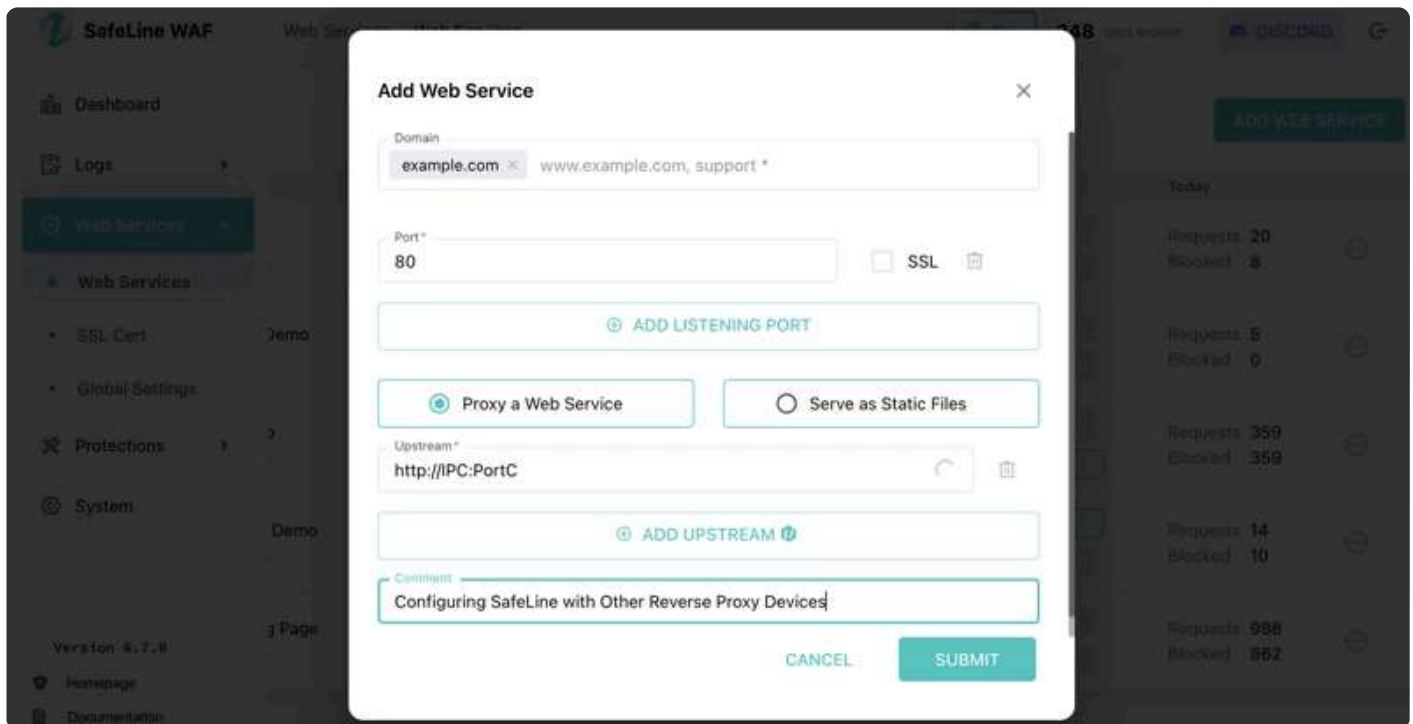

If you can access your website at example.com:80 and the "Requests" count increases on the statistics page, the configuration was successful.

Confirming Website Accessibility

Use the parameters you configured in SafeLine to access your site. Open your browser and go to `http://<IP or domain>:<port>/`.

- The default protocol is `http`; check `ssl` for `https`.
- The hostname can be SafeLine's IP or your website's domain (make sure the domain is resolved to SafeLine).
- The port is the one you configured on the SafeLine page.

Simulating Attacks Manually

Simulate attacks by visiting the following URLs:

Simulate SQL Injection: `http://<IP or domain>:<port>/?id=1%20AND%201=1`

Simulate XSS: `http://<IP or domain>:<port>/?html=<script>alert(1)</script>`

In your browser, you will see that SafeLine has detected and blocked the attack requests.




Heroku

PROMOTED



Tutorial

How I Improved My Productivity with Cursor and the Heroku MCP Server

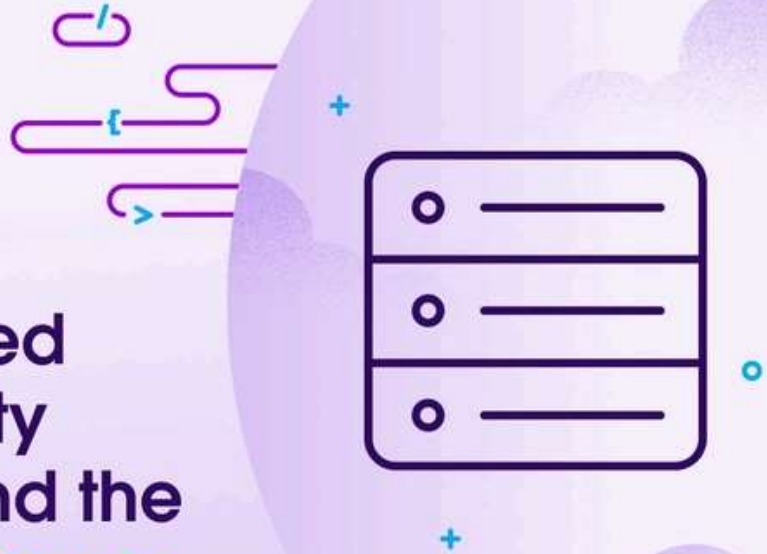

[Save time with this productivity hack.](#)

See how Heroku MCP Server connects tools like Cursor to Heroku, so you can build, deploy, and manage apps—right from your editor.


[Learn More](#)

Top comments (0)

[Code of Conduct](#) • [Report abuse](#)

DEV Community



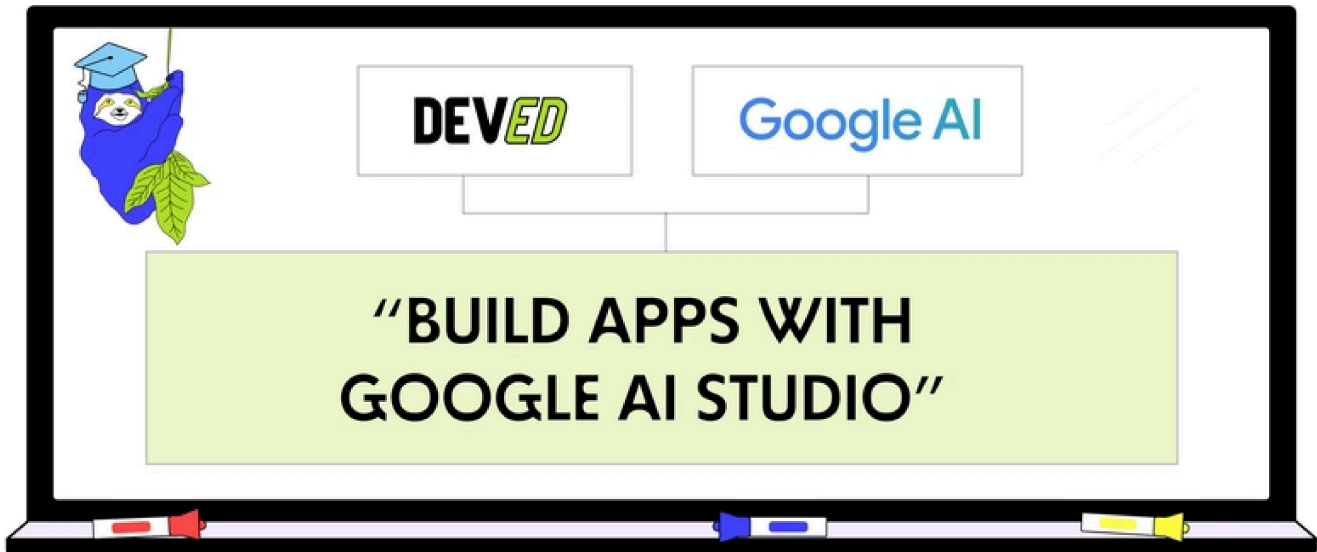

[Work through these 3 parts to earn the exclusive Google AI Studio Builder badge!](#)

This track will guide you through Google AI Studio's new "Build apps with Gemini" feature, where you can turn a simple text prompt into a fully functional, deployed web application in minutes.

[Read more →](#)



Carrie

Cybersecurity Engineer | Follow Me and Learn Web Application Security Step by Step

JOINED

10 сент. 2024 г.

More from **Carrie**

SafeLine Detection Engine Performance Configuration

[#webdev](#) [#threatdetection](#) [#websecurity](#) [#application](#)

SafeLine HTTP Request Processing Flow

#http #safeline #websecurity #webdev

Install SafeLine WAF in 10 Minutes: Quick-Start Guide for DevOps Teams

#safelinewaf #wafdeployment #devops #websecurity

 MongoDB PROMOTED

...



[Gen AI apps are built with MongoDB Atlas](#)

MongoDB Atlas is the developer-friendly database for building, scaling, and running gen AI & LLM apps—no separate vector DB needed. Enjoy native vector search, 115+ regions, and flexible

document modeling. Build AI faster, all in one place.

[Start Free](#)