

## MPP Pretest, July, 2018

The purpose of this test is to assess your level of preparation in problem-solving, data structures, basic OO, and the Java programming language. For each of the problems below, write the simplest, clearest solution you can, in the form of a short program. You will be writing your code with the help of a Java compiler and the Eclipse development environment; you will not, however, have access to the internet. Because a compiler has been provided, it is expected that the code you submit for each of the problems will be free of compilation errors and will be a fully functioning program. If a solution that you submit has compilation errors, you will not receive credit for that problem.

Initially, you will receive Java code for each problem, which provides skeletons for the solutions to each. Your task is to fill in the details of each of these skeletons. Do not change the names of the methods (though you may add new methods if you want) and do not change their signatures or access modifiers (e.g. `public`)).

To get a passing grade on this pretest (so that you may go directly to MPP rather than FPP), there are two requirements:

- A. You must get a passing score (to be determined by the graders) for the Polymorphism problem (Problem 3)
- B. Your total score on all three problems needs to be 70% or higher

**Problem 1:** [40 %] [Recursion] In the `probl` package, there is a class `Probl` containing an unimplemented method

```
void frequencies(List<String> input)
```

and an instance variable

```
HashMap<String, Integer> h
```

To implement the method `frequencies`, you will compute the number of occurrences of each of the strings in the `input` list and place this information in the `HashMap h`. In `h`, each key is a string from the `input` list and each value is the number of occurrences of that string in the `input` list. You must compute these values in the body of the `frequencies` method, *using recursion*.

Example: Suppose your input list is

[Tom, cat, Tom, dog, cat, Tom, feather, dog, bull rich feather].

After your `frequencies` method runs using this list as input, `HashMap h` should look like this:

feather	2
Tom	3
cat	2
rich	1
dog	2
bull	1

Note: There is a `main` method in `Prob1` that you can use to test your implementation of `frequencies`.

*Requirements for Problem 1.*

1. You must use recursion in your computation of the number of occurrences of each `String` in the input list
2. Your computation of `frequencies` must be correct.
3. There should be no compiler or runtime errors.

**Problem 2.** [40%][Data Structures] For this problem, you will implement a stack of `Strings`, using a `Node` as a background data structure. To get started, you will find in your `prob2` package a class named `MyStringStack`. There is just one implemented method in this class – the `toString` method, which outputs as a single, space-separated `String` all the `Strings` that are in the stack. The class also contains a `Node` class and an instance variable `top` of type `Node`. Your task is to provide implementations of the two methods declared in this class: `push` and `pop`. The comments provided in the code specify the expected behavior of each of these operations.

There is a `main` method that provides data to test your code. The `toString` method (which has been implemented) can be used to display the contents of your stack as you test it.

Your code must meet the following requirements:

1. The `push` method should never cause an exception to be thrown.
2. If an attempt is made to `pop` an empty stack, the `pop` method will return `null`.
3. Your stack should reject `null` inputs – it should not be possible to push a `null` `String` onto your stack. If the `push` method is passed a `null` argument, it should do nothing.
4. Your code should have no compiler errors and should not produce any runtime errors.

**Problem 3.** [20%][Polymorphism] In the `prob3` package of your workspace, you are given fully implemented classes `Circle` and `Rectangle`. Each has a `computeArea` method, which returns the area of the figure according to the usual mathematical formulas. In the `DataMiner` class, a raw list is provided, named `objects`, and the `main` method calls `populateList` in order to populate this list with instances of `Rectangle` and `Circle`.

There is one unimplemented method in `DataMiner`: `computeAverageArea`. This method should compute the average area of the figures in the `objects` list.

For this problem you must implement `computeAverageArea` by *polymorphically computing* the area of each figure in the list. This implies that your implementation *does not check* the runtime types of the figures in the `objects` list.

In order to set up the code so that you can use polymorphism, create a suitable interface that can be implemented by both `Rectangle` and `Circle`, and insert the appropriate type parameter in the declaration of the `objects` list. Then implement `computeAverageArea`. (If you do not use an interface, or try to use polymorphism by using inheritance, you will lose credit.)

# Programming Environment Set-up Instructions for Online MPP Pretests

This document describes how to set up your home laptop in order to take the MPP Pretest online.

The MPP Pretest makes use of an embedded proctoring tool. You will receive separate instructions for how to set up the proctoring tool and work with it while you are taking one of the pretests. The proctoring tool requires that you take an *onboarding test* a few days before the actual MPP Pretest; this preliminary test is given to ensure that you have been successful in the setup procedures; your answers to the programming parts of the onboarding test will not be graded.

NOTE: In an orientation video that you may have seen, it was stated that you are free to use any development environment you want for the test---this is NO LONGER TRUE. Because the number of test-takers has become very large, we need all of you to use the same IDE – namely, Eclipse. Details for set up of Eclipse are given below. We cannot accept solutions created using other tools (such as IntelliJ or Netbeans).

This document covers the follow points:

1. Software setup (not including ProctorTrack)
2. Configuring Eclipse
3. Taking the Onboarding Test and the MPP Pretest

**Software Setup.** For convenience in assessing your work, we ask you to use the versions of Java and Eclipse that we specify here. You will download and install these as part of your software setup.

**Java.** You will need to download and install Oracle jdk-17 which can be obtained by following this link for windows (use the installer) . (Jdk 18 is also available – you may install this version instead if you want, BUT be sure to check if the latest version of Eclipse supports jdk 18.)

<https://www.oracle.com/java/technologies/downloads/#jdk17-windows>

For the Mac, use this link:



<https://www.oracle.com/java/technologies/downloads/#jdk17-mac>

**Eclipse.** Download the latest version of Eclipse from here:


<https://www.eclipse.org/downloads/>

## Configuring Eclipse.


1. Create a workspace. You can do this by creating a new folder on your Desktop called workspace. All the code that you write will be in this folder.
2. Launch Eclipse; at startup, it will ask for your workspace location; browse to the workspace folder that you just created and click the "Launch" button.

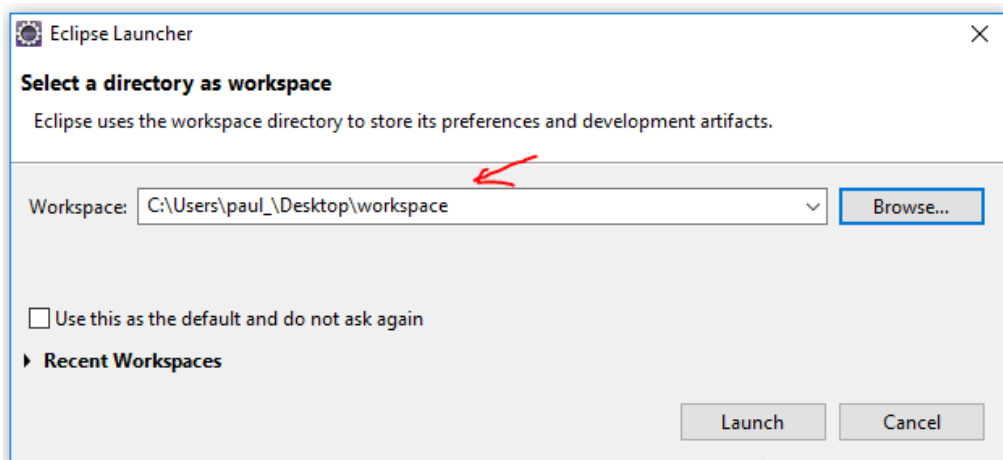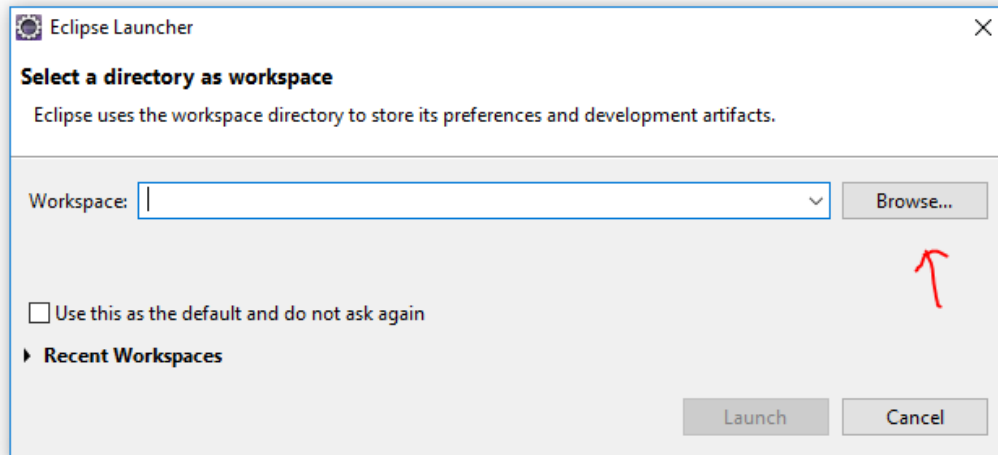


3. Close the Welcome tab and find Window along the top menu bar. Click Window > Perspective > Open Perspective > Java.

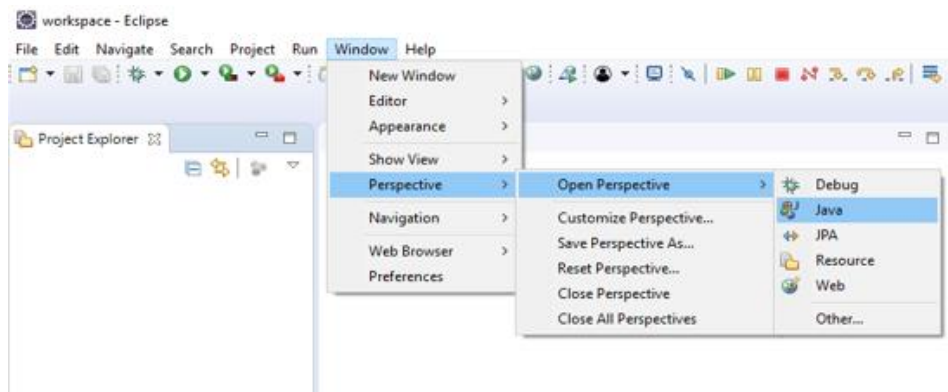

- 
- The screenshot shows the Eclipse IDE's 'Preferences' dialog, with the 'Java' category selected and the 'Installed JREs' sub-category chosen. The 'Add...' button is highlighted with a red arrow. The 'Add External JREs' dialog is open, displaying a table for installed JREs. The table has three columns: 'Name', 'Location', and 'Type'. The 'Add...' button in this dialog is also highlighted with a red arrow. The dialog includes instructions on how to add JREs and buttons for 'Add...', 'Edit...', 'Duplicate...', 'Remove', and 'Search...'. The 'Add External JREs' dialog also has a warning message: 'You must provide at least one JRE to act as the workspace default'.

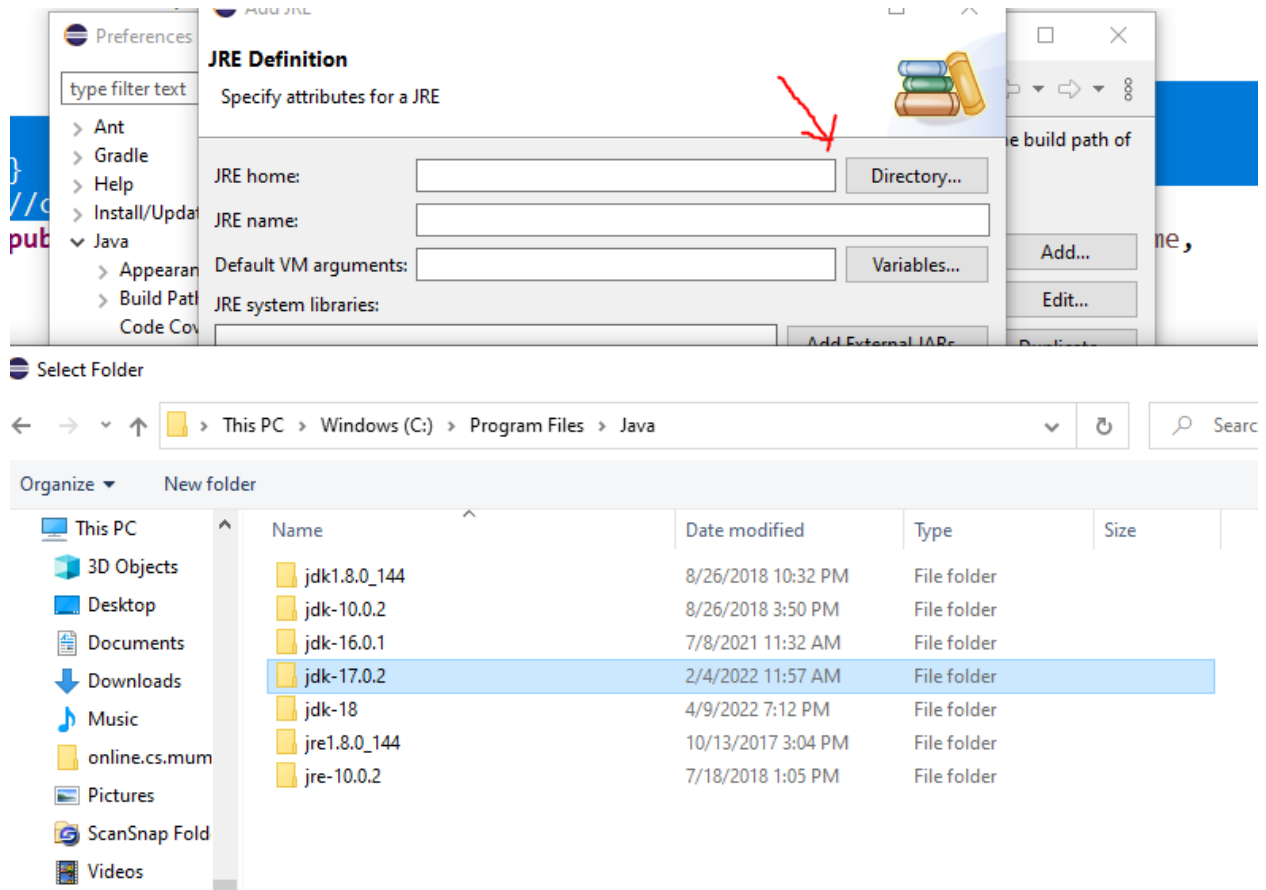

- c. When you have highlighted the folder jdk-17.0.2, click OK and you will see the following window. Click Finish.

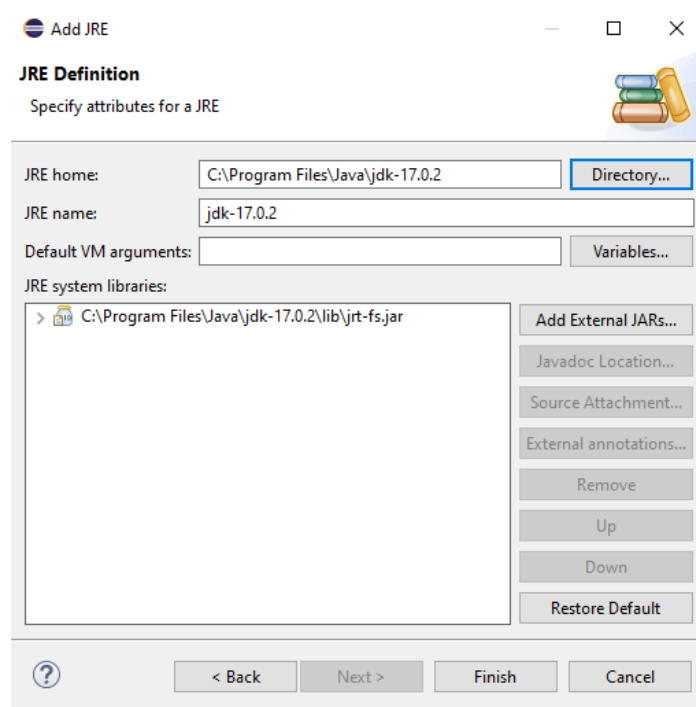

On the next window that comes up, you must check the box on the next window that asks you to specify jdk 17.0.2 as your default JRE. Then click the Apply and Close button.

5. The next step is to upload the startup code that you have downloaded from Sakai. From Sakai, you will get zip files containing startup code for the Onboarding test and for the MPP Pretest. To upload these into Eclipse, you first create two Eclipse projects, and then add packages to those projects. All of this is described in detail below.

NOTE: You will upload the Onboarding test first and take/submit that test a couple of days before you upload and take the actual MPP Pretest.

- a. *MPP PreTest*. In the Package Explorer panel, right click and select New > Java Project. You will see the following window. In the Project Name field type your first name and last name (do not include more than two names) followed by an underscore '\_', followed by your student ID. This is the project name for your MPP Pretest code. Click the Finish button at the bottom

**New Java Project**

**Create a Java Project**

Create a Java project in the workspace or in an external location.

Project name:

☒ Use default location

Location:  [Browse...](#)

**JRE**

☒ Use an execution environment JRE:

☐ Use a project specific JRE:

☐ Use default JRE 'jdk-16.0.1' and workspace compiler preferences [Configure JREs...](#)

**Project layout**

☐ Use project folder as root for sources and class files

☒ Create separate folders for sources and class files [Configure default...](#)

**Working sets**

☐ Add project to working sets [New...](#)

Working sets:  [Select...](#)


**Module**

☒ Create module-info.java file


[?](#) [< Back](#) [Next >](#) **Finish** [Cancel](#)




- b. *Onboarding Test.* Create a second project (as in the previous step). This time, name the project Onboarding (you do not need to include you ID for this one). REMEMBER: You will create the Onboarding project and work on it a couple of days before starting work on the actual MPP Pretest. Below is a picture of these two projects as they appear in your workspace.

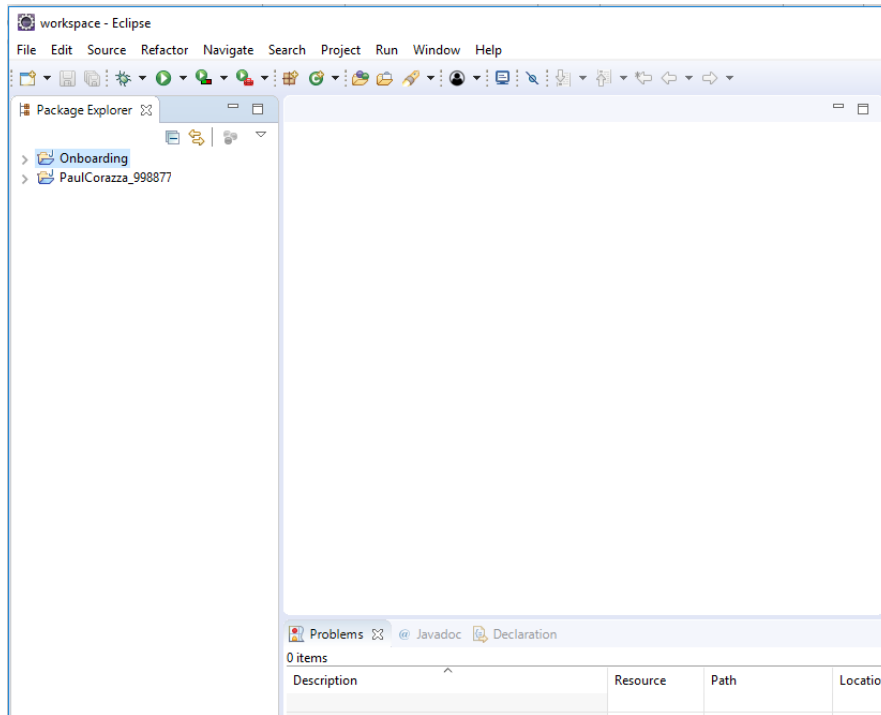

- c. Create a folder startup\_code in which to place the startup code that you retrieve from Sakai – you will find this code in a zipped folder as an attachment to the tests shown in Sakai. Unzip them and place them in start\_up code folder. There will be startup code for the Onboarding test and also, later, for the MPP Pretest.

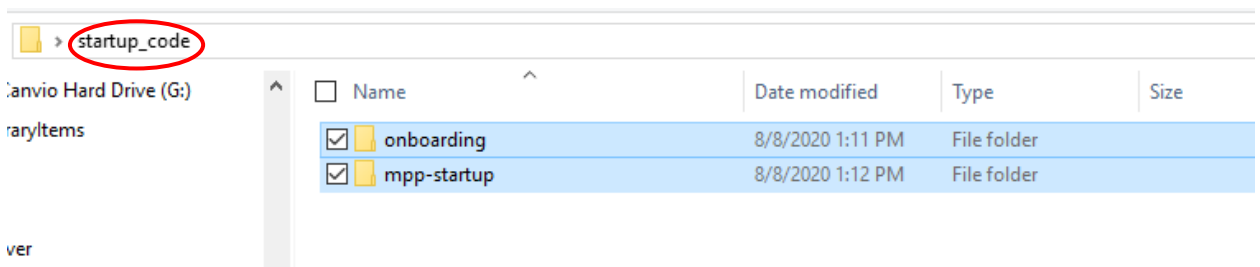

- d. Each of these two folders contains three java packages, named prob1, prob2, and prob3. Copy these three from the onboarding folder into the src folder of the Onboarding project as shown below. When the MPP Pretest startupcode becomes available, do the same thing: copy the packages prob1, prob2, prob3 from the mpp-startup folder to the src folder of the mpp project (that uses your name as the project name).


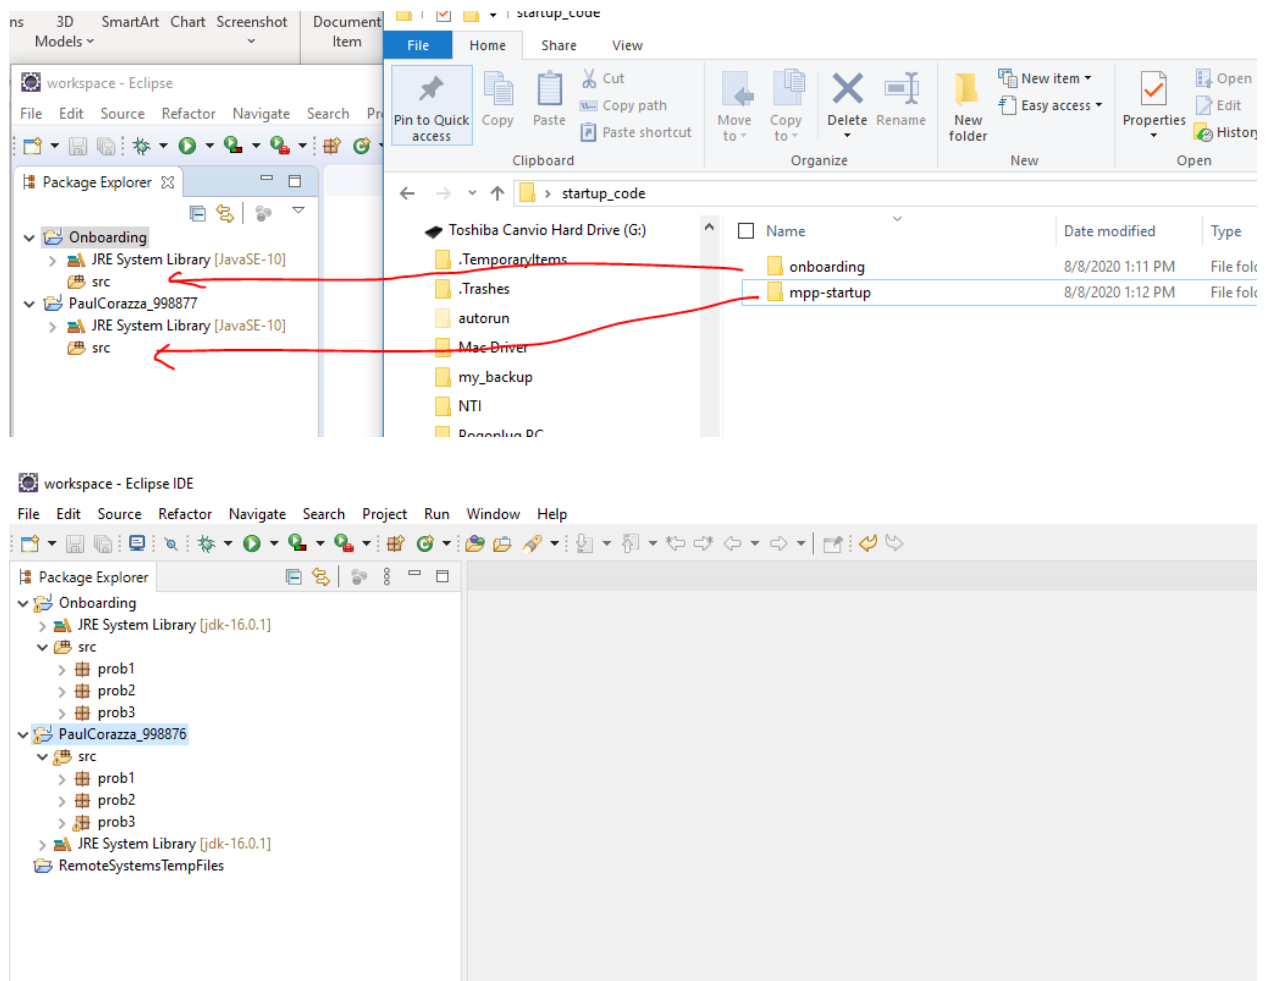


**Taking the Onboarding Test and the MPP Pretest.** You will receive instructions about accessing the exam instructions and startup code within the proctoring tool in a separate document. For both the onboarding and MPP pretest, you will take some steps to ensure that the proctoring tool is set up properly. Then when you are ready, you will begin working on one of the tests.


For each of the tests (onboarding and MPP pretests), you will follow the exam instructions and write your code using the startup code as the starting point.


When you have finished writing your code, you will do the following. The procedure will be the same for each test.

1. Make sure your work has been saved – do this by checking your workspace folder (on the Desktop) and checking the timestamp on the files inside the folder you are ready to submit.

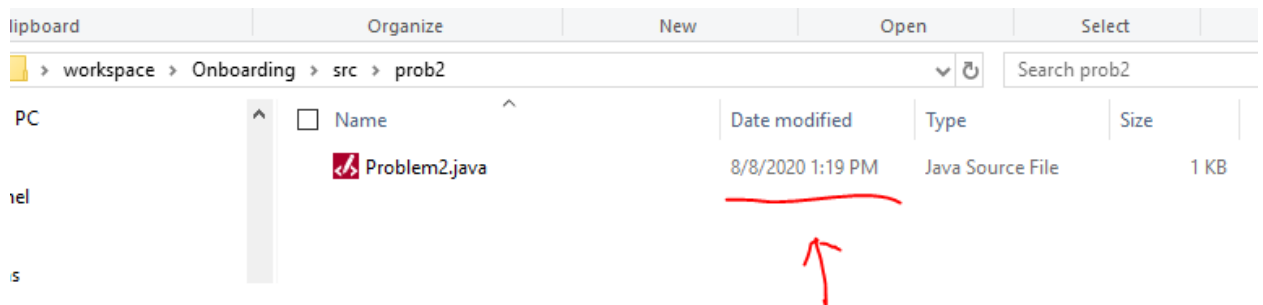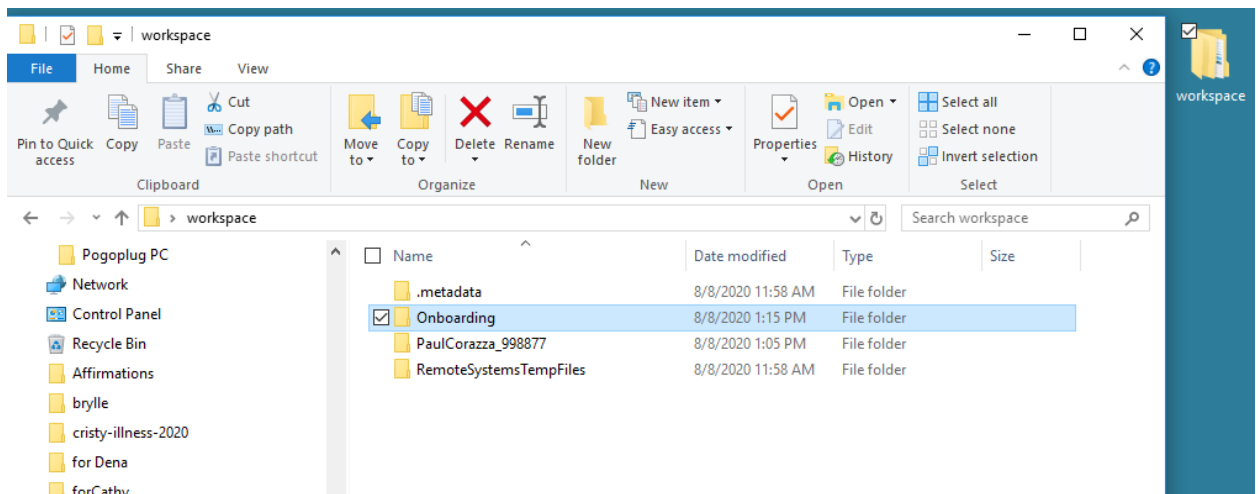


- Then, within your workspace folder (on the Desktop), zip up the project

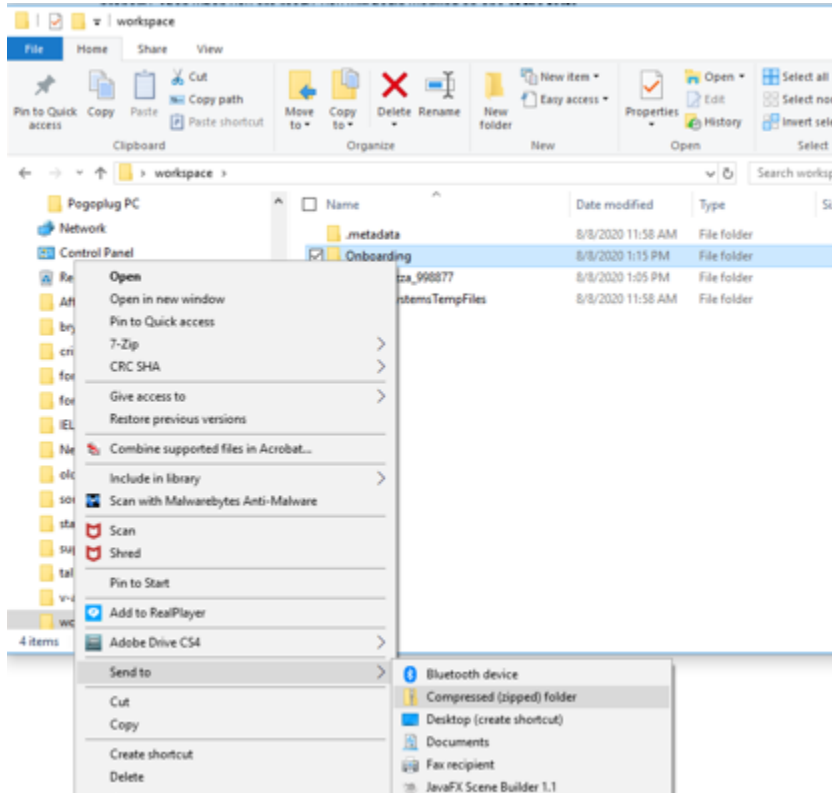


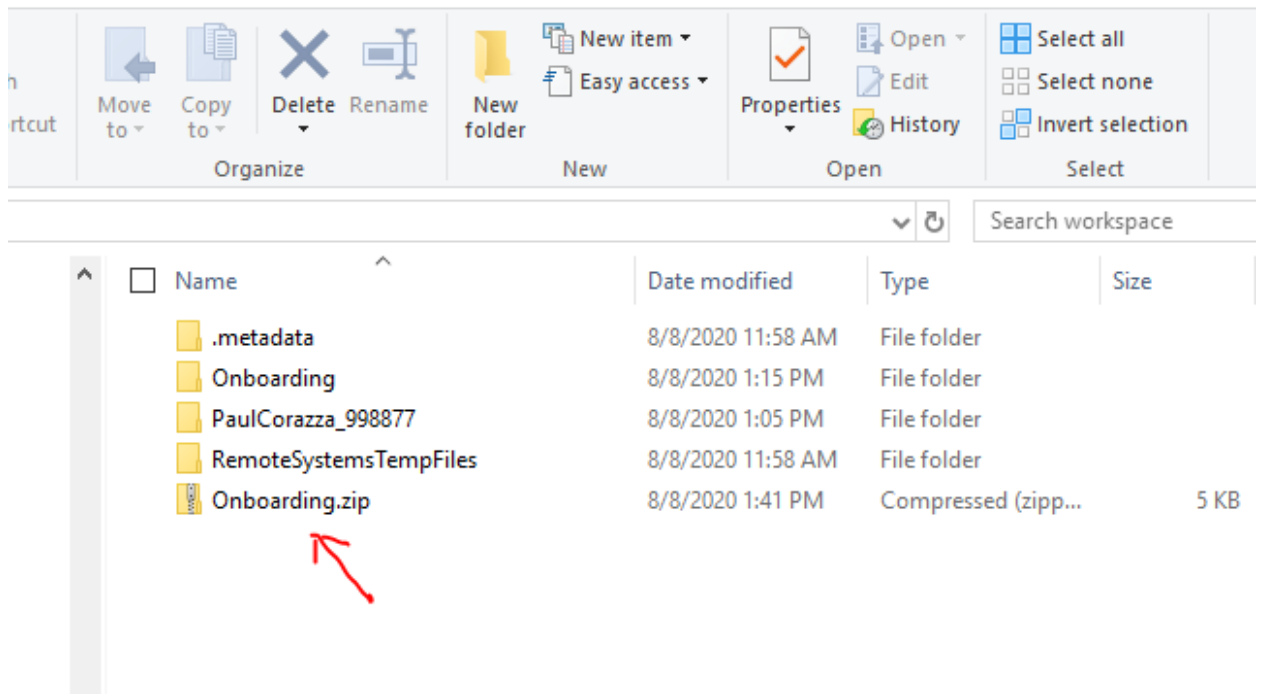

3. Submit your work by attaching this zip file in the Submit area in Sakai for this particular test. Once you have attached the file, remember to click the Submit button in Sakai.
4. *Cleanup.* Once you have submitted, go back to the startup\_code folder and delete the code that you used for this test

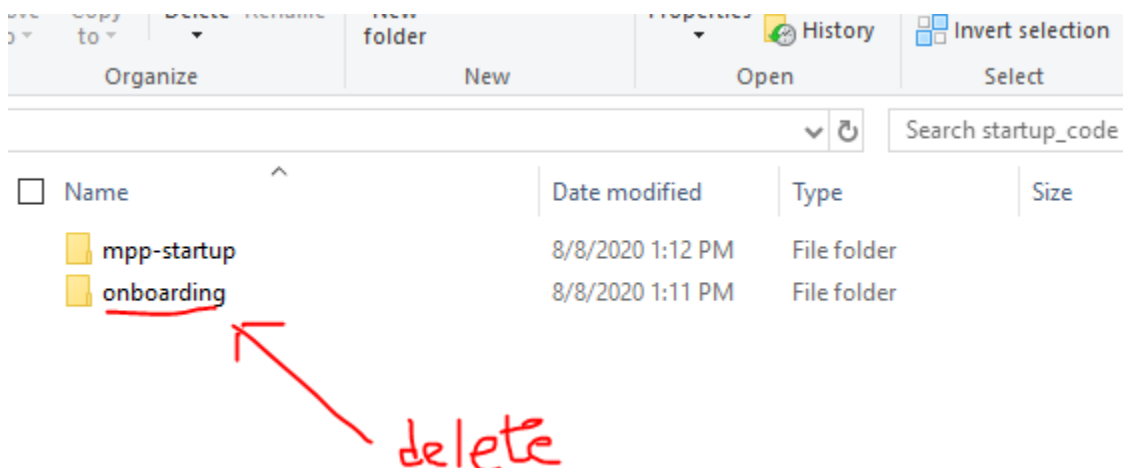

Also, from within Eclipse, delete the work that you did on this test by right clicking the Java project, selecting delete, and clicking the option "delete files from disc".

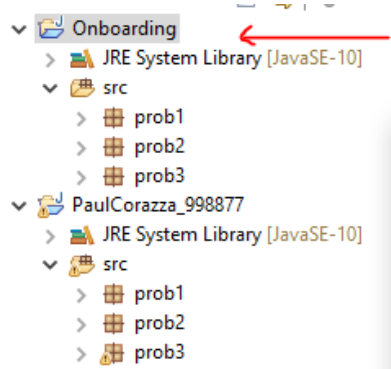

delete

