

ZSerializer


Quick Start Guide

Contents

Setup	2
Serializing Components	2
Serializing GameObjects	3
Saving and Loading.....	4
ZSave.SaveAll();	4
ZSave.LoadAll();	4
OnSave and OnLoad Events.....	5
Saving Groups.....	5
Component Settings	6
Save Group.....	6
Sync	6
Serialized Fields.....	6
On/Off	6
Global Switches.....	7
Advanced Serialization.....	7
On Persistent Components	7
On Persistent GameObjects.	8
On Unity Components	9
The ZSerializer Menu	10
Saving Groups Menu.....	11
Component Blacklist.....	12

Setup

When you first install ZSerializer you will be greeted by this big Setup button. When you click it, it'll generate the necessary files you need to start using the tool.

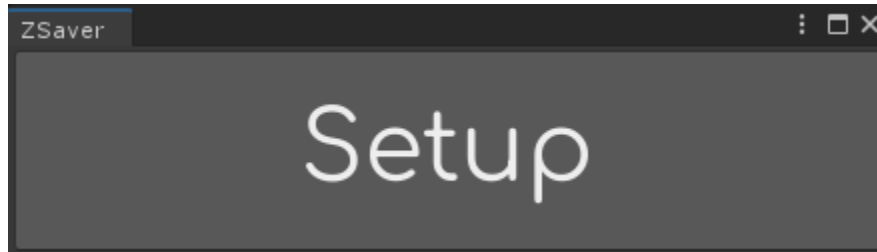

There are several things you can serialize using this tool:

Serializing Components

Let's say you have a component you want to serialize, for example, a Game Manager that holds information about the state of the game:

```
public class GameManager : MonoBehaviour
{
    public int highScore;
    public int currentScore;
    public string playerName;
    public Vector3 playerPosition;
}
```

If you make your class inherit from **PersistentMonoBehaviour** (you will need to add the ZSerializer namespace for it to be available), it will be recognized as a **Persistent Component**.

Whenever you go back to Unity, on the [ZSerializer Menu](#), you'll see the name of your class appear on that menu. This means your class is now recognized as Persistent.

Depending on your settings, you might see either a green, yellow, or red button to the right of your class.




- **Green** means everything's fine, the class instances will be saved and loaded when prompted.
- **Yellow** means the files needed for serialization have been created, but they need to be rebuilt, because the class itself was changed.
- **Red** means there's no files and they need to be built.

Clicking the button in either **Yellow** or **Red** will fix these problems.

Serializing GameObjects

Making GameObjects serializable is even easier than components, just add the **Persistent GameObject** component to your gameObject, and it will be saved and loaded when prompted.

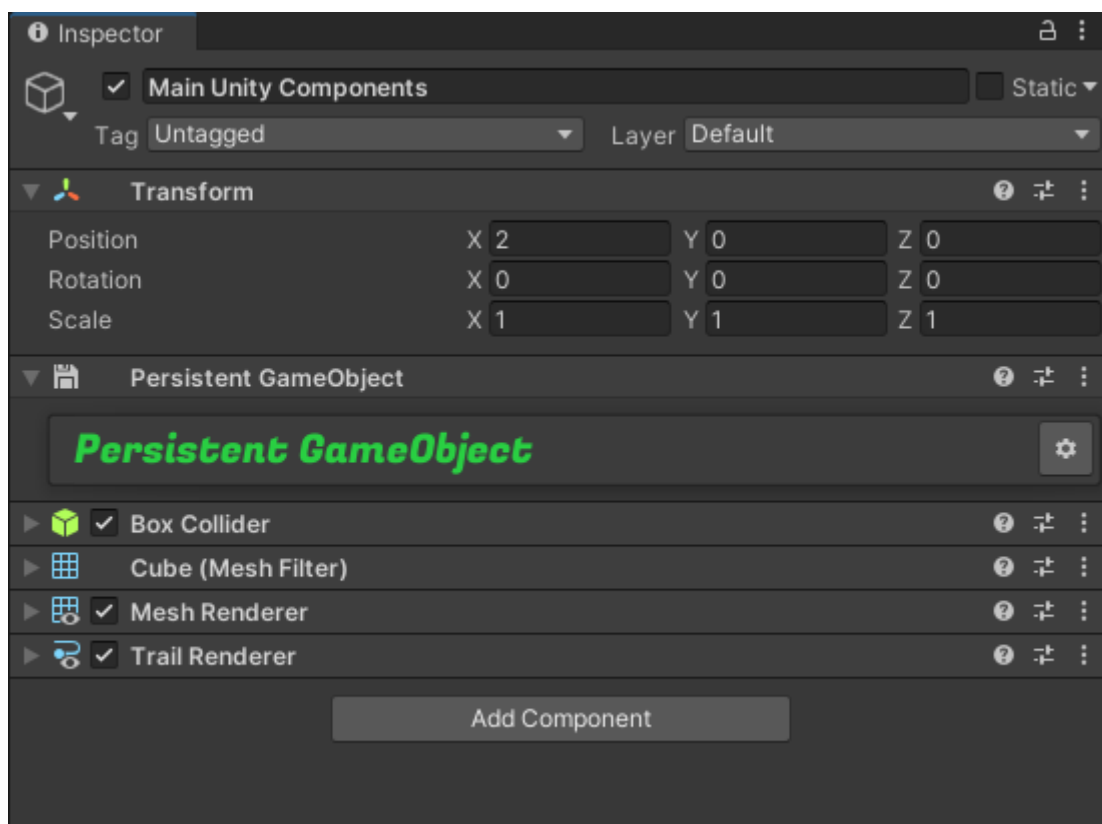

The **Persistent GameObject** component will save the GameObject's name, tag, layer, static state, transform, and each and every one of the Unity Components that are attached to it.

(That includes Colliders, Renderers, and everything else under the UnityEngine namespace.)

Saving and Loading.

This part is also pretty easy, you just need to call:

```
ZSerialize.SaveAll();  
ZSerialize.LoadAll();
```

ZSave.SaveAll();

1. It will serialize every instance of a **Persistent Component** you have on your scene.
2. It will serialize every instance of a **Persistent GameObject** along with its selected Unity Components and **Persistent Components**.
3. (Optional) It will encrypt your data using the Rijndael Algorithm.
4. It will save your data based on which Save File you've selected and which scene you're currently in when performing the Save.

ZSave.LoadAll();

1. It will deserialize every **Persistent GameObject**, and instantiate new ones in case they're not already in the scene, preserving all of the gameObject's data along with their hierarchy.
2. It will deserialize every one of Unity's Components and add them into their respective Game Objects.
3. It will deserialize every one of your custom **Persistent Components** and add them into their respective Game Objects
4. It will restore the references and values that each component had at the time of saving.

It will however NOT:

1. Restore a custom **Persistent Component**'s GameObject if said GameObject doesn't have a **Persistent GameObject** Component attached to it.
2. Restore an instance of a Material, Mesh and similar assets that have been modified from the original.

OnSave and OnLoad Events

If you want to execute some code right before or after a Save or a Load, you can override any of the following methods like this:

```
public override void OnPreSave()
{
    //Your code goes here...
}

public override void OnPostSave()
{
    //Your code goes here...
}

public override void OnPreLoad()
{
    //Your code goes here...
}

public override void OnPostLoad()
{
    //Your code goes here...
}
```

Saving Groups

Let's say there's several *kinds* of things you want to save or load at a given time. You may want to save the audio settings of your game, but not necessarily the other 300 gameObjects and components that are present in the scene.

When you click on the cogwheel icon of a Persistent GameObject or Component, you'll see a menu pop up where you can choose between a series of Save Groups.

By default, there are two Save Groups, Main and Settings, but you can add more of them in the Settings tab of the [ZSerializer Menu](#).

The way you Save and Load specific Save Groups is by inputting the groupId into the [Save and Load functions](#) as a parameter.

You can use the function `ZSerializer.NameToSaveGroup()` to get the id by name:


```
public void MySaveFunction()
{
    ZSerialize.SaveAll(ZSerialize.NameToSaveGroupID("Settings"));
}

public void MyLoadFunction()
{
    ZSerialize.LoadAll(ZSerialize.NameToSaveGroupID("Settings"));
}
```

Whenever you call either of those functions without parameters or with a -1 as the group ID, it'll just save every group.

Component Settings

Whenever you add a PersistentMonoBehaviour or a PersistentGameObject component to a GameObject, you'll see they have a cogwheel icon to the right. If you click it, you'll see some settings being displayed for them.

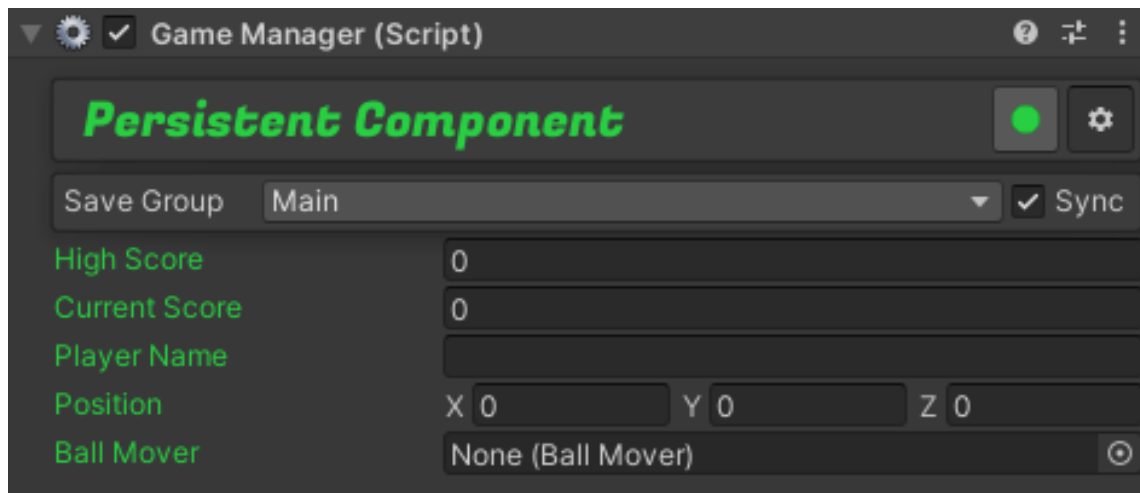

Save Group

This lets you choose in which Save Group this component will be saved.

Sync

When this option is activated, when you change a Save Group on one component, it'll also change in the rest of them in that scene, and on the ones you create afterwards.

Serialized Fields

Whenever the settings button is active, you'll see your fields turn a certain color. This defines their Serialization State.


When the variable is green, it'll be saved and loaded when prompted.

If they're gray, however, they'll be ignored. You can learn more about field serialization in [Advanced Serialization](#)

On/Off

Whenever you've built your ZSerializers through the Red or Yellow buttons, the Green button works a bit differently: It toggles the serialization on and off. This means that, even if the component is present in the scene, it'll not be saved nor loaded.

A component being off is signified by the label and button becoming gray.

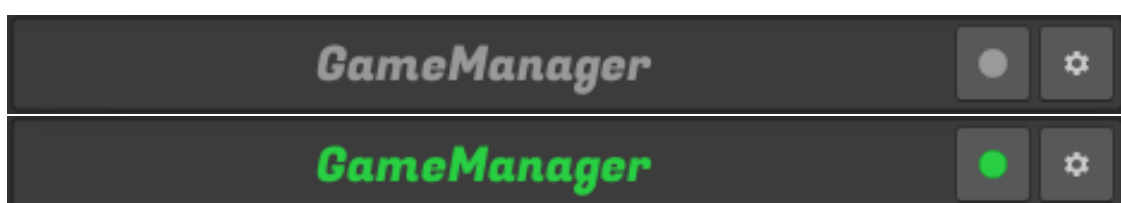

Global Switches

Much like how you can change the configuration of Persistent Components one by one, you can also do so globally in the [ZSerializer Menu](#).

You can just change a setting for any given Persistent Type, and it'll update it on every instance of said component in the scene, provided they have their Sync enabled.

Advanced Serialization.

On Persistent Components

Let's say that you have a script like this:

```
public class WaveManager : PersistentMonoBehaviour
{
    public int wave;
    public float waveTimer;
    public BigBulkyDataObject[] bigObjects;
}
```

Where BigBulkyDataObject is a gigantic class that holds enormous amount of information that gets processed when the game starts, or depends on the state of the game.

Whatever the case, you may not want to serialize this, as the save files could get really bulky really quick.

If you wish not to serialize a specific field inside a PersistentMonoBehaviour, you can do so by writing [NonSerialized] just before the declaration, and that field will no longer be serialized. And it will now appear gray in your Settings Menu.

```
public class WaveManager : PersistentMonoBehaviour
{
    public int wave;
    public float waveTimer;
    [NonSerialized] public BigBulkyDataObject[] bigObjects;
}
```


On Persistent GameObjects.

By enabling Advanced Serialization on your [ZSerializer Menu's Settings](#), you'll get some additional settings when displaying the settings for Persistent GameObjects:



There will now be a whole new menu enumerating every Unity Component attached to the GameObject, along with their InstanceID (provided you're in [Debug Mode](#)).

To the right, you'll be able to select the type of Serialization that specific component will have:

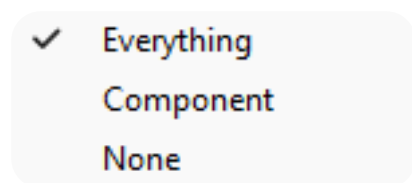

Everything

This will make it so the entire component is saved, along with its fields.

Component

This will load a default version of a component when loading a destroyed gameObject.

None

This will make it so the component is neither saved nor loaded when prompted. This is useful for temporary components.

Adding Components through code.

Whenever you add a component through code, it'll by default not be added to the serialization list of the Persistent GameObject component and it will thus, not be saved nor loaded when prompted.

To add a component with a specific Serialization type, you'll need to use the special AddComponent methods that are present within the Persistent GameObject Component:

```
public void MyAddComponentFunction()
{
    GetComponent<PersistentGameObject>().AddComponent<BoxCollider>(PersistentType.Component);
}
```



On Unity Components

There are some unity components like the Mesh or TrailRenderer which have a lot of properties that many people usually leave untouched.

For the most part, the only thing we care about serializing in a MeshRenderer, if at all, is the materials it has.


This is when the ZSerializer Configurator comes in handy.

If you go to Tools/ZSerializer/ZSerializer Configurator, a new window will open up containing two separate boxes:

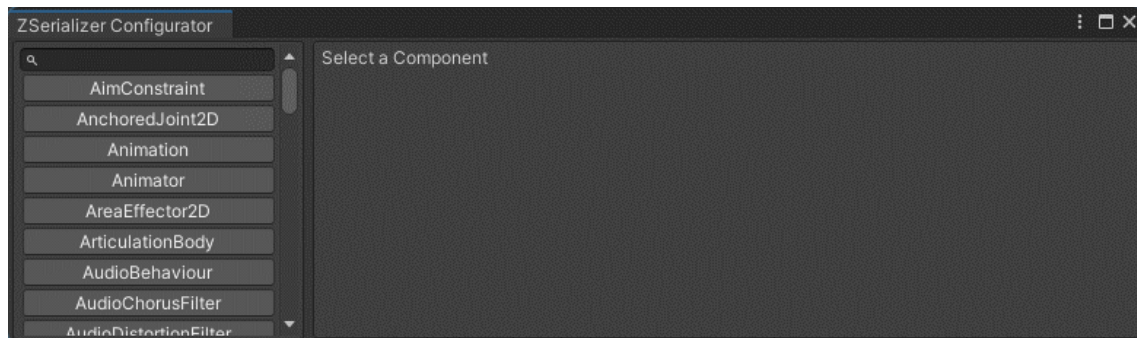

To the left, you'll be able to select any Unity Component you want to configure.

Whenever you select your desired one, a list of fields will appear on your right:

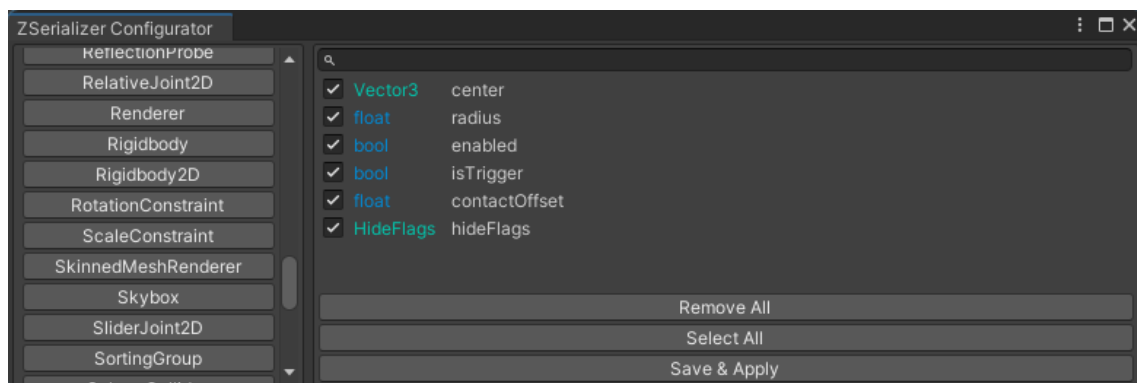

In this case, this is the SphereCollider ZSerializer. You can toggle off any fields you don't want to serialize. If I wanted to save only the center and radius, I'd click "Remove All" and toggle those ones on.

When you hit "Save & Apply", your UnityComponentZSerializers.cs file will be rebuilt to reflect these changes, and any unchecked fields will no longer be serialized.

The ZSerializer Menu


This menu contains information about your current scene's **Persistent Components** as well as some settings.



The first panel will show you which classes have been marked as **Persistent** in your current Scene.

When you press on the cogwheel to the right, you'll see the Settings menu:

Settings menu

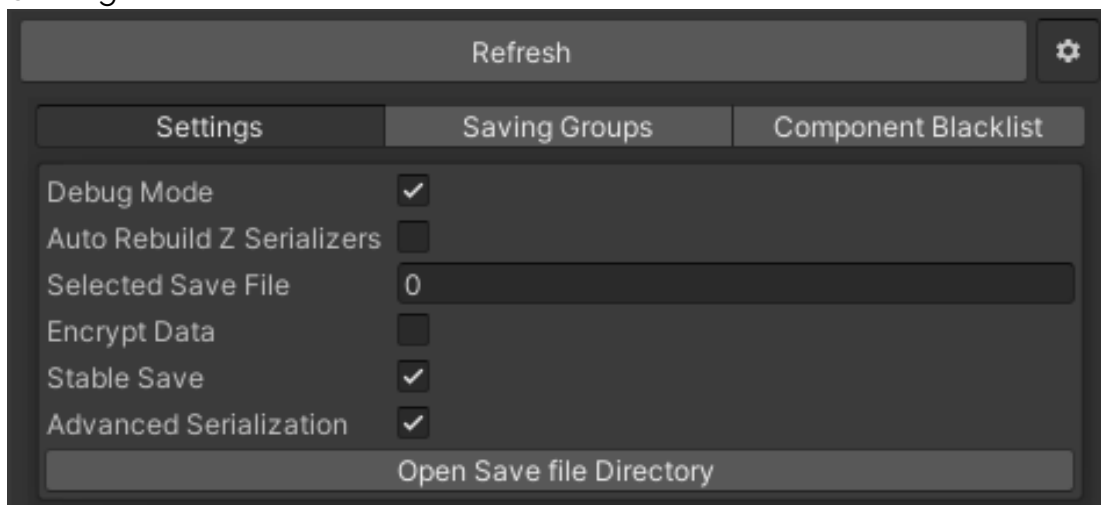

This tab will show you some settings to do with how the tool works and how serialization is managed in your project.

Debug Mode

This will dump information into the console whenever a save or a load occurs, useful for debugging in case something breaks.

Auto Rebuild ZSerializers

This will rebuild the ZSerializers of your Persistent Components, so that you don't have to click that filthy yellow or red button ever again.

Selected Save File

The selected Save File in which the saving and loading will be done. There can technically be any amount of save files you want, although it may take a toll on disk space on very large games if it's not used correctly, so limiting it is a good idea.

Encrypt Data

Determines whether or not your data will be encrypted using the [Rijndael Algorithm](#).

Advanced Serialization

This will toggle on or off the use of Advanced Serialization.

Open Save File Directory


When you click this button, the folder in which save files will be created will open, and you will be able to explore it.

The file structure of this folder will be the following:


<SelectedSaveFile>/<CurrentSceneBuild>/<SaveGroup>/...

Saving Groups Menu

This menu will show you your current project's Save Groups. You can have up to 16 of these, and Main and Settings come predefined.

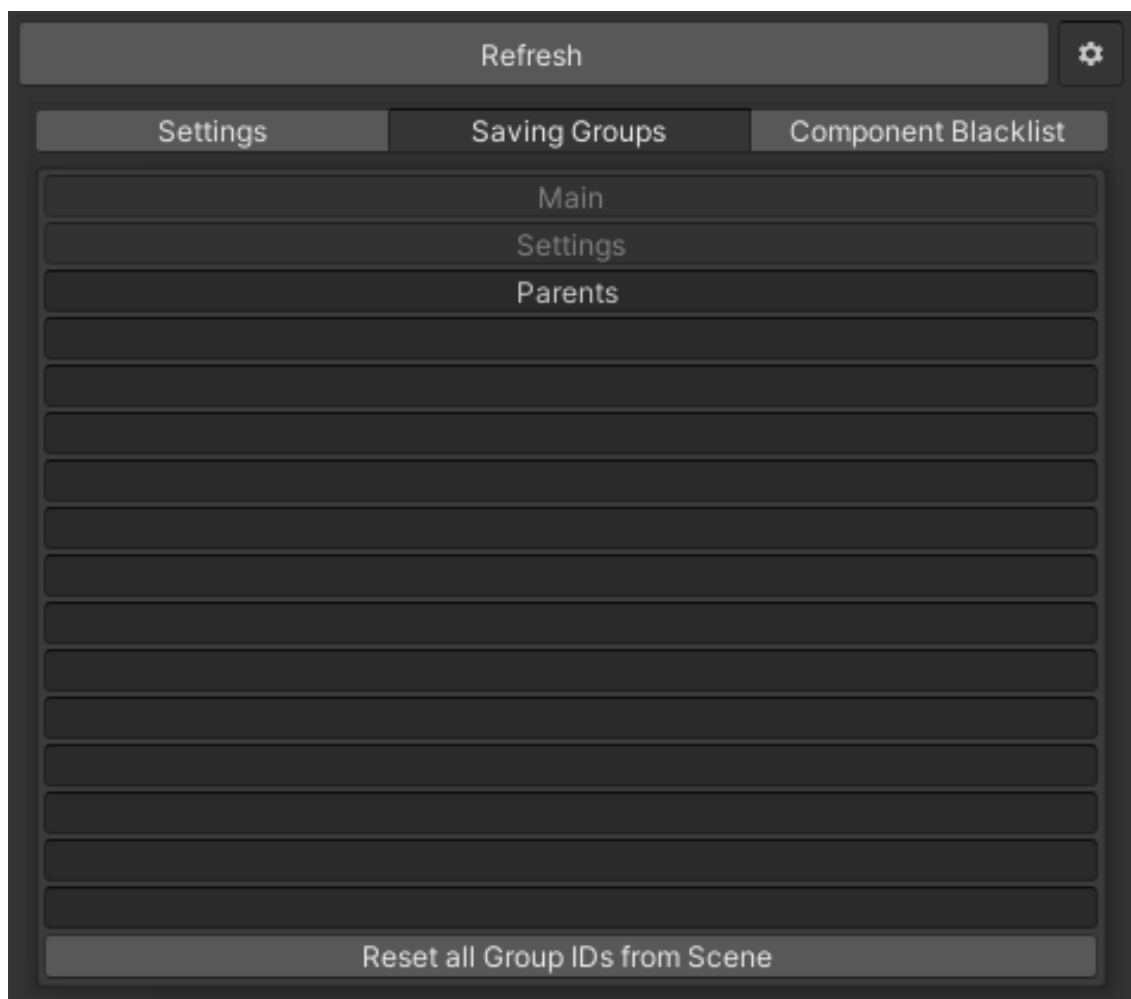

Component Blacklist

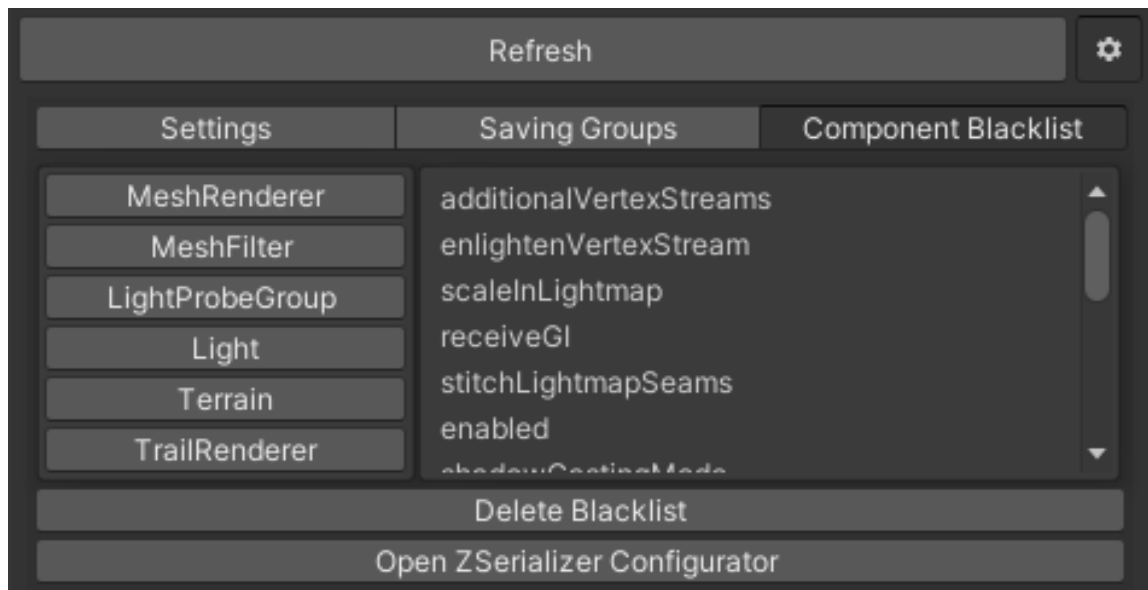

This menu will show you your current project's Component Blacklist. This is a List defined for every Unity Component about which fields should be serialized or not. You can learn more about it [here](#).