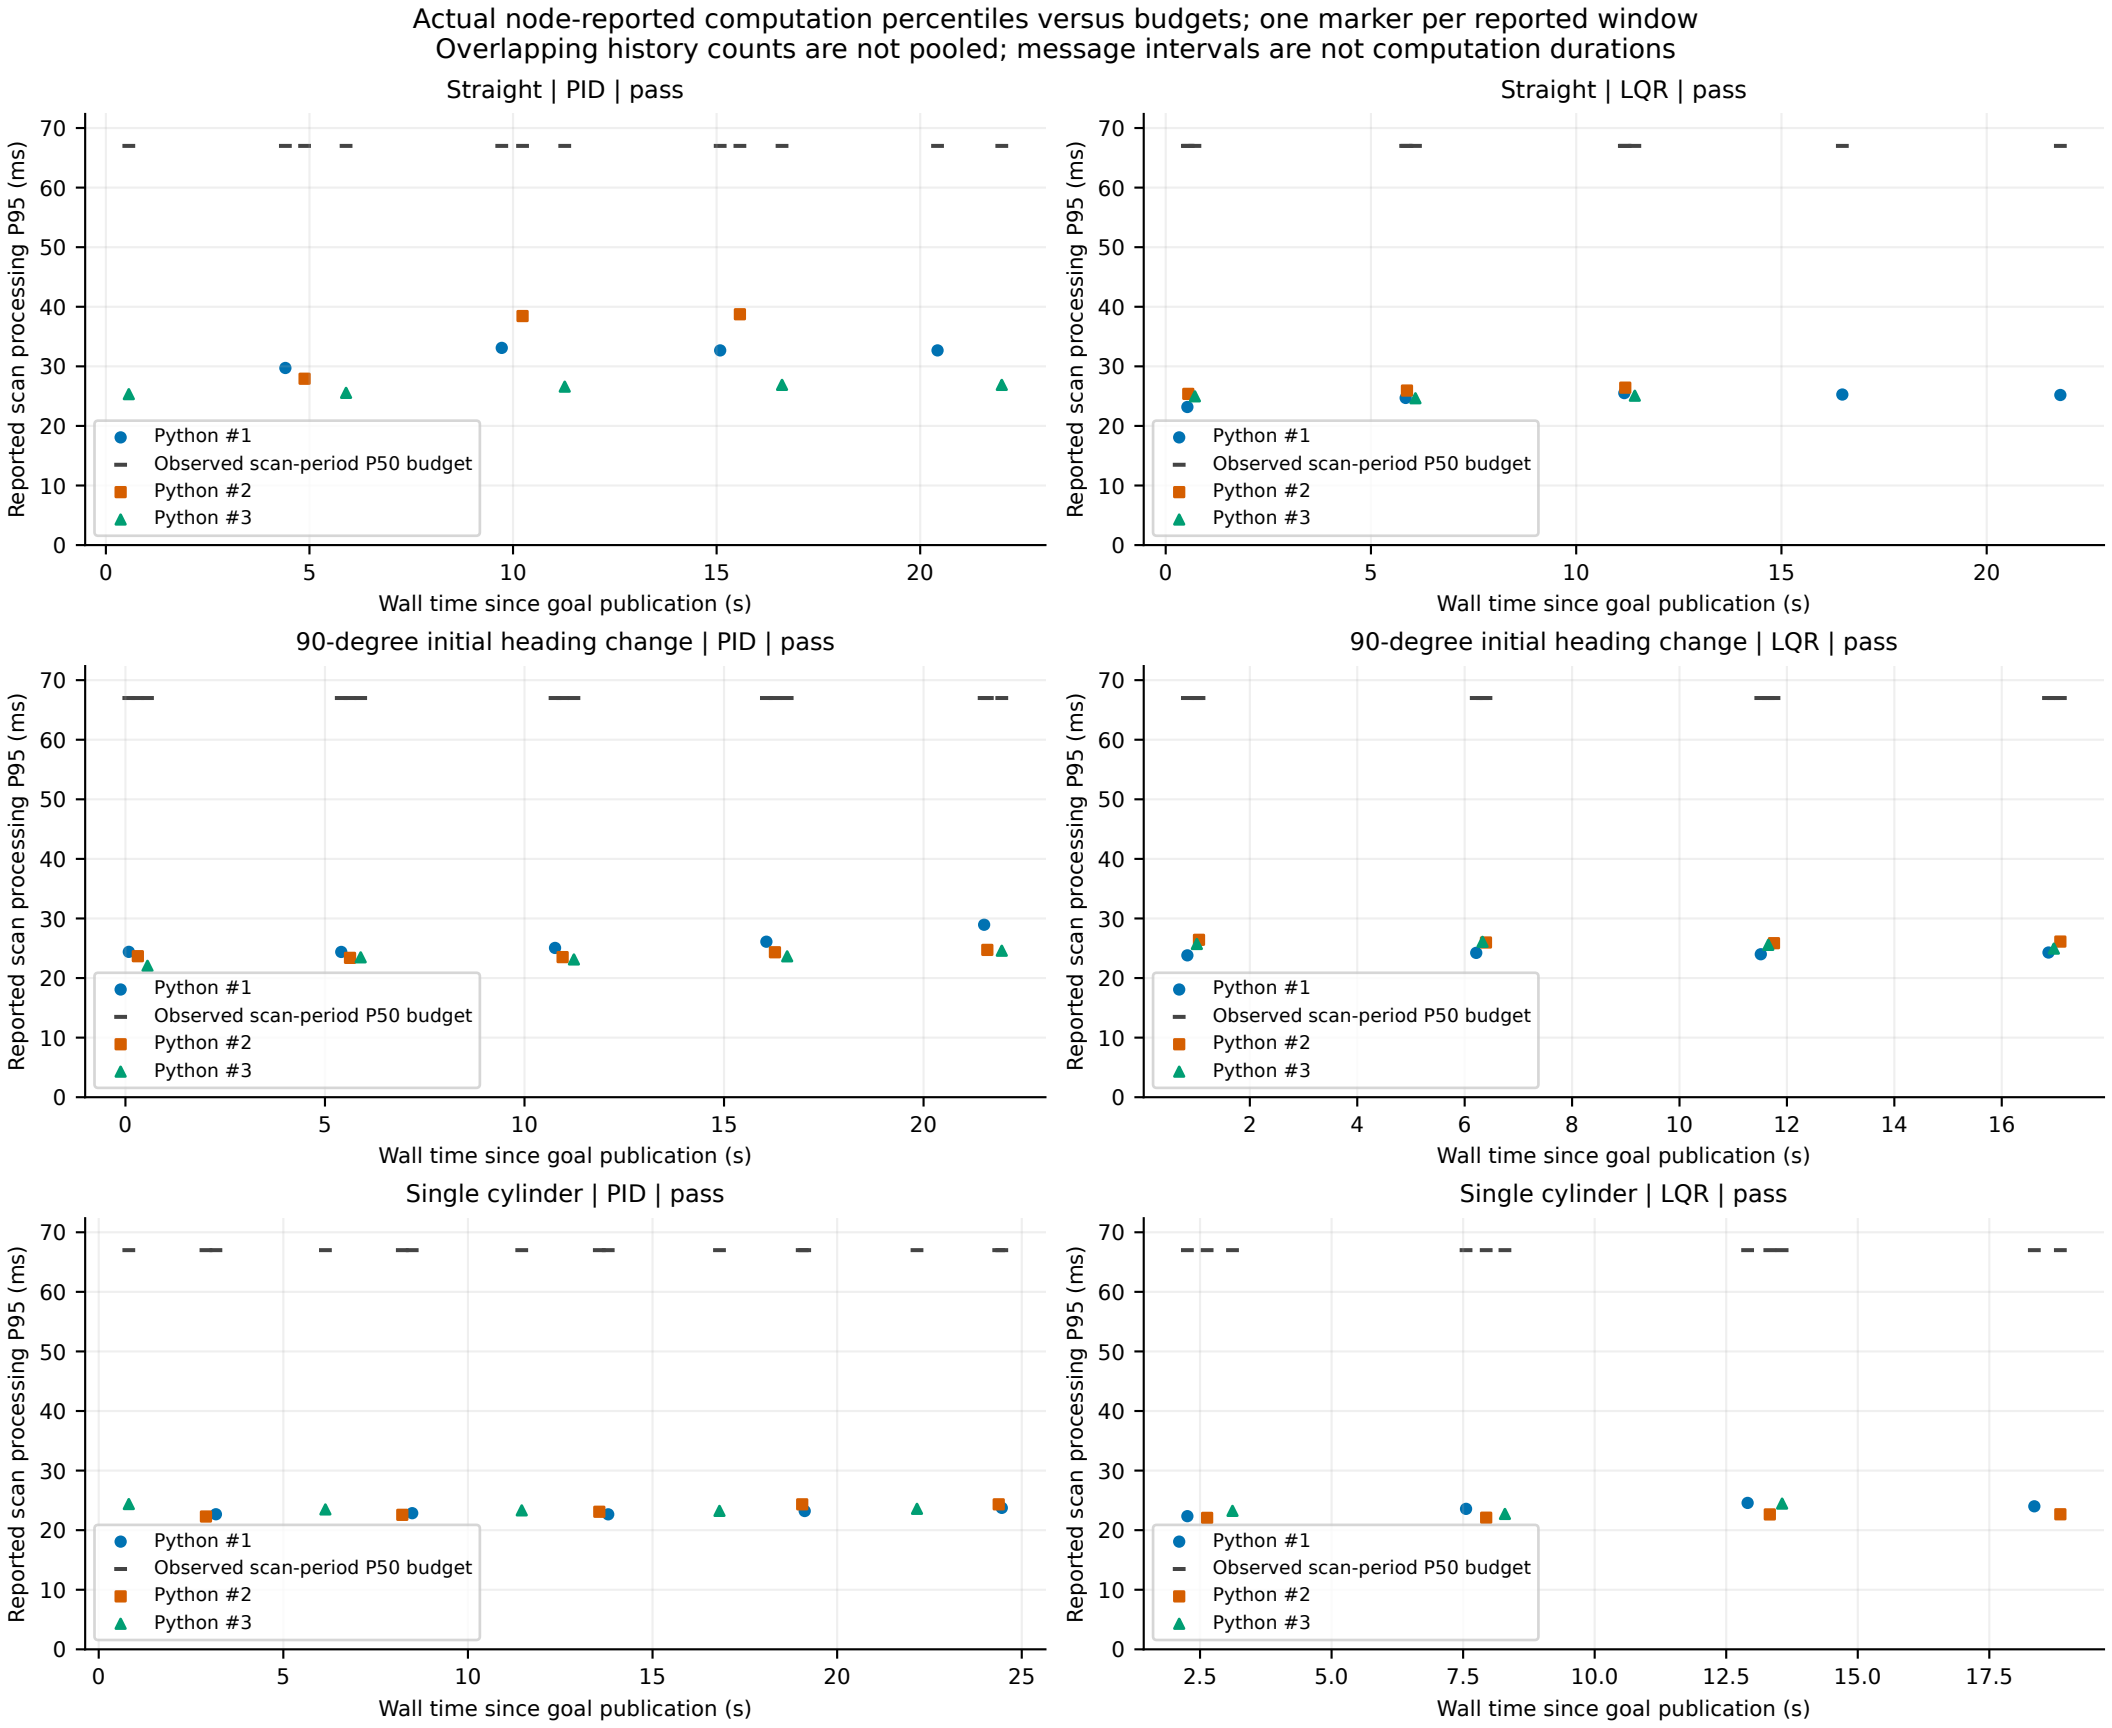
Actual node-reported computation percentiles versus budgets; one marker per reported window
Overlapping history counts are not pooled; message intervals are not computation durations
Straight | PID | pass
Straight | LQR | pass
90-degree initial heading change | PID | pass
90-degree initial heading change | LQR | pass
Single cylinder | PID | pass
Single cylinder | LQR | pass
Reported scan processing P95 (ms)
Wall time since goal publication (s)
Python #1
Observed scan-period P50 budget
Python #2
Python #3