
Optimization and batch composition — BUDGET-COMPLETE SNAPSHO

B183: 50.450M targets (100.0% of budget)

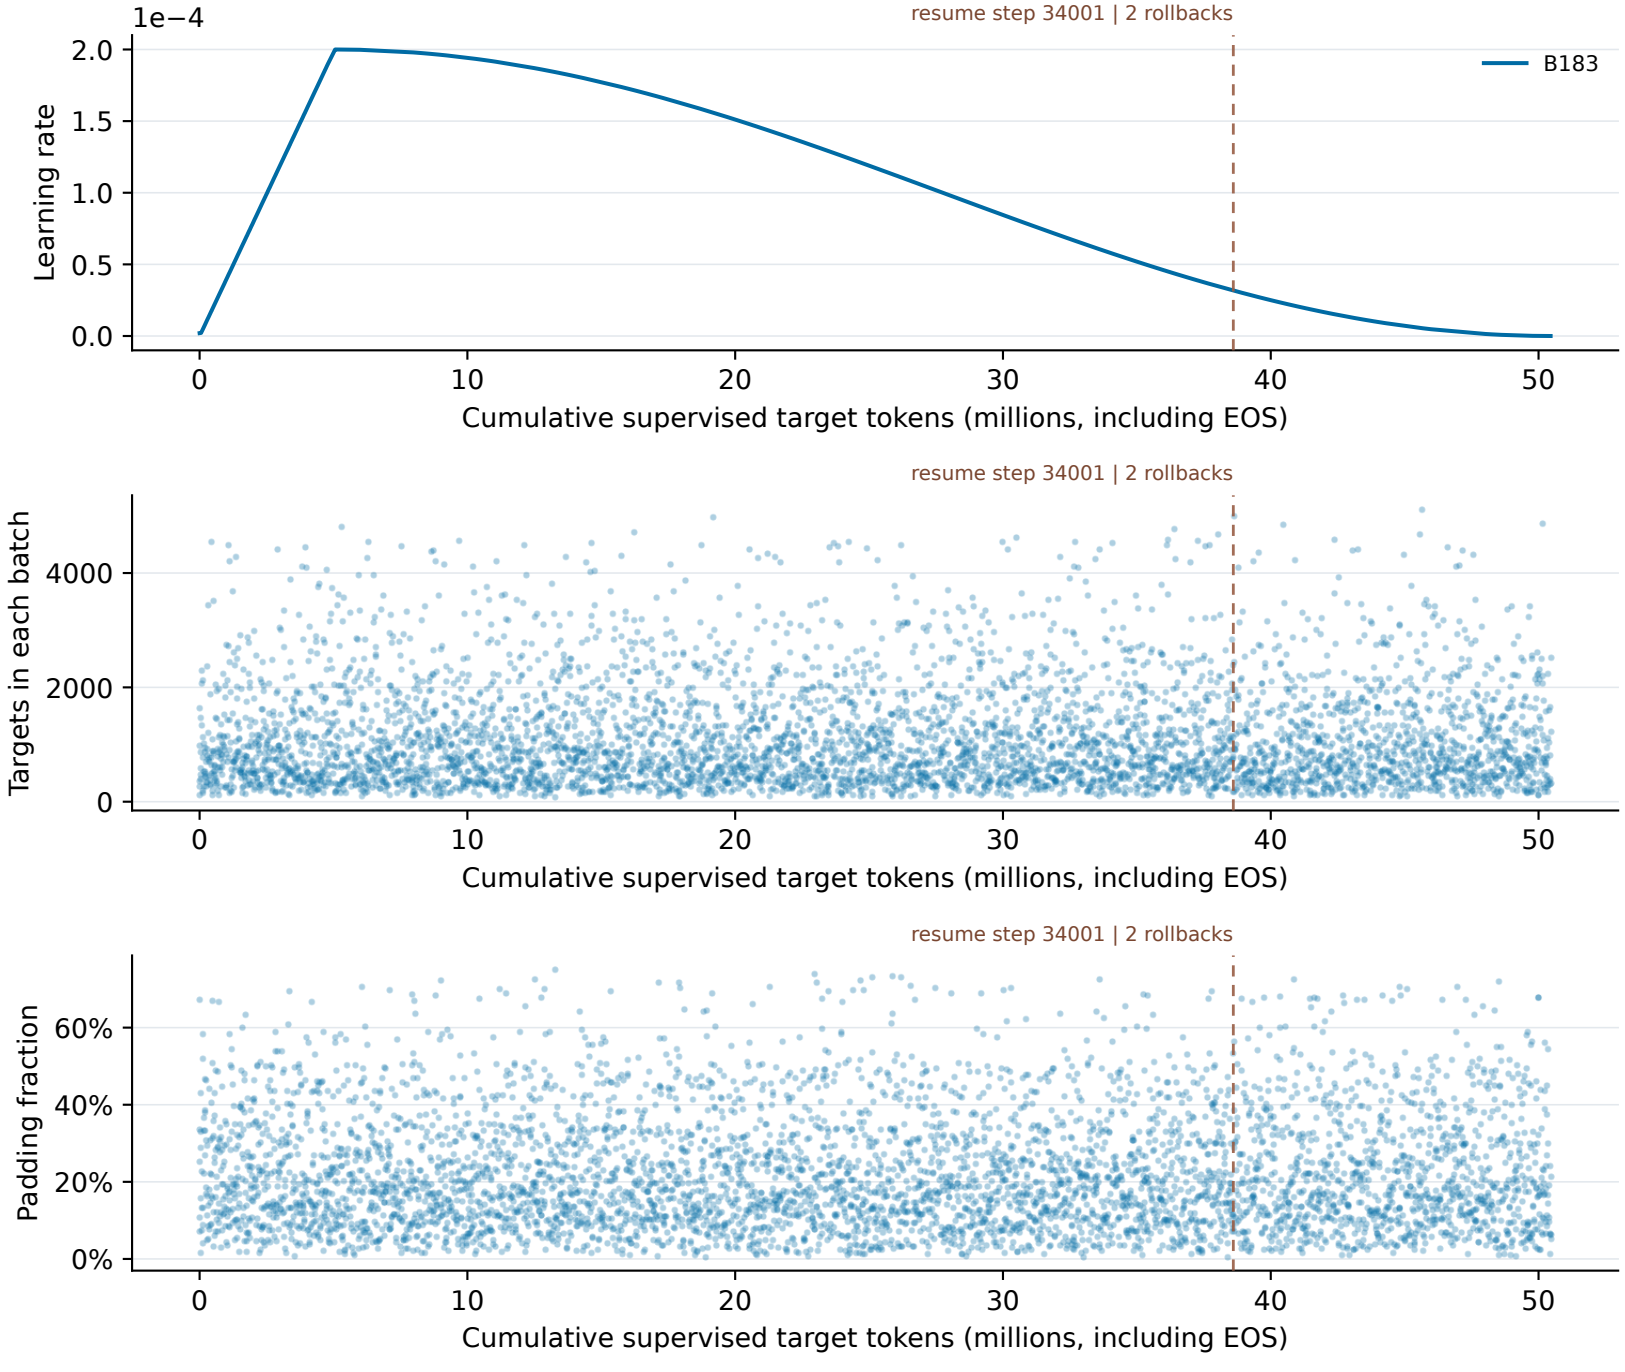

Batch targets include EOS; long batches contribute more weight to the training-metric window.
Raw scatter is uniformly thinned to at most 5,000 observations per run; complete data are in the CSV files.
Dashed: recovery boundary on the retained-token axis, not a restart time. Failed old tails are excluded from this axis;
actual costs are counted separately (B-recovery-costs.json). Memory changes alone do not establish restart causality.