

Day 24 — Mon 28 Sep

Countdown: 1 day to CS Diploma Paper-I

Method: start by recalling yesterday's topic with this page closed. Study the sections below, work every example by hand, then do 20 MCQs.

🎯 Diploma — MS-DOS & Windows

Source: ComputerScience_Diploma/CSDip_02_MSOoffice_and_DOS.md

F.4 ★ Internal vs External commands (the key table with syntax)

Intuition — the single most important DOS distinction:

- **Internal commands** are **built into COMMAND.COM** — they load into memory at boot, so they are **always available** and need no separate file on disk.
- **External commands** are **separate program files** (**.COM** / **.EXE**) stored on disk — DOS must **find and load the file** to run them, so they only work if that file (or its PATH) is present.

INTERNAL COMMANDS (in COMMAND.COM):

Command	Syntax	Purpose
DIR	DIR [drive:][path] [/P] [/W]	List files & folders in a directory
CD / CHDIR	CD [path]	Change the current directory
MD / MKDIR	MD dirname	Make (create) a directory
RD / RMDIR	RD dirname	Remove an (empty) directory
COPY	COPY source destination	Copy one or more files
DEL / ERASE	DEL filename	Delete file(s)
REN / RENAME	REN oldname newname	Rename a file
TYPE	TYPE filename	Display a text file's contents on screen
CLS	CLS	Clear the screen
DATE	DATE	Display/set the system date
TIME	TIME	Display/set the system time
VER	VER	Show the DOS version
PROMPT	PROMPT \$p\$g	Change the look of the command prompt
PATH	PATH=C:\DOS;...	Set the search path for executable files

EXTERNAL COMMANDS (separate .EXE/.COM files on disk):

Command	Syntax	Purpose
FORMAT	FORMAT drive:	Prepare (format) a disk for use — erases it
DISKCOPY	DISKCOPY A: B:	Make an exact copy of one floppy to another

- [5] Explain file and folder management operations in Windows.
- [5] List the Windows versions in chronological order.

Part G — MCQ traps (with answers)

Answers

1. Deleted files go to the? → **Recycle Bin** 2. Which key permanently deletes (bypasses the Bin)? → **Shift+Delete** 3. Notepad saves files with which extension? → **.txt** 4. Which supports formatting: Notepad or WordPad? → **WordPad** 5. F2 is used to? → **Rename** 6. Alt+Tab does? → **switch between open windows** 7. Which came first: Windows 98 or Windows XP? → **Windows 98** 8. The file-management tool in Windows is? → **File Explorer / Windows Explorer**

🎓 Diploma — viruses & SAD

Source: *ComputerScience_Diploma/CSDip_03_SystemAnalysisAndViruses.md*

CS (Diploma) — Viruses, System Analysis & Design, and Internet Technology

Covers three separate syllabus units that are grouped here because they are all **vocabulary-heavy, low-maths, high-yield** topics — the kind that hand you cheap marks if you know the standard phrasing, and cost you nothing to learn:

- **Paper-I Unit 9 — Computer Viruses**
- **Paper-II Unit 4 — System Analysis & Design**
- **Paper-I Unit 6 — Internet Technology**

Two of the three are on **Paper-I** (viruses, internet) and one is on **Paper-II** (system analysis). All three are also heavily mined for MCQs — the real 2024 paper had ~15 questions drawn straight from these units.

Why this file matters

You are a B.Tech CS graduate. Your instinct will be to skip these units as "trivial" — and that instinct will cost you marks. Here is the honest situation:

1. **Viruses.** You know modern malware taxonomy (ransomware, rootkits, RATs, supply-chain attacks). The syllabus does **not** ask for that. It asks for a **1990s-era taxonomy** — "command-processor infection", "file-specific infection", "memory-resident infection" — phrases you have almost certainly never used. The examiner wants *their* categories back, in *their* words. Learn the vocabulary, not the concept (you already have the concept).
2. **System Analysis & Design.** This is management-information-systems vocabulary (Elias M. Awad / classic SAD textbooks), not software-engineering-as-you-were-taught. "Physical vs abstract system", "open vs closed system", "deterministic vs probabilistic", "TPS / MIS / DSS / ESS", "role of the system analyst", "factors causing failure" — these are *definitional* answers. A degree course teaches you to *build* software; this unit tests whether you can *classify systems* and *name SDLC phases* in the textbook's own terms.
3. **Internet Technology.** The connectivity types — **dial-up, leased line, ISDN, VSAT** — are dated and specific. You may never have configured a dial-up modem in your life. These are pure recall, and they generate easy single-fact MCQs (the 2024 paper had a full

matching question on VSAT/dial-up/cable/leased).

Bottom line: none of this is hard. All of it is *unfamiliar phrasing of familiar ideas*.

The failure mode is over-confidence, not difficulty. Read for the vocabulary.

Tick-box checklist — you are done with this file when you can:

- ☐ List the **six virus types in the syllabus** (command-processor, boot-sector, executable-file, file-specific, memory-resident, macro) and give one distinguishing sentence for each — **without notes**.
- ☐ Distinguish **virus vs worm vs trojan vs ransomware** in a clean four-row table.
- ☐ Write the **symptoms of infection** and the **steps to deal with an infection** as numbered lists.
- ☐ Define **system**, list its **characteristics** and its **elements** (the "IPOFC" chain).
- ☐ Classify systems five ways: **physical/abstract, open/closed, deterministic/probabilistic, man-made/natural, permanent/temporary**.
- ☐ Name and one-line the four **information system** types: **TPS, MIS, DSS, ESS** (add OAS/KWS if asked).
- ☐ Recite the **SDLC phases in order** with the deliverable of each.
- ☐ State the **role of the system analyst** and the **factors that cause SDLC failure**.
- ☐ Contrast **intranet vs internet vs extranet**.
- ☐ Name the **internet services** (email, chat, BBS, video-conf, FTP, Telnet, WWW) and one line on each.
- ☐ Fill the **connectivity comparison table** (dial-up / leased / ISDN / VSAT / broadband) from memory.

How to use this file

Each topic follows the house format: **Concept** → **Key points** → **Worked example / illustration** →

Likely exam questions (5 / 10 / 15) → **MCQ traps**. Numbers or facts I could not fully verify are flagged $\triangle$ **verify** — check them against a second source before quoting them as exact.

Mark scheme reminder. Descriptive Paper-I and Paper-II are each 100 marks / 3 hours:

Section A = any **8 of 10 × 5**, Section B = any **3 of 5 × 10**, Section C = any **2 of 4 × 15**.

MCQ = $100 \times 2 = 200$ with **-1/3 negative marking** per wrong answer. Definitions, tables and numbered lists score fastest in the descriptive papers — every topic below is built to deliver exactly those.

Topic checklist and where each unit sits

#	Topic	Paper	Depth	Best answer format
A	Computer viruses — definition, working	P-I §9	Medium	Definition + numbered life-cycle
B	Virus types (the syllabus's six)	P-I §9	High	Table, one row per type
C	Worms / trojans / ransomware (context)	P-I §9	Low	Four-row comparison table
D	Protection, recognising, dealing with infection	P-I §9	Medium	Three numbered lists
E	System concept, characteristics, elements	P-II §4	Medium	Definition + IPOFC diagram
F	Types of system	P-II §4	High	Five two-column tables
G	Information systems (TPS/MIS/DSS/ESS)	P-II §4	Medium	Pyramid + one-line each

H	SDLC phases	P-II §4	High	Numbered phases + deliverables
I	Role of system analyst; failure factors	P-II §4	Medium	Two numbered lists
J	Intranet / internet / extranet	P-I §6	Medium	Three-column table
K	Internet services	P-I §6	Medium	List, one line each
L	WWW, browsers, search engines	P-I §6	Medium	Definition + how-search-works
M	Connectivity (ISP, dial-up, leased, ISDN, VSAT)	P-I §6	High	Comparison table

PART 1 — COMPUTER VIRUSES (Paper-I, Unit 9)

A. What a virus is and how it works

Concept

A **computer virus** is a small program (a piece of malicious code) that **attaches itself to another program or file** and, when that host is run, **copies itself into other programs or files** — it *replicates*. That self-replication, riding on a host, is the defining property. The biological analogy is exact: a virus cannot live on its own; it hijacks a host cell (a legitimate program) and uses it to reproduce.

Two properties together define a virus:

1. **It replicates** (makes copies of itself), and
2. **It needs a host / a trigger** — it does not run by itself; it runs when the infected program runs, the infected document is opened, or the infected disk is booted.

A program that replicates **without needing a host** and spreads by itself across a network is a **worm** (see Part C) — that distinction is a classic MCQ.

The life cycle — the numbered answer

A virus goes through recognisable phases. This numbered list is the ideal shape for a 5-mark "how does a virus work" answer:

1. **Infection / insertion.** The virus code is attached to a host (program, boot sector, or document macro). This usually happens when you run infected software, open an infected attachment, or boot from an infected disk / USB.
2. **Dormant phase (latency).** The virus sits idle, doing nothing visible, waiting for a trigger. Not all viruses have this phase.
3. **Trigger (activation).** A condition fires it — a particular date (e.g. the "Friday the 13th" virus), a number of executions, or a specific user action.
4. **Replication / propagation.** Each time the infected host runs, the virus copies itself into other clean files or disks, spreading the infection.
5. **Execution / payload / damage.** The virus delivers its **payload** — the harmful action: deleting files, corrupting data, displaying messages, slowing the system, or opening a backdoor. Some payloads are merely annoying; some are destructive.

Exam phrasing tip. Examiners love the words "**replicate**" and "**payload**". Use both in any virus answer. Note: replication is *always* present; a destructive payload is *not* — some viruses only replicate and consume resources.

Key points

- A virus is **man-made software**, written deliberately. (The 2024 paper asked "Why do people write these?" with the intended answer being about **viruses** — motives include mischief, vandalism, showing off skill, financial gain, and disruption.)
- A virus **cannot infect hardware directly** — it corrupts *data and programs*. (2024 MCQ: "A computer virus is unable to do —" answer "**Disabling hardware**". Modern nuance: malware *can* damage hardware indirectly, e.g. overwriting firmware/BIOS or overheating — mark this as ⚠ verify against the intended textbook answer, which says a virus cannot physically destroy hardware.)
- Viruses spread through **executable files, boot sectors, email attachments, infected removable media (USB/CD), macros in documents, and network shares**.
- **Plain-text and pure-data formats generally cannot carry a virus** because they contain no executable code. (2024 MCQ: "Which document format cannot contain a virus?" — the intended answer was **.rtf** ⚠ verify. The safe underlying principle: formats that support **macros or embedded code** (.doc, .docx, .xls, .pdf with scripts) *can* carry malware; a format with no code-execution capability cannot. **.txt** is the cleanest true example.)

B. Types of viruses — the syllabus's own taxonomy (HIGH PRIORITY)

This is the single most examinable sub-topic in the unit, and it is worded in **1990s vocabulary you must reproduce exactly**. Learn these six categories in the syllabus's own words.

#	Virus type	What it infects / how it works	Key identifier
1	Command-processor infection	Infects the command interpreter — COMMAND.COM in DOS (the shell that reads and executes your commands). Because the command processor is loaded and run constantly, the virus gains control very frequently.	Targets the shell / COMMAND.COM
2	Boot-sector infection	Infects the boot sector (the Master Boot Record / DOS boot record) of a disk. It loads into memory before the OS , every time you boot from the infected disk. Spreads mainly via infected floppies/USB left in the drive at boot.	Runs at boot, before the OS
3	Executable-file infection	Attaches to executable program files (.EXE , .COM , .SYS). When you run the program, the virus runs first (or alongside) and infects other executables. The classic "file virus" / "parasitic virus".	Rides on .EXE/.COM programs
4	File-specific infection	Targets one particular named file or one particular type of file — it is selective, only infecting a specific target rather than any executable.	Highly selective — one file/type
5	Memory-resident infection	Loads itself into RAM and stays resident (TSR — Terminate-and-Stay-Resident) . It stays active in memory even after the host program ends, and infects every program that runs or every disk that is accessed while it is resident.	Lives in RAM, infects on-the-fly
6	Macro virus	Written in the macro language of an application (e.g. VBA in MS Word/Excel). It infects documents and templates (e.g. Word's Normal.dot), not programs. Spreads when infected documents are shared. Was the most common virus type in the late 1990s because documents are shared far more than programs.	Infects documents via macros

How to keep them straight (the memory hook)

Group them by **what they attach to**:

- **The shell** → command-processor virus.
- **The disk's boot area** → boot-sector virus.
- **Program files** → executable-file virus (any) and file-specific (one specific target).
- **Where it lives while active** → memory-resident (stays in RAM) vs non-resident (runs, infects, exits).
- **Documents, not programs** → macro virus.

A useful extra distinction (often asked): a **resident** virus stays in memory and works in the background; a **non-resident / direct-action** virus executes, finds and infects a few targets, then hands control back and exits without staying in memory. Also worth naming: **polymorphic virus** (changes its own code/signature on each infection to evade scanners) and **stealth virus** (actively hides its presence from antivirus, e.g. by intercepting disk reads). These two are not in the six-type list but are common MCQ distractors.

MCQ traps for virus types

- **Boot-sector virus loads before the OS** — a favourite "true/false" fact. True.
- **Macro virus infects documents, not programs** — do not say it infects `.EXE` files.
- A **memory-resident** virus is **not** the same as a boot virus; a boot virus *becomes* resident, but resident refers specifically to staying in RAM.
- **Command-processor virus** = **COMMAND.COM**, not "any command you type".

C. Worms, trojans and other malware — for context and contrast

The syllabus's virus unit sits inside a broader malware picture. You need the contrasts because "differentiate virus and worm" is a stock 5-marker and the distinctions are prime MCQ material.

Malware	Self-replicates?	Needs a host?	Spreads by	One-line definition
Virus	Yes	Yes (attaches to a file/program/boot sector)	Running the infected host; sharing files/media	Malicious code that attaches to a host and replicates when the host runs
Worm	Yes	No (standalone)	By itself, across networks (exploits, email)	A standalone program that self-replicates and spreads over networks without a host
Trojan horse	No	Disguises itself as legitimate software	User is tricked into installing it	Malware disguised as a useful program; does NOT self-replicate
Ransomware	Sometimes	Often delivered by trojan/worm	Phishing, exploits	Encrypts the victim's files and demands payment for the key
Spyware	No	—	Bundled with software, drive-by	Secretly collects user information
Backdoor / RAT	No	—	Trojan delivery	Lets an attacker take remote control of the PC over the internet

Notes that turn into MCQs:

- **The virus-vs-worm line = self-propagation.** A worm spreads **on its own** across a network; a virus needs the user to run/open the host. (The syllabus itself often lumps these, but the exam distinguishes them.)

- **Trojan does not replicate** — that is its defining contrast with viruses and worms. (2024 MCQ: "a program that allows someone to take control of another user's PC via the internet" → **Backdoor Trojan**.)
- **Virus hoax** = a fake warning (usually a chain email) telling you a non-existent virus will destroy your PC and urging you to forward the message. It carries no code — the "damage" is the panic and wasted effort. (2024 MCQ: "Which one is a virus hoax?" → the famous "**Good Times**" hoax.)
- **Spam / UCE / junk mail** are the same thing (Unsolicited Commercial Email) — a 2024 MCQ grouped Spam / Junk Mail / UCE together and asked which was the odd one out (Gmail).

D. Protecting, recognising, and dealing with an infection

These three are natural sub-parts of a 10-mark or 15-mark question ("Discuss the types of viruses, how to recognise an infection and how to deal with it"). Keep each as a numbered list.

D.1 Protecting the PC (prevention)

1. **Install and update antivirus / anti-malware software**, and keep its virus definitions current — an out-of-date scanner is nearly useless.
2. **Keep the OS and applications patched** — most infections exploit known, already-fixed vulnerabilities.
3. **Use a firewall** (software and/or hardware router) to block unauthorised network access.
4. **Do not run unknown executables or open unexpected email attachments**; be wary of links.
5. **Scan removable media (USB, CD/DVD) before use**; disable autorun.
6. **Disable macros by default** in Office; enable only for trusted documents.
7. **Take regular backups** kept offline/separate — the only reliable recovery from destructive malware and ransomware.
8. **Use standard (non-administrator) user accounts** for daily work to limit what malware can do.
9. **Download software only from trusted / official sources.**
10. **Configure the browser for security** and keep a **separate network for internet-facing machines** where possible. (Both appear as 2024 MCQ "safety tip" options; the *wrong* option — i.e. NOT a safety tip — was "always explore/open money-related mails".)

D.2 Recognising an infection (symptoms)

Common signs that a PC may be infected:

1. The computer runs **noticeably slower** than usual, or freezes/crashes often.
2. Programs **fail to start, behave oddly, or close unexpectedly**.
3. **Unusual error messages, pop-ups or on-screen messages** appear.
4. **Files or folders disappear, get renamed, change size, or become corrupted**.
5. **Free disk space or memory shrinks** for no clear reason (the virus is replicating).
6. The system **boots slowly or fails to boot**; the OS won't load (2024 MCQ hint: "PC boots but will not start the OS" as a troubleshooting scenario — often the boot area).
7. **Antivirus software is disabled** or cannot be updated (malware often kills it).
8. **Unexpected network activity**, the modem/disk light active when idle, or programs accessing the internet on their own.
9. **Emails you did not send** go out from your account.

D.3 Dealing with an infection (removal / recovery)

1. **Disconnect from the network / internet** to stop it spreading and to cut off any backdoor.
2. **Do not panic and do not reboot repeatedly** — some viruses do damage on each boot.
3. **Run a full scan with up-to-date antivirus**; let it **quarantine or clean** the infected files.
4. If the running OS is compromised, **boot from a clean rescue disk / bootable antivirus media** and scan from outside the infected OS.
5. **Delete or repair** the files the scanner cannot clean; for boot-sector infections, repair the boot record (e.g. **FDISK /MBR** in DOS-era systems △ verify for the specific OS).
6. **Restore lost/corrupted data from a clean backup.**
7. **Change passwords** (they may have been captured) after the system is clean.
8. In severe cases, **reformat and reinstall the OS** from trusted media, then restore data.
9. **Patch the vulnerability** that let it in, so you are not re-infected immediately.

Likely exam questions — Viruses

5-mark

- What is a computer virus? Explain how it works. (*definition + numbered life cycle*)
- Differentiate between a virus and a worm. (*two-column table*)
- What is a Trojan horse? How does it differ from a virus? (*table*)
- List any five symptoms that indicate a computer may be infected.
- What is a macro virus? Why did it become so common?
- What is a virus hoax?

10-mark

- Explain the different types of computer viruses. (*the six-row table — this is the safe banker; add polymorphic/stealth for extra marks.*)
- How can a PC be protected from viruses? Also explain how to recognise an infection. (*two numbered lists.*)
- Compare virus, worm, trojan and ransomware. (*four-row table + one line each.*)

15-mark

- Discuss computer viruses in detail: what they are, how they work, their types, how to recognise an infection and how to deal with one. (*This is the "everything" question — structure it exactly as Parts A→D above: definition + life cycle, the six types table, recognition list, protection + removal lists. A labelled structure with tables outscores prose easily.*)

MCQ traps — Viruses (from the real 2024 paper and their kin)

- "A virus is unable to do —" → **disabling hardware** (per textbook answer). △ verify.
- "Where is your office **not** vulnerable?" → **SMPS** (the power supply is not an infection vector; internet/email/CD are).
- "Why do people write these?" → **Virus**.
- "Which is a virus hoax?" → **Good Times**.
- "Take control of another user's PC via the internet" → **Backdoor Trojan**.
- "Which document format cannot contain a virus?" → intended **.rtf** (△ verify; the sound principle is: a format with no macros/embedded code cannot carry one — **.txt** is the cleanest case).
- "Which is NOT a safety tip while using the internet?" → **"Always explore money-related mails."**

PART 2 — SYSTEM ANALYSIS & DESIGN (Paper-II, Unit 4)

Shared-core pointer. The software-process side of this unit — waterfall / prototype / spiral / RAD models, cost estimation, testing strategies, quality assurance — is treated in depth in the shared-core software-engineering notes (conventionally `CORE_07_SoftwareEngineering.md` — $\triangle$ confirm the exact filename by listing `Materials\_Shared\`; at time of writing the `_Shared` folder contains `CORE_01_DigitalLogic`, `CORE_02_ComputerOrganization`, `CORE_03_OperatingSystems`, `CORE_04_UnixLinux`, `CORE_05_ComputerNetworks`). **This file covers the diploma-specific angle:** the *systems-theory vocabulary* (system concept, characteristics, elements, and the classification of systems), *information-system types*, the *SDLC phases at diploma depth*, the *role of the system analyst*, and *failure factors* — the material a B.Tech course usually skips because it is MIS vocabulary rather than software engineering.

E. The system concept — definition, characteristics, elements

Concept — intuition first

Before "system analysis" means anything, you need the textbook's idea of a **system**. Strip away the jargon: a system is just **a set of parts that work together toward a common goal**. A car, a human body, a payroll department, a hospital, a computer — all systems. The parts interact; the whole does something none of the parts could do alone.

Definition (memorise one clean line):

A **system** is an orderly grouping of interdependent components (elements) linked together according to a plan to achieve a specific objective (a common goal).


Characteristics of a system


A stock 5- or 10-marker. Learn these named characteristics:

1. **Organisation** — the arrangement of components in a structure (order/hierarchy) that gives the system its form.
2. **Interaction / interdependence** — components depend on and affect one another; a change in one affects others.
3. **Interrelationship** — the components are connected and coordinated toward the goal.
4. **Integration** — the parts work as a unified whole, not as isolated pieces (the whole is greater than the sum of parts — *synergy*).
5. **Central objective** — the system exists to achieve a defined common goal; every part serves it.
6. **Boundary and environment** — a system has a boundary that separates it from its environment; what is outside the boundary is the environment.

Elements of a system — the IPOFC chain

Every system can be described by these elements. This is the ideal thing to **draw** as a left-to-right flow diagram:





1. **Input** — the data/energy/material entering the system (e.g. raw data, forms).
2. **Processor / process** — the part that transforms input into output (the logic/procedures).
3. **Output** — the result the system produces (reports, products, decisions).
4. **Control** — the element that governs the process (management, rules, the control program) to keep it on track toward the objective.
5. **Feedback** — output information fed back to compare actual results against the goal, so the system can self-correct. **Positive feedback** reinforces; **negative feedback** corrects/dampens.
6. **Boundary & environment** — the limit of the system and everything outside it that affects it.

Exam-safe short form: the basic elements are **Input, Process (Processor), Output, Control, Feedback**, operating within a **Boundary/Environment**.

(2024 MCQ: "Which is NOT a basic element of a system?" — options were Resources, Procedures, Processes, **Procurement** → answer **Procurement**.)

F. Types of system (HIGH PRIORITY — five classifications)

The syllabus explicitly names **physical/abstract** and **open/closed**; the standard SAD textbook adds three more pairs. Each pair is a clean two-column table — pre-build all five.

1. Physical vs Abstract

Physical system	Abstract system
Tangible entities that physically exist	Conceptual / non-physical — ideas, models, formulas
Can be static (fixed) or dynamic (changing)	Exists as a representation of a real system
Example: a computer, a car, a payroll office	Example: a mathematical model, a set of formulas, a design blueprint

2. Open vs Closed

Open system	Closed system
Interacts freely with its environment — takes input and returns output	Cut off from its environment; does not interact with it
Adapts to environmental change	Isolated, self-contained; largely theoretical (truly closed systems are rare)
Example: a business organisation, a living organism	Example: a sealed chemical reaction; a fully isolated program

3. Deterministic vs Probabilistic

Deterministic system	Probabilistic (stochastic) system
Behaviour is fully predictable ; output is known if input and state are known	Behaviour involves uncertainty / probability ; output cannot be predicted with certainty

Example: a computer program, a correct arithmetic operation

Example: weather forecasting, inventory demand, a warehouse system

4. Man-made vs Natural (commonly listed)

Man-made system	Natural system
Designed and built by humans	Exists in nature, not created by humans
Example: a transport system, an information system	Example: the solar system, an ecosystem

5. Permanent vs Temporary (commonly listed)

Permanent system	Temporary system
Exists for a long, indefinite period	Set up for a limited time then dismantled
Example: an organisation's accounting system	Example: a system built for a one-off event/project


MCQ calibration (2024 matching question): open = "interacts freely with its environment"; closed = "cut off from its environment"; physical = "tangible entities, static or dynamic"; abstract = "non-physical / conceptual, model of a real system."
Learn those four phrases word-for-word — the matching question used them almost verbatim.

G. Information systems (TPS / MIS / DSS / ESS)

Concept

An **information system** is a man-made system that **collects, processes, stores and distributes information** to support the operations, management and decision-making of an organisation. Its basic elements are **people, hardware, software, data and procedures** (sometimes networks is added as a sixth). (2024 MCQ: "basic element of an information system?" → People / Hardware / Software → All of the above.)

Information systems are usually drawn as a **pyramid**, matching the levels of management they serve — bottom = operational/day-to-day, top = strategic:

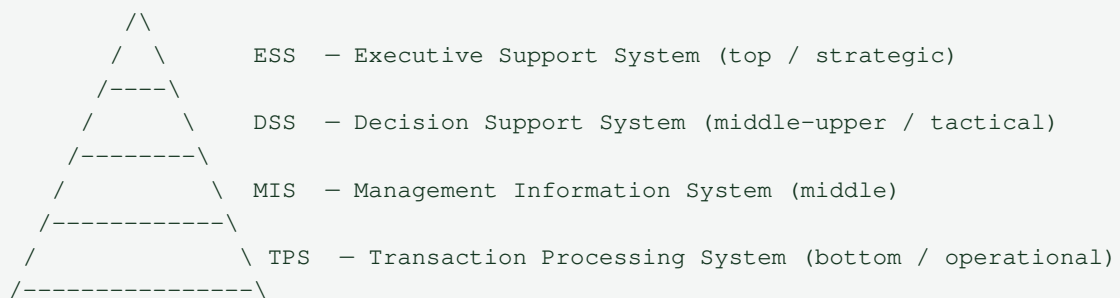

Type	Full form	Serves	What it does	Example
TPS	Transaction Processing System	Operational staff	Captures, classifies, stores, updates and retrieves day-to-day transaction data ; the base that feeds all other systems	Billing, payroll, order entry, ATM transactions
MIS	Management Information System	Middle management	Summarises TPS data into routine reports for monitoring and control	Monthly sales report, inventory summary

DSS	Decision Support System	Middle/upper management	Interactive tools + models to support semi-structured decisions ("what-if" analysis)	Sales forecasting, budgeting model
ESS / EIS	Executive Support / Information System	Top executives	Highly summarised, big-picture information for strategic decisions	Company-wide performance dashboard
(OAS)	Office Automation System	All office staff	Supports communication/productivity (email, word processing, scheduling)	MS Office, email, calendars
(KWS)	Knowledge Work System	Knowledge workers	Supports creation of new knowledge (CAD, analysis tools)	CAD workstations

MCQ calibration (2024): "Which is **not** a Computer-Based Information System (CBIS)?"

→ options TPS, MIS, **Networking System**, OAS → answer **Networking System**. And "which system captures, classifies, stores, maintains, updates and retrieves data for record keeping and input to other CBIS?" → **TPS**. And "which is **not** part of OAS?" →

System designing (mailing, typing, scheduling are OAS; system design is not).

H. The System Development Life Cycle (SDLC) — phases (HIGH PRIORITY)

Concept

The **SDLC** is the structured sequence of stages a system passes through from first idea to final retirement. Different books split it into 5–8 phases with slightly different names; the **substance is always the same**. Learn one canonical ordered list and be able to state the **deliverable (output) of each phase** — examiners reward that.

The phases (canonical seven-phase version)

#	Phase	What happens	Deliverable / output
1	Preliminary investigation / Problem identification	Recognise the problem or need; do a quick scope check.	Problem statement; project request
2	Feasibility study	Is the project worth doing? Assess technical, economic (cost–benefit), operational, legal and schedule feasibility.	Feasibility report; go / no-go decision
3	Requirements analysis (System analysis)	Study the current system; gather and analyse user requirements; model data & processes (DFDs, ER).	SRS (System/Software Requirements Specification)
4	System design	Decide how the system will meet the requirements — structure of files, databases, inputs, outputs, processes and screens/interfaces.	Design document (logical + physical design)
5	Coding / development (implementation)	Programmers write and unit-test the code from the design.	Working program modules
6	Testing	Verify the system against requirements — unit, integration, system, acceptance testing.	Tested, validated system; test reports

7	Implementation / deployment & Maintenance	Install, convert data, train users, go live; then maintain — fix bugs and enhance over the system's life.	Operational live system; maintenance updates
---	--	--	--

Two-way memory aid: "*Investigate* → *Feasibility* → *Analyse* → *Design* → *Code* → *Test* → *Implement & Maintain*." (2024 MCQ: "first phase of SDLC?" → **Problem Analysis** among the options given; "phase where structure of files, databases, input, output, processes and screens is decided?" → **Designing**; "which is NOT a phase of SDLC?" → **Networking**.)

Note on models. The *phases* above are the life cycle; the *models* (Waterfall, Prototyping, Spiral, RAD/DSDM) are different ways of *sequencing/iterating* those phases — covered in the shared-core SE notes. Two diploma-level facts worth carrying here:

RAD (Rapid Application Development) is also known as / associated with **Prototyping and DSDM** (2024 MCQ), and **feasibility study types** are **technical, economic, operational, legal and schedule** (2024 MCQ: "type of feasibility?" → All of the above).

I. Role of the system analyst; factors causing failure

Role of the system analyst

The **system analyst** is the **bridge between the users/management and the technical developers** — the person who understands the business problem *and* enough technology to specify a solution. Present as a numbered list of roles/responsibilities:

1. **Investigator / fact-finder** — studies the existing system, gathers requirements (interviews, questionnaires, observation, document study).
2. **Problem-solver / analyst** — analyses requirements and defines what the new system must do; models data and processes.
3. **Communicator / liaison** — communicates effectively, one-on-one, with users, business managers **and** programmers; translates business needs into technical terms and back.
4. **System designer** — specifies the design of files, databases, inputs, outputs and interfaces.
5. **Project manager / coordinator** — plans, schedules and coordinates the project team and resources.
6. **Change agent** — introduces and manages the change the new system brings; trains and supports users.
7. **Ethical professional** — deals **fairly, honestly and ethically** with team members, managers and users, and **maintains confidentiality**.

Common role labels an analyst wears (2024 MCQ): **business analyst, requirements analyst, project manager** — the question asked which is NOT a role and the answer was "All of the above" *are* roles. Also (2024): "not important for analysts to maintain confidence" is a **false** statement — confidentiality *is* required.

Factors causing failure in the SDLC / a system project

A stock 10-marker. Why systems fail:

1. **Incomplete, unclear or changing requirements** — the biggest single cause.
2. **Poor communication** between users, analysts and developers.
3. **Lack of user involvement / management support**.
4. **Unrealistic schedule, budget or scope** (over-optimistic planning).
5. **Inadequate feasibility study** — building the wrong thing.

6. **Poor project management** and lack of proper planning/control.
7. **Insufficient testing** — defects reach production.
8. **Resistance to change** / inadequate user training.
9. **Technology risk** — chosen technology is immature or unsuitable.
10. **Inadequate maintenance / no post-implementation review.**

Likely exam questions — System Analysis & Design

5-mark

- Define a system. State its characteristics.
- Explain the basic elements of a system with a diagram. (*IPOFC + feedback*)
- Differentiate between an open system and a closed system. (*table*)
- Differentiate between a physical and an abstract system. (*table*)
- What is a deterministic system? Give an example.
- Differentiate between TPS and MIS.

10-mark

- Explain the different types of systems with examples. (*the five paired tables — a strong banker.*)
- Describe the types of information systems (TPS, MIS, DSS, ESS) with a pyramid and examples.
- Explain the role of the system analyst.
- Discuss the factors that cause failure in system development.

15-mark

- Explain the SDLC in detail — describe each phase and its deliverable. (*the seven-phase table; add a short line on Waterfall vs Prototyping vs Spiral for extra depth.*)
- "A system analyst is the bridge between users and developers." Discuss the role of the system analyst and the factors that cause a system project to fail.

MCQ traps — System Analysis & Design

- Basic elements of a system → Input, Process, Output, Control, Feedback (**not** Procurement).
- CBIS types → TPS, MIS, DSS, ESS, OAS (**not** "Networking System").
- OAS includes mailing, typing, scheduling (**not** "system designing").
- SDLC phases (**not** "Networking").
- RAD ⇔ Prototyping / DSDM.
- Feasibility types → technical, economic, operational, legal, schedule.
- Structured tools: DFD, ERD, STD are structured tools; **RAD is a methodology, not a tool** (2024 MCQ: "which is NOT a structured tool?" → **RAD**).
- Charles Bachman won the Turing Award for **DBMS** (network data model) — a 2024 SAD-section MCQ, easy to confuse; note it is DBMS, not SAD.

PART 3 — INTERNET TECHNOLOGY (Paper-I, Unit 6)

Shared-core pointer. The *network fundamentals* underneath the internet — LAN/MAN/WAN, the OSI and TCP/IP models, transmission media and modes, topologies, and connectivity devices (hub/switch/router/bridge/gateway) — are covered in depth in

Materials_Shared\CORE_05_ComputerNetworks.md (and the Paper-I networks unit, §5). **This part covers the diploma-specific internet layer:** intranet vs internet, the internet services, the WWW / browsers / search engines, and the *connectivity types*

(dial-up / leased / ISDN / VSAT) — which are dated, specific, and heavily examined.

J. Intranet vs Internet vs Extranet

Concept

- **Internet** — the global, public "network of networks" connecting millions of computers worldwide; open to everyone. (2024 MCQ: "Once restricted to a few scientists, it quickly became universal. It reaches everywhere." → Internet.)
- **Intranet** — a **private network internal to one organisation**, using the same internet technologies (TCP/IP, browsers, web pages) but **accessible only to authorised members** of that organisation.
- **Extranet** — a **controlled extension of an intranet to selected outsiders** (suppliers, partners, customers) over the internet, usually secured by login/VPN.

Feature	Intranet	Internet	Extranet
Scope	Within one organisation	Global / worldwide	Organisation + selected partners
Access	Private, authorised users only	Public, anyone	Restricted external users
Ownership	One organisation	No single owner	One org + its partners
Security	High (behind firewall)	Low / open	Controlled (login/VPN)
Example use	Company noticeboard, HR portal	Public websites, email	Supplier order portal, B2B

MCQ calibration (2024): "Which service is **not** possible with an intranet?" →

Public Web sites (an intranet is private; public sites belong to the internet.

Private discussion groups, access to legacy databases and teleconferencing *are* possible internally).

K. Internet services

The syllabus names these services explicitly — learn one line for each:

Service	What it does
Email (Electronic mail)	Send/receive messages and attachments. Sending uses SMTP ; retrieving/storing in the mailbox uses POP3 or IMAP .
Chatting / Instant messaging	Real-time text (and voice/video) conversation between users; chat rooms use an avatar/ nickname as your online identity; often implemented in Java △ (2024 MCQ said Java).
Bulletin Board System (BBS) / Newsgroups (Usenet)	Post-and-read message boards on topics; Usenet is one of the oldest internet services, older than the WWW. A web forum is the modern alternative to a real-time chat room.
Video conferencing	Real-time audio + video meeting between remote participants. Components: camera, microphone, monitor/display, speakers, codec, network — (2024 MCQ: an "interpreter" is NOT a component). Apps: NetMeeting, CU-SeeMe, WebEx.
FTP (File Transfer Protocol)	Transfer arbitrary files between computers over the internet (upload/download). (2024 MCQ: "transfer arbitrary files across the internet" → FTP.)

Telnet	Log in to and use a remote computer over the network as if sitting at it (a remote terminal). <i>(Note: Telnet is a service/protocol, NOT a type of internet connection — a 2024 trap.)</i>
WWW (World Wide Web)	The system of interlinked hypertext documents (web pages) accessed via browsers over the internet.
VoIP	Voice calls over the internet (telephone-to-telephone, or PC-to-PC), e.g. Skype.
VoD / Podcast / Streaming	On-demand audio/video; a playback buffer allows smooth streaming despite network jitter.

Netiquette & terminology (all real 2024 MCQs): **Netiquette** = suggested rules for polite online behaviour; **Internauts / Netizens** = internet users; **postmaster@domain** = the address to contact when you know a domain but not a username; **mailbot** = an automatic email auto-responder; **user agents** = email client programs (Gmail, Outlook, Thunderbird, Apple Mail).

L. The World Wide Web, browsers and search engines

WWW essentials

- **WWW** = a collection of **hypertext/hypermedia documents (web pages)** linked by **hyperlinks** and served over the internet. Invented by **Tim Berners-Lee in 1989** (2024 MCQ).
- Its enabling technologies: **HTML** (page markup), **HTTP** (transfer protocol), and the **URL** (address).
- **URL (Uniform Resource Locator)** — the unique **address of a file/resource on the internet** (2024 MCQ). Form: **protocol://host/path** e.g. **https://www.example.com/page.html**.
- **W3C (World Wide Web Consortium)** develops the standards/guidelines for the long-term growth of the Web (2024 MCQ).
- **Web server** — software/computer that **stores, retrieves and distributes the Web's files** (serves pages to browsers) (2024 MCQ). **Web browser** — the client program that requests and displays those pages.

Web browser

A **browser** is the client application used to access and display web pages (Chrome, Firefox, Edge, Safari). Typical **elements of the browser window**: **title bar, menu bar, toolbar, address/URL bar, viewing/content window, status bar, scroll bars, tabs, bookmarks/favourites bar**. (2024 MCQ asked which is NOT an element of the browser window.)

Search engines — how searching works

A **search engine** (Google, Bing) is a service that helps users **find information on the Web by keyword**. Its core requirement is a **huge database/index** of web pages (2024 MCQ: "most required to a search engine" → **Database**). It works in three stages:

1. **Crawling** — automated programs (**spiders / crawlers / bots**) follow links and fetch web pages.
2. **Indexing** — the fetched pages are analysed and stored in a searchable **index** (by keywords).
3. **Searching / ranking** — when you enter a query, the engine matches it against the index and returns results **ranked by relevance** (using text matching, keyword frequency,

link popularity, etc.). (2024 MCQ: "approach NOT used in web searching" → Priority setting was the odd option; text matching, indexing, pattern matching, keyword frequency are used.)

M. Connectivity — ISP and connection types (HIGH PRIORITY)

Concept

To reach the internet you connect through an **ISP (Internet Service Provider)** — a company that sells internet access (and often email, hosting, etc.). You need: a **device + a modem/router + a physical line + an account with an ISP**. The *type* of line/account is the examinable part, because the options are dated and specific.

Connection-type comparison table (learn this cold)

Connection	Line / medium	Speed (approx)	How it works	Notes
Dial-up	Ordinary telephone line + modem	~ 56 kbps (very slow)	Modem dials the ISP over the voice phone line; ties up the phone while connected	Oldest, cheapest, obsolete; connection established using a modem
Leased line	Permanent dedicated telephone line	High, fixed (e.g. T1 ≈ 1.544 Mbps) △ verify	A private line permanently connected to the ISP — always on, dedicated bandwidth	Expensive; for businesses; created with a permanent telephone line
ISDN	Digital telephone line (Integrated Services Digital Network)	64 / 128 kbps (BRI: 2B+D) △ verify	Sends digital voice+data over the phone network; faster and cleaner than dial-up	Narrowband ISDN and Broadband ISDN (B-ISDN) exist
Cable	Coaxial cable TV network	Several Mbps+	Shares the cable-TV line; a cable modem connects the PC	Faster than dial-up; shared bandwidth in a locality
DSL / Broadband	Telephone copper (DSL) or fibre	Mbps–Gbps	"Always-on" high-speed digital line; DSL runs data above voice frequencies so phone stays free	The modern default
VSAT	Satellite (Very Small Aperture Terminal)	Varies	An earthbound station with a small dish communicates via a satellite — used where cabling is impractical (remote areas)	Satellite communication; higher latency
Wireless / Wi-Fi / mobile	Radio (Wi-Fi, 3G/4G/5G)	Varies	Connect via radio frequency to an access point / cell tower	Hotspot = a Wi-Fi access point

MCQ calibration (2024 matching question): VSAT = "an earthbound station used in satellite communication"; **Dial-up** = "established using a modem"; **Cable connection** = "created/carried over cable"; **Leased connection** = "created with a permanent telephone line." Learn those four phrases verbatim.

Also (2024): **Telnet is NOT a type of internet connection** (it is a remote-login service); **Bluetooth is NOT a way to connect to the internet** in the intended answer (Wi-Fi, hotspot are) △ verify — Bluetooth tethering technically exists, but the exam treated Bluetooth as the odd one out.

Likely exam questions — Internet Technology

5-mark

- Differentiate between the internet and an intranet. (*table*)
- What is a URL? Give its structure with an example.
- Differentiate between a web browser and a web server.
- List and briefly explain any five internet services.
- What is video conferencing? Name its components.
- What is an ISP?

10-mark

- Explain the various services provided by the internet. (*the services table*.)
- Explain the different types of internet connections. (*the connectivity table — a strong banker; VSAT/ISDN/leased/dial-up are the diploma-favourite content*.)
- How does a search engine work? Explain crawling, indexing and ranking.
- Differentiate between intranet, internet and extranet. (*three-column table*.)

15-mark

- Explain internet technology in detail: intranet vs internet, the main internet services, the WWW with browsers and search engines, and the types of internet connectivity. (*The "everything" question — structure exactly as Parts J→M.*)

MCQ traps — Internet Technology

- Intranet **cannot** host **public web sites** (it is private).
- **SMTP** sends mail; **POP3** receives/stores it in the mailbox.
- **Usenet** is one of the **oldest** internet services (older than the WWW).
- **FTP** transfers arbitrary files; **Telnet** is remote login (NOT a connection type).
- **Video conferencing** components do **not** include an "interpreter".
- Search engine's most-required asset = **database/index**; "priority setting" is not a search approach.
- **URL** = address of a file on the internet; **W3C** sets Web standards; **Tim Berners-Lee** invented the WWW (1989).
- Connection matching: **VSAT** = **satellite** / **earthbound station**, **dial-up** = **modem**, **leased** = **permanent line**.

One-paragraph summary, if you read nothing else

Three cheap-mark units. For **viruses**, learn the syllabus's own six-type taxonomy (command-processor, boot-sector, executable-file, file-specific, memory-resident, macro), the virus-vs-worm-vs-trojan contrasts, and the three numbered lists (protect / recognise / deal-with). For **system analysis**, this is MIS vocabulary, not software engineering: define a system and its IPOFC elements, classify systems five ways (physical/abstract, open/closed, deterministic/probabilistic, man-made/natural, permanent/temporary), name TPS/MIS/DSS/ESS, recite the SDLC phases with their deliverables, and know the analyst's role and the failure factors. For **internet technology**, know intranet-vs-internet, the internet services, the WWW/browser/search-engine story, and above all the dated connectivity table (dial-up, leased, ISDN, VSAT). All three are more about reproducing the textbook's exact words than about understanding — so drill the phrasing, build every "differentiate" table in advance, and answer with tables and numbered lists.

Where the rest of these units live

You need...	Look in
Network fundamentals (OSI, TCP/IP, media, topologies, devices)	<code>Materials_Shared\CORE_05_ComputerNetworks.md</code> + Paper-I §5
Software process models, cost estimation, testing, QA	<code>CORE_07_SoftwareEngineering.md</code> △ confirm filename in <code>_Shared\</code>
Legacy protocols (NetBEUI, IPX/SPX), IEEE 802.x	<code>CORE_05_ComputerNetworks.md</code>
Hardware, storage, motherboard	<code>CSDip_01_HardwareAndDevices.md</code>
MS Office / MS-DOS / Windows	<code>CSDip_02_MSOoffice_and_DOS.md</code> (written by another agent)
Exam dates, strategy, day-by-day plan	<code>CSDip_00_OVERVIEW.md</code>

© Diploma — MCQ bank

Source: `ComputerScience_Diploma/CSDip_04_MCQ_and_QuestionBank.md`

CS (Diploma) — MCQ Bank and Descriptive Question Bank

Elective 3: **Computer Science / Computer Engineering (Diploma)**, NPSC CTSE 2026.
Companion to `CSDip_00_OVERVIEW.md`. This is the **drill** file — the others are the *learning* files.

Why this file matters

Reading notes feels like studying. It mostly isn't. What actually moves your score in the next three weeks is **retrieval practice** — being asked a question cold and having to produce the answer without the page in front of you. This file exists so that every study session can end with 20–30 minutes of that.

Three specific reasons it matters more than usual for *this* exam:

1. **The MCQ is 200 marks — the single biggest component of the elective**, worth as much as Paper-I and Paper-II combined times one. And it is almost pure recall. There is no way to reason your way to "which DOS file is the command interpreter"; you either know it or you don't. Drilling is the only method.
2. **Negative marking of one-third makes *calibration* a skill**. You need to know the difference between "I know this", "I can eliminate two options" and "I have no idea", because those three states have different correct actions. Practising with the answer key covered teaches you that self-awareness. See §1.
3. **The descriptive papers are answered from skeletons, not from prose**. An examiner marking 500 scripts is looking for the points on their marking scheme. The model answers in §3 and §4 are written as *point-lists on purpose* — that is the shape your answer should have on the page.

How to use this file

When	How
------	-----

After learning a topic	Do the MCQs for just that topic, answer key covered
Mid-September	Do 30 mixed MCQs a day, timed at 30 s each
26 September	The full 100-question mock in §2.14, strictly 2 hours, negative marking applied
Any spare hour	Work the real 2024 papers in <code>PYQ_text\CTSE2024_ComputerScience_Diploma_Paper*.txt</code> — 400 real questions, better than anything synthetic
Throughout	Pick 2 descriptive questions a day and write only the skeleton in 3 minutes, then compare
27–28 September	Build your mock Paper-I and Paper-II by picking 10 + 5 + 4 questions from §3 / §4

The rule that matters: cover the answer, commit to an answer *out loud or on paper*, then check. Reading a question and its answer together teaches you nothing — it produces the feeling of knowing without the ability to retrieve.

Checklist for this file

- ☐ Read §1 (guessing strategy) **before** the first mock, not during
- ☐ MCQ set A — Hardware, generations, classification (§2.1)
- ☐ MCQ set B — Number systems and data representation (§2.2)
- ☐ MCQ set C — Input / output devices (§2.3)
- ☐ MCQ set D — Storage devices (§2.4)
- ☐ MCQ set E — Motherboard and ports (§2.5)
- ☐ MCQ set F — MS Word (§2.6)
- ☐ MCQ set G — MS Excel (§2.7)
- ☐ MCQ set H — MS PowerPoint and MS Access (§2.8)
- ☐ MCQ set I — MS-DOS and Windows (§2.9)
- ☐ MCQ set J — OS, UNIX (§2.10)
- ☐ MCQ set K — Networks, Internet, viruses (§2.11)
- ☐ MCQ set L — DBMS, SQL, C programming, SAD (§2.12)
- ☐ **MCQ set M — the 2024-calibrated set: networks, Internet, Office 2010, C/C++ (§2.13) — do this one first**
- ☐ Read §0 (the real 2024 paper analysis) and worked through both 2024 `.txt` papers
- ☐ Full 100-question mock assembled and sat under time (§2.14)
- ☐ Paper-I descriptive bank — all 5-markers skeletoned (§3.1)
- ☐ Paper-I 10-markers (§3.2) and 15-markers (§3.3)
- ☐ Paper-II descriptive bank — 5-markers (§4.1), 10-markers (§4.2), 15-markers (§4.3)
- ☐ Two full-length descriptive rehearsals done by hand

0. CALIBRATION AGAINST THE REAL CTSE 2024 CS (DIPLOMA) PAPERS — read this first

The 2024 papers at `C:\Users\hp\Desktop\prep\PYQ\2024\ComputerScience-Diploma\` have now been OCR'd successfully into

`C:\Users\hp\Desktop\prep\PYQ\_text\CTSE2024_ComputerScience_Diploma_PaperI.txt` and

100–134	Registers, buses, motherboard, chipset, BIOS, beep codes, storage capacities, IDE/ SATA/PATA , and MS Excel 2010 / MS Word formatting in detail	~35	17.5%
135–164	Internet technology — intranet, email, netiquette, spam, Usenet, chat, web forums, video conferencing, web servers, URLs, browsers, connection types , search engines, FTP, VoIP	~30	15%
165–175	MS PowerPoint and MS Access in detail	11	5.5%
176–200	Software classification, firmware, open source, ALU, machine language, cyber attacks, misc hardware facts, viruses , programming-language concepts	~25	12.5%

Paper-2 (2024) — 200 questions:

Q range	Topic block	≈ Count	Share
1–26	Operating systems — definition, modes, multiprogramming, system calls, process states, PCB, scheduling criteria, convoy effect, RR quantum, aging, an SJF average-waiting-time calculation , MMU, swapping, paging	26	13%
27–40	MS-DOS (internal/external commands, .bat/.cmd/.btm, .com), CLI vs GUI, hypervisor, Windows 10 desktop and File Explorer	14	7%
41–80	DBMS — Bachman, transactions, DBMS vs file system, data models, three schema levels, DBA duties, E-R model (strong entities, specialization, generalization, aggregation), relational model, intension/extension, entity and referential integrity, relational algebra , relational calculus, QBE, QUEL, SQL DDL/DML , set operators, audit trail, database security (authentication / authorization / access management / accountability), DISTINCT, privileges	40	20%
81–95	System Analysis and Design — analyst's roles, elements of a system, open/closed/ physical/abstract, information systems, CBIS, TPS, OAS, SDLC phases, structured tools (DFD, ERD, STD, RAD), feasibility types, design phase, RAD/DSDM	15	7.5%
96–110	UNIX — virtual consoles, shell, commands, control characters (Ctrl-U/S/Q/D), exit/logout, \$ prompt, X Window, file permissions, <code>man</code>	15	7.5%
111–161	Programming in C — features, pseudocode, algorithm properties, flowchart symbols, character sets, IDE, <code>gcc</code> , comments, keywords, Turbo-C shortcuts, expression evaluation , <code>%6.2f</code> , operator precedence, functions, loops, <code>goto</code> , valid identifiers, many output-prediction programs , arrays, strings, <code>malloc/calloc</code> , recursion, jump statements	~51	25.5%
162–200	C++ and Object-Oriented Programming, plus Windows GDI graphics programming — classes, constructors, destructors, inheritance types, pointers, operator overloading, header files, casts, access specifiers, infix→postfix, and Borland OWL / Windows GDI graphics (TWindow, TFrameWindow, device contexts, R2_ drawing modes)	~39	19.5%

0.3 The five things this changes about your study plan

1. **Networks is the single biggest block in Paper-I — about a quarter of it.** The overview file classes networks as "refresh only" (`CORE_05`). That under-rates it badly. 2024 asked about line coding (AMI, NRZ, biphase), propagation methods, SONET, piconet, NFC, GPS satellite orbits (GEO/LEO/MEO), IGMP, SCTP, port numbers, IPv6 zero-compression, throughput vs bandwidth, straight-through cable, W3C/IAB/ISOC/IETF, mesh-link count $n(n-1)/2$, user

agents vs MTAs, and NetBEUI/IPX-SPX. Give **CORE_05_ComputerNetworks.md** full attention, not a skim.

2. ● **C++ and OOP appear heavily in Paper-II even though the Diploma syllabus §5 only names "Programming in C".** Roughly 39 questions in 2024 — classes, constructors, destructors, inheritance, operator overloading, pointers. There was even a block on **Windows GDI graphics programming with Borland OWL**, which is in no version of the syllabus. **Do not skip C++.** Budget at least two days on OOP and C++ syntax from **CORE_09**.
 ▲ verify whether the GDI/OWL block recurs — it may have been a one-off from an old question bank. Do not spend more than 30 minutes on it.
3. ● **MS Office was confirmed as examinable and product-version-specific.** 2024 asked about *MS Excel 2010's* **AGGREGATE()** function, the **Translate** command's menu location, the Paste Special dialog, **Ctrl+F1** to collapse the ribbon, the Sunburst chart, PowerPoint 2007 transition names, the default 4:3 slide ratio, Access 2010's **.accdb** extension and its data types. **The overview file was right that this matters — and it is even more version-specific than expected.** Learn it from an actual copy of Office if you can open one.
4. ● **Motherboard/hardware detail was confirmed** — form factor, north bridge vs south bridge, built-in controllers, POST beep codes, BIOS boot step ordering, ATA/SATA/PATA/IDE, DIMM slots, storage-capacity matching (CD 640 MB / DVD 4.7 GB / floppy 1.4 MB / Blu-ray ≈ 4× DVD), power-supply functions. **CSDip_01** §9 earns its length.
5. ● **MS-DOS was smaller than feared** — about 6 questions in 2024, all easy (internal vs external commands, batch-file extensions, where **.com** runs). Still learn it (it is cheap marks) but **do not give it 25% of your hours.** Move that time to networks and C/C++.

0.4 The 2024 question styles you must practise

The 2024 paper used five recurring formats. Practise all five, because the format itself costs time if it is unfamiliar.

Style	Example from 2024	How to attack it
"Which is NOT ..." — the most common form by far	"Which is not a polar line coding scheme?" · "Which is not a part of mother board?"	Read the word NOT twice. Find the three that fit, and the odd one is your answer. Many candidates lose marks purely by missing "not"
Match the following (a–d ↔ i–iv)	"a. Switch, b. Bridge, c. Repeater, d. Router ↔ physical layer / physical+datalink / determines network of destination / connects LANs and WANs"	Anchor on the one pair you are certain of, then eliminate options that contradict it. You rarely need all four
"Select the right option: i & ii / ii & iii / only i"	"Some statements about ping are: i... ii... iii... Select the right option"	Evaluate each numbered statement independently as true/false first, <i>then</i> pick the option. Do not read the options first
Output prediction (C / C++)	<pre>x = -3 * -4 % -6 / -5; printf("%d %d %d", a, ++a, a++); printf(6 + "Happy Sunday");</pre>	Work them on paper. Note that several 2024 items relied on undefined behaviour (the a, ++a, a++ one) — pick the "textbook" answer the examiner intends
Single-fact recall	"Which port number is used for SMTP?" · "The extension of Access 2010 file is —"	Instant or skip. Never spend more than 20 seconds

Also note: the 2024 OCR shows several questions that are **duplicated verbatim** (P-I Q135 and Q136 are identical) and several with **garbled or missing options**. Expect one or two unanswerable items per paper; identify them fast and move on.

0.5 Actual 2024 questions worth memorising the answers to

These are real questions from the 2024 Diploma papers. Anything asked once has an elevated chance of being asked again in the same or altered form.

From	Question	Answer
P-I Q35	Port number for SMTP	25
P-I Q43	Non-routable protocol designed for a single LAN segment	NetBEUI
P-I Q44	Protocol for data transport on a NetWare network	IPX (SPX is the connection-oriented transport atop it)
P-I Q45	IEEE standard for wireless hotspots	802.11
P-I Q47	Body that develops protocols/guidelines for long-term Web growth	W3C
P-I Q69	Value of "111"	Depends on base — hex 111 ≠ binary 111. ⚠ OCR garbled; the intended pairing is likely $(6E)_{16} = 110_{10}$
P-I Q70	ASCII can be extended up to	8-bit
P-I Q184	Function keys on a standard PC keyboard	12
P-I Q185	AIX is whose operating system	IBM
P-I Q186	Who invented the WWW in 1989	Tim Berners-Lee
P-I Q187	Links needed for 10 PCs in mesh topology	45 = $n(n-1)/2$
P-I Q194	Which is a virus hoax	Good Times
P-I Q200	<code>myString</code> , <code>myStack</code> , <code>myFriend</code> naming style	Camel case
P-I Q128	Capacity matching	CD ≈ 640 MB , DVD 4.7 GB , floppy 1.4 MB , Blu-ray ≈ 4× a DVD
P-I Q123	Chipset providing support for main memory, cache and PCI bus controllers	North bridge
P-I Q166	Default PowerPoint slide width:height ratio	4:3
P-I Q173	Extension of an Access 2010 file	.accdb

P-I Q113	Shortcut to collapse/expand the ribbon	Ctrl + F1
P-II Q8	Carnegie Mellon's operating system	Mach
P-II Q20	Average waiting time, SJF, bursts 6/8/3/3	7 ms (order P3,P4,P1,P2 → waits 0,3,6,12 → $21/4 \approx 5.25$ Δ verify: with bursts 3,3,6,8 the waits are 0,3,6,12, mean 5.25; the key says 7 ms, which matches the order P1 first. Work it yourself and trust your own Gantt chart)
P-II Q29/30	VOL , TIME , COPY , PATH internal; SYS and TREE external	—
P-II Q41	First Turing Award recipient, for DBMS work	Charles Bachman
P-II Q104	Default UNIX prompt	\$
P-II Q106	UNIX's graphical environment	X Window
P-II Q122	Turbo C shortcut to compile	Alt + F9 (Ctrl+F9 = compile <i>and</i> run)
P-II Q193	Postfix of A+B*C^D- (E/F-G)	Work it with the stack algorithm — a guaranteed-marks question if you know the method

Homework, 1 hour, do it this week: open both 2024 **.txt** files, work through all 400 questions, and mark every one you cannot answer. That list *is* your revision syllabus.

0.6 What this bank is therefore calibrated on

- **Primary:** the real CTSE 2024 CS (Diploma) Paper-1 and Paper-2, analysed above.
- **Secondary:** the official Diploma syllabus (Section 4 of **OFFICIAL_SYLLABUS.md**).
- **Tertiary:** the 2025 CS (Degree) descriptive question shapes, for the §3/§4 descriptive banks — since 2024 gives us no descriptive Diploma questions to copy.

1. MCQ strategy under one-third negative marking

1.1 The arithmetic, done once

Marking: **correct** = +2, **wrong** = $-(1/3) \times 2 = -0.667$, **blank** = 0.

Your state of knowledge	P(correct)	Expected value if you answer
You know it	1.00	+2.00
3 options remain (eliminated 1)	1/3	$(1/3)(2) + (2/3)(-0.667) = \mathbf{+0.22}$
2 options remain (eliminated 2)	1/2	$(1/2)(2) + (1/2)(-0.667) = \mathbf{+0.67}$
Blind guess, 4 options	1/4	$(1/4)(2) + (3/4)(-0.667) = \mathbf{0.00}$

Leave blank	—	0.00
-------------	---	------

1.2 What follows from it

- **A blind 1-in-4 guess is exactly break-even.** One-third negative marking on a four-option paper is precisely calibrated so that random guessing has zero expected value. It cannot help you on average; it only adds variance. **So there is no reason to blind-guess.**
- **Eliminate one option and answering becomes positive (+0.22).** Eliminate two and it is **+0.67** — over 20 such questions that is **+13 marks**, which in a competitive exam is a large number of ranks.
- **Therefore the operating rule is: if you can rule out even ONE option, answer. If all four are genuinely equally plausible, leave it blank.**
- On a factual paper like this one, there is almost always one absurd option. Expect to leave **fewer than 5 questions blank** in the whole paper.

1.3 The elimination habits that actually work

Cue	What to do
Two options are opposites (e.g. "volatile" / "non-volatile")	The answer is usually one of those two — eliminate the other two
One option is far longer and more qualified	Often correct on badly-written papers, but do not rely on it
"All of the above" present	If you are sure <i>any one</i> option is wrong, "All of the above" dies with it
"None of the above" present	Rarely correct on this style of paper. Deprioritise it
A number option that is not a power of 2, in a memory/capacity question	Almost always wrong
An option using vocabulary from a <i>different</i> unit	Distractor imported from another topic — eliminate

1.4 Time and sequencing (120 min / 100 Q)

Pass	Time	What you do
1	~50 min	Answer everything you know instantly. Mark others ? (workable) or ?? (guess)
2	~45 min	Work the ? set — conversions, C output, calculations
3	~20 min	The ?? set — eliminate, then apply the §1.2 rule
4	~5 min	Verify OMR alignment at Q25, Q50, Q75, Q100

The most expensive single mistake available to you in this exam is a one-row shift on the OMR sheet. It can cost 100+ marks. Check alignment at each quarter, not just at the end.

2. MCQ Bank — 120 questions

Weighting is deliberate. MS Office, MS-DOS, hardware and motherboard facts are over-represented relative to their syllabus share, because (a) they generate easy single-fact

MCQs so the examiner writes lots of them, and (b) they are where a B.Tech CS candidate is weakest. Shared-core topics (OS, networks, DBMS, C) are represented lightly in sets A–L — drill those from [CORE_01](#) ... [CORE_09](#) and their own question sets.

⚠ **Read §0.2 before you rely on this weighting.** The real 2024 paper devoted **25% of Paper-I to networks** and **45% of Paper-II to C and C++**. Sets A–L below are the *weak-spot* drill; they are not a scale model of the paper. **Set M (§2.13) is the 2024-calibrated set** covering exactly the blocks the real paper over-weighted, and it is the more important of the two. Do sets A–L to fix your gaps; do set M to rehearse the paper.

Set	Topic	Qs	Syllabus unit
A	Generations, classification, basic organisation	10	P-I §1.1, 1.2, 1.4
B	Data representation and number systems	12	P-I §1.3
C	Input and output devices	12	P-I §2
D	Storage devices	14	P-I §3
E	Motherboard, buses, ports	14	P-I §4
F	MS Word	12	P-I §8b
G	MS Excel	12	P-I §8c
H	MS PowerPoint and MS Access	10	P-I §8d, 8e
I	MS-DOS and Windows	14	P-II §1f, 1g
J	Operating systems and UNIX	8	P-II §1, §2
K	Networks, Internet, viruses	8	P-I §5, §6, §9
L	DBMS, SQL, C, System Analysis	6	P-II §3, §4, §5
M	2024-calibrated: networks, Internet, Office 2010, C/C++	40	P-I §5,6,8 · P-II §5
	Total	172	

Answer keys with explanations follow each set. **Cover them.**

2.1 Set A — Generations, classification, basic organisation

A1. The first generation of computers used which component as the main switching element?

(a) Transistor (b) Vacuum tube (c) Integrated circuit (d) Microprocessor

A2. ENIAC, EDVAC and UNIVAC-I belong to which generation?

(a) First (b) Second (c) Third (d) Fourth

A3. The transistor, which defined the second generation, was invented at:

(a) IBM (b) Bell Laboratories (c) MIT (d) Intel

A4. Integrated Circuits (ICs) are the defining technology of the:

(a) First generation (b) Second generation (c) Third generation (d) Fourth generation

A5. VLSI / the microprocessor characterises which generation?

(a) Second (b) Third (c) Fourth (d) Fifth

A6. Which of the following is *not* one of the three components of the CPU as described in

the Diploma syllabus's functional block diagram?

(a) ALU (b) Control Unit (c) Main memory (d) Printer

A7. Which class of computer is characterised by supporting hundreds to thousands of simultaneous users, very high I/O throughput, and use in banks and railways?

(a) Supercomputer (b) Mainframe (c) Minicomputer (d) Microcomputer

A8. A computer optimised for a single user running compute-intensive engineering or graphics applications, more powerful than a PC but not multi-user like a mainframe, is a:

(a) Workstation (b) Server (c) Supercomputer (d) Terminal

A9. PARAM, developed by C-DAC, is an example of a:

(a) Mainframe (b) Supercomputer (c) Minicomputer (d) Workstation

A10. The unit that co-ordinates and directs the operation of all other units by generating timing and control signals is the:

(a) ALU (b) Control unit (c) Memory unit (d) Input unit

Answers A1–A10

| Q | Ans | Why | |---|---|---| | A1 | **(b)** | Vacuum tubes (thermionic valves); huge, hot, ~2000 tubes in ENIAC | | A2 | **(a)** | All 1940s–early-1950s vacuum-tube machines | | A3 | **(b)** | Bardeen, Brattain and Shockley at Bell Labs, 1947 | | A4 | **(c)** | 3rd gen = SSI/MSI integrated circuits (1964–1971) | | A5 | **(c)** | 4th gen = LSI/VLSI, microprocessor on a chip (1971 onward) | | A6 | **(d)** | Printer is an output device, outside the CPU | | A7 | **(b)** | Mainframe = throughput and concurrency, not raw FLOPS | | A8 | **(a)** | Workstation = single-user, high-performance | | A9 | **(b)** | PARAM series, C-DAC Pune | | A10 | **(b)** | Control unit — fetch/decode/control signal generation | **Trap:** A7 vs A9. *Supercomputer* = maximum speed on one huge calculation (weather, nuclear simulation). *Mainframe* = maximum number of transactions and users. Papers love this pair.

2.2 Set B — Data representation and number systems

B1. A nibble consists of how many bits?

(a) 2 (b) 4 (c) 8 (d) 16

B2. Standard ASCII is a how-many-bit code?

(a) 4 (b) 7 (c) 8 (d) 16

B3. How many distinct characters can standard 7-bit ASCII represent?

(a) 64 (b) 127 (c) 128 (d) 256

B4. EBCDIC is a code of how many bits, and associated with which vendor?

(a) 7-bit, Intel (b) 8-bit, IBM (c) 16-bit, Microsoft (d) 8-bit, DEC

B5. The decimal number 45 in binary is:

(a) 101011 (b) 101101 (c) 110101 (d) 101110

B6. The hexadecimal equivalent of binary 11011110 is:

(a) DE (b) ED (c) BE (d) DF

B7. The octal equivalent of decimal 100 is:

(a) 144 (b) 164 (c) 134 (d) 154

B8. The 2's complement of the 8-bit number 00101100 is:

(a) 11010011 (b) 11010100 (c) 11010101 (d) 00101101

B9. In BCD, the decimal number 59 is represented as:

(a) 0101 1001 (b) 0011 1011 (c) 1011 1001 (d) 0101 1011

B10. Which of the following bit patterns is **invalid** in BCD?

(a) 0111 (b) 1001 (c) 1010 (d) 0000

B11. One kilobyte is exactly:

- (a) 1000 bytes (b) 1024 bytes (c) 1024 bits (d) 8000 bits

B12. Unicode UTF-16 uses how many bits for a character in the Basic Multilingual Plane?

- (a) 7 (b) 8 (c) 16 (d) 32

Answers B1–B12

| Q | Ans | Working / why | |---|---|---| | B1 | **(b)** | Nibble = 4 bits = one hex digit | | B2 | **(b)** | 7 bits; the 8th bit was originally parity. "Extended ASCII" is 8-bit | | B3 | **(c)** | $2^7 = 128$ (codes 0–127). Trap: (b) 127 is the *highest code*, not the count | | B4 | **(b)** | Extended Binary Coded Decimal Interchange Code, 8-bit, IBM mainframes | | B5 | **(b)** | $45 = 32+8+4+1 = 101101$ | | B6 | **(a)** | $1101 = D$, $1110 = E \rightarrow DE$ | | B7 | **(a)** | $100 = 64+32+4 = 1100100_2 \rightarrow$ group by 3 from right: $001 \cdot 100 \cdot 100 = 144_8$ | | B8 | **(b)** | 1's comp of $00101100 = 11010011$; $+1 = 11010100$ | | B9 | **(a)** | $5 = 0101$, $9 = 1001$ | | B10 | **(c)** | $1010 = 10$ decimal — BCD codes only 0–9, so 1010–1111 are invalid | | B11 | **(b)** | $2^{10} = 1024$ | | B12 | **(c)** | UTF-16 BMP = 16 bits; supplementary planes use surrogate pairs (32 bits) | **Trap:** B3 — "how many characters" vs "highest code number" differ by one. Also B8: candidates routinely give the 1's complement when 2's is asked. Always do the "+1".

2.3 Set C — Input and output devices

C1. The standard PC keyboard layout is called:

- (a) DVORAK (b) QWERTY (c) AZERTY (d) COLEMAK

C2. The standard enhanced PC keyboard has how many keys?

- (a) 84 (b) 101/104 (c) 128 (d) 96

C3. An optical mouse detects movement using:

- (a) A rubber ball and two rollers (b) An LED/laser and a small camera sensor
(c) A magnetic field (d) A gyroscope

C4. Mouse pointer speed is usually quoted in:

- (a) Hz (b) DPI/CPI (c) Baud (d) Pixels

C5. OCR stands for:

- (a) Optical Character Recognition (b) Optical Code Reader
(c) Ordered Character Retrieval (d) Optical Cathode Ray

C6. MICR, used mainly on bank cheques, stands for:

- (a) Magnetic Ink Character Recognition (b) Micro Ink Code Reader
(c) Magnetic Image Colour Recognition (d) Multiple Input Character Reader

C7. A bar-code reader works by:

- (a) Weighing the item (b) Measuring reflected light from bars and spaces
(c) Reading a magnetic strip (d) Radio frequency

C8. Which is an **impact** printer?

- (a) Laser (b) Inkjet (c) Dot matrix (d) Thermal

C9. A laser printer's speed is measured in:

- (a) CPS (b) LPM (c) PPM (d) DPI

C10. A dot matrix printer's speed is measured in:

- (a) CPS (characters per second) (b) PPM (c) DPI (d) Hz

C11. Which printer can produce **carbon copies** in a single pass?

- (a) Laser (b) Inkjet (c) Dot matrix (d) Thermal inkjet

C12. In a CRT monitor, the picture is produced by:

- (a) Liquid crystals twisting polarised light (b) An electron beam striking a phosphor coating

(c) Organic LEDs emitting light (d) Plasma cells

Answers C1–C12

| Q | Ans | Why | |---|---|---| | C1 | **(b)** | QWERTY — named after the first six letters of the top row | | C2 | **(b)** | 101-key enhanced; 104 with the Windows keys. Older AT keyboard = 84 keys | | C3 | **(b)** | LED (or laser) illuminates the surface; a tiny CMOS camera takes thousands of images/sec and a DSP computes displacement | | C4 | **(b)** | Dots (counts) per inch | | C5 | **(a)** | Converts a scanned image of text into editable character codes | | C6 | **(a)** | Magnetic Ink Character Recognition — E-13B font on cheques | | C7 | **(b)** | Dark bars absorb, light spaces reflect; a photodiode reads the pattern | | C8 | **(c)** | Dot matrix hammers pins through a ribbon onto the paper — impact | | C9 | **(c)** | Pages per minute | | C10 | **(a)** | Characters per second | | C11 | **(c)** | Only impact printers can, because they physically strike the paper | | C12 | **(b)** | Electron gun → deflection → phosphor glows | **Trap:** C11 is a classic. "Which printer is used where multi-part stationery/carbon copies are needed" → **dot matrix**, always. Also remember: **laser** = page printer, inkjet & DMP = character/line printers.

2.4 Set D — Storage devices

D1. Which memory retains its contents when power is removed?

- (a) SRAM (b) DRAM (c) ROM (d) Cache

D2. A PROM can be programmed:

- (a) Never (b) Once, by the user (c) Any number of times electrically (d) Only at the factory

D3. An EPROM is erased by:

- (a) A high electrical voltage (b) Ultraviolet light through a quartz window
(c) Heating it (d) Software command

D4. EEPROM differs from EPROM in that it is:

- (a) Faster to read (b) Erasable electrically, byte by byte, in circuit
(c) Volatile (d) Larger in capacity

D5. Which is the **fastest** storage in the memory hierarchy?

- (a) Cache (b) Main memory (c) CPU registers (d) Hard disk

D6. SRAM is faster than DRAM primarily because:

- (a) It uses capacitors (b) It uses a flip-flop per bit and needs no refresh
(c) It is placed on the hard disk (d) It has a wider bus

D7. DRAM must be **refreshed** because each cell stores a bit as:

- (a) A magnetic domain (b) A charge on a capacitor that leaks away
(c) A latched flip-flop state (d) An optical pit

D8. DDR SDRAM achieves roughly double the bandwidth of SDR SDRAM at the same clock because it transfers data:

- (a) On both the rising and falling edges of the clock (b) On a 128-bit bus
(c) Without refresh (d) Using two memory controllers

D9. A concentric circle on one surface of a hard-disk platter is called a:

- (a) Sector (b) Track (c) Cylinder (d) Cluster

D10. The set of all tracks at the same radius across all platters is a:

- (a) Sector (b) Cluster (c) Cylinder (d) Block

D11. The smallest unit of disk space that the file system will allocate to a file is a:

- (a) Bit (b) Sector (c) Cluster (allocation unit) (d) Cylinder

D12. The traditional hard-disk sector size is:

- (a) 128 bytes (b) 512 bytes (c) 1024 bytes (d) 4096 bits

D13. The capacity of a standard 3.5-inch high-density floppy disk is:

- (a) 360 KB (b) 720 KB (c) 1.2 MB (d) 1.44 MB

D14. On a CD, data is physically recorded as:

- (a) Magnetic domains (b) Pits and lands read by laser reflection
(c) Electrical charges (d) Holes punched in the substrate

Answers D1–D14

| Q | Ans | Why | |---|---|---| | D1 | **(c)** | ROM is non-volatile; SRAM, DRAM and cache are all volatile | | D2 | **(b)** | Programmable ROM — one-time, blown fuses/antifuses (OTP) | | D3 | **(b)** | UV through the quartz window, ~20 minutes; erases the whole chip | | D4 | **(b)** | Electrically erasable, selectively, without removing the chip | | D5 | **(c)** | Registers > cache > main memory > secondary | | D6 | **(b)** | 6-transistor flip-flop cell, no refresh cycle stealing access time | | D7 | **(b)** | 1 transistor + 1 capacitor; charge leaks, so refresh every few ms | | D8 | **(a)** | **D**ouble **D**ata **R**ate = both clock edges | | D9 | **(b)** | Track | | D10 | **(c)** | Cylinder | | D11 | **(c)** | Cluster = 1, 2, 4, 8 ... sectors. Cause of internal fragmentation / slack space | | D12 | **(b)** | 512 bytes classically; modern drives use 4096-byte "Advanced Format" | | D13 | **(d)** | 3.5" HD = 1.44 MB. (5.25" HD = 1.2 MB; 3.5" DD = 720 KB; 5.25" DD = 360 KB) | | D14 | **(b)** | Pits and lands; the transition between them encodes a 1 | **Traps:** - D13 is the classic floppy question — memorise **all four** capacities in the table above, because the examiner may ask any of them. - D8: "DDR" does **not** mean double clock speed; it means two transfers per clock cycle. - D11: cluster vs sector. The **disk** is formatted into sectors; the **file system** allocates clusters.

2.5 Set E — Motherboard, buses and ports

E1. The chipset component traditionally called the **Northbridge** is also known as the:

- (a) I/O Controller Hub (b) Memory Controller Hub (c) Super I/O (d) BIOS

E2. Which of the following connects **directly** to the Memory Controller Hub in the classic two-chip chipset layout?

- (a) USB ports (b) IDE channels (c) DIMM slots and the AGP slot (d) PS/2 ports

E3. AGP was designed specifically for:

- (a) Sound cards (b) Graphics/display adapters (c) Network cards (d) Hard drives

E4. DIMM stands for:

- (a) Dual Inline Memory Module (b) Direct Internal Memory Map
(c) Dynamic Inline Memory Module (d) Dual Interface Main Memory

E5. A standard parallel ATA (IDE) ribbon cable supports how many devices per channel?

- (a) 1 (b) 2 (master and slave) (c) 4 (d) 7

E6. A 40-pin IDE connector paired with an **80-conductor** cable is used for:

- (a) Floppy drives (b) Higher-speed UDMA hard-disk modes
(c) SCSI devices (d) Serial ports

E7. The floppy-drive ribbon connector on a motherboard has how many pins?

- (a) 26 (b) 34 (c) 40 (d) 50

E8. The traditional 9-pin D-type connector on a PC's back panel is a:

- (a) Parallel port (b) Serial (RS-232 / COM) port (c) VGA port (d) Game port

E9. The 25-pin female D-type connector traditionally used for a printer is the:

- (a) Serial port (b) Parallel (LPT / Centronics) port (c) SCSI port (d) MIDI port

E10. By colour convention, the **green** PS/2 port is for the:

- (a) Keyboard (b) Mouse (c) Monitor (d) Speaker

E11. The CMOS battery on a motherboard is typically a:

- (a) AA alkaline cell (b) CR2032 3 V lithium coin cell

(c) 9 V PP3 (d) Ni-Cd rechargeable pack

E12. If the CMOS battery fails, the most visible symptom is:

- (a) The hard disk is erased (b) The system loses date/time and BIOS settings at every power-off
- (c) The RAM fails (d) The monitor shows no signal permanently

E13. The POST (Power-On Self Test) is performed by:

- (a) The operating system (b) The BIOS firmware in ROM
- (c) COMMAND.COM (d) The device drivers

E14. On an ATX power supply, the main motherboard power connector has how many pins?

- (a) 12 (b) 20 or 24 (c) 34 (d) 40

Answers E1–E14

| Q | Ans | Why | |---|---|---| | E1 | **(b)** | Northbridge = Memory Controller Hub (MCH); Southbridge = I/O Controller Hub (ICH) | | E2 | **(c)** | MCH handles the fast stuff: CPU (FSB), RAM, AGP/PCIe graphics | | E3 | **(b)** | Accelerated Graphics Port — a dedicated point-to-point graphics bus | | E4 | **(a)** | Dual Inline Memory Module — independent contacts on both sides (SIMM had them tied) | | E5 | **(b)** | Two: one jumpered master, one slave | | E6 | **(b)** | 80-conductor cable keeps 40 pins but adds 40 ground wires to reduce crosstalk for UDMA/66 and above | | E7 | **(b)** | 34 pins — this is a favourite MCQ | | E8 | **(b)** | DB-9 male on the PC = serial COM port | | E9 | **(b)** | DB-25 female = parallel LPT port | | E10 | **(b)** | ****Green = mouse, purple = keyboard.**** Memorise it | | E11 | **(b)** | CR2032, 3 V lithium | | E12 | **(b)** | CMOS RAM holding settings + RTC lose their standby power | | E13 | **(b)** | BIOS, before any OS is loaded | | E14 | **(b)** | ATX 20-pin, extended to 24-pin in ATX12V 2.0 | ****Traps:**** - E7 vs E5: ****floppy = 34 pins, IDE = 40 pins, SCSI-1 = 50 pins.**** Three numbers, learn all three. - E10: green/purple PS/2 colours are asked surprisingly often. - E6: the trap answer is "80 pins". The ***cable*** has 80 conductors; the ***connector*** still has 40 pins.

2.6 Set F — MS Word

F1. The horizontal bar at the very top of the Word window showing the document name is the:

- (a) Menu bar (b) Title bar (c) Status bar (d) Ruler

F2. The default file extension of a Word 2007+ document is:

- (a) .doc (b) .docx (c) .txt (d) .wrd

F3. Drop Cap is used to:

- (a) Convert text to capitals (b) Make the first letter of a paragraph large and dropped over several lines
- (c) Drop a picture into text (d) Lower the case of selected text

F4. Text that appears at the **bottom of every page** is placed in the:

- (a) Header (b) Footer (c) Footnote (d) Endnote

F5. The key difference between a **footnote** and an **endnote** is that:

- (a) Footnotes are numbered, endnotes are not
- (b) A footnote appears at the bottom of the same page; an endnote appears at the end of the document or section
- (c) Footnotes cannot be edited (d) Endnotes cannot contain references

F6. Mail Merge requires which two documents?

- (a) Main document and data source (b) Header and footer
- (c) Template and macro (d) Form and report

F7. In Mail Merge, the placeholders inserted into the main document are called:

- (a) Fields (merge fields) (b) Bookmarks (c) Hyperlinks (d) Captions

F8. WordArt is used to:

- (a) Insert clipart (b) Create decorative, stylised text objects

(c) Draw freehand (d) Check spelling

F9. The shortcut Ctrl + Z performs:

(a) Redo (b) Undo (c) Zoom (d) Save

F10. Red wavy underlines in Word indicate:

(a) Grammar errors (b) Possible spelling errors (c) Tracked changes (d) Hyperlinks

F11. A **text box** or **callout** is used to:

(a) Hold text that can be positioned independently anywhere on the page
(b) Increase font size (c) Create a table (d) Add a footnote

F12. To split a page into two or more vertical text columns you use:

(a) Insert → Table (b) Page Layout → Columns (c) Format → Tabs (d) Insert → Text Box

Answers F1–F12

| Q | Ans | Note | |---|---|---| | F1 | ****(b)**** | Title bar | | F2 | ****(b)**** | .docx (Office Open XML). Pre-2007 = .doc | | F3 | ****(b)**** | Drop Cap — "dropped" or "in margin" style | | F4 | ****(b)**** | Footer. Header = top of every page | | F5 | ****(b)**** | Position, not numbering — both are auto-numbered | | F6 | ****(a)**** | Main document + data source (recipient list) → merged output | | F7 | ****(a)**** | Merge fields, e.g. «FirstName» | | F8 | ****(b)**** | Stylised/decorative text | | F9 | ****(b)**** | Undo. Redo = Ctrl+Y | | F10 | ****(b)**** | Red wavy = spelling; green wavy (classic) = grammar | | F11 | ****(a)**** | Free-floating container | | F12 | ****(b)**** | Columns | ****Trap:**** F4 vs F5. ****Footer**** (page furniture, every page) is not the same thing as ****footnote**** (a reference note tied to a specific word). This pair is an examiner favourite.

2.7 Set G — MS Excel

G1. The intersection of a row and a column in a worksheet is called a:

(a) Cell (b) Field (c) Record (d) Range

G2. Every formula in Excel must begin with:

(a) A colon (b) An equals sign (=) (c) A hash (d) An apostrophe

G3. A **workbook** is:

(a) A single sheet (b) A file containing one or more worksheets
(c) A row of data (d) A chart

G4. The reference **\$A\$1** is a:

(a) Relative reference (b) Absolute reference (c) Mixed reference (d) 3-D reference

G5. The reference **A\$1** is a:

(a) Relative reference (b) Absolute reference (c) Mixed reference (d) Circular reference

G6. **=SUM(A1:A10)** adds:

(a) Cells A1 and A10 only (b) All cells from A1 to A10 inclusive
(c) Row 1 to row 10 entirely (d) Nothing — invalid syntax

G7. Which function counts only the cells in a range that contain **numbers**?

(a) COUNT (b) COUNTA (c) COUNTBLANK (d) SUM

G8. Which of these is a **logical** function?

(a) AVERAGE (b) IF (c) LEFT (d) NOW

G9. VLOOKUP belongs to which function category?

(a) Statistical (b) Lookup and Reference (c) Financial (d) Text

G10. Which chart type is best for showing each part as a percentage of a single whole?

(a) Line chart (b) Pie chart (c) Scatter chart (d) Bar chart

G11. In a chart, the key that identifies each data series by colour is the:

(a) Axis (b) Legend (c) Plot area (d) Gridline

G12. The error #DIV/0! means:

- (a) A cell reference is invalid (b) A formula divides by zero or an empty cell
- (c) The column is too narrow (d) A name is misspelt

Answers G1–G12

| Q | Ans | Note | |---|---|---| | G1 | **(a)** | Cell | | G2 | **(b)** | `=` (Lotus-style `+` also works but `=` is the answer) | | G3 | **(b)** | Workbook = the file; worksheet = a sheet inside it | | G4 | **(b)** | Both `\$` = absolute; does not change when copied | | G5 | **(c)** | Column relative, row absolute = mixed | | G6 | **(b)** | `:` is the range operator | | G7 | **(a)** | COUNT = numeric only; COUNTA = any non-empty | | G8 | **(b)** | IF, AND, OR, NOT are logical. AVERAGE = statistical, LEFT = text, NOW = date/time | | G9 | **(b)** | Lookup and Reference | | G10 | **(b)** | Pie — parts of one whole | | G11 | **(b)** | Legend | | G12 | **(b)** | Divide by zero

Error-code table worth memorising (high MCQ yield):

Error	Meaning
#DIV/0!	Division by zero
#NAME?	Unrecognised text / misspelt function name
#REF!	Reference to a deleted cell
#VALUE!	Wrong data type in an operand
#N/A	Value not available (typical of a failed lookup)
#NUM!	Invalid numeric argument
#NULL!	Invalid intersection of two ranges

2.8 Set H — MS PowerPoint and MS Access

H1. The default file extension of a PowerPoint 2007+ presentation is:

- (a) .ppt (b) .pptx (c) .ppsx (d) .potx

H2. Which PowerPoint view shows thumbnails of all slides for reordering?

- (a) Normal view (b) Slide Sorter view (c) Notes Page view (d) Reading view

H3. The effect applied when moving **from one slide to the next** is a:

- (a) Animation (b) Transition (c) Action button (d) Template

H4. An effect applied to an **individual object on a slide** (text, picture) is:

- (a) A transition (b) An animation (c) A theme (d) A layout

H5. The function key that starts a slide show from the first slide is:

- (a) F2 (b) F5 (c) F7 (d) F12

H6. An **action button** in PowerPoint is used to:

- (a) Format text (b) Provide a clickable control that jumps to a slide, file or URL
- (c) Insert a chart (d) Print handouts

H7. In MS Access, a **table** stores data in rows and columns; a row is called a:

- (a) Field (b) Record (c) Query (d) Form

H8. In MS Access, a column of a table is a:

- (a) Record (b) Field (c) Report (d) Macro

H9. Which Access object is designed primarily for **printed output**?

- (a) Table (b) Query (c) Form (d) Report

H10. The Access field property that guarantees each record has a unique identifier is:

- (a) Index (b) Primary key (c) Validation rule (d) Default value

Answers H1–H10

| Q | Ans | Note | |---|---|---| | H1 | **(b)** | .pptx. `ppsx` = slide **show** (opens straight into presentation); `potx` = template | | H2 | **(b)** | Slide Sorter | | H3 | **(b)** | Transition = between slides | | H4 | **(b)** | Animation = within a slide | | H5 | **(b)** | F5 from the start; Shift+F5 from the current slide | | H6 | **(b)** | Hyperlinked control | | H7 | **(b)** | Record = row = one entity instance | | H8 | **(b)** | Field = column = one attribute | | H9 | **(d)** | Report | | H10 | **(b)** | Primary key **Trap:** H3 vs H4 — **transition** between slides, **animation** within a slide. **Guaranteed to be asked in some form.** Also H7/H8: record = row, field =

column; candidates swap them under pressure.

2.9 Set I — MS-DOS and Windows

- I1.** In MS-DOS, the command interpreter (the program that reads and executes your typed commands) is:
(a) IO.SYS (b) MSDOS.SYS (c) COMMAND.COM (d) CONFIG.SYS
- I2.** Which of the following is an **internal** DOS command?
(a) FORMAT (b) DIR (c) CHKDSK (d) XCOPY
- I3.** Which of the following is an **external** DOS command?
(a) COPY (b) DEL (c) FORMAT (d) CLS
- I4.** Internal commands are so called because they are:
(a) Stored as separate .EXE files on disk (b) Built into COMMAND.COM and loaded in memory
(c) Only usable by the administrator (d) Written in assembly
- I5.** The DOS file-naming convention is:
(a) 8 characters name + 3 character extension (b) 11 characters, no extension
(c) 255 characters (d) 8 characters only
- I6.** **DIR /P** does what?
(a) Prints the directory (b) Pauses after each screenful
(c) Lists in wide format (d) Shows hidden files
- I7.** **DIR /W** displays the listing:
(a) One file per line with details (b) In wide format, names only, multiple columns
(c) Sorted by date (d) With subdirectories recursively
- I8.** The command used to change a file's read-only, hidden, system or archive attribute is:
(a) CHKDSK (b) ATTRIB (c) LABEL (d) EDIT
- I9.** A **.BAT** file is:
(a) A compiled binary (b) A plain-text file of DOS commands executed in sequence
(c) A device driver (d) A backup file
- I10.** The essential difference between a **.COM** and an **.EXE** file is that:
(a) .COM is text, .EXE is binary
(b) .COM is a single-segment program limited to 64 KB with no relocation header; .EXE has a header and may use multiple segments
(c) .EXE is older (d) .COM cannot be executed
- I11.** When two files of the same base name but different extensions exist, DOS executes them in which order of preference?
(a) .BAT, .COM, .EXE (b) .COM, .EXE, .BAT (c) .EXE, .COM, .BAT (d) Alphabetical
- I12.** The DOS wildcard ***** stands for:
(a) Exactly one character (b) Any sequence of characters
(c) A directory (d) A drive letter
- I13.** In Windows, deleted files from a hard disk are temporarily held in the:
(a) Clipboard (b) Recycle Bin (c) Temp folder (d) My Documents
- I14.** Which Windows accessory is a **plain-text** editor with no formatting?
(a) WordPad (b) Notepad (c) Paint (d) Character Map

Answers I1–I14

| Q | Ans | Note | | I1 | **(c)** | COMMAND.COM — the shell / command interpreter | | I2 | **(b)** | DIR is internal | | I3 | **(c)** | FORMAT.COM is a separate file on disk — external | | I4 | **(b)** | Resident

inside COMMAND.COM, always in memory, no disk access needed | I5 | **(a)** | The "8.3" convention | I6 | **(b)** | /P = pause | I7 | **(b)** | /W = wide | I8 | **(b)** | ATTRIB +R/-R, +H/-H, +S/-S, +A/-A | I9 | **(b)** | Batch file — plain text, one command per line | I10 | **(b)** | .COM = memory image, ≤64 KB, one segment; .EXE = relocatable, header, multi-segment | I11 | **(b)** | **.COM → .EXE → .BAT** | I12 | **(b)** | **`** = any number of characters; **`?** = exactly one | I13 | **(b)** | Recycle Bin (not for files deleted from removable media or with Shift+Delete) | I14 | **(b)** | Notepad = plain text; WordPad = basic rich text (.rtf) | **The three DOS system files, in load order — memorise:** | File | Role | **IO.SYS** | Low-level device I/O routines; loads first, interfaces with the BIOS | **MSDOS.SYS** | The DOS kernel — file system, memory management, system calls | **COMMAND.COM** | The command interpreter / shell — displays the prompt, runs commands | **Internal vs external — the list to memorise:** | Internal (in COMMAND.COM) | External (separate .COM/.EXE on disk) | **DIR, COPY, DEL/ERASE, REN, TYPE, CLS, MD/MKDIR, CD/CHDIR, RD/RMDIR, DATE, TIME, VER, VOL, PATH, PROMPT, SET, ECHO, EXIT | FORMAT, CHKDSK, SCANDISK, DISKCOPY, XCOPY, ATTRIB, LABEL, TREE, MORE, SORT, FIND, PRINT, EDIT, FDISK, DEFRAG, BACKUP, RESTORE, DOSKEY, MEM, SYS | Trap:** | I2/I3 pairs appear every year. The rule of thumb: **if it does something big to a disk (FORMAT, CHKDSK, FDISK, DEFRAG, XCOPY) it is external. If it is a small everyday file/console operation it is internal.** **`COPY`** is internal but **`XCOPY`** is external — that exact pair is a favourite.

2.10 Set J — Operating systems and UNIX

Core treatment in [CORE_03_OperatingSystems.md](#) and [CORE_04_UnixLinux.md](#). Sampler only here.

J1. Which CPU scheduling algorithm is guaranteed to give the minimum average waiting time for a given set of processes arriving together?

- (a) FCFS (b) SJF (c) Round Robin (d) Priority

J2. Round Robin scheduling is essentially FCFS plus:

- (a) Priorities (b) Preemption on a time quantum (c) Aging (d) Multiple queues

J3. The problem in which a low-priority process never executes because higher-priority processes keep arriving is:

- (a) Deadlock (b) Starvation (c) Thrashing (d) Fragmentation

J4. In UNIX, the command that displays the users currently logged in is:

- (a) `whoami` (b) `who` (c) `ls` (d) `ps`

J5. Which UNIX command counts the lines, words and characters in a file?

- (a) `cat` (b) `wc` (c) `cut` (d) `sort`

J6. `head -5 file.txt` displays:

- (a) The last 5 lines (b) The first 5 lines (c) Every 5th line (d) 5 characters

J7. Which command searches files for lines matching a pattern?

- (a) `find` (b) `grep` (c) `tr` (d) `join`

J8. In UNIX, the component that interacts directly with the hardware is the:

- (a) Shell (b) Kernel (c) Utilities (d) Application layer

Answers J1–J8

| Q | Ans | Note | **J1** | **(b)** | SJF is provably optimal for average waiting time | **J2** | **(b)** | RR = FCFS + preemptive time slice | **J3** | **(b)** | Starvation / indefinite blocking; cured by **aging** | **J4** | **(b)** | `who`. `who am i` / `whoami` shows just you | **J5** | **(b)** | `wc` — `-l` lines, `-w` words, `-c` characters | **J6** | **(b)** | `head` = start of file, `tail` = end | **J7** | **(b)** | `grep` = Global Regular Expression Print | **J8** | **(b)** | Kernel. Shell is the user interface; utilities sit on top |

2.11 Set K — Networks, Internet and viruses

K1. How many layers does the OSI reference model have?

- (a) 4 (b) 5 (c) 7 (d) 8

K2. A device that regenerates a weakened signal to extend network distance, operating at the physical layer, is a:

- (a) Router (b) Repeater (c) Gateway (d) Bridge

K3. In which topology does a single cable break bring down the entire network?

- (a) Star (b) Bus (c) Mesh (d) Tree

K4. A transmission mode allowing communication in both directions but only one at a time is:

- (a) Simplex (b) Half duplex (c) Full duplex (d) Multiplex

K5. The protocol used to transfer files between hosts on the Internet is:

- (a) SMTP (b) FTP (c) Telnet (d) HTTP

K6. A **boot sector virus** infects:

- (a) Word documents (b) The master boot record / DOS boot record of a disk
(c) The command interpreter only (d) Network packets

K7. A **macro virus** is written in:

- (a) Assembly language (b) The macro/scripting language of an application such as VBA
(c) C++ (d) Machine code

K8. Which malicious program is **self-replicating across a network without needing a host program**?

- (a) Virus (b) Worm (c) Trojan horse (d) Logic bomb

Answers K1–K8

| Q | Ans | Note | |---|---|---| | K1 | **(c)** | 7 — Physical, Data Link, Network, Transport, Session, Presentation, Application | | K2 | **(b)** | Repeater — layer 1 | | K3 | **(b)** | Bus — single shared backbone is a single point of failure | | K4 | **(b)** | Half duplex (walkie-talkie) | | K5 | **(b)** | FTP, ports 20 (data) / 21 (control) | | K6 | **(b)** | Boot sector / MBR | | K7 | **(b)** | VBA in Word/Excel; spreads via documents, not executables | | K8 | **(b)** | Worm — a virus needs a host, a worm does not |

2.12 Set L — DBMS, SQL, C, System Analysis

L1. Which SQL statement removes all rows from a table but keeps the table structure and cannot be rolled back in most systems?

- (a) DELETE (b) DROP (c) TRUNCATE (d) ALTER

L2. An attribute or set of attributes that uniquely identifies each tuple of a relation is a:

- (a) Foreign key (b) Primary key (c) Domain (d) View

L3. In an E-R diagram, an **entity** is represented by a:

- (a) Diamond (b) Rectangle (c) Ellipse (d) Line

L4. What is the output of `printf("%d", 7/2);` in C?

- (a) 3.5 (b) 3 (c) 4 (d) 0

L5. Which of the following is **not** a valid C keyword?

- (a) static (b) volatile (c) function (d) register

L6. The first phase of the classical SDLC is:

- (a) Design (b) Coding (c) Preliminary investigation / requirement analysis (d) Testing

Answers L1–L6

| Q | Ans | Note | |---|---|---| | L1 | **(c)** | TRUNCATE is DDL; DELETE is DML and is logged/rollbackable | |

L2 | **(b)** | Primary key | | L3 | **(b)** | Rectangle = entity, ellipse = attribute, diamond = relationship | | L4 | **(b)** | Integer division truncates: 3 | | L5 | **(c)** | `function` is not a C keyword | | L6 | **(c)** | Preliminary investigation / feasibility study, then requirement analysis |

2.13 Set M — the 2024-calibrated set (40 questions)

These are modelled directly on the blocks the **real 2024 Diploma paper** over-weighted and on its actual question styles: networks (25% of Paper-I), C and C++ (45% of Paper-II), Internet technology (15% of Paper-I), and version-specific MS Office. **If you only have time for one set, do this one.**

M(a) — Networks and data communication (12 Q)

M1. Which is **not** one of the four fundamental characteristics determining the effectiveness of a data communication system?

- (a) Delivery (b) Accuracy (c) Timeliness/Jitter (d) Designing

M2. The five components of a data communication system are message, sender, receiver, transmission medium and:

- (a) Switch (b) Protocol (c) Router (d) Modem

M3. If a periodic signal decomposes into sine waves of 100, 300, 500, 700 and 900 Hz, its bandwidth is:

- (a) 200 Hz (b) 400 Hz (c) 800 Hz (d) 2500 Hz

M4. Which is **not** a polar line-coding scheme?

- (a) NRZ (b) RZ (c) Biphasic (Manchester) (d) AMI

M5. A measure of how fast data can *actually* be sent through a network — as opposed to the theoretical channel capacity — is:

- (a) Bandwidth (b) Throughput (c) Frequency (d) Latency

M6. Which port number is used by SMTP?

- (a) 20 (b) 22 (c) 25 (d) 80

M7. A non-routable protocol designed for a single LAN segment, containing no network address, is:

- (a) NetBEUI (b) IPX (c) TCP (d) SMTP

M8. Which IEEE standard covers wireless LANs and hotspots?

- (a) 802.3 (b) 802.5 (c) 802.11 (d) 802.16

M9. How many links are required to connect 10 PCs in a full mesh topology?

- (a) 30 (b) 35 (c) 40 (d) 45

M10. A multiport bridge with buffering, whose many ports reduce collision traffic, is a:

- (a) Repeater (b) Gateway (c) Router (d) Switch

M11. `FDEC:0:0:0:0:BBFF:0:FFFF` and `FDEC::BBFF:0:FFFF` are:

- (a) Two different IPv6 addresses (b) The same IPv6 address
(c) MAC addresses (d) IPv4-mapped addresses

M12. Which is **not** a Transport-layer protocol?

- (a) TCP (b) UDP (c) SCTP (d) SNMP

Answers M1–M12

| Q | Ans | Why | |---|---|---| | M1 | **(d)** | The four are delivery, accuracy, timeliness and jitter. "Designing" is the intruder | | M2 | **(b)** | Message, sender, receiver, medium, **protocol** | | M3 | **(c)** | Bandwidth = highest – lowest = 900 – 100 = **800 Hz** | | M4 | **(d)** | AMI is **bipolar** (three levels: +, 0, –), not polar | | M5 | **(b)** | Throughput = actual; bandwidth = potential | | M6 | **(c)** | 25. (20/21 FTP, 22 SSH, 23 Telnet,

53 DNS, 80 HTTP, 110 POP3, 143 IMAP, 443 HTTPS) | | M7 | **(a)** | NetBEUI — asked verbatim in 2024 | | M8 | **(c)** | 802.11. (802.3 Ethernet, 802.5 Token Ring, 802.15 Bluetooth/piconet, 802.16 WiMAX) | | M9 | **(d)** | $n(n-1)/2 = 10 \times 9 / 2 = 45$. (Each node needs $n-1 = 9$ ports) | | M10 | **(d)** | Switch | | M11 | **(b)** | `` compresses one run of consecutive all-zero groups — they are identical | | M12 | **(d)** | SNMP is Application layer | **Memorise the port table.** It generated several 2024 questions and costs 5 minutes to learn.

M(b) — Internet technology (8 Q)

M13. Which service is **not** possible on an intranet?

- (a) Private discussion groups (b) Access to legacy databases
- (c) Teleconferencing (d) Public web sites

M14. Mail servers **receive and store** e-mail in mailboxes using:

- (a) SMTP (b) POP3 (c) SNMP (d) FTP

M15. Gmail, Outlook, Thunderbird and Apple Mail are examples of:

- (a) Message transfer agents (b) User agents (c) Mail servers (d) Webmail protocols

M16. A set of suggestions for courteous conduct on the Internet is called:

- (a) Netizens (b) Netiquette (c) Flaming (d) Spam

M17. The oldest of the Internet services listed — a decade older than the World Wide Web — is:

- (a) Usenet (b) Telnet (c) Podcast (d) VoIP

M18. Every file on the Internet has an address known as its:

- (a) MAC address (b) IP address (c) URL (d) DNS record

M19. Match the connection type to its description:

a. VSAT b. Dial-up c. Cable d. Leased line

i. established using a modem ii. permanent dedicated telephone line

iii. earth-bound station used in satellite communication iv. via radio frequency over TV cable

- (a) a-iii, b-i, c-iv, d-ii (b) a-i, b-iv, c-ii, d-iii

- (c) a-ii, b-iv, c-iii, d-i (d) a-ii, b-iv, c-i, d-iii

M20. Smooth playback of streamed audio and video is made possible by:

- (a) VoD (b) A playback buffer (c) A string buffer (d) A device buffer

Answers M13–M20

| Q | Ans | Why | |---|---|---| | M13 | **(d)** | An intranet is private by definition; hosting a *public* website is an Internet/extranet function | | M14 | **(b)** | **SMTP** pushes mail between servers; POP3/IMAP let the client retrieve from the mailbox. **Learn this split** | | M15 | **(b)** | User agents (UA). MTAs are the servers (sendmail, Postfix, Exchange) | | M16 | **(b)** | Netiquette. *Netizens* = the people; *flaming* = abusive posting | | M17 | **(a)** | Usenet (1980) predates the Web (1989–91). Telnet is older still but the 2024 key was Usenet — $\triangle$ verify if it recurs | | M18 | **(c)** | Uniform Resource Locator | | M19 | **(a)** | a-iii, b-i, c-iv, d-ii | | M20 | **(b)** | Playback (jitter) buffer |

M(c) — MS Office, version-specific (8 Q)

M21. In Excel, ##### displayed in a cell means:

- (a) The formula is wrong (b) The column is not wide enough to show the content
- (c) The cell is protected (d) The value is negative

M22. Which shortcut collapses or expands the Office ribbon?

- (a) Ctrl+F1 (b) Ctrl+F2 (c) Alt+F1 (d) Ctrl+F4

M23. The ribbon — the "dynamic toolbar" of modern Office — replaced which older elements?

- (a) The status bar (b) The menu bar and toolbars (c) The clipboard (d) The task pane

M24. To start a bulleted list automatically in Word you type:

- (a) A hyphen and Enter (b) An asterisk * followed by a space
(c) A hash and a tab (d) Ctrl+B

M25. Which is **not** a valid page-border setting in Word?

- (a) Box (b) Shadow (c) 3-D (d) Window

M26. By default, PowerPoint slides are sized for an on-screen show with a width : height ratio of:

- (a) 4:3 (b) 3:4 (c) 5:4 (d) 16:9

M27. In MS Access, the rows and columns of a table are respectively called:

- (a) Fields and records (b) Records and fields (c) Queries and forms (d) Forms and reports

M28. The default file extension of an MS Access 2010 database is:

- (a) .mdb (b) .accdb (c) .adp (d) .xlsx

Answers M21–M28

| Q | Ans | Why | |---|---|---| | M21 | **(b)** | Widen the column or reduce the font | | M22 | **(a)** | Ctrl+F1 | | M23 | **(b)** | Introduced in Office 2007, replacing menus and toolbars | | M24 | **(b)** | ` + space (AutoFormat As You Type). `1.` + space starts a numbered list | | M25 | **(d)** | Box, Shadow, 3-D, Custom and None are the settings. "Window" is invented | | M26 | **(a)** | **4:3** is the classic default; 16:9 became default in PowerPoint 2013+. **The 2024 key was 4:3** | | M27 | **(b)** | Rows = records, columns = fields | | M28 | **(b)** | .accdb from Access 2007; .mdb was 2003 and earlier | **⚠ Version warning.** **2024** asked explicitly about *Excel 2010's* `AGGREGATE()` function, where `Translate` lives (the **Review** tab), the Paste Special dialog's options (Add, Transpose, Skip blanks — but **not** `ISTEXT`, which is a worksheet function), and the Sunburst chart (introduced in **Excel 2016**, so "not available in Excel 2007/2010"). If you can open a copy of Office, **click through the tabs once** — 20 minutes of clicking beats 2 hours of reading.

M(d) — C and C++ (12 Q)

M29. Using C's hierarchy of operations, what is **i** after **$i = 3/2*4 + 3/8 + 3$** ;

- (a) 7 (b) 10 (c) 8 (d) 12

M30. What does **%6.2f** specify in **`printf("%6.2f", fahr);`**;

- (a) Decimal integer at least 6 wide
(b) Floating point, at least 6 wide, 2 digits after the decimal point
(c) Floating point, 2 wide, 6 after the point (d) 6 significant figures

M31. Which is **not** a reserved keyword in C?

- (a) long (b) public (c) register (d) volatile

M32. Which variable name is **invalid** in C?

- (a) last_name (b) Avg (c) branch name (d) INTEREST

M33. Arrange in decreasing order of precedence: A. **< > <= >=** B. **!** C. **=** D. **== !=**

- (a) A, B, D, C (b) B, A, D, C (c) B, D, C, A (d) A, D, B, C

M34. What is printed?

```
int a[15], i;
a[0] = 0; a[1] = 1;
for (i = 2; i < 15; ++i) a[i] = a[i-2] + a[i-1];
```

- (a) The first 15 natural numbers (b) The first 15 Fibonacci numbers
(c) 15! (d) Powers of 2

M35. What does **`printf(6 + "Happy Sunday");`** print?

- (a) Happy (b) Sunday (c) Happy Sunday (d) 6Happy Sunday

M36. A string constant in C is a one-dimensional character array terminated by:

(a) '0' (b) '\0' (c) '\n' (d) EOF

M37. Which is **not** a jump statement in C?

(a) goto (b) break (c) continue (d) switch

M38. Which operator **cannot** be overloaded in C++?

(a) + (b) - (c) * (d) ::

M39. A special member function preceded by a tilde ~ is a:

(a) Constructor (b) Destructor (c) Friend function (d) Virtual function

M40. Convert the infix expression $A + B * C ^ D - (E / F - G)$ to postfix.

Show your stack working.

Answers M29–M40

| Q | Ans | Working | |---|---|---| | M29 | **(a)** | Integer arithmetic, left to right for equal precedence: $\frac{3}{2} = 1$, $1 * 4 = 4$; $\frac{3}{8} = 0$; $4 + 0 + 3 = 7$ | | M30 | **(b)** | Width 6 (minimum, including the point), precision 2 | | M31 | **(b)** | 'public' is C++/Java, not C | | M32 | **(c)** | Identifiers cannot contain a space | | M33 | **(b)** | Unary '!' > relational '<' '>' > equality '==' '!=' > assignment '='. **B, A, D, C** | | M34 | **(b)** | Each term is the sum of the previous two — Fibonacci | | M35 | **(b)** | The string literal is a 'char*'; adding 6 skips "Happy" (6 characters) leaving "Sunday" | | M36 | **(b)** | The null character '\0', ASCII 0. Note '0' is ASCII 48 — the classic trap | | M37 | **(d)** | 'switch' is a selection statement. Jumps are 'goto', 'break', 'continue', 'return' | | M38 | **(d)** | The five non-overloadable operators: '::' '\0' '*' '?' and 'sizeof' | | M39 | **(b)** | Destructor | | M40 | — | See below | **M40 worked (infix → postfix, stack algorithm).** Precedence: '^' (right-associative) > '*' '/' > '+' '-'. | Token | Stack | Output | |---|---|---| | A | | A | | + | + | A | | B | + | A B | | * | + * | A B | | C | + * | A B C | | ^ | + ^ | A B C | | D | + ^ | A B C D | | - | - | (pop ^, *, + first) | A B C D ^ * + | | (| - | (| A B C D ^ * + | | E | - | (| ... E | | / | - | (/ | ... E | | F | - | (/ | ... E F | | - | - | (pop /) | ... E F | | G | - | (- | ... E F / G | |) | - | (pop -, discard parens) | ... E F / G - | | end | (pop -) | **A B C D ^ * + E F / G -** | **Answer:** **ABCD^*+EF/G-** | **Note on M29 and M35.** Both are pure-reasoning questions that reward 60 seconds of careful work with a guaranteed +2. On the real paper, hunt these down in pass 2 — they are the highest expected value per minute on the whole sheet. **Note on undefined behaviour.** The 2024 paper included `printf("%d %d %d", a, ++a, a++)`, whose result is **undefined** in C (unsequenced modification of 'a'). The examiner wants the right-to-left-evaluation answer that Turbo C produces. If you meet one of these, give the textbook answer, do not argue with the paper. $\triangle$ verify against your own compiler if curious, but do not let it cost you time in the hall.

2.14 How to build your own 100-question mock (26 September)

Do **not** simply re-do the sets above in order — you will remember the answers, not the facts.

Instead:

1. Number every question in §2.1–§2.13 (there are 172).
2. Pick 100 of them **in a scrambled order** — e.g. write out the numbers 1–172, strike out 72 at random, then answer the remainder in reverse order. **Keep all 40 of Set M in the 100** — it is the part calibrated to the real paper.
3. Sit them in **exactly 120 minutes** with a watch, and mark every answer on a numbered sheet (simulate the OMR).
4. Score with real marking: **+2 correct, -0.667 wrong, 0 blank**.
5. Record two numbers: your **score**, and your **hit rate on the questions you guessed**. If your guess hit rate is well below your own estimate, you are over-confident and should guess less; if it is above, you are leaving marks on the table.

Target score for a comfortable position: 140+/200 with fewer than 5 blanks.

3. Paper-I descriptive question bank

Paper-I covers: introduction to computers, input/output devices, storage devices, motherboard, computer networks, Internet technology, computer languages, computer software (MS Office), computer viruses.

Format reminder: Section A — any 8 of 10×5 marks. Section B — any 3 of 5×10 .
Section C — any 2 of 4×15 .

Each answer below is a **skeleton**: the points the examiner's marking scheme will contain.
Write in that structure — definition, then diagram/table, then numbered points, then one line of application.

3.1 Section A — 5-mark questions (Paper-I)

P1-A1. Define the terms bit, byte, nibble and word. [5]

- Bit — binary digit, 0 or 1, smallest unit of data.
- Nibble — 4 bits; exactly one hexadecimal digit.
- Byte — 8 bits; the smallest addressable unit; holds one ASCII character.
- Word — the number of bits the CPU processes as a unit (16/32/64-bit); determines register and bus width.
- Close with the multiples table: $1 \text{ KB} = 2^{10} \text{ B}$, $1 \text{ MB} = 2^{20} \text{ B}$, $1 \text{ GB} = 2^{30} \text{ B}$, $1 \text{ TB} = 2^{40} \text{ B}$.

P1-A2. Differentiate between a compiler and an interpreter. [5]

- Two-column table, 5 rows: unit of translation (whole program / line by line); output (object code / none, executes directly); speed of translation vs execution; error reporting (all at once / stops at first); memory requirement; examples (C, C++ / BASIC, Python).

P1-A3. Convert (a) $(1101101)_2$ to decimal and octal, (b) $(357)_8$ to binary and hexadecimal. [5]

- Show the positional working for each, do not just state the answer.
- (a) $1101101_2 = 64+32+8+4+1 = 109_{10}$; group in 3s: $1 \cdot 101 \cdot 101 = 155_8$.
- (b) $357_8 = 011 \ 101 \ 111 = 011101111_2$; regroup in 4s from the right: $0000 \ 1110 \ 1111 = 0EF_{16} = EF_{16}$.
- One line stating the general rule: octal $\leftrightarrow$ binary is 3 bits per digit, hex $\leftrightarrow$ binary is 4 bits per digit.

P1-A4. What is 2's complement? Subtract 27 from 45 using 8-bit 2's complement arithmetic. [5]

- Definition: 1's complement (invert all bits) + 1; used so subtraction can be done by the adder.
- $45 = 00101101$, $27 = 00011011$.
- 1's comp of 27 = 11100100 ; 2's comp = 11100101 .
- Add: $00101101 + 11100101 = 1 \ 00010010$.
- Discard the carry out of the MSB $\rightarrow 00010010 = 18 \checkmark$.
- State the rule: carry out = 1 means the result is positive and the carry is discarded.

P1-A5. Differentiate between SRAM and DRAM. [5]

- Table: cell structure (flip-flop, 6 transistors / 1 transistor + 1 capacitor); refresh (not required / required every few ms); speed (faster / slower); density and cost per bit; power; typical use (cache / main memory).

P1-A6. Differentiate between an impact and a non-impact printer, with examples. [5]

- Mechanism (physical strike through ribbon / no contact — thermal, electrostatic, spray).
- Noise, speed, print quality, multi-part/carbon copy capability, running cost.
- Examples: impact — dot matrix, daisy wheel, line printer. Non-impact — inkjet, laser, thermal.

P1-A7. Explain the working of an optical mouse. [5]

- An LED (or laser) illuminates the surface at a shallow angle.
- A small CMOS image sensor photographs the surface thousands of times per second.
- A DSP compares successive images and computes the displacement (Δx , Δy).
- Displacement is sent to the PC (USB/PS-2) and moved on screen; resolution in DPI/CPI.
- Advantages over the ball mouse: no moving parts to clog, no cleaning, works on most surfaces, higher

precision.

P1-A8. What is cache memory? Why is it used? [5]

- Definition: small, very fast memory between CPU and main memory.
- Rationale: CPU is far faster than DRAM; cache bridges the speed gap.
- Locality of reference — temporal and spatial — makes it work.
- Levels L1/L2/L3; hit, miss, hit ratio.
- One line: effective access time = $h \times t_{\text{cache}} + (1-h) \times t_{\text{main}}$.

P1-A9. Differentiate between primary and secondary memory. [5]

- Table: volatility, speed, capacity, cost/bit, direct CPU access, examples.

P1-A10. What is a bar-code reader? Where is it used? [5]

- A scanner that reads a printed pattern of parallel bars and spaces of varying width.
- Light source + photodetector measures reflected light; dark bars absorb, spaces reflect.
- The pulse train is decoded into digits by the decoder.
- Standards: UPC, EAN, Code 39.
- Applications: retail point of sale, inventory, library issue, courier tracking.

P1-A11. What is the function of the ALU and the Control Unit? [5]

- ALU: performs all arithmetic (add, subtract, multiply, divide) and logic (AND, OR, NOT, compare, shift) operations; works with accumulator and status/flag register.
- CU: fetches, decodes, sequences; generates timing and control signals; directs data movement between units; does not process data itself.
- Together = CPU. One-line analogy: CU is the manager, ALU is the workshop.

P1-A12. Differentiate between CRT and LCD monitors. [5]

- Table: technology (electron gun + phosphor / liquid crystals + backlight), size and weight, power consumption, radiation and flicker, geometric distortion, native resolution, viewing angle, cost, life.

P1-A13. What is a plotter? How does it differ from a printer? [5]

- Definition: an output device that draws continuous lines by moving a pen or cutting head over paper under vector control.
- Types: drum plotter, flatbed plotter, inkjet/electrostatic plotter.
- Difference: printer prints dots to form an image (raster); plotter draws continuous vector lines.
- Applications: engineering drawings, CAD, architectural plans, maps, large-format posters.

P1-A14. Explain the terms track, sector, cylinder and cluster. [5]

- Track: one concentric circle on one platter surface.
- Sector: the smallest physically addressable division of a track, traditionally 512 bytes.
- Cylinder: the set of all tracks of the same number on all platter surfaces — reachable without moving the head assembly.
- Cluster: the smallest unit the file system will allocate, = 1, 2, 4 ... sectors; the cause of slack space.
- Add: capacity = heads $\times$ cylinders $\times$ sectors/track $\times$ bytes/sector.

P1-A15. What is BIOS? State its functions. [5]

- Basic Input Output System — firmware stored in a ROM/flash chip on the motherboard.
- Functions: (1) POST — Power-On Self Test; (2) initialise and identify hardware; (3) locate the boot device and load the bootstrap loader; (4) provide low-level I/O service routines; (5) hold the CMOS setup utility.
- Distinguish BIOS (the program, in ROM) from CMOS (the RAM holding its settings, kept alive by the battery).

P1-A16. Differentiate between the Internet and an intranet. [5]

- Table: scope (global public / single organisation, private), ownership, access control, security, content, cost, examples.

P1-A17. List and explain briefly any five services provided by the Internet. [5]

- Email; chat (text / voice / video); bulletin boards and newsgroups; video conferencing; FTP; Telnet; WWW. Pick five, one or two lines each with the protocol name.

P1-A18. What is a search engine? Name any four. [5]

- Definition: a program/website that indexes web pages and returns links matching a query.
- Three components: crawler/spider, indexer and database, query processor + ranking.
- Examples: Google, Bing, Yahoo, DuckDuckGo. Distinguish from a *directory* (human-curated) and a *browser* (client software).

P1-A19. What is a computer virus? How does it differ from a worm? [5]

- Virus: a program that attaches itself to a host program or boot sector and replicates when the host runs.
- Worm: a stand-alone self-replicating program that spreads over a network, needs no host and no user action.
- Table of 4 differences: host required, propagation, user action, typical damage.

P1-A20. List any five symptoms by which you may recognise a virus infection. [5]

- Unexplained slowdown; unexpected reduction in free memory or disk space; files change size, date or disappear; frequent crashes and unusual error messages; programs take longer to load or fail; strange messages/graphics; antivirus disabled; unexpected disk activity or network traffic; boot failure.

P1-A21. What are the characteristics of a good programming language? [5]

- Simplicity and readability; naturalness for the problem domain; abstraction support; portability; efficiency of generated code; well-defined syntax and semantics; strong error detection; good library and tool support; maintainability; cost of learning and use.

P1-A22. Differentiate between system software and application software. [5]

- Purpose (manage/operate the machine vs solve a user problem); dependence; who writes it; generality; runs in background vs foreground; examples (OS, compiler, device driver, utility vs MS Word, Photoshop, PageMaker, Tally).

3.2 Section B — 10-mark questions (Paper-I)

P1-B1. Explain the generations of computers with the defining technology, characteristics and examples of each. [10]

- One-line intro: a generation is defined by the *switching technology* used.
- Then a five-row table: Generation | Period | Technology | Memory | Language | Speed | Examples | Limitations.
 1. 1st (1946–1958): vacuum tube; magnetic drum; machine language; ms; ENIAC, EDVAC, EDSAC, UNIVAC-I; huge, hot, unreliable.
 2. 2nd (1959–1964): transistor; magnetic core; assembly and early HLL (FORTRAN, COBOL); μ s; IBM 1401, IBM 7094, CDC 1604.
 3. 3rd (1965–1971): IC (SSI/MSI); semiconductor + core; HLL, multiprogramming OS; ns; IBM 360/370, PDP-8, PDP-11.
 4. 4th (1971–): LSI/VLSI microprocessor; semiconductor RAM; GUI OS, 4GLs; ns/ps; IBM PC, Apple II, Pentium.
 5. 5th (present/future): ULSI, parallel processing, AI; natural-language interfaces; quantum and neural research.
- Close: each generation reduced size, cost and power while increasing speed, reliability and storage.

P1-B2. Classify computers on the basis of size and capacity, and compare them. [10]

- Comparison table: Type | Users | Processing power | Memory/storage | Cost | Typical applications | Examples.
- Supercomputer — fastest, measured in FLOPS, used for weather, nuclear, molecular modelling; PARAM, CRAY, Sunway.
- Mainframe — very high throughput, thousands of concurrent users/terminals, huge I/O; banking, railways, census; IBM z-series.
- Minicomputer — mid-range, departmental, tens–hundreds of users; PDP-11, VAX.
- Workstation — powerful single-user, engineering/CAD/graphics; Sun SPARC, HP, Silicon Graphics.
- Microcomputer — single-user PC/laptop/palmtop; based on a microprocessor.
- Close with a note that the boundaries have blurred: a modern PC outruns a 1990 mainframe.

P1-B3. Explain, with a labelled block diagram, the basic functional organisation of a computer. [10]

- Diagram: draw **Input Unit** on the left → into **CPU** box in the centre, and **Output Unit** on the right. Inside the CPU box draw two sub-boxes: **ALU** and **Control Unit**. Below/beside the CPU draw **Memory Unit (Primary)**,

connected both ways to CPU. Below that draw **Secondary / Mass Storage** connected to memory and CPU. Use **solid arrows for data flow** (input → memory → ALU → memory → output) and **dashed arrows for control signals** radiating from the CU to every other block.

- Then explain each block: input unit (accept, convert to binary, supply to memory); memory unit (store program and data, intermediate and final results); ALU (arithmetic and logic); control unit (fetch—decode—execute, timing and control); output unit (convert from binary to human-readable); mass storage (permanent bulk storage).
- Mention the stored-program (von Neumann) concept in one line.

P1-B4. Compare dot matrix, inkjet and laser printers. [10]

- Lead with the impact/non-impact distinction, then the table (this is the answer's centre of gravity):

Feature	Dot matrix	Inkjet	Laser
Type	Impact	Non-impact	Non-impact
Mechanism	Pins strike an inked ribbon	Nozzles spray tiny ink droplets	Laser writes a charge image on a drum; toner adheres; heat fuses it
Speed	30–600 CPS (slow)	4–20 PPM (medium)	8–100+ PPM (fast)
Print quality	Low (9/24-pin, visible dots)	Good, 600–4800 DPI, excellent colour	Excellent, sharp text, 600–2400 DPI
Noise	Very noisy	Quiet	Quiet
Initial cost	Low	Low	High
Running cost per page	Lowest	Highest (cartridges)	Low–medium
Colour	Limited	Excellent	Good, but costly
Carbon copies	Yes	No	No
Best for	Invoices, multi-part stationery, harsh environments	Home, photos, low volume colour	Office, high volume text

- Then a short paragraph on the working of each, and a closing recommendation line.

P1-B5. Describe the components of a hard disk drive and how data is organised on it. [10]

- Components with function: platters (aluminium/glass, magnetic coating, both surfaces used); spindle and spindle motor (rotates at 5400/7200/10000/15000 RPM); read/write heads (one per surface, fly on an air bearing microns above); actuator arm and voice-coil actuator (positions heads); head-actuator assembly moves as one; logic/controller board; air filter; sealed HDA (head-disk assembly).
- Organisation: track → sector → cylinder → cluster; low-level format writes the sector structure; partition table and MBR; boot sector; FAT/MFT; root directory; data area.
- Capacity formula: $\text{capacity} = \text{heads} \times \text{cylinders} \times \text{sectors per track} \times \text{bytes per sector}$, with a worked example: $4 \text{ heads} \times 16383 \text{ cylinders} \times 63 \text{ sectors} \times 512 \text{ B} \approx 2.1 \text{ GB}$ (the old CHS limit).
- Access time = seek time + rotational latency + transfer time. Average rotational latency at 7200 RPM = $(60/7200)/2 = 4.17 \text{ ms}$ — show this calculation.

P1-B6. Explain the read and write mechanism of a CD and a DVD. [10]

- Physical structure: polycarbonate substrate, reflective aluminium (or dye/alloy) layer, lacquer, label; a **single continuous spiral track** from the centre outwards (unlike a disk's concentric tracks).
- Reading: a laser diode beam is focused on the track; a **land** reflects the beam strongly; a **pit** is 1/4 wavelength deep, so reflection from a pit interferes destructively and reflects weakly; the photodetector sees the intensity

change. **A transition pit ↔ land = 1; no transition = 0** (EFM encoding).

- CD-R writing: a high-power laser burns/darkens an organic dye layer, permanently creating low-reflectivity spots — write once.

- CD-RW writing: a phase-change alloy (Ag-In-Sb-Te) is switched between **crystalline (reflective)** and **amorphous (non-reflective)** states by different laser powers — rewritable, ~1000 cycles.

- Comparison table:

Feature	CD	DVD
Laser wavelength	780 nm (infra-red)	650 nm (red)
Track pitch	1.6 µm	0.74 µm
Minimum pit length	0.83 µm	0.4 µm
Capacity	650–700 MB	4.7 GB single layer / 8.5 GB dual layer / 17 GB double sided dual layer
Layers	1	Up to 2 per side, 2 sides
1x data rate	150 KB/s	1.38 MB/s

- Add Blu-ray for contrast: 405 nm blue-violet laser, 25 GB per layer.
- Close: shorter wavelength → smaller focused spot → smaller pits → more capacity. That single sentence explains the whole progression.

P1-B7. Explain the ROM family: ROM, PROM, EPROM, EEPROM and Flash. [10]

- Common property: non-volatile, retains contents without power, used for firmware/BIOS.

- Table: Type | Programmed by | Erasable? | Erase method | Erase granularity | Reprogram cycles | Typical use.

- **Mask ROM** — at manufacture, by mask; not erasable; mass production firmware; cheapest per unit at volume.

- **PROM** — once, by the user, using a PROM programmer that blows fuses; not erasable; OTP.

- **EPROM** — electrically programmed, erased by UV light through a quartz window, ~20 min, whole chip at once; ~100–1000 cycles.

- **EEPROM** — electrically programmed and erased, **byte by byte, in circuit**; ~10⁴–10⁶ cycles; used for CMOS settings and small config stores.

- **Flash** — a type of EEPROM erased in **blocks/sectors** rather than bytes, hence much faster and denser; NOR (byte-readable, for BIOS) vs NAND (page-based, for SSD/pen drives).

- Close with the trend line: each step made reprogramming easier and cheaper, which is why modern BIOS is flash and can be updated in software.

P1-B8. Explain the memory hierarchy with a diagram, comparing cache, primary and secondary memory by capacity and speed. [10]

- Diagram: a pyramid. Apex at the top = **Registers**, then **L1 cache**, **L2/L3 cache**, **Main memory (RAM)**,

Secondary storage (HDD/SSD), base = **Tertiary/off-line (tape, optical)**. Label the left side of the pyramid

"**increasing speed and cost per bit ↑**" and the right side "**increasing capacity ↑ (downwards)**".

- Table:

Level	Typical capacity	Typical access time	Cost per bit	Managed by	Volatile
Registers	tens–hundreds of bytes	< 1 ns	Highest	Compiler/CPU	Yes
L1 cache	32–128 KB	1–2 ns	Very high	Hardware	Yes
L2/L3 cache	256 KB – 32 MB	3–20 ns	High	Hardware	Yes
Main memory	4–64 GB	50–100 ns	Medium	OS	Yes

SSD	128 GB – 4 TB	25–100 μ s	Low	OS/file system	No
Hard disk	500 GB – 20 TB	5–15 ms	Very low	OS/file system	No
Tape / optical	100 GB – PB	seconds–minutes	Lowest	Operator	No

- Explain the principle of locality (temporal, spatial) that makes the hierarchy work, hit ratio, and effective access time with a one-line worked example: $h = 0.9$, $t_{\text{cache}} = 2 \text{ ns}$, $t_{\text{main}} = 100 \text{ ns}$ $\rightarrow$ $\text{EAT} = 0.9(2) + 0.1(100) = 11.8 \text{ ns}$.

P1-B9. Explain the OSI reference model and the function of each layer. [10]

Deep treatment: [CORE_05_ComputerNetworks.md](#). Diploma answer needs the 7-layer table with one function line and the PDU name for each, plus a mnemonic ("All People Seem To Need Data Processing", top-down).

P1-B10. Explain the different network topologies with diagrams and compare them. [10]

Deep treatment: [CORE_05_ComputerNetworks.md](#). Diploma answer: sketch bus, star, ring, mesh, tree, hybrid; table comparing cable cost, ease of installation, fault tolerance, fault isolation, expandability, performance under load.

P1-B11. Explain the different options for connecting to the Internet and compare them. [10]

- Dial-up: modem over PSTN, up to 56 kbps, ties up the phone line, per-minute billing, obsolete.
- Leased line: dedicated permanent point-to-point circuit, symmetric, fixed monthly cost, high reliability, for organisations.
- ISDN: digital over copper; BRI = $2B + D = 2 \times 64 + 16 \text{ kbps}$; PRI = $30B + D$ in India/Europe.
- DSL/broadband: ADSL over the same copper, asymmetric, always on.
- VSAT: Very Small Aperture Terminal, satellite dish + indoor unit, works anywhere including remote areas, high latency (~500 ms round trip via geostationary), weather-affected, expensive.
- Cable, leased fibre, 3G/4G/5G mobile for completeness.
- Comparison table: speed, cost, availability, latency, symmetry, typical user.

P1-B12. What is a computer virus? Explain how it works and how to protect a PC against it. [10]

Full treatment in [CSDip_03_SystemAnalysisAndViruses.md](#) §1. Skeleton: definition; life cycle (dormant $\rightarrow$ propagation $\rightarrow$ triggering $\rightarrow$ execution); how it attaches and gains control; then the protection list (updated antivirus with real-time scanning, OS and application patching, firewall, scan removable media, disable macros, avoid unknown attachments and pirated software, least-privilege accounts, regular verified backups, write-protect, boot order and BIOS password).

P1-B13. Explain the features of MS Excel, the categories of functions available, and the components of a chart. [10]

Full treatment in [CSDip_02_MSOoffice_and_DOS.md](#). Skeleton: features (grid of cells, automatic recalculation, formulas and 400+ built-in functions, formatting, sorting/filtering, charts, pivot tables, what-if analysis, sharing); function categories with an example of each (Math & Trig — SUM, ROUND; Statistical — AVERAGE, COUNT, MAX; Logical — IF, AND, OR; Text — LEFT, CONCATENATE, LEN; Date & Time — NOW, TODAY, DATEDIF; Lookup & Reference — VLOOKUP, HLOOKUP, INDEX, MATCH; Financial — PMT, NPV, FV; Database — DSUM, DCOUNT); chart components (chart area, plot area, category/X axis, value/Y axis, data series, data points, data labels, legend, chart title, axis titles, gridlines) and chart types.

P1-B14. Explain Mail Merge in MS Word — what it is, when it is used, and the steps involved. [10]

Full treatment in [CSDip_02_MSOoffice_and_DOS.md](#). Skeleton: definition (combining a main document with a data source to produce many personalised copies); the two/three files involved; the six-step wizard in order (select document type $\rightarrow$ select starting document $\rightarrow$ select recipients $\rightarrow$ write your letter and insert merge

fields → preview your letters → complete the merge); insert merge field / address block / greeting line; filtering and sorting recipients; merge to new document vs directly to printer vs to email; applications (circulars, invitations, envelopes, mailing labels, certificates).

3.3 Section C — 15-mark questions (Paper-I)

P1-C1. Explain in detail the components of a motherboard, with a labelled diagram. [15]

Full treatment in [CSDip_01_HardwareAndDevices.md](#) §9. Skeleton:

- Definition and role — the main printed circuit board carrying the chipset, sockets, slots and connectors that interconnect every component.
- **Diagram to draw:** a large rectangle. Top-left = **CPU socket** with heatsink mount holes. To its right = 2–4 long **DIMM slots**. Below the socket = **MCH / Northbridge** (with heatsink), joined to the CPU by the **FSB / system bus**, to the DIMM slots by the **memory bus**, and downwards to the **AGP / PCIe x16** slot. Below the MCH = **ICH / Southbridge**, joined by an internal link. Around the ICH: **PCI slots** (row on the left-bottom), **primary and secondary IDE connectors** and **SATA ports** (right edge), **floppy connector (34-pin)**, **BIOS ROM chip**, **CMOS coin battery**, **super-I/O chip** driving the **serial, parallel, PS/2 keyboard (purple) and mouse (green)** back-panel connectors, **USB headers**, front-panel header. Top-right = **24-pin ATX SMPS connector**; near the CPU = **4/8-pin 12 V connector**. Add the **crystal oscillator / RTC** near the Southbridge, and **VRM capacitors** near the CPU socket.
- Then a component-by-component table: name | where it sits | function.
- **Memory Controller Hub (Northbridge)** — the fast half of the chipset. Handles: **system bus / FSB** to the CPU; the **processor socket** (LGA/PGA/ZIF, pin count, one CPU per socket); **DIMM slots** (168-pin SDRAM, 184-pin DDR, 240-pin DDR2/DDR3, 288-pin DDR4; notches prevent wrong insertion); **AGP** (dedicated 32-bit 66 MHz graphics port, 1x/2x/4x/8x, superseded by PCI Express x16).
- **I/O Controller Hub (Southbridge)** — the slow half. Handles: **primary and secondary IDE channels** (40-pin, two devices each, master/slave jumpers, 80-conductor cable for UDMA); **PCI bus** (32-bit, 33 MHz, 133 MB/s, plug-and-play); **serial ports** (DB-9, RS-232, bit-at-a-time, COM1/COM2); **parallel port** (DB-25, byte-at-a-time, LPT1, SPP/EPP/ECP modes); **PS/2 ports** (6-pin mini-DIN, purple keyboard / green mouse); **USB** (4-pin, hot-pluggable, up to 127 devices via hubs, 1.5/12/480 Mbps for USB 1.1/2.0, 5 Gbps USB 3.0, supplies 5 V power).
- **BIOS ROM** — firmware; POST, hardware initialisation, bootstrap loading, setup utility; flash so it can be updated.
- **CMOS battery** — CR2032 3 V lithium; keeps the CMOS RAM (BIOS settings) and RTC alive when the PSU is off; symptoms of failure.
- **Real Time Clock** — a low-power counter driven by a **32.768 kHz** crystal, keeping date and time independent of the OS.
- **SMPS connector** — ATX 20/24-pin main connector plus the 4-pin/8-pin 12 V CPU connector; rails at +3.3 V, +5 V, +12 V, -12 V, +5 V standby; the PS_ON signal lets the OS switch the supply off.
- Close: modern boards have collapsed the MCH into the CPU die, leaving a single PCH — mention as a one-line "current practice" note, it shows awareness. **△ verify** whether the examiner expects the legacy two-chip model; the syllabus wording (MCH + ICH) implies they do, so **answer the legacy model first** and add the modern note at the end.

P1-C2. Explain the various storage devices used in a computer system, classifying them and comparing capacity, speed and cost. [15]

- Classification tree: Primary (semiconductor: RAM — SRAM/DRAM; ROM — mask/PROM/EPROM/EEPROM/flash) | Secondary (magnetic: floppy, hard disk, tape; optical: CD/DVD/Blu-ray; solid state: SSD, pen drive, memory card) | Tertiary/offline (tape libraries, optical jukebox).
- Then take each in turn with construction, working, capacity and use, as in §3.2 B5–B8.
- Grand comparison table: device | capacity | access time | transfer rate | cost per GB | volatility | access method

(random/sequential).

- Close with the hierarchy diagram and the trade-off statement.

P1-C3. Explain the number systems used in computers and demonstrate all the conversions between them with examples. [15]

- Define positional number systems, base/radix, and the four systems with their digit sets.

- Table of the six conversion directions with the method and a worked example of each:

1. Decimal → binary (repeated division by 2, read remainders upwards): $156 \rightarrow 10011100$.

2. Binary → decimal (positional weights): $10011100 = 128 + 16 + 8 + 4 = 156$.

3. Decimal → octal / hex (repeated division by 8 / 16): $156 \rightarrow 234_8, 9C_{16}$.

4. Octal/hex → decimal (positional weights).

5. Binary ↔ octal (3-bit groups) and binary ↔ hex (4-bit groups) — the shortcut, no arithmetic needed.

6. Octal ↔ hex (go via binary).

- Fractional conversion: repeated multiplication by 2, read integer parts downwards. Worked: $0.6875 \rightarrow 0.1011$.

- Then binary arithmetic: addition rules and a worked sum; subtraction by borrowing; **1's complement subtraction** (add the 1's complement, then **end-around carry**) and **2's complement subtraction** (add the 2's complement, discard the carry) — both fully worked, and both cases (positive and negative results).

- Close with the reason all this matters: hardware can only add, so subtraction is done by complement addition, saving a subtractor circuit.

P1-C4. Explain the input and output devices of a computer in detail. [15]

- Definition and the role of the I/O units in the block diagram.

- Input devices, each with a short working description: keyboard (types — 84-key, 101/104-key enhanced, ergonomic, membrane vs mechanical, virtual; key groups — alphanumeric, numeric keypad, function, cursor control, special/modifier; how a keystroke is scanned into a scan code); mouse (mechanical/ball, optical, laser, wireless; scroll wheel; DPI); trackball, joystick, light pen, touch screen, digitiser tablet; scanners (flatbed, handheld, drum, sheet-fed; resolution in DPI, colour depth); OCR; OMR; MICR; bar-code reader; MIDI, microphone, webcam; smart-card reader; biometric devices.

- Output devices: monitors (CRT working with electron gun/deflection/phosphor/shadow mask, refresh rate, resolution, dot pitch; LCD working with liquid crystal, polarisers, backlight, TFT active matrix; LED and plasma for completeness) with the CRT vs LCD table; printers (impact vs non-impact, the three-way comparison table, working of each); plotters (drum, flatbed); speakers; projectors; COM (computer output on microfilm) for completeness.

- Close: a table of "device → is it input, output, or both" (touch screen, modem, NIC, hard disk and multifunction printer are **both**) — a very common MCQ and a good closing paragraph.

P1-C5. Explain the features of MS Word and any five of its important facilities in detail. [15]

Full treatment in [CSDip_02_MSOoffice_and_DOS.md](#). Skeleton: what a word processor is; the Word window components (title bar, ribbon and tabs, quick access toolbar, rulers, scroll bars, status bar, view buttons, zoom); creating, saving and editing; then five facilities in depth with steps: (1) formatting — character, paragraph, page; (2) tables — insert, merge/split, borders and shading, formula; (3) header/footer and footnote/endnote; (4) Mail Merge steps in order; (5) columns, Drop Cap, WordArt, text boxes/callouts/captions; plus spelling & grammar and AutoCorrect. Give menu paths.

P1-C6. Discuss the types of computer viruses, how to recognise an infection and how to deal with it. [15]

Full treatment in [CSDip_03_SystemAnalysisAndViruses.md](#). Skeleton: definition and life cycle; the six syllabus types explained separately with an example each (command processor infection, boot sector infection, executable file infection, file-specific infection, memory resident infection, macro virus); other malware for contrast (worm, trojan, ransomware, spyware, logic bomb); protection measures; symptoms of infection; and the step-by-step removal procedure (isolate → boot clean → scan → quarantine/clean → restore from backup → change passwords → patch the entry point).

P1-C7. Explain the seven layers of the OSI reference model in detail, with the function of each, and compare it with TCP/IP. [15]

Deep treatment: [CORE_05_ComputerNetworks.md](#). Diploma-level answer: 7-layer diagram, function table with PDU and example protocols/devices per layer, encapsulation walkthrough of one message top to bottom, then the OSI vs TCP/IP comparison table (layers, development order, protocol dependence, transport reliability, practical use).

4. Paper-II descriptive question bank

Paper-II covers: operating systems (with MS-DOS and Windows), UNIX, DBMS, System Analysis and Design, and programming in C.

Same structure: Section A any 8 of 10 × 5, Section B any 3 of 5 × 10, Section C any 2 of 4 × 15.

4.1 Section A — 5-mark questions (Paper-II)

P2-A1. Define an operating system and state any five of its functions. [5]

- Definition: system software acting as an interface between the user/applications and the hardware, managing resources.
- Functions: process management; memory management; file management; device/IO management; security and protection; user interface; job/resource scheduling; error detection; accounting.

P2-A2. Differentiate between multiprogramming and multitasking. [5]

- Multiprogramming: several programs in memory, CPU switched when the running one blocks on I/O; goal = CPU utilisation; batch context.
- Multitasking: time-shared multiprogramming; CPU switched on a time quantum; goal = interactive response; each user's task appears to run simultaneously.
- Table with 4 rows: switching trigger, objective, user interaction, example.

P2-A3. Differentiate between internal and external DOS commands, with examples. [5]

- Internal: built into COMMAND.COM, resident in memory, execute immediately, no disk file — DIR, COPY, DEL, REN, TYPE, CLS, MD, CD, RD, DATE, TIME, VER, PATH, PROMPT.
- External: separate executable files (.COM/.EXE) in the DOS directory, must be found on disk and loaded before running, can be deleted or missing — FORMAT, CHKDSK, XCOPY, ATTRIB, DISKCOPY, LABEL, TREE, EDIT, FDISK, SORT, FIND, MORE.
- Table: location, memory residency, speed, dependence on the DOS directory, effect if deleted.

P2-A4. What are the DOS system files? State the function of each. [5]

- IO.SYS — low-level device I/O routines, extends and interfaces with the BIOS; loaded first.
- MSDOS.SYS — the DOS kernel; file management, memory management, system calls (INT 21h).
- COMMAND.COM — the command interpreter/shell; displays the prompt, contains the internal commands, loads and runs external programs.
- Add: IO.SYS and MSDOS.SYS are hidden, read-only, system files; all three are placed by `FORMAT /S` or `SYS C:.`

P2-A5. Explain the difference between .BAT, .COM and .EXE files. [5]

- Table: file type (ASCII text vs binary vs binary); who executes it (COMMAND.COM interprets line by line / loaded and run directly); size limit (none / ≤64 KB one segment / no practical limit, multi-segment); relocation header (n/a / none / yes); load speed; typical use.
- End with the execution priority: **.COM before .EXE before .BAT.**

P2-A6. What is booting? Differentiate between cold and warm booting. [5]

- Booting: the process of loading the operating system into main memory and preparing the machine for use.
- Cold boot: from power-off; full POST is run; started by the power switch.

- Warm boot: with power already on; POST is skipped or shortened; Ctrl+Alt+Del or the reset button.
- One-line note on why warm booting is faster and when a cold boot is necessary (hardware left in a bad state).

P2-A7. Explain the structure of the UNIX operating system. [5]

- Layered diagram: **Hardware** at the centre → **Kernel** → **Shell** → **Application/utility programs** → **User** at the outside. Draw as concentric circles.
- Kernel: the core; memory, process, file and device management; the only layer that talks to the hardware.
- Shell: the command interpreter; reads commands, expands wildcards, handles redirection and pipes; types — Bourne (sh), C (csh), Korn (ksh), Bash.
- Utilities: the several hundred small programs (`ls`, `grep`, `wc`, `sort` ...).

P2-A8. What is the difference between `cmp`, `comm` and `diff`? [5]

- `cmp` — byte-by-byte comparison of two files; reports the byte and line of the **first** difference; works on binary files too.
- `comm` — compares two **sorted** files and produces three columns: lines only in file1, only in file2, in both.
- `diff` — reports the **changes needed** to convert file1 into file2, in an editor-script form (`a` append, `c` change, `d` delete).
- One line each on typical use.

P2-A9. Define data, information, database and DBMS. [5]

- Data: raw unprocessed facts and figures.
- Information: data processed into a form that is meaningful and useful for decision-making.
- Database: an organised, integrated, shared collection of related data stored with controlled redundancy.
- DBMS: the software that defines, creates, stores, manipulates, controls and maintains a database.
- Close with the data → processing → information diagram in one line.

P2-A10. What are the functions of a Database Administrator (DBA)? [5]

- Schema definition and modification; storage structure and access-method definition; granting authorisation and access control; integrity constraint specification; performance monitoring and tuning; backup and recovery planning; liaison with users; data dictionary maintenance.

P2-A11. Differentiate between a base table and a view. [5]

- Base table: physically stored, has its own data, named relation in the database.
- View: a virtual/derived table defined by a stored query; no data of its own; recomputed on reference; provides logical data independence and security; may or may not be updatable.
- Table with 5 rows.

P2-A12. Define a system. State any five characteristics of a system. [5]

- Definition: an organised set of interrelated and interdependent components working together towards a common objective.
- Characteristics: organisation; interaction; interdependence; integration; central objective; boundary and environment; inputs/processing/outputs; feedback and control.

P2-A13. Differentiate between an open system and a closed system. [5]

- Open: exchanges matter, energy or information with its environment; adapts; e.g. a business information system, a living organism.
- Closed: isolated, no environmental interaction, self-contained, tends to decay/entropy; only relatively closed systems exist in practice; e.g. a sealed chemical reaction, a stand-alone offline program.
- Table with 4–5 rows.

P2-A14. What is the role of a system analyst? [5]

- Investigator and fact-finder; problem definer; analyst of the existing system; designer of the proposed system; liaison and communicator between users and programmers; change agent; motivator; project manager; documenter; evaluator after implementation.

P2-A15. Differentiate between an algorithm and a flowchart. [5]

- Algorithm: a finite, ordered, unambiguous step-by-step *textual* procedure to solve a problem.

- Flowchart: a *graphical/pictorial* representation of the same, using standard symbols.
- Table: representation, symbols, ease of understanding, ease of modification, language dependence, suitability for complex logic.
- List the flowchart symbols: oval (start/stop), parallelogram (input/output), rectangle (process), diamond (decision), arrow (flow line), circle (connector).

P2-A16. Explain the hierarchy (precedence) of operators in C. [5]

- Table from highest to lowest: `() [] . ->` → unary `! ~ ++ -- + - * & sizeof` (right-to-left) → `* / %` → `+ -` → `<< >>` → `< <= > >=` → `== !=` → `&` → `^` → `||` → `&&` → `||` → `?:` → assignment `= += -= ...` (right-to-left) → comma `,`.
- One worked example: `a = 2 + 3 * 4 % 5` → `3*4 = 12, 12%5 = 2, 2+2 = 4`.

P2-A17. Differentiate between `while` and `do-while` loops in C. [5]

- Entry-controlled vs exit-controlled; condition tested before vs after the body; minimum executions 0 vs 1; syntax including the semicolon after `while` in `do-while`; when each is preferable.
- Add a tiny code example of each producing different output when the condition is false at the start.

P2-A18. Differentiate between `printf/scanf` and `getchar/putchar`. [5]

- Formatted vs unformatted I/O; multiple values with conversion specifiers vs a single character; header `<stdio.h>` for all; buffering; `getch/putch` from `<conio.h>` are non-standard, non-echoing, DOS/Turbo-C specific.

P2-A19. What is the difference between `break` and `continue` in C? [5]

- `break`: terminates the innermost loop or `switch` entirely; control passes to the statement after it.
- `continue`: skips the rest of the current iteration and jumps to the next iteration's update/test; only valid in loops.
- Small code trace for both over `for (i=1; i<=5; i++)`.

P2-A20. Differentiate between FCFS and SJF scheduling. [5]

- Table: selection criterion, preemption, average waiting time, starvation possibility, convoy effect, implementability (SJF needs the burst time to be known/estimated).

P2-A21. What is thrashing? [5]

- Definition: a state in which the system spends more time paging (swapping pages in and out) than executing processes.
- Cause: degree of multiprogramming too high → each process's resident set falls below its working set → page fault rate explodes → CPU utilisation collapses → the scheduler adds more processes → worse.
- Draw the CPU-utilisation vs degree-of-multiprogramming curve (rises, peaks, then falls off a cliff).
- Cures: working-set model, page-fault frequency control, reduce multiprogramming, add memory, local page replacement.

P2-A22. Explain the terms authentication, authorisation and access control in database security. [5]

- Authentication: verifying *who you are* (username/password, biometrics, certificates).
- Authorisation: deciding *what you are allowed to do* (GRANT/REVOKE of SELECT, INSERT, UPDATE, DELETE on objects).
- Access control: the mechanism that enforces authorisation at access time — discretionary (DAC, owner grants), mandatory (MAC, labels/clearances), role-based (RBAC).
- Enforcement: the DBMS checks every request against the authorisation catalogue; views and stored procedures are used to restrict at row/column granularity; audit trails record attempts.

4.2 Section B — 10-mark questions (Paper-II)

P2-B1. Explain the evolution of operating systems from serial processing to multitasking. [10]

Deep treatment: `CORE_03_OperatingSystems.md`. Skeleton: serial/manual processing (no OS, sign-up sheet, setup time); simple batch (resident monitor, JCL, job sequencing); multiprogrammed batch (several jobs in memory, overlap CPU with I/O, needs memory protection and interrupts); time-sharing/multitasking (quantum, interactive terminals, CTSS/MULTICS/UNIX); multiprocessing (multiple CPUs, symmetric vs

asymmetric); real time (hard vs soft deadlines); distributed and network OS; modern mobile/embedded. For each: the problem it solved and the hardware feature it needed.

P2-B2. Explain FCFS, SJF, Priority and Round Robin scheduling, and compute the average waiting time for a given set of processes. [10]

Deep treatment: [CORE_03_OperatingSystems.md](#). Skeleton: define the metrics first (arrival time, burst time, completion, turnaround = completion – arrival, waiting = turnaround – burst, response time). Then each algorithm in 3 lines + a **Gantt chart** + a table of WT and TAT. **Always draw the Gantt chart — it is where the marks are.** Use one common process set across all four so the comparison is direct, e.g. P1(0,7) P2(2,4) P3(4,1) P4(5,4). Close with a comparison table: preemptive?, starvation?, optimal for?, suitable for?

P2-B3. Describe the booting process of a PC running MS-DOS, step by step. [10]

Full treatment in [CSDip_02_MSOoffice_and_DOS.md](#). Skeleton, in strict order:

1. Power on → SMPS asserts Power Good → CPU reset, jumps to the BIOS entry vector (FFFF:0000).
 2. **POST** — BIOS tests CPU, memory, keyboard, video, ports; beep codes signal failure.
 3. BIOS reads the boot order from CMOS, loads the **boot sector (512 bytes)** of the first bootable device into memory at 0000:7C00 and jumps to it.
 4. The boot record checks for and loads **IO.SYS**.
 5. IO.SYS loads **MSDOS.SYS** (the kernel), which initialises the file system and internal data structures.
 6. **CONFIG.SYS** is read — DEVICE=, FILES=, BUFFERS=, LASTDRIVE=, SHELL=.
 7. **COMMAND.COM** is loaded (the command interpreter) in two parts, resident and transient.
 8. **AUTOEXEC.BAT** is executed — PATH, PROMPT, environment, TSRs, launching an application.
 9. The DOS prompt **C:\>** appears; the system is ready.
- Then define cold vs warm boot and the role of the bootstrap loader.

P2-B4. Explain the internal and external commands of MS-DOS with syntax and examples. [10]

Full treatment in [CSDip_02_MSOoffice_and_DOS.md](#). Skeleton: the internal/external distinction (as in P2-A3); then two tables:

Internal	Syntax	Purpose
DIR	<code>DIR [drive:][path] [/P] [/W] [/A] [/S] [/O]</code>	List directory contents
COPY	<code>COPY source destination</code>	Copy files
DEL / ERASE	<code>DEL filename</code>	Delete files
REN	<code>REN oldname newname</code>	Rename
TYPE	<code>TYPE filename</code>	Display a text file
MD / CD / RD	<code>MD dirname etc.</code>	Create / change / remove directory
CLS, DATE, TIME, VER, VOL, PATH, PROMPT	—	Console and environment

External	Syntax	Purpose
FORMAT	<code>FORMAT drive: [/S] [/Q] [/U]</code>	Format a disk; <code>/S</code> makes it bootable

CHKDSK	CHKDSK [drive:] [/F]	Check the disk and FAT, report/fix errors
XCOPY	XCOPY source dest [/S] [/E] [/V]	Copy directories and subdirectories
ATTRIB	ATTRIB [+R -R][+H -H][+S -S][+A -A] file	Change file attributes
DISKCOPY, LABEL, TREE, MORE, SORT, FIND, EDIT, FDISK, DEFRAG, SYS	—	—

- Add wildcards (*, ?), redirection (>, >>, <) and the pipe (|) with one example each: `DIR *.TXT > LIST.TXT`, `DIR | MORE`.

P2-B5. Explain the essential UNIX file-processing commands with their options. [10]

Deep treatment: `CORE_04_UnixLinux.md`. Skeleton: a table of command | syntax | purpose | key options, covering `wc` (-l -w -c), `head/tail` (-n, -f), `cut` (-c -d -f), `paste` (-d), `join` (-1 -2), `split` (-l), `sort` (-n -r -k -u), `grep/egrep` (-i -v -n -c -l -w), `tr` (-d -s), `comm`, `cmp`, `diff`, `more/less`, `pr` (-h -n -d -l), `lp`. Then 4–5 worked pipeline examples: `sort emp.txt | uniq -c | sort -nr | head -5`.

P2-B6. What is an E-R model? Draw and explain an E-R diagram for a library system. [10]

Deep treatment in the shared DBMS notes. Skeleton: definition; the symbols table (rectangle = entity, double rectangle = weak entity, ellipse = attribute, double ellipse = multivalued, dashed ellipse = derived, underlined = key, diamond = relationship, lines = participation, double line = total participation); cardinality 1:1, 1:N, M:N.

- **Diagram to draw:** entities **BOOK** (Book_ID key, Title, Author, Publisher, Price), **MEMBER** (Member_ID key, Name, Address, Phone), **LIBRARIAN**. Relationship diamond **ISSUED_TO** between BOOK and MEMBER, M:N, with attributes Issue_Date and Due_Date on the relationship. Relationship **MANAGES** between LIBRARIAN and BOOK.
- Then explain the mapping of the diagram to relational tables, showing that the M:N relationship becomes its own table with a composite key.

P2-B7. Explain the SQL data definition and data manipulation statements with examples. [10]

Deep treatment in the shared DBMS notes. Skeleton: DDL — CREATE TABLE with data types and constraints (PRIMARY KEY, FOREIGN KEY, NOT NULL, UNIQUE, CHECK, DEFAULT), ALTER TABLE ADD/MODIFY/DROP, DROP TABLE, TRUNCATE, CREATE VIEW/INDEX. DML — INSERT, UPDATE, DELETE, SELECT with WHERE, ORDER BY, GROUP BY, HAVING, aggregate functions, joins, subqueries. **Write actual SQL for every one** on a single EMPLOYEE(empno, name, dept, salary) example — examiners give marks for the syntax being right, not the prose.

P2-B8. Explain the phases of the System Development Life Cycle (SDLC). [10]

Full treatment in `CSDip_03_SystemAnalysisAndViruses.md` §2. Skeleton: draw the waterfall diagram; then each phase with its purpose, activities, who does it, and the deliverable it produces:

1. Preliminary investigation / recognition of need — feasibility study (technical, economic, operational, schedule, legal) → feasibility report.
2. Requirement analysis / system analysis — fact-finding (interview, questionnaire, observation, record review), DFDs, data dictionary → SRS.
3. System design — logical then physical; output, input, file/database, procedure and control design → design specification.
4. Coding / development → source code.

5. Testing — unit, integration, system, acceptance → test reports.
 6. Implementation / conversion — direct, parallel, pilot, phased; training; file conversion → live system.
 7. Maintenance and review — corrective, adaptive, perfective, preventive.
- Close with a line on why it is a *cycle*: maintenance eventually triggers a new investigation.

P2-B9. Discuss the factors causing failure in the SDLC. [10]

Full treatment in [CSDip_03_SystemAnalysisAndViruses.md](#) §2. Skeleton, grouped: (a) requirements — incomplete, ambiguous, changing scope/"scope creep"; (b) management — unrealistic schedules and budgets, poor planning, weak project control, inadequate resources; (c) people — lack of top-management support, no user involvement, poor communication between analyst and user, user resistance to change, inadequate training, staff turnover; (d) technical — wrong technology choice, poor design, inadequate testing, poor documentation; (e) process — skipping phases, no feasibility study, no change control, no risk management. Give a one-line remedy for each group.

P2-B10. Write a C program to (a) find the largest of three numbers and (b) print the Fibonacci series up to n terms. Explain the logic. [10]

- Write the full program with `#include`, `main()`, declarations, input, logic, output and `return 0`. Indent it. Add 3–4 lines of explanation and a dry run for a sample input.
- Fibonacci logic: initialise `a=0`, `b=1`; print; loop `n-2` times computing `c=a+b`, print `c`, shift `a=b`, `b=c`. Handle `n=1` and `n=2` as special cases.

P2-B11. Explain arrays in C — declaration, initialisation, one- and two-dimensional — with examples. [10]

Deep treatment in the shared C notes. Skeleton: definition (a collection of homogeneous elements in contiguous memory, accessed by index); declaration syntax; zero-based indexing; initialisation at declaration and at run time; memory layout diagram; 2-D arrays as arrays of arrays, row-major storage, address calculation formula `addr = base + [(i × ncols) + j] × size`; passing an array to a function (name decays to a pointer, so it is effectively by reference); one worked program (sum of an array, or matrix addition).

P2-B12. Explain memory management in an operating system: partitioning, paging and segmentation. [10]

Deep treatment: [CORE_03_OperatingSystems.md](#). Skeleton: purpose of memory management; contiguous allocation (single, fixed partition, variable partition; first/best/worst fit; internal vs external fragmentation, compaction); paging (frames and pages, page table, logical-to-physical translation diagram, no external fragmentation, TLB); segmentation (variable-size logical units, segment table with base and limit, matches the program's structure, external fragmentation returns); segmentation with paging. Include the address-translation diagram for paging — it is where the marks concentrate.

P2-B13. Explain the Windows desktop and file/folder management operations. [10]

Full treatment in [CSDip_02_MSOoffice_and_DOS.md](#). Skeleton: desktop components (icons, taskbar, Start button/menu, notification area, shortcuts, Recycle Bin); window anatomy (title bar, minimise/maximise/restore/close, menu/ribbon, scroll bars, status bar, borders) and operations (open, close, move by dragging the title bar, resize by dragging a border, minimise, maximise, restore, switch with Alt+Tab, arrange/cascade/tile); Windows Explorer / File Explorer navigation pane and tree; file and folder operations (create, rename F2, copy Ctrl+C/Ctrl+V, move Ctrl+X, delete Del vs Shift+Del, restore from Recycle Bin, search, properties, attributes, sharing); Accessories (Notepad, WordPad, Paint, Calculator, Character Map, Snipping Tool) with what each is for; a one-paragraph version history table.

4.3 Section C — 15-mark questions (Paper-II)

P2-C1. Explain MS-DOS in detail: its features, booting process, system files, and internal and external

commands. [15]

Full treatment in [CSDip_02_MSOoffice_and_DOS.md](#). Combine P2-A3, P2-A4, P2-B3 and P2-B4 into one structured answer with headings. Add: features and characteristics of MS-DOS (single-user, single-tasking, 16-bit, CUI/command-line, 8.3 file naming, hierarchical directory structure, FAT12/FAT16 file system, 640 KB conventional memory limit, no built-in networking or GUI, small footprint); the directory tree diagram with root, subdirectories, path and the \ separator; wildcards, redirection and piping; and the CONFIG.SYS / AUTOEXEC.BAT roles.

P2-C2. Explain the UNIX operating system: its history, features, structure, and the essential commands with examples. [15]

Deep treatment: [CORE_04_UnixLinux.md](#). Skeleton: history (Bell Labs 1969, Thompson and Ritchie, rewritten in C in 1973, AT&T System V vs BSD, POSIX, Linux); features (multi-user, multitasking, portability because written in C, hierarchical file system, security through ownership and permissions, shell programming, pipes and filters, device independence — everything is a file); the concentric structure diagram (hardware → kernel → shell → utilities → user); hardware requirements; then grouped command tables — session ([login](#), [passwd](#), [who](#), [who am i](#), [tty](#), [date](#), [cal](#), [exit](#), [shutdown](#)); file and directory ([ls](#), [cat](#), [cp](#), [mv](#), [rm](#), [mkdir](#), [rmdir](#), [cd](#), [pwd](#)); processing ([wc](#), [head](#), [tail](#), [cut](#), [paste](#), [sort](#), [grep](#), [tr](#), [comm](#), [cmp](#), [diff](#)); printing ([pr](#), [lp](#)); help ([man](#)); maths ([bc](#), [expr](#), [factor](#), [units](#)); communication ([write](#), [wall](#), [mail](#)). Give a worked example for at least eight of them.

P2-C3. Explain the concept of a system, its characteristics, elements and types, with examples. [15]

Full treatment in [CSDip_03_SystemAnalysisAndViruses.md](#) §2. Skeleton: definition; the characteristics (organisation, interaction, interdependence, integration, central objective); the elements with a **diagram** (inputs → processing → outputs, with feedback and control loops, inside a boundary, within an environment, with interfaces to other systems); the types with examples for each pair — physical vs abstract, open vs closed, deterministic vs probabilistic, man-made vs natural, permanent vs temporary, adaptive vs non-adaptive; then information systems as a class — TPS, MIS, DSS, ESS/EIS, OAS, KMS — with a pyramid diagram showing which organisational level each serves. Close with an example worked through: a college admission system, identified against every characteristic and element.

P2-C4. Explain the System Development Life Cycle in detail: all phases, the role of the system analyst, and the factors causing failure. [15]

Full treatment in [CSDip_03_SystemAnalysisAndViruses.md](#) §2. Combine P2-B8, P2-B9 and P2-A14. Structure: (i) definition and the waterfall diagram; (ii) each of the seven phases with activities and deliverables; (iii) the role of the analyst, mapped phase by phase (in analysis he is a fact-finder, in design an architect, in implementation a trainer and change agent); (iv) failure factors grouped as in P2-B9; (v) a closing paragraph on how iterative/prototyping models address the waterfall's weaknesses.

P2-C5. Explain the relational model in detail: relations, domains, keys, base tables and views, and the SQL language. [15]

Deep treatment in the shared DBMS notes. Skeleton: Codd's relational model; terminology table (relation/table, tuple/row, attribute/column, degree, cardinality, domain); properties of a relation (no duplicate tuples, unordered tuples and attributes, atomic values); kinds of relations (base, view/virtual, snapshot, query result, temporary); keys (super, candidate, primary, alternate, foreign, composite) each with a definition and an example from one running schema; relations and predicates (a relation is the extension of a predicate — Date's framing, which is what the syllabus wording points at); then SQL DDL and DML as in P2-B7, plus views (CREATE VIEW, updatability), and a closing note on query optimisation.

P2-C6. Discuss CPU scheduling in detail: the criteria, and FCFS, SJF, Priority, Round Robin and

multiprocessor scheduling, with examples. [15]

Deep treatment: `CORE_03_OperatingSystems.md`. Skeleton: the CPU–I/O burst cycle; when scheduling decisions occur; preemptive vs non-preemptive; the scheduling criteria (CPU utilisation, throughput, turnaround time, waiting time, response time — say which are maximised and which minimised); then each algorithm with a Gantt chart and a WT/TAT table on one common process set; SJF preemptive (SRTF) as well; priority scheduling and starvation/aging; Round Robin and the effect of quantum size (too large → FCFS; too small → context-switch overhead dominates); multilevel queue and multilevel feedback queue; multiprocessor scheduling (asymmetric vs symmetric SMP, load balancing — push and pull migration, processor affinity). Close with the comparison table.

P2-C7. Explain control statements and loops in C in detail, with syntax, flowcharts and examples. [15]

Deep treatment in the shared C notes. Skeleton: the three structured-programming constructs (sequence, selection, iteration); then each statement with **syntax + flowchart + short example + output**: `if`, `if-else`, nested `if`, `else-if` ladder, `switch-case` (with the role of `break` and `default`, and the restriction to integral/character constant labels), `goto` (and why to avoid it); loops `for`, `while`, `do-while` with the entry/exit-controlled distinction, nested loops; jump statements `break`, `continue`, `return`. Include a comparison table of the three loops (initialisation/test/update placement, entry or exit controlled, minimum iterations, best use case) and one complete program using several of them (e.g. a menu-driven calculator using `switch` inside a `do-while`).

P2-C8. Explain database security: authentication, authorisation, access control and enforcement mechanisms. [15]

Deep treatment in the shared DBMS notes. Skeleton: the threats first (loss of integrity, availability and confidentiality; unauthorised access; inference; SQL injection; insider misuse); countermeasures — access control, inference control, flow control, encryption; authentication (something you know/have/are, password policy, OS vs DBMS authentication); authorisation (GRANT and REVOKE syntax with examples, privilege types, WITH GRANT OPTION and cascading revocation, roles); access-control models (DAC, MAC with Bell–LaPadula labels, RBAC) compared in a table; enforcement (the DBMS authorisation catalogue checked at parse/execute time, views for row and column restriction, stored procedures, audit trails, encryption at rest and in transit, backup and recovery). Close with a short paragraph on SQL injection as the most common practical failure of enforcement and its prevention by parameterised queries.

5. Final drill discipline — the last 10 days

Day	Drill
Daily	30 MCQs from a set you did not do yesterday, timed at 30 s each
Alternate days	Two skeletons written cold from §3 or §4, 3 minutes each, then compared
26 Sept	Full 100-question MCQ mock, 2 hours, negative marking scored
27 Sept	Full Paper-I mock: pick Q1–Q10 from §3.1, Q11–Q15 from §3.2, Q16–Q19 from §3.3. Sit 3 hours, by hand
28 Sept	Full Paper-II mock built the same way from §4. Sit 3 hours, by hand
29 Sept am	Re-read the answer keys' trap notes only. Nothing else

Write by hand for the mocks. Three hours of continuous handwriting is a physical skill. If your hand is going to cramp, find out on 27 September, not at 2:30 pm on 29 September.

Appendix — numbers most likely to be asked

Fact	Value
ASCII bits / characters	7 bits / 128 characters (extended 8-bit / 256)
EBCDIC	8-bit, IBM
Unicode UTF-8 / UTF-16 / UTF-32	8–32 bits variable / 16 bits (BMP) / 32 bits
Nibble / byte / word	4 / 8 / 16–64 bits
1 KB / MB / GB / TB	2^{10} / 2^{20} / 2^{30} / 2^{40} bytes
BCD valid codes	0000–1001 only; 1010–1111 invalid
Floppy 5.25" DD / HD	360 KB / 1.2 MB
Floppy 3.5" DD / HD	720 KB / 1.44 MB
Hard disk sector size	512 bytes (4096 in Advanced Format)
CD capacity / 1x speed	650–700 MB / 150 KB/s
DVD capacity / 1x speed	4.7 GB SL, 8.5 GB DL / 1.38 MB/s
Blu-ray capacity	25 GB per layer
CD / DVD / BD laser wavelength	780 nm / 650 nm / 405 nm
IDE connector pins	40 (80-conductor cable for UDMA)
Floppy connector pins	34
SCSI-1 connector pins	50
Serial port	DB-9 male (also DB-25)
Parallel port	DB-25 female
PS/2 colours	Purple = keyboard, green = mouse
PS/2 connector	6-pin mini-DIN
USB 1.1 / 2.0 / 3.0 speeds	12 Mbps / 480 Mbps / 5 Gbps
USB max devices	127
ATX main power connector	20-pin (24-pin ATX12V 2.0)
CMOS battery	CR2032, 3 V lithium
RTC crystal	32.768 kHz

PCI bus	32-bit, 33 MHz, 133 MB/s
OSI layers	7
DOS file naming	8.3
DOS conventional memory	640 KB
DOS execution priority	.COM → .EXE → .BAT
ISDN BRI	$2B + D = 2 \times 64 + 16$ kbps
Dial-up maximum	56 kbps
Rotational latency at 7200 RPM	4.17 ms average
MCQ negative marking	$-1/3$ of 2 = -0.667