

Problem Solving With Computational Thinking

Session-2



CLARUSWAY©
WAY TO REINVENT YOURSELF



Review

- ▶ What is CT?
Problem solving
technique for humans
to ease life




CLARUSWAY©
WAY TO REINVENT YOURSELF

► Review



- Decomposition
- Pattern Recognition
- Abstraction
- Algorithm Design

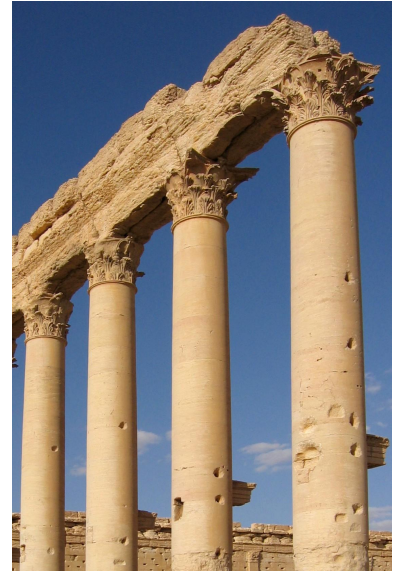

► Review



Algorithm

- Step by step
- Clearly defined
- One simple job at a time
- Instruct computer what to do





Find the “?”


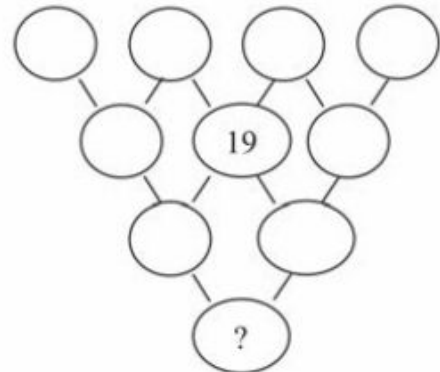


Table of Contents

- ▶ Abstraction
- ▶ Pseudocode
- ▶ Flowchart


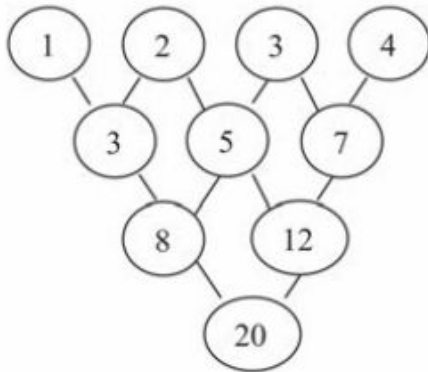


Abstraction

Abstraction is getting rid of the useless information that is not going to have any contribution to the solution.

Abstraction is the core concept of computer science and computational thinking. To be able to express a real world problem to a computer, the problem has to be abstract.

THE ABSTRACT-O-METER

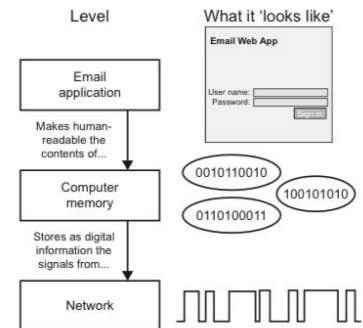

Let's abstract stuff!

The key part of abstraction is ignoring the useless aspects of something and including the beneficial aspects. So, find out the useless aspects that are going to be ignored and the beneficial aspects that are going to be considered of the items below. Try going abstract as far as possible. (For example a house is nothing but a shelter for humans when you look abstractly)

Car



Pencil



House



Mobile phone



HINT: Think of what do these objects help solving and which aspects of them wouldn't prevent them from solving that particular problem.



Students, write your response!



► Let's Abstract Stuff!

The abstractions should look something like this:

Object	Include	Ignore
Car	Engine, tires, rims, seat	Color, shape, trunk, radio
Pencil	color of the tip, grip	material, brand, type
Mobile phone	speaker, microphone, cellular	color, brand, camera



► Recap Time





1

Pseudocode



Pseudocode

Let's discuss and try to predict what does pseudocode mean!





Pseudocode


- Pseudocodes are one of two popular ways to represent an algorithm.
- Pseudocode is an informal way of representing a computer program or an algorithm.
- It looks like a programming language though, it should be written in a programming language for it to be executed. It's language-agnostic.
- Writing pseudocode is basically writing what you want your program to do in English.
- Aims to mimic the general style of a programming language

```
OUTPUT 'What is your name?'
INPUT user inputs their name
STORE the user's input in the name variable
OUTPUT 'Hello' + name
OUTPUT 'How old are you?'
INPUT user inputs their age
STORE the user's input in the age variable
IF age >= 70 THEN
    OUTPUT 'You are aged to perfection!'
ELSE
    OUTPUT 'You are a spring chicken!'
```



Pseudocode


```
OUTPUT 'What is your name?'
INPUT user inputs their name
STORE the user's input in the name variable
OUTPUT 'Hello' + name
OUTPUT 'How old are you?'
INPUT user inputs their age
STORE the user's input in the age variable
IF age >= 70 THEN
    OUTPUT 'You are aged to perfection!'
ELSE
    OUTPUT 'You are a spring chicken!'
```






Pseudocode

```
OUTPUT 'What is your name?'
INPUT user inputs their name
STORE the user's input in the name variable
OUTPUT 'Hello' + name
OUTPUT 'How old are you?'
INPUT user inputs their age
STORE the user's input in the age variable
IF age >= 70 THEN
    OUTPUT 'You are aged to perfection!'
ELSE
    OUTPUT 'You are a spring chicken!'
```

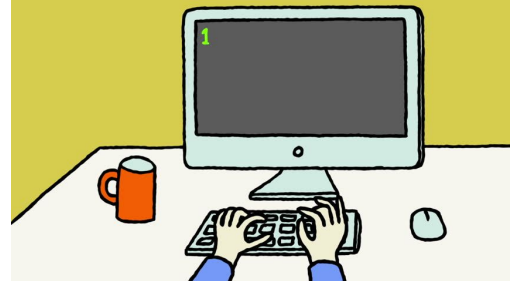

Pseudocode

```
OUTPUT 'What is your name?'
INPUT user inputs their name
STORE the user's input in the name variable
OUTPUT 'Hello' + name
OUTPUT 'How old are you?'
INPUT user inputs their age
STORE the user's input in the age variable
IF age >= 70 THEN
    OUTPUT 'You are aged to perfection!'
ELSE
    OUTPUT 'You are a spring chicken!'
```





Keyword

There are these keywords that are widely used, you can use your own keywords, but these are the most frequently used amongst other computer programmers and should not be used as variable names.

```
START, BEGIN: This is the start of your pseudocode.  
INPUT: This is data retrieved from the user through the input device.  
READ, GET: This is used when reading data from a data file.  
PRINT, DISPLAY, SHOW, OUTPUT: This will show your output to a screen.  
COMPUTE, CALCULATE: To calculate the result of the expression.  
SET, INIT: To initialize values  
INCREMENT, BUMP: To increase the value of a variable  
DECREMENT: To reduce the value of a variable  
END: This is the end of your pseudocode
```



Example

Set total to zero

Set grade counter to one

While grade counter is less than or equal to ten

 Input the next grade

 Add the grade into the total

Set the class average to the total divided by ten

Print the class average.





Question

Let's write a pseudocode for calculating Mary's wage.

Inputs : hours and rate

Output: pay



Students, write your response!

Pear Deck Interactive Slide
Do not remove this bar

19



Let's brew coffee

- ▶ Prepare ingredients
- ▶ Make coffee
- ▶ Prepare serving
- ▶ Enjoy





IF - ELSE IF - ELSE

This keyword is used if a certain condition has to be met for the upcoming block to be executed. For example:

```
IF you are happy      If you are tired
    Then smile        Then rest
                        else if you are stressed
                        Then relax
ENDIF                else
                       Keep working
```

As you can see we also use indentation in order to declare that "smile" is being executed **inside** the if statement above it.



IF - ELSE IF - ELSE

This keyword is used if a certain condition has to be met for the upcoming block to be executed. For example:


```
IF you are happy      If you are tired
    Then smile        Then rest
                        else if you are stressed
                        Then relax
ENDIF                else
                       Keep working
```

As you can see we also use indentation in order to declare that "smile" is being executed **inside** the if statement above it.



IF - ELSE IF - ELSE

This keyword is used if a certain condition has to be met for the upcoming block to be executed. For example:

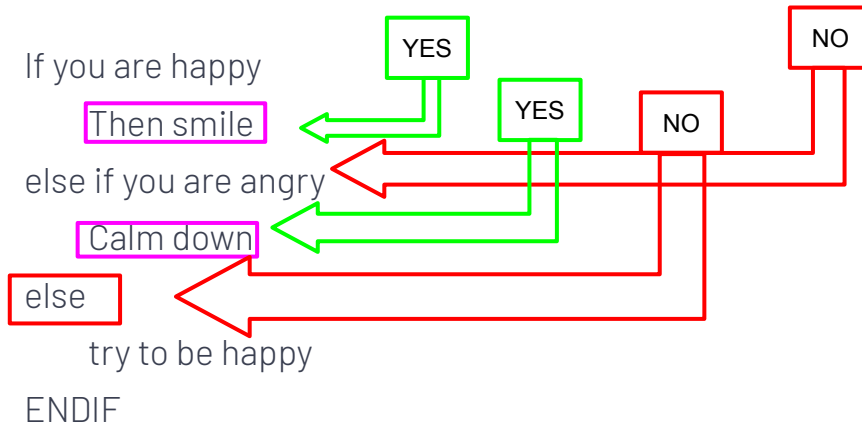

IF - ELSE IF - ELSE

```
Begin
INPUT hours, rate
IF hours < 40
THEN
    pay = hours * rate
ELSE
    pay = 40 * rate + (hours - 40) * rate * 1.5
OUTPUT pay
End
```

FOR structure



For loop runs for each element inside a group. For example:

For every day of the week

Count;

endfor

FOR structure



For loop runs for each element inside a group.

For example:

For every 25 minutes of study

Earn one Pomodoro;



Pomodoro = Pomodoro +1



endfor



▶ WHILE Structure

While is similar to the for loop, differently it runs the loop until the condition provided is **unsatisfied**. Example:

Apples = 5

Oranges = 10

While apples < oranges

 increase apples;

endwhile



▶ Exercise

Write a pseudocode that takes a number as an input and prints true if it is greater than 10 and false otherwise.





▶ Let's wash the dishes

Let's wash the dishes. Think that we have all the tools etc.



▶ Let's wash the dishes

```
gather the dirty dishes
if you have a dishwasher around you
    put the dirty dishes inside the dishwasher
    set the settings of the dishwasher
    while the time set is not over
        wait
else
    while dishes are not clean
        take one of the dishes
        wash it with your hand
        dry it and put it aside
```






Kahoot!



2

Flowcharts

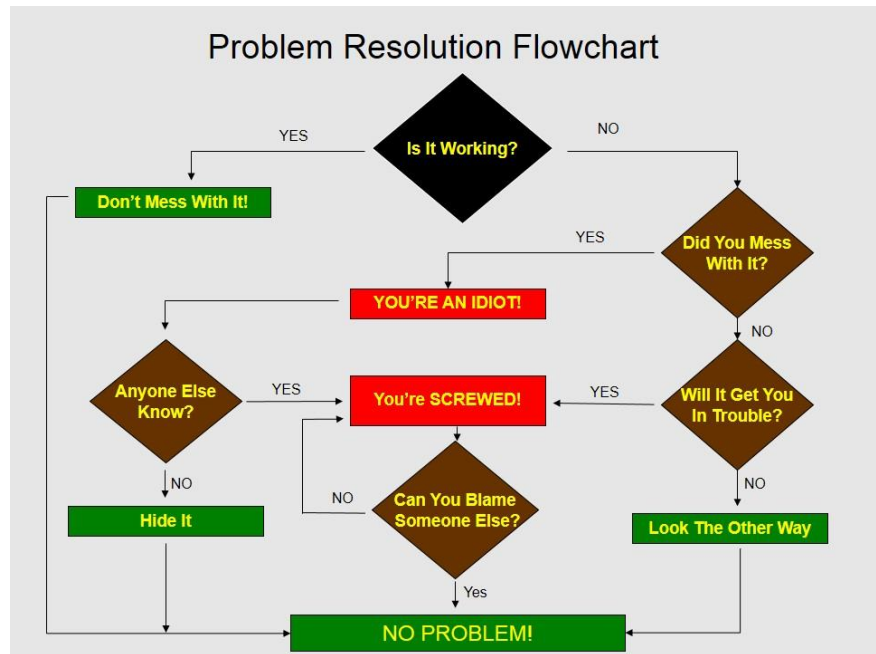

► Flowcharts




- A flowchart is a diagram that represents a sequence of instructions.
- Flowcharts have standard symbols to represent different instructions.

Name	Symbol	Usage
Start or Stop		The beginning and end points in the sequence.
Process		An instruction or a command.
Decision		A decision, either yes or no.
Input or Output		An input is data received by a computer. An output is a signal or data sent from a computer.
Connector		A jump from one point in the sequence to another.
Direction of flow		Connects the symbols. The arrow shows the direction of flow of instructions.



Login Diagram

A flowchart to login to facebook account:

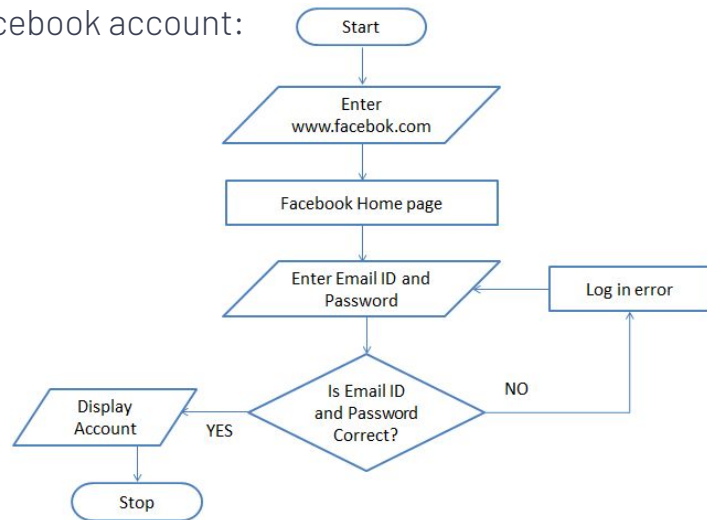

Brew Turkish Tea

Let's draw a flowchart of steps to brew Turkish tea using gitmind flowchart drawing feature!





► Showtime



Show your masterpiece

4-5 team ⌚ 10 min




► Exercise

Bank of America has launched a promotion for its credit card customers. According to the promotion, the customers will receive a gift voucher worth \$500 with their monthly bill if they spend \$15,000 more than their last month spending and their last month bill is not less than \$10,000.

Solution

Draw the flowchart of the promotion

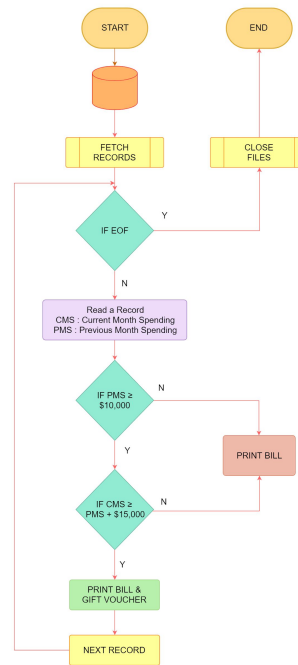

THANKS!

Any questions?

You can find me at:

- ▶ @marcus
- ▶ marcus@clarusway.com

