

Big_match - Testing and Demo

Rachael 'Rocky' Aikens, Voight Lab

August 24, 2018

This R markdown document is used for testing and demoing the current functionality of bigmatch. We'll use the sample data from the MatchIt package for basic testing.

```
library(MatchIt)
library(ggplot2)
library(ggpubr)
library(dplyr)

data("lalonge")
source('big_match.R')
source('class_functions.R')

# adding a binary outcome
lalonge$outcome <- lalonge$re78 > 15000
lalonge$re78 <- NULL

# changing name of treat column to "treated" to demonstrate that any name will suffice
names(lalonge)[names(lalonge) == "treat"] <- "treated"
```

Stratify

Manual Stratify

Testing errors and warnings

This call should return an error because “educ” is a continuous variable.

```
# manual stratification with a continuous variable
m.strat <- manual_stratify(lalonde, treat = "treat",
                           covariates = c("black", "hispan", "educ", "nodegree"))

# Error in warn_if_continuous(data[, covariates[i]], covariates[i]) :
#   There are 19 distinct values for educ. Is it continuous?

# manual stratification with a continuous variable, force = TRUE
m.strat <- manual_stratify(lalonde, treat = "treat",
                           covariates = c("black", "hispan", "educ", "nodegree"), force = TRUE)

# There are 19 distinct values for educ. Is it continuous?
```

Testing Functionality with Valid Inputs

This call should return six strata (since black and hispan seem to be mutually exclusive categories in this dataset).

```
# allowable manual stratification
m.strat <- manual_stratify(lalonde, treat = "treated",
                           covariates = c("black", "hispan", "nodegree"))
```

```
## Warning: package 'bindrcpp' was built under R version 3.4.4
```

Auto Stratify

Testing Errors and Warnings

First, testing error handling. These should fail and/or give warnings.

```
# auto stratification with missing arguments
a.strat <- auto_stratify(lalonde, "treat", "outcome")

# Error in auto_stratify(lalonde, "treat", "outcome") :
#   At least one of covariates and prog_scores should be specified.

# auto stratification with covariates and prog scores specified, and prog_scores invalid
a.strat <- auto_stratify(lalonde, "treat", "outcome", c("age", "educ"), prog_scores = 1:4)

# covariates and prog_scores are both specified. Using prog_scores; ignoring covariates.
# Error in auto_stratify(lalonde, "treat", "outcome", c("age", "educ"), :
#   prog_scores must be the same length as the data
```

Testing Functionality with Valid Inputs

These should give valid results.

```
# auto stratification with pre-specified prognostic score
myprogscore <- runif(n = dim(lalonde)[1])
a.strat1 <- auto_stratify(data = lalonde, "treated", "outcome",
                          prog_scores = myprogscore, size = 100)

# auto stratification
a.strat2 <- auto_stratify(lalonde, "treated", "outcome",
                          covariates = c("age", "educ", "hispan", "nodegree", "black"),
                          size = 100)

# auto stratification with a non-continuous prognostic score
a.strat3 <- auto_stratify(lalonde, "treated", "outcome",
                          covariates = c("hispan", "nodegree", "black"), size = 100 )
```

Diagnostics

Most of this is implemented with the generic functions `print`, `summary`, and `plot`.

Print

```
print(m.strat)
```

```
## manual_strata object from package big_match.
##
## Function call:
## manual_stratify(data = lalonde, treat = "treated", covariates = c("black",
##   "hispan", "nodegree"))
##
## Strata Sizes:
## # A tibble: 6 x 6
##   Stratum Treat Control Total Control_Proportion
##   <dbl> <int>   <dbl> <int>         <dbl>
## 1      1      9    127   136         0.9338235
## 2      2      9    154   163         0.9447853
## 3      3      2     15    17         0.8823529
## 4      4      9     46    55         0.8363636
## 5      5     43     31    74         0.4189189
## 6      6   113     56   169         0.3313609
## # ... with 1 more variables: Potential_Issues <chr>
```

```
print(a.strat1)
```

```
## auto_strata object from package big_match.
##
## Function call:
## auto_stratify(data = lalonde, treat = "treated", outcome = "outcome",
##   prog_scores = myprogscore, size = 100)
##
## Prognostic Scores prespecified.
##
## Strata Sizes:
## # A tibble: 7 x 6
##   Stratum Treat Control Total Control_Proportion Potential_Issues
##   <int> <int>   <dbl> <int>         <dbl>         <chr>
## 1      1    22     66    88         0.7500000         none
## 2      2    27     61    88         0.6931818         none
## 3      3    29     59    88         0.6704545         none
## 4      4    25     62    87         0.7126437         none
## 5      5    32     56    88         0.6363636         none
## 6      6    23     65    88         0.7386364         none
## 7      7    27     60    87         0.6896552         none
```

```
print(a.strat2)
```

```
## auto_strata object from package big_match.
##
## Function call:
## auto_stratify(data = lalonde, treat = "treated", outcome = "outcome",
```

```

##      covariates = c("age", "educ", "hispan", "nodegree", "black"),
##      size = 100)
##
## Prognostic Score Model:
##
## Call:  glm(formula = formula(formula_str), family = "binomial", data = data0)
##
## Coefficients:
## (Intercept)          age          educ          hispan          nodegree
##    -5.00887      0.04639      0.19183      0.09823      0.14705
##      black
##    -0.53706
##
## Degrees of Freedom: 428 Total (i.e. Null);  423 Residual
## Null Deviance:      388.2
## Residual Deviance: 361.1    AIC: 373.1
##
## Strata Sizes:
## # A tibble: 7 x 6
##   Stratum Treat Control Total Control_Proportion
##   <int> <int>   <dbl> <int>         <dbl>
## 1     1     1    40     48     88      0.5454545
## 2     2     2    37     51     88      0.5795455
## 3     3     3    39     49     88      0.5568182
## 4     4     4    26     61     87      0.7011494
## 5     5     5    22     66     88      0.7500000
## 6     6     6    16     72     88      0.8181818
## 7     7     7     5     82     87      0.9425287
## # ... with 1 more variables: Potential_Issues <chr>

```

Summary

```
# TODO: implement summary methods  
summary(m.strat)
```

```
## [1] 0
```

```
summary(a.strat1)
```

```
## [1] 0
```

```
summary(a.strat2)
```

```
## [1] 0
```

Plot


There are three types of plots: "scatter", "residual", and "hist". Any other plot options for a strata object will throw an error.

```
plot(m.strat, type = "QQ")  
# Error in plot.strata(m.strat, type = "QQ") :  
#   Not a recognized plot type.
```

Auto and Manual Stratify : Size-Balance Scatterplot

Below are the basic size \times control fraction scatterplots for (A) manual stratification by **black**, **hispan** and **nodegree**, (B) auto-stratification with a uniform random prognostic score, (C) auto-stratification with a prognostic score that is relatively continuous, and (D) auto-stratification with a prognostic score that is discontinuous (built solely from discrete variables with few distinct values). As you can see, this sample data contains a relatively small number of examples to begin with, so most strata are quite small.

```
a <- plot(m.strat) # equivalently: plot(m.strat, type = "scatter")  
b <- plot(a.strat1)  
c <- plot(a.strat2)  
d <- plot(a.strat3)  
  
ggarrange(a, b, c, d, ncol = 2, nrow = 2,  
          labels = "AUTO")
```

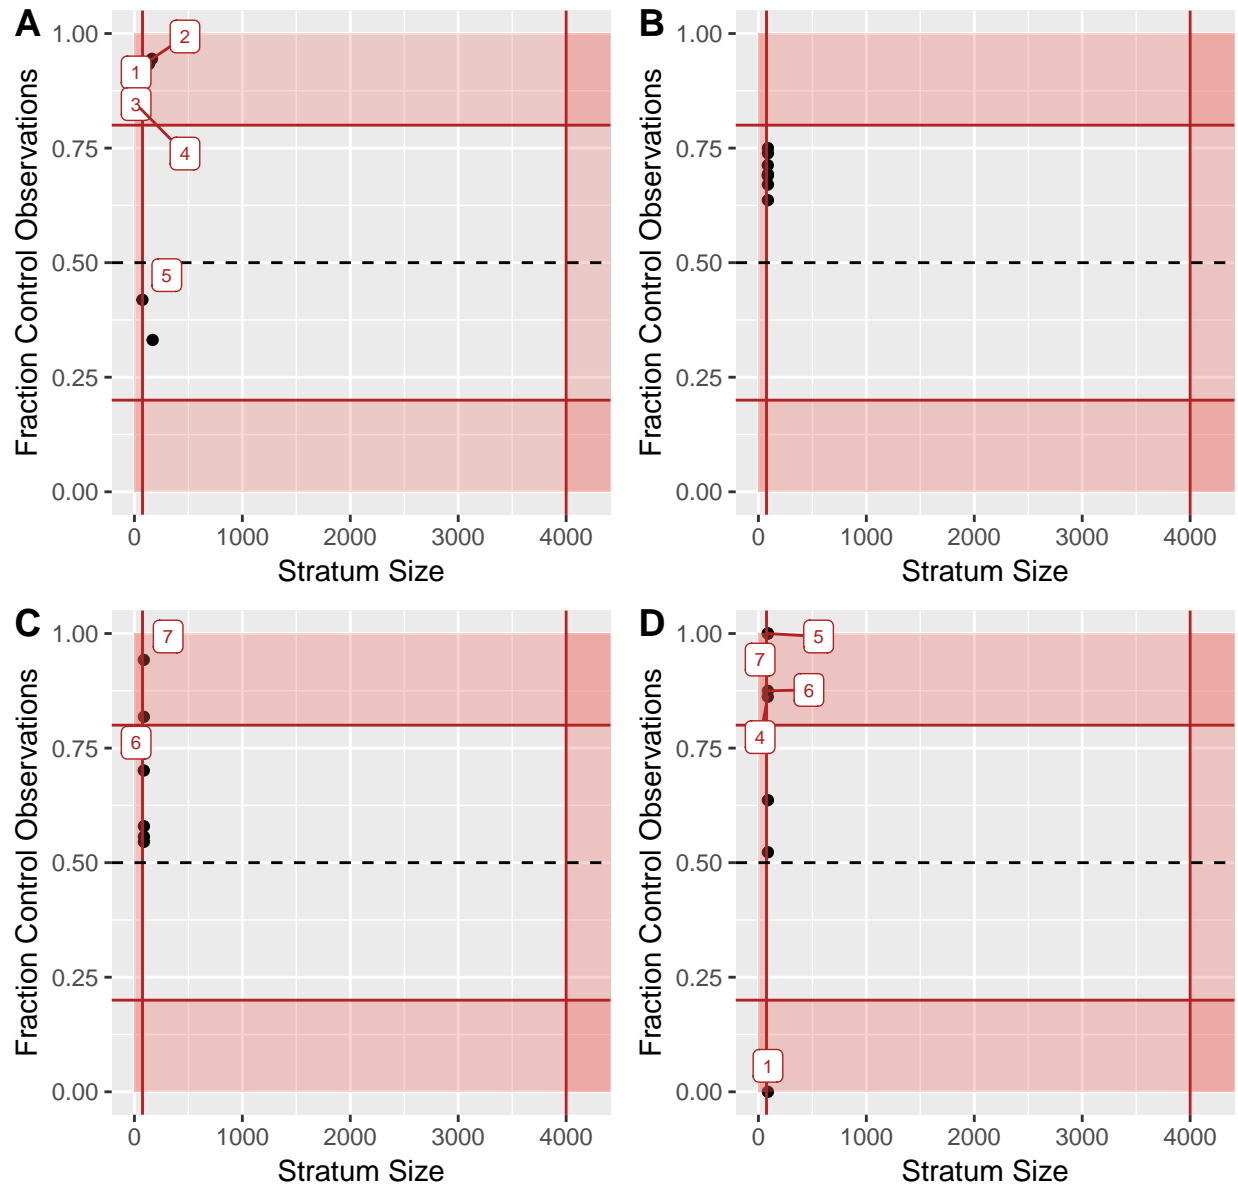

Auto Stratify: Prognostic Score Residual Plot


This function is only meant for auto-stratified data for which prognostic scores were not prespecified. Running it on a `manual_strata` object or an `auto_strata` object where prognostic scores were prespecified will throw an error.

```
plot(m.strat, type = "residual")
# Error in plot.strata(m.strat, type = "residual") :
#   Prognostic score residual plots are only valid for auto-stratified data.

plot(a.strat1, type = "residual")
# Error in plot.strata(a.strat1, type = "residual"):
#   Cannot make prognostic score residual plots. Prognostic model is unknown.
```



```
# TODO: implement this plot
plot(a.strat2, type = "residual")
```

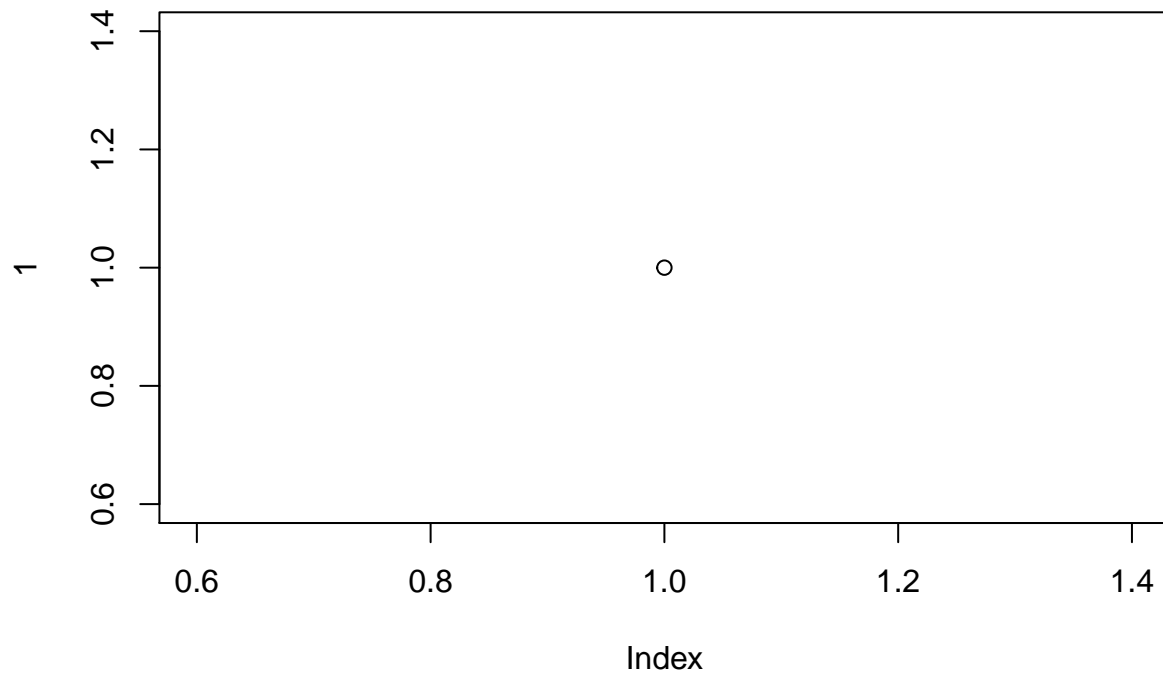

Auto Stratify: Prognostic Score Histograms

This function is only meant for auto-stratified data. Running it on a `manual_strata` object will throw an error.

```
plot(m.strat, type = "hist")
```

```
# Error in plot.strata(m.strat, type = "hist"):
# Prognostic score histograms are only valid for auto-stratified data.
```

```
# uniformly generated prognostic score. Nicely continuous from 0 to 1
a <- plot(a.strat1, type = "hist")
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

```
# prognostic score generated from some continuous and some discrete variables.
# Fairly continuous
b <- plot(a.strat2, type = "hist")
```


```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

```
# prognostic score generated from only a few discrete variables.
# Since prog_score only takes on a few different values,
# strata quantiles are less evenly distributed from 0 to 1
```

```
c <- plot(a.strat3, type = "hist")
```

```
## `stat_bin()` using `bins = 30`. Pick better value with `binwidth`.
```

```
ggarrange(a, b, c, ncol = 1, nrow = 3, labels = "AUTO")
```

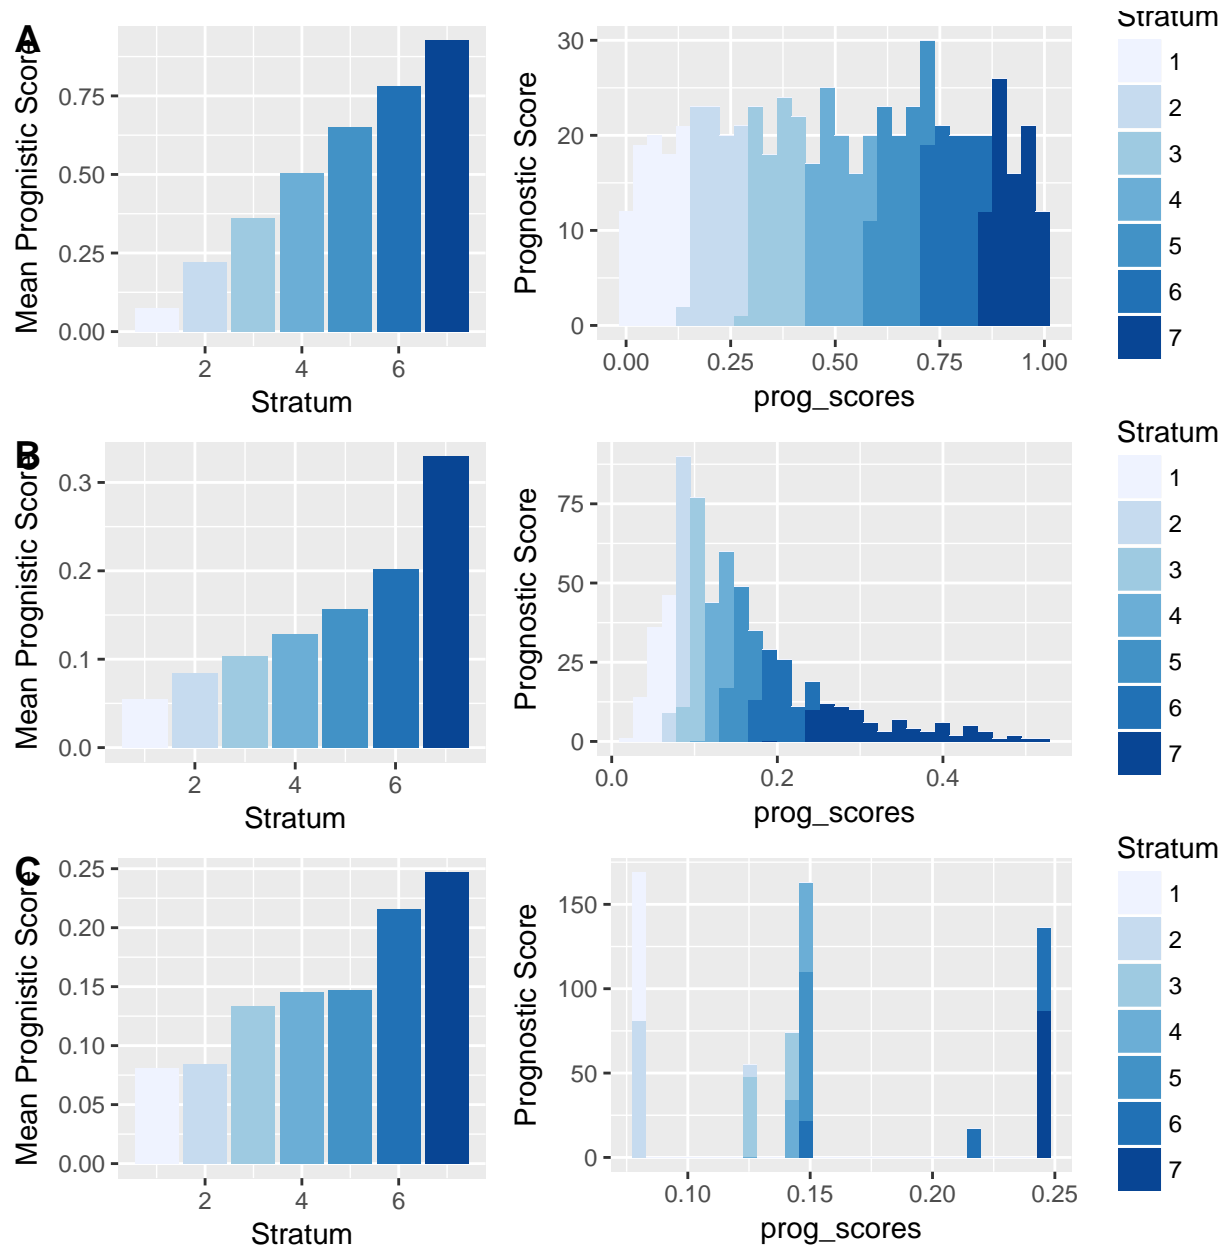

Matching