


Diagrams

1. Main Diagram	1
-----------------------	---

Tables

fast_fuel.admins [1]	2
fast_fuel.allergies [1]	2
fast_fuel.allergyingredient [1]	2
fast_fuel.aspnetroleclaims [1]	2
fast_fuel.aspnetroles [1]	3
fast_fuel.aspnetuserclaims [1]	3
fast_fuel.aspnetuserlogins [1]	3
fast_fuel.aspnetuserroles [1]	4
fast_fuel.aspnetusers [1]	4
fast_fuel.aspnetusertokens [1]	5
fast_fuel.customers [1]	5
fast_fuel.employees [1]	5
fast_fuel.employeeestationcategory [1]	5
fast_fuel.foodingredients [1]	6
fast_fuel.foods [1]	6
fast_fuel.ingredients [1]	6
fast_fuel.ingredientstationcategory [1]	7
fast_fuel.machines [1]	7
fast_fuel.menufoods [1]	7
fast_fuel.menus [1]	8
fast_fuel.openinghours [1]	8
fast_fuel.orderfoods [1]	8
fast_fuel.ordermenus [1]	9
fast_fuel.orders [1]	9
fast_fuel.restaurants [1]	9
fast_fuel.shifts [1]	10
fast_fuel.stationcategories [1]	10
fast_fuel.stations [1]	10

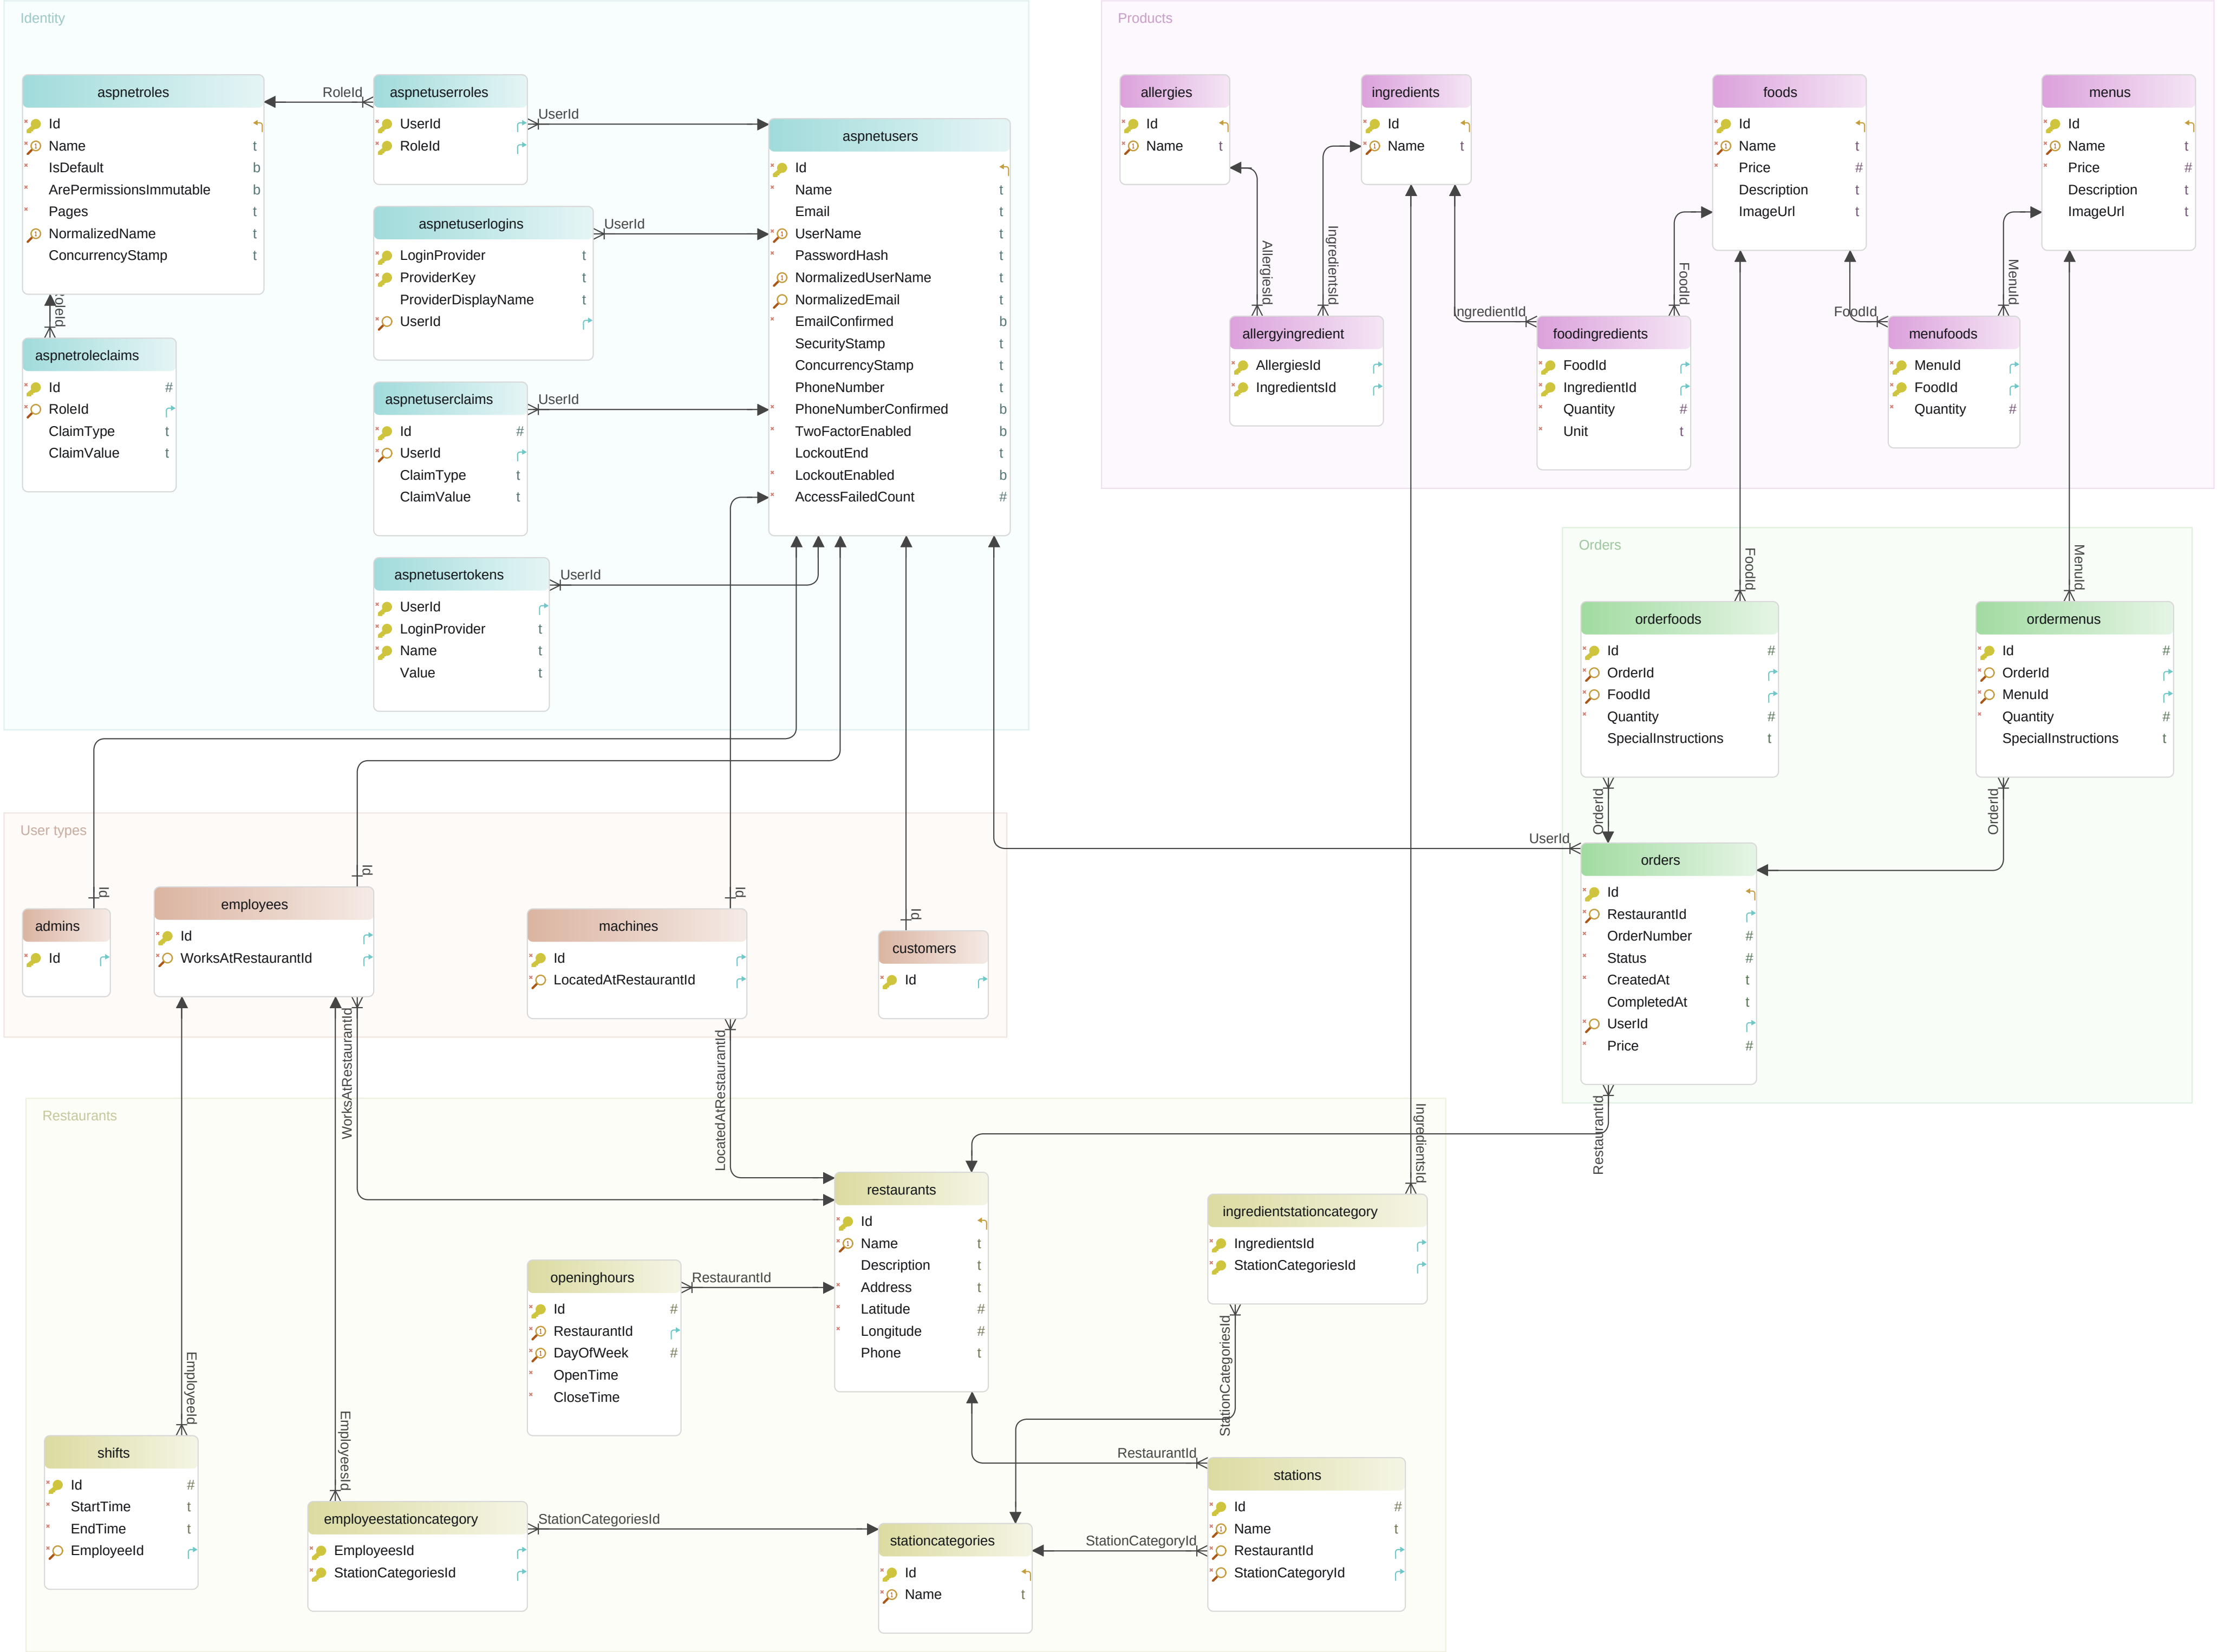

Main Diagram

Table admins		
Idx	Name	Data Type
* Pk	Id	INT UNSIGNED
Indexes		
Type	Name	On
Pk	pk_admins	Id
Foreign Keys		
Type	Name	On
	FK_Admins_AspNetUsers_Id (Id) ref aspnetusers (Id)	
Options		
ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci		

Table allergies		
Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
* Unq	Name	VARCHAR(100)
Indexes		
Type	Name	On
Pk	pk_allergies	Id
Unq	IX_Allergies_Name	Name
Options		
ENGINE=InnoDB AUTO_INCREMENT=4 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci		

Table allergyingredient		
Idx	Name	Data Type
* Pk	AllergiesId	INT UNSIGNED
* Pk	IngredientsId	INT UNSIGNED
Indexes		
Type	Name	On
Pk	pk_allergyingredient	AllergiesId, IngredientsId
	IX_AllergyIngredient_IngredientsId	IngredientsId
Foreign Keys		
Type	Name	On
	FK_AllergyIngredient_Allergies_AllergiesId (AllergiesId) ref allergies (Id)	
	FK_AllergyIngredient_Ingredients_IngredientsId (IngredientsId) ref ingredients (Id)	
Options		
ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci		

Table aspnetroleclaims		
Idx	Name	Data Type
* Pk	Id	INT AUTO_INCREMENT
* Idx	RoleId	INT UNSIGNED
	ClaimType	LONGTEXT
	ClaimValue	LONGTEXT
Indexes		
Type	Name	On
Pk	pk_aspnetroleclaims	Id

Table aspnetroleclaims

IX_AspNetRoleClaims_RoleId

RoleId

Foreign Keys

Type	Name	On
------	------	----

FK_AspNetRoleClaims_AspNetRoles_RoleId (RoleId) ref aspnetroles (Id)

Options

ENGINE=InnoDB AUTO_INCREMENT=70 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table aspnetroles

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
* Unq	Name	VARCHAR(500)
*	IsDefault	BOOLEAN DEFAULT false
*	ArePermissionsImmutable	BOOLEAN DEFAULT false
*	Pages	LONGTEXT
Unq	NormalizedName	VARCHAR(256)
	ConcurrencyStamp	LONGTEXT

Indexes

Type	Name	On
Pk	pk_aspnetroles	Id
Unq	IX_AspNetRoles_Name	Name
Unq	RoleNameIndex	NormalizedName

Options

ENGINE=InnoDB AUTO_INCREMENT=5 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table aspnetuserclaims

Idx	Name	Data Type
* Pk	Id	INT AUTO_INCREMENT
* Idx	UserId	INT UNSIGNED
	ClaimType	LONGTEXT
	ClaimValue	LONGTEXT

Indexes

Type	Name	On
Pk	pk_aspnetuserclaims	Id
	IX_AspNetUserClaims_UserId	UserId

Foreign Keys

Type	Name	On
	FK_AspNetUserClaims_AspNetUsers_UserId (UserId)	ref aspnetusers (Id)

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table aspnetuserlogins

Idx	Name	Data Type
* Pk	LoginProvider	VARCHAR(255)
* Pk	ProviderKey	VARCHAR(255)
	ProviderDisplayName	LONGTEXT
* Idx	UserId	INT UNSIGNED

Indexes

Type	Name	On
------	------	----

Table aspnetuserlogins

Pk	pk_aspnetuserlogins	LoginProvider, ProviderKey
	IX_AspNetUserLogins_UserId	UserId

Foreign Keys

Type	Name	On
	FK_AspNetUserLogins_AspNetUsers_UserId (UserId)	ref aspnetusers (Id)

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table aspnetuserroles

Idx	Name	Data Type
* Pk	UserId	INT UNSIGNED
* Pk	RoleId	INT UNSIGNED

Indexes

Type	Name	On
Pk	pk_aspnetuserroles	UserId, RoleId
	IX_AspNetUserRoles_RoleId	RoleId

Foreign Keys

Type	Name	On
	FK_AspNetUserRoles_AspNetRoles_RoleId (RoleId)	ref aspnetroles (Id)
	FK_AspNetUserRoles_AspNetUsers_UserId (UserId)	ref aspnetusers (Id)

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table aspnetusers

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
*	Name	VARCHAR(100)
	Email	VARCHAR(255)
* Unq	UserName	VARCHAR(50)
*	PasswordHash	VARCHAR(255)
Unq	NormalizedUserName	VARCHAR(256)
Idx	NormalizedEmail	VARCHAR(256)
*	EmailConfirmed	BOOLEAN
	SecurityStamp	LONGTEXT
	ConcurrencyStamp	LONGTEXT
	PhoneNumber	LONGTEXT
*	PhoneNumberConfirmed	BOOLEAN
*	TwoFactorEnabled	BOOLEAN
	LockoutEnd	DATETIME(6)
*	LockoutEnabled	BOOLEAN
*	AccessFailedCount	INT

Indexes

Type	Name	On
Pk	pk_aspnetusers	Id
Unq	IX_AspNetUsers_UserName	UserName
Unq	UserNameIndex	NormalizedUserName
	EmailIndex	NormalizedEmail

Options

Table aspnetusers

ENGINE=InnoDB AUTO_INCREMENT=4 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table aspnetusertokens

Idx	Name	Data Type
* Pk	UserId	INT UNSIGNED
* Pk	LoginProvider	VARCHAR(255)
* Pk	Name	VARCHAR(255)
	Value	LONGTEXT

Indexes

Type	Name	On
Pk	pk_aspnetusertokens	UserId, LoginProvider, Name

Foreign Keys

Type	Name	On
	FK_AspNetUserTokens_AspNetUsers_UserId (UserId) ref aspnetusers (Id)	

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table customers

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED

Indexes

Type	Name	On
Pk	pk_customers	Id

Foreign Keys

Type	Name	On
	FK_Customers_AspNetUsers_Id (Id) ref aspnetusers (Id)	

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table employees

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED
* Idx	WorksAtRestaurantId	INT UNSIGNED

Indexes

Type	Name	On
Pk	pk_employees	Id
	IX_Employees_WorksAtRestaurantId	WorksAtRestaurantId

Foreign Keys

Type	Name	On
	FK_Employees_AspNetUsers_Id (Id) ref aspnetusers (Id)	
	FK_Employees_Restaurants_WorksAtRestaurantId (WorksAtRestaurantId) ref restaurants (Id)	

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table employeestationcategory

Idx	Name	Data Type
* Pk	EmployeeId	INT UNSIGNED
* Pk	StationCategoriesId	INT UNSIGNED

Table employeestationcategory

Indexes

Type	Name	On
Pk	pk_employeestationcategory	EmployeesId, StationCategoriesId
	IX_EmployeeStationCategory_StationCategoriesId	StationCategoriesId

Foreign Keys

Type	Name	On
	FK_EmployeeStationCategory_Employees_EmployeesId (EmployeesId)	ref employees (Id)
	FK_EmployeeStationCategory_StationCategories_StationCategoriesId (StationCategoriesId)	ref stationcategories (Id)

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table foodingredients

Idx	Name	Data Type
* Pk	FoodId	INT UNSIGNED
* Pk	IngredientId	INT UNSIGNED
*	Quantity	INT UNSIGNED
*	Unit	VARCHAR(50)

Indexes

Type	Name	On
Pk	pk_foodingredients	FoodId, IngredientId
	IX_FoodIngredients_IncidentId	IngredientId

Foreign Keys

Type	Name	On
	FK_FoodIngredients_Foods_FoodId (FoodId)	ref foods (Id)
	FK_FoodIngredients_Ingredients_IncidentId (IncidentId)	ref ingredients (Id)

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table foods

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
* Unq	Name	VARCHAR(100)
*	Price	INT UNSIGNED
	Description	VARCHAR(600)
	ImageUrl	LONGTEXT

Indexes

Type	Name	On
Pk	pk_foods	Id
Unq	IX_Foods_Name	Name

Options

ENGINE=InnoDB AUTO_INCREMENT=4 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table ingredients

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
* Unq	Name	VARCHAR(100)

Indexes

Type	Name	On
------	------	----

Table ingredients

Pk	pk_ingredients	Id
Unq	IX_Ingredients_Name	Name

Options

ENGINE=InnoDB AUTO_INCREMENT=9 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table ingredientstationcategory

Idx	Name	Data Type
* Pk	IngredientsId	INT UNSIGNED
* Pk	StationCategoriesId	INT UNSIGNED

Indexes

Type	Name	On
Pk	pk_ingredientstationcategory	IngredientsId, StationCategoriesId
	IX_InгредиentStationCategory_StationCategoriesId	StationCategoriesId

Foreign Keys

Type	Name	On
	FK_InгредиentStationCategory_Ingredients_IngredientsId (IngredientsId)	ref ingredients (Id)
	FK_InгредиentStationCategory_StationCategories_StationCategorie~ (StationCategoriesId)	ref stationcategories (Id)

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table machines

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED
* Idx	LocatedAtRestaurantId	INT UNSIGNED

Indexes

Type	Name	On
Pk	pk_machines	Id
	IX_Machines_LocatedAtRestaurantId	LocatedAtRestaurantId

Foreign Keys

Type	Name	On
	FK_Machines_AspNetUsers_Id (Id)	ref aspnetusers (Id)
	FK_Machines_Restaurants_LocatedAtRestaurantId (LocatedAtRestaurantId)	ref restaurants (Id)

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table menufoods

Idx	Name	Data Type
* Pk	MenuId	INT UNSIGNED
* Pk	FoodId	INT UNSIGNED
*	Quantity	INT UNSIGNED

Indexes

Type	Name	On
Pk	pk_menufoods	MenuId, FoodId
	IX_MenuFoods_FoodId	FoodId

Foreign Keys

Type	Name	On
	FK_MenuFoods_Foods_FoodId (FoodId)	ref foods (Id)
	FK_MenuFoods_Menus_MenuId (MenuId)	ref menus (Id)

Table menufoods

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table menus

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
* Unq	Name	VARCHAR(100)
*	Price	INT UNSIGNED
	Description	VARCHAR(600)
	ImageUrl	LONGTEXT

Indexes

Type	Name	On
Pk	pk_menus	Id
Unq	IX_Menus_Name	Name

Options

ENGINE=InnoDB AUTO_INCREMENT=2 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table openinghours

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
* Unq	RestaurantId	INT UNSIGNED
* Unq	DayOfWeek	INT
*	OpenTime	TIME
*	CloseTime	TIME

Indexes

Type	Name	On
Pk	pk_openinghours	Id
Unq	IX_OpeningHours_RestaurantId_DayOfWeek	RestaurantId, DayOfWeek

Foreign Keys

Type	Name	On
	FK_OpeningHours_Restaurants_RestaurantId (RestaurantId) ref restaurants (Id)	

Options

ENGINE=InnoDB AUTO_INCREMENT=44 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table orderfoods

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
* Idx	OrderId	INT UNSIGNED
* Idx	FoodId	INT UNSIGNED
*	Quantity	INT UNSIGNED
	SpecialInstructions	VARCHAR(300)

Indexes

Type	Name	On
Pk	pk_orderfoods	Id
	IX_OrderFoods_FoodId	FoodId
	IX_OrderFoods_OrderId	OrderId

Foreign Keys

Type	Name	On
------	------	----

Table orderfoods

FK_OrderFoods_Foods_FoodId (FoodId) ref foods (Id)

FK_OrderFoods_Orders_OrderId (OrderId) ref orders (Id)

Options

ENGINE=InnoDB AUTO_INCREMENT=2 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table ordermenus

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
* Idx	OrderId	INT UNSIGNED
* Idx	MenuId	INT UNSIGNED
*	Quantity	INT UNSIGNED
	SpecialInstructions	VARCHAR(300)

Indexes

Type	Name	On
Pk	pk_ordermenus	Id
	IX_OrderMenus_MenuId	MenuId
	IX_OrderMenus_OrderId	OrderId

Foreign Keys

Type	Name	On
	FK_OrderMenus_Menus_MenuId (MenuId) ref menus (Id)	
	FK_OrderMenus_Orders_OrderId (OrderId) ref orders (Id)	

Options

ENGINE=InnoDB AUTO_INCREMENT=2 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table orders

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
* Idx	RestaurantId	INT UNSIGNED
*	OrderNumber	INT UNSIGNED
*	Status	INT DEFAULT 0
*	CreatedAt	DATETIME(6) DEFAULT current_timestamp(6)
	CompletedAt	DATETIME(6)
* Idx	UserId	INT UNSIGNED
*	Price	INT UNSIGNED

Indexes

Type	Name	On
Pk	pk_orders	Id
	IX_Orders_RestaurantId	RestaurantId
	IX_Orders_UserId	UserId

Foreign Keys

Type	Name	On
	FK_Orders_Restaurants_RestaurantId (RestaurantId) ref restaurants (Id)	
	FK_Orders_AspNetUsers_UserId (UserId) ref aspnetusers (Id)	

Options

ENGINE=InnoDB AUTO_INCREMENT=2 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table restaurants

Idx	Name	Data Type
-----	------	-----------

Table restaurants

* Pk	Id	INT UNSIGNED AUTO_INCREMENT
* Unq	Name	VARCHAR(100)
	Description	VARCHAR(600)
*	Address	VARCHAR(200)
*	Latitude	DOUBLE
*	Longitude	DOUBLE
	Phone	VARCHAR(15)

Indexes

Type	Name	On
Pk	pk_restaurants	Id
Unq	IX_Restaurants_Name	Name

Options

ENGINE=InnoDB AUTO_INCREMENT=3 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table shifts

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
*	StartTime	DATETIME(6)
*	EndTime	DATETIME(6)
* Idx	EmployeeId	INT UNSIGNED

Indexes

Type	Name	On
Pk	pk_shifts	Id
	IX_Shifts_EmployeeId	EmployeeId

Foreign Keys

Type	Name	On
	FK_Shifts_Employees_EmployeeId (EmployeeId) ref employees (Id)	

Options

ENGINE=InnoDB DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table stationcategories

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
* Unq	Name	VARCHAR(100)

Indexes

Type	Name	On
Pk	pk_stationcategories	Id
Unq	IX_StationCategories_Name	Name

Options

ENGINE=InnoDB AUTO_INCREMENT=3 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci

Table stations

Idx	Name	Data Type
* Pk	Id	INT UNSIGNED AUTO_INCREMENT
* Unq	Name	VARCHAR(100)
* Unq	RestaurantId	INT UNSIGNED
* Idx	StationCategoryId	INT UNSIGNED

Indexes

Table stations

Type	Name	On
Pk	pk_stations	Id
Unq	IX_Stations_RestaurantId_Name	RestaurantId, Name
	IX_Stations_RestaurantId_StationCategoryId	RestaurantId, StationCategoryId
	IX_Stations_StationCategoryId	StationCategoryId

Foreign Keys

Type	Name	On
	FK_Stations_Restaurants_RestaurantId (RestaurantId) ref restaurants (Id)	
	FK_Stations_StationCategories_StationCategoryId (StationCategoryId) ref stationcategories (Id)	

Options

ENGINE=InnoDB AUTO_INCREMENT=3 DEFAULT CHARSET=utf8mb4 COLLATE=utf8mb4_uca1400_ai_ci