Fixed optimizer: actual full-Tube readouts

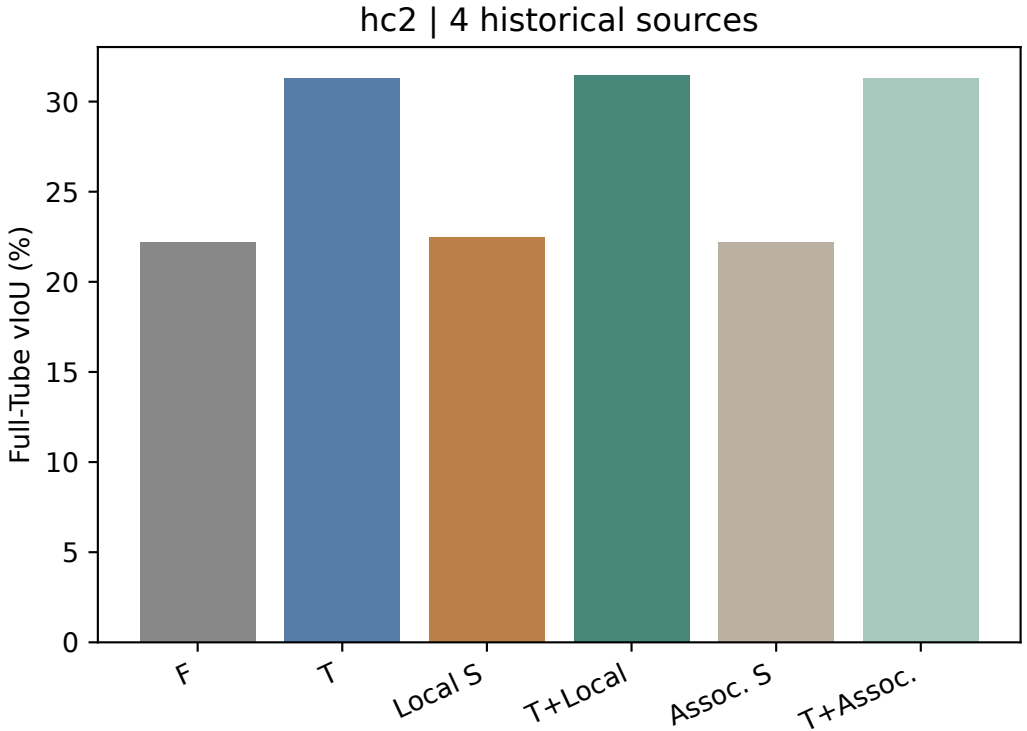


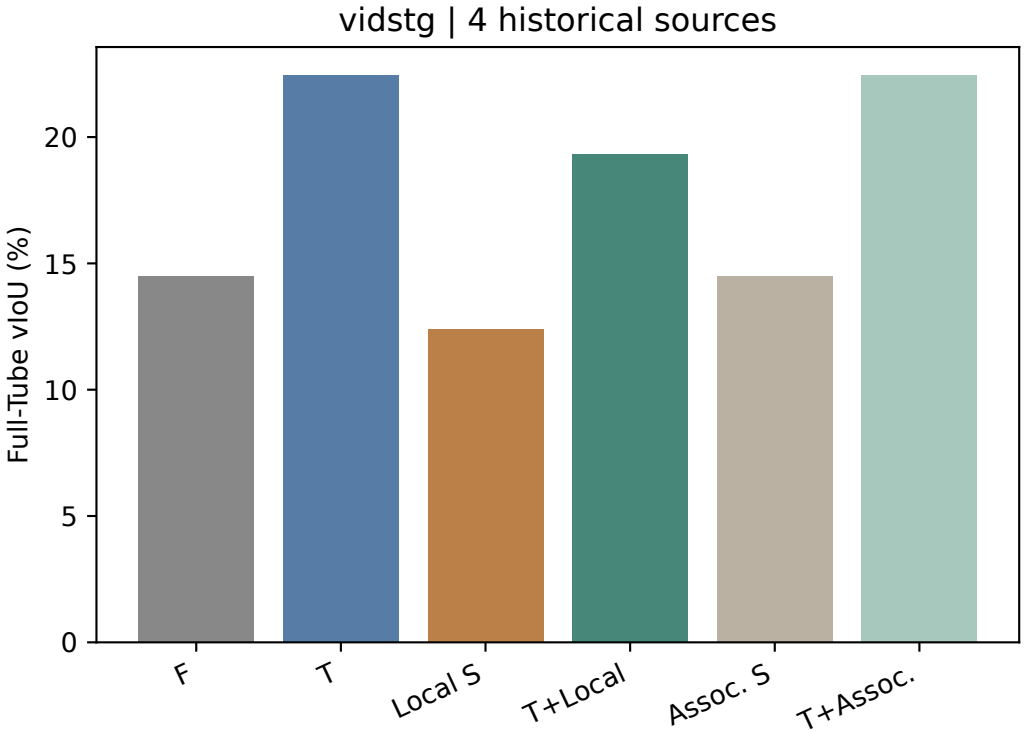


Associated reference rule abstains on all eight sources; exact F/T reuse, no fit.

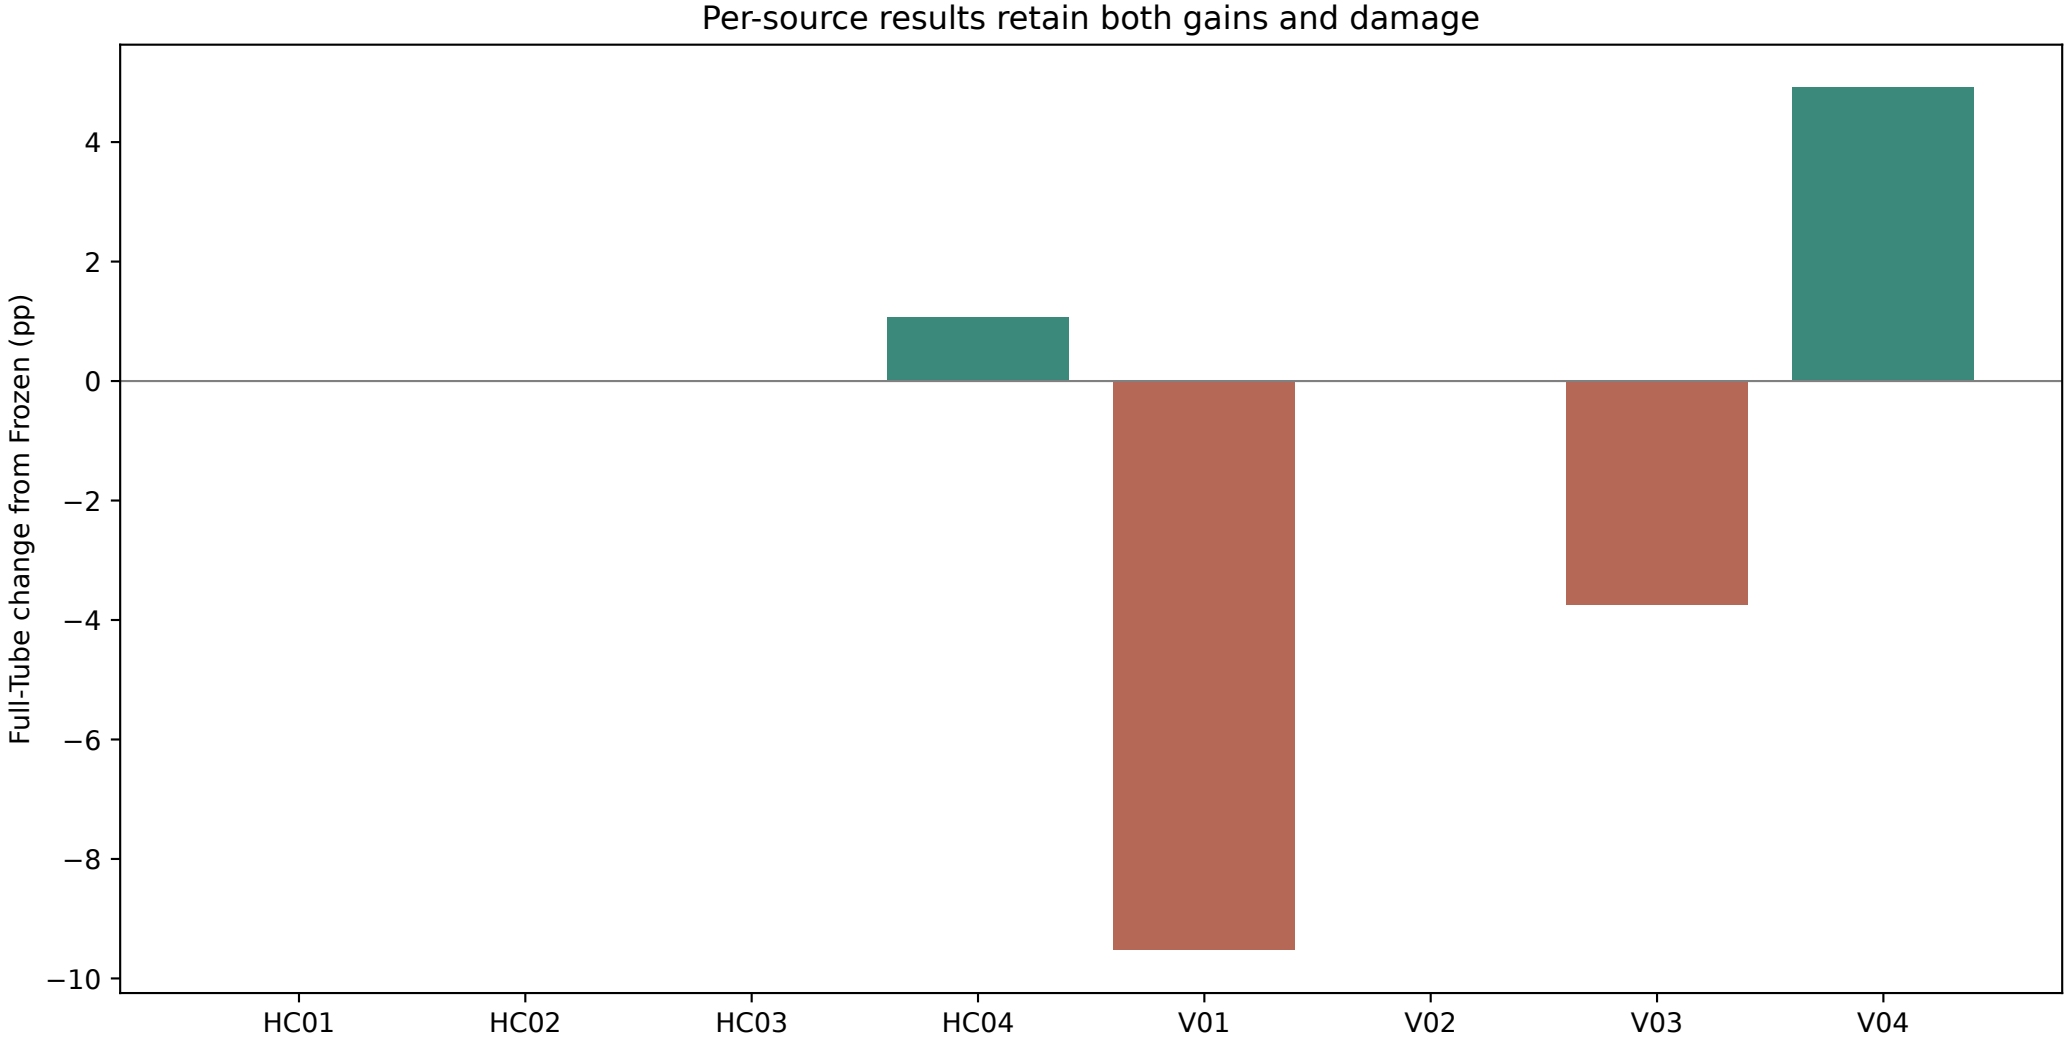
Per-source results retain both gains and damage
Full-Tube change from Frozen (pp)
4
2
0
−2
−4
−6
−8
−10
HC01
HC02
HC03
HC04
V01
V02
V03
V04
Four actual nonempty-reference fits; other cases exactly unchanged. No GT-selected update amplitude.

# Sparse common-center IoU diagnostics (not full-Tube vIoU)

| Source | Window | R1 ID | Pool delta (pp) | Teacher delta (pp) |
|---|---|---|---|---|
| HC01 | 0 | abstain | +0.000 | unknown |
| HC01 | 1 | abstain | +0.000 | unknown |
| HC01 | 2 | abstain | +50.000 | unknown |
| HC01 | 3 | abstain | +3.455 | unknown |
| HC02 | 0 | 1 | +0.000 | +0.000 |
| HC02 | 1 | 1 | +0.000 | +0.000 |
| HC02 | 2 | 1 | +0.000 | +0.000 |
| HC02 | 3 | 1 | +0.000 | +0.000 |
| HC03 | 0 | abstain | unknown | unknown |
| HC03 | 1 | 1 | +0.000 | +0.000 |
| HC03 | 2 | 1 | +4.884 | +0.000 |
| HC03 | 3 | 1 | +0.000 | +0.000 |
| HC04 | 0 | 1 | +0.000 | +0.000 |
| HC04 | 1 | 5 | +0.000 | -0.229 |
| HC04 | 2 | 1 | +1.378 | +0.000 |
| HC04 | 3 | 1 | unknown | unknown |
| V01 | 0 | 3 | unknown | unknown |
| V01 | 1 | 1 | +0.000 | +0.000 |
| V01 | 2 | 1 | +0.000 | +0.000 |
| V01 | 3 | 1 | +0.000 | +0.000 |
| V02 | 0 | 1 | +9.988 | +0.000 |
| V02 | 1 | 1 | +21.125 | +0.000 |
| V02 | 2 | 1 | +11.041 | +0.000 |
| V02 | 3 | 1 | +9.385 | +0.000 |
| V03 | 0 | 1 | +0.000 | +0.000 |
| V03 | 1 | 1 | unknown | unknown |
| V03 | 2 | 1 | unknown | unknown |
| V03 | 3 | 3 | unknown | unknown |
| V04 | 0 | 4 | +20.097 | +20.097 |
| V04 | 1 | 1 | unknown | unknown |
| V04 | 2 | 1 | unknown | unknown |
| V04 | 3 | 1 | unknown | unknown |

Unknown is preserved; pool includes Source. Offline Oracle is never used for method selection.