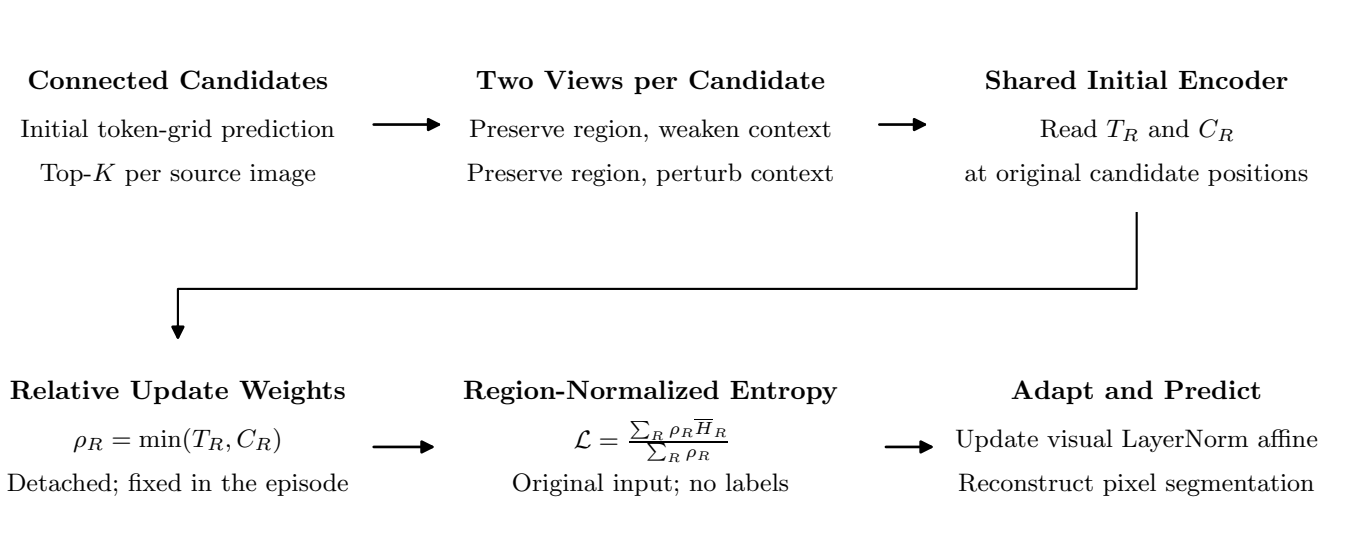

Connected Candidates
Initial token-grid prediction
Top-K per source image
Two Views per Candidate
Preserve region, weaken context
Preserve region, perturb context
Shared Initial Encoder
Read T_R and C_R
at original candidate positions
Relative Update Weights
$\rho_R = \min(T_R, C_R)$
Detached; fixed in the episode
Region-Normalized Entropy
$\mathcal{L} = \frac{\sum_R \rho_R \overline{H}_R}{\sum_R \rho_R}$
Original input; no labels
Adapt and Predict
Update visual LayerNorm affine
Reconstruct pixel segmentation