



S1 Sequencing depth per library, by plate (bar = median of kept)
Reads before trimming (millions, log)
10^2
10^1
10^0
10^{-1}
10^{-2}
0.5 M (failed-library cutoff)
n=96
(8 excl.)
n=96
(3 excl.)
n=96
(2 excl.)
n=96
(1 excl.)
n=52
(20 excl.)
Plate 1
Plate 2
Plate 3
Plate 4
Plate 5
X
F
S
IV
excluded
A. hudsonica


S2 Mapping to the (clade X-like) reference, kept individuals; bar and label = median

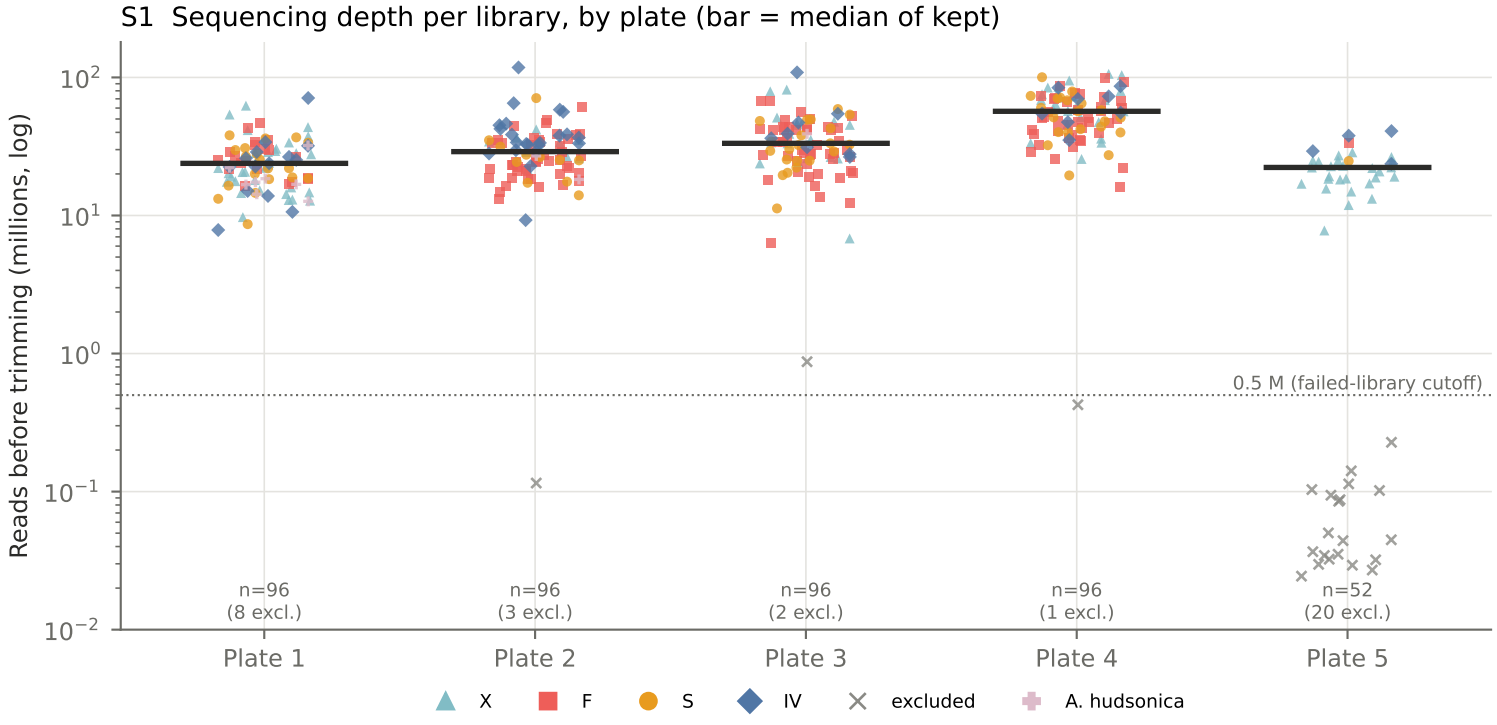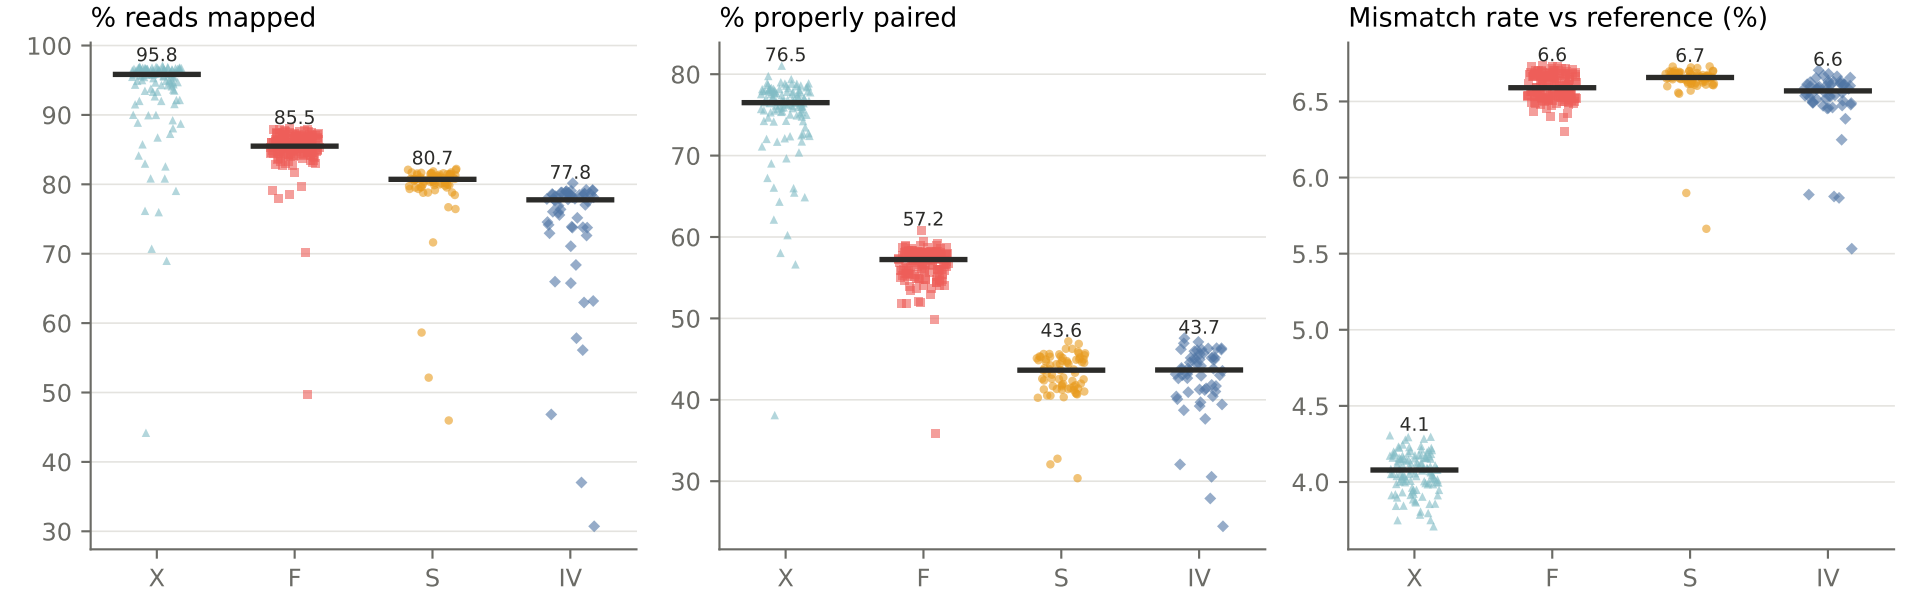


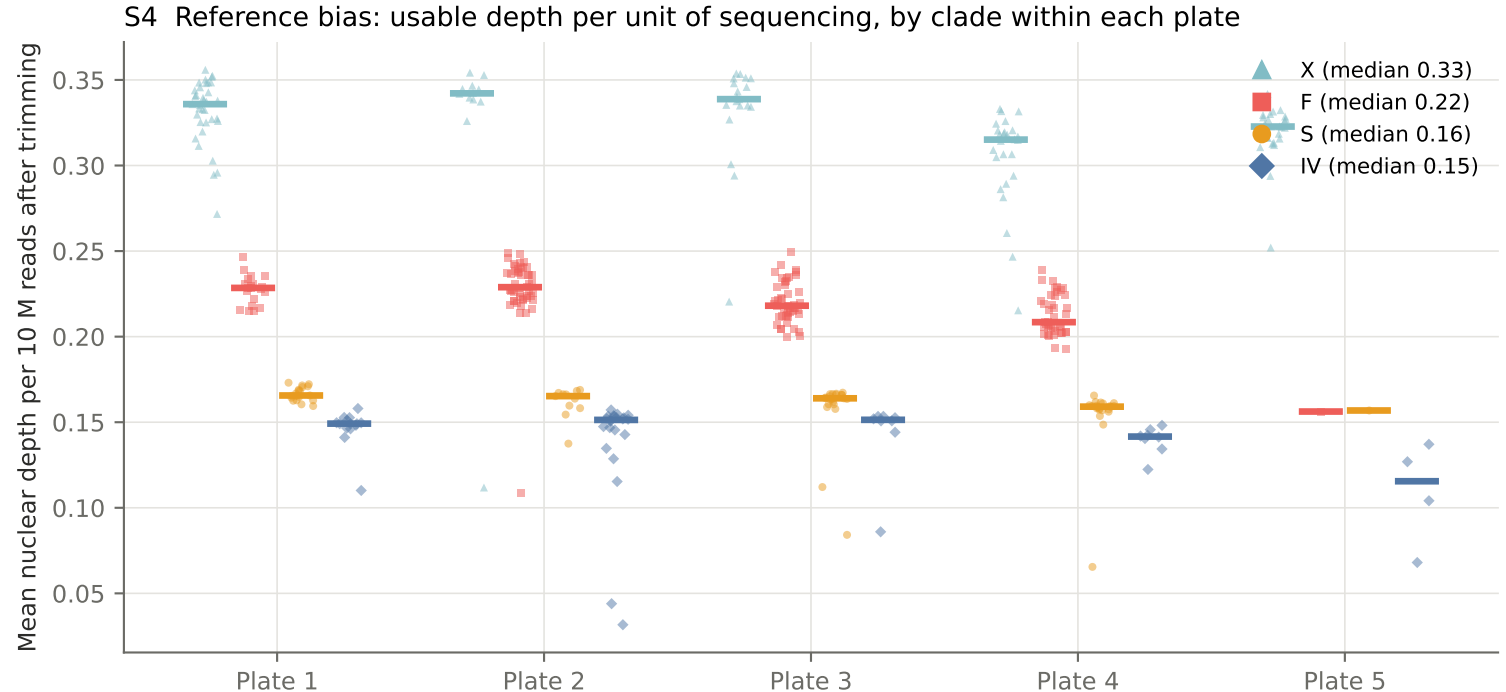


Depth: mosdepth, MAPQ >= 20, duplicates excluded, whole nuclear genome. Bars = clade medians per plate.


S7 Samples with possible non-host DNA

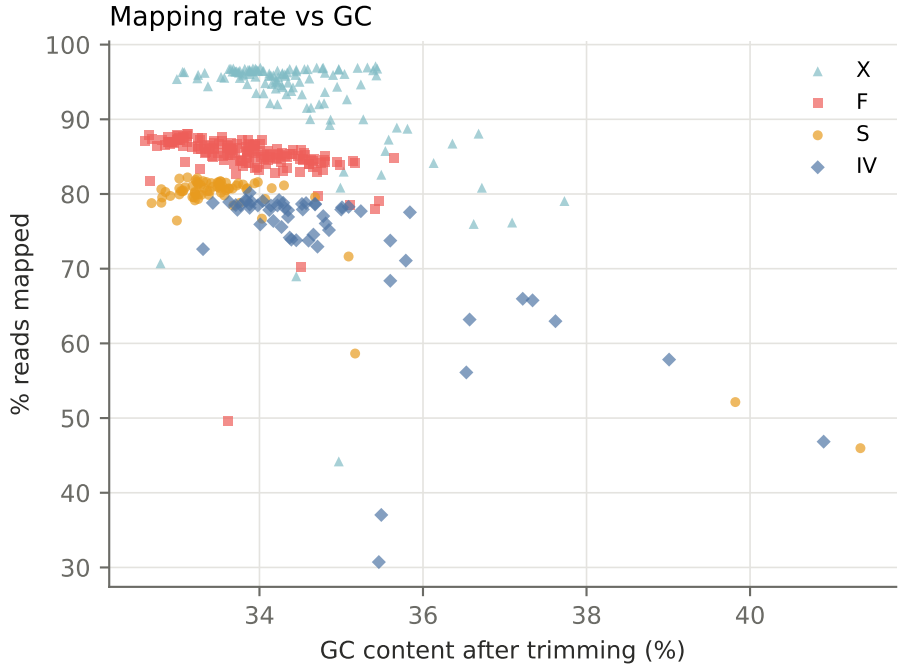

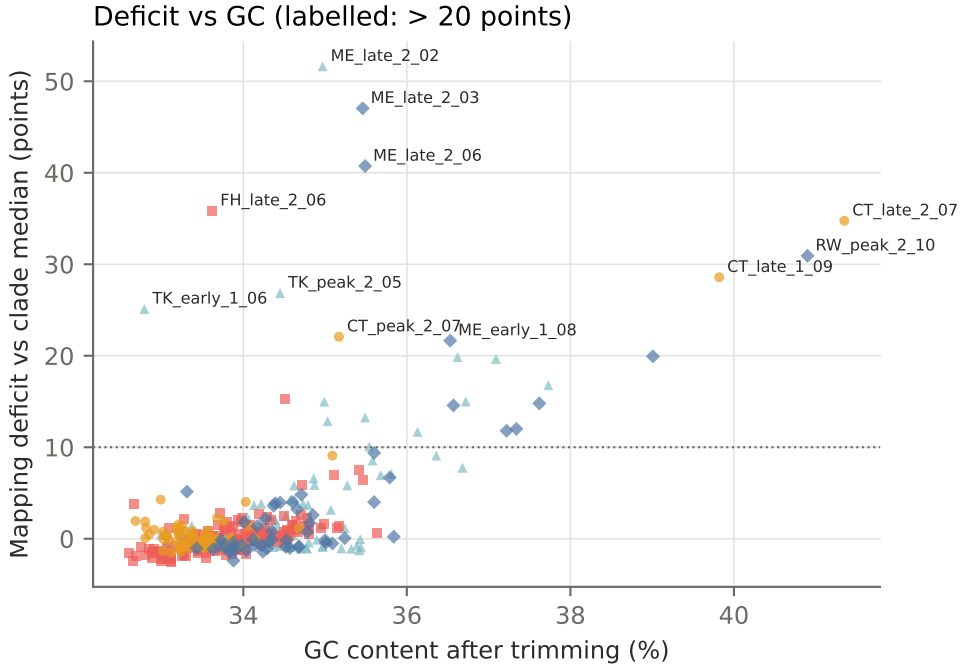


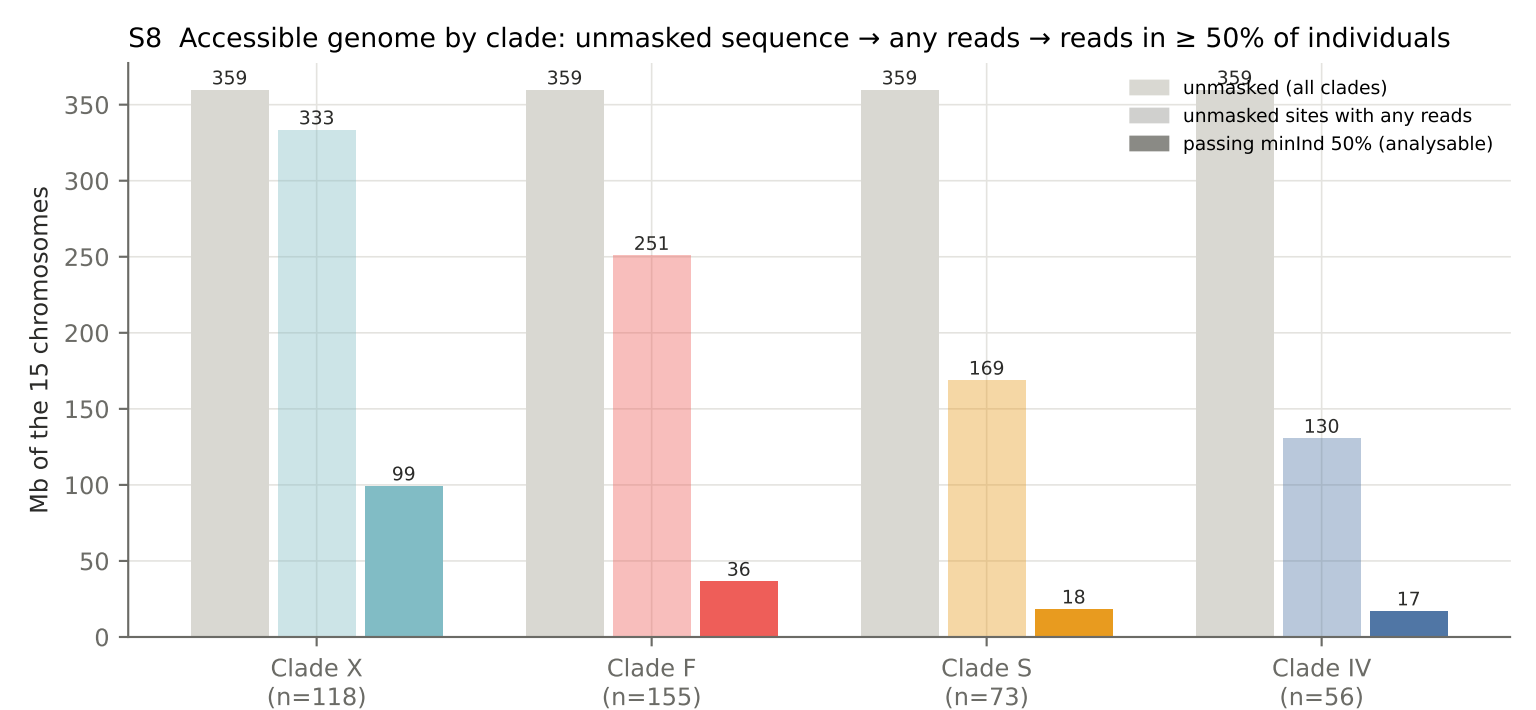


ANGSD counts: MAPQ >= 30, base Q >= 20, unmasked nuclear sites; per provisional clade.

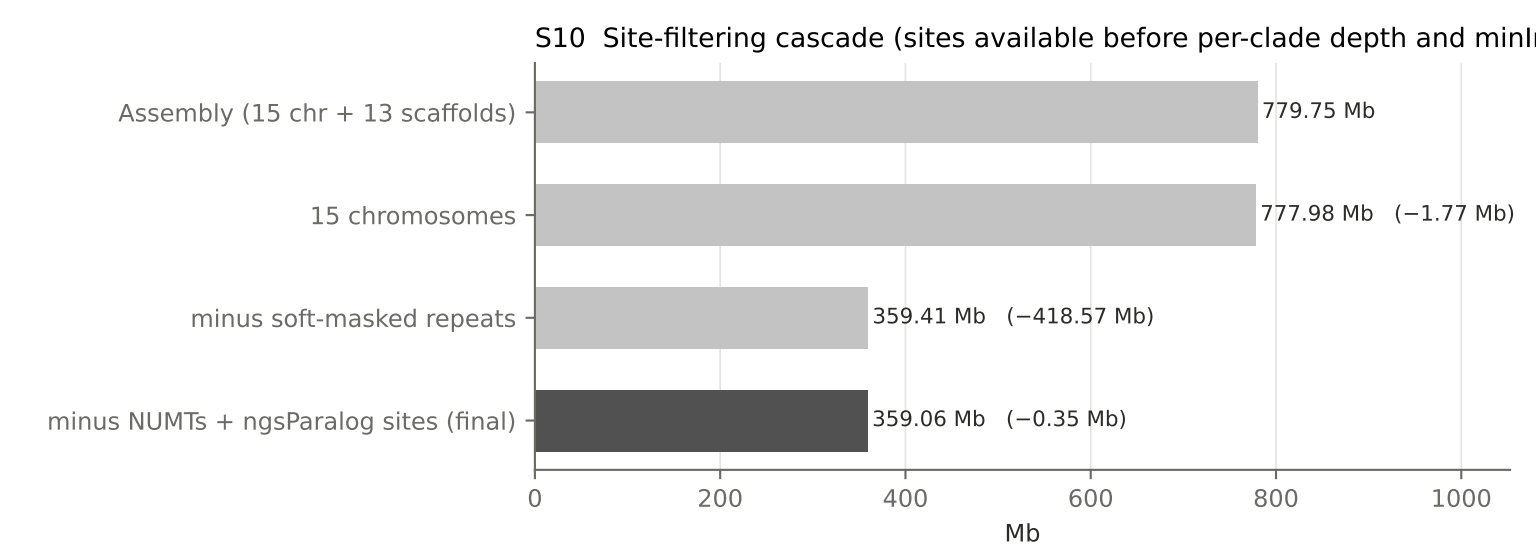
S10 Site-filtering cascade (sites available before per-clade depth and minI
Assembly (15 chr + 13 scaffolds)
779.75 Mb
15 chromosomes
777.98 Mb (−1.77 Mb)
minus soft-masked repeats
359.41 Mb (−418.57 Mb)
minus NUMTs + ngsParalog sites (final)
359.06 Mb (−0.35 Mb)
0
200
400
600
800
1000
Mb

S11 Paralog / mismapping filter

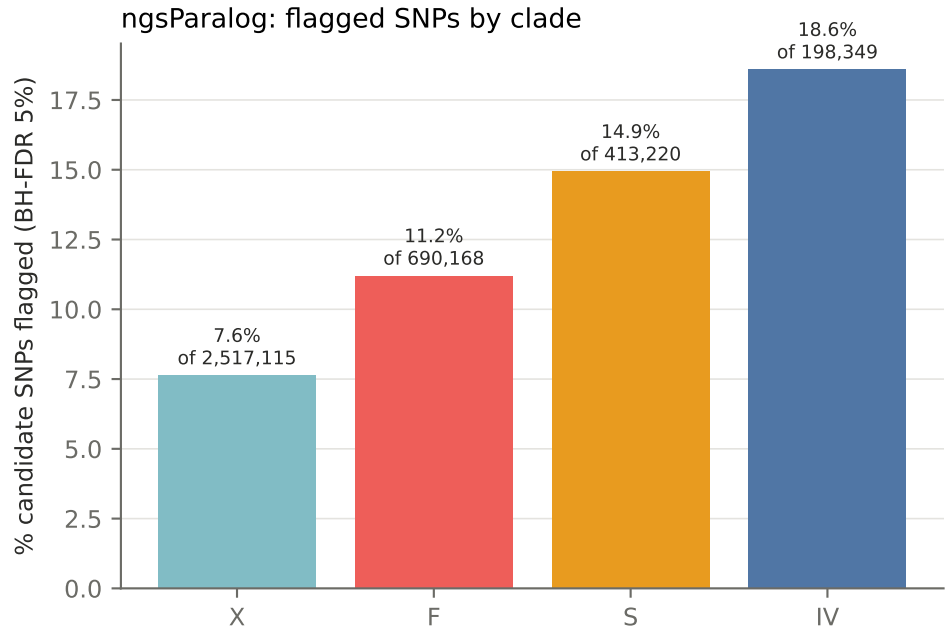



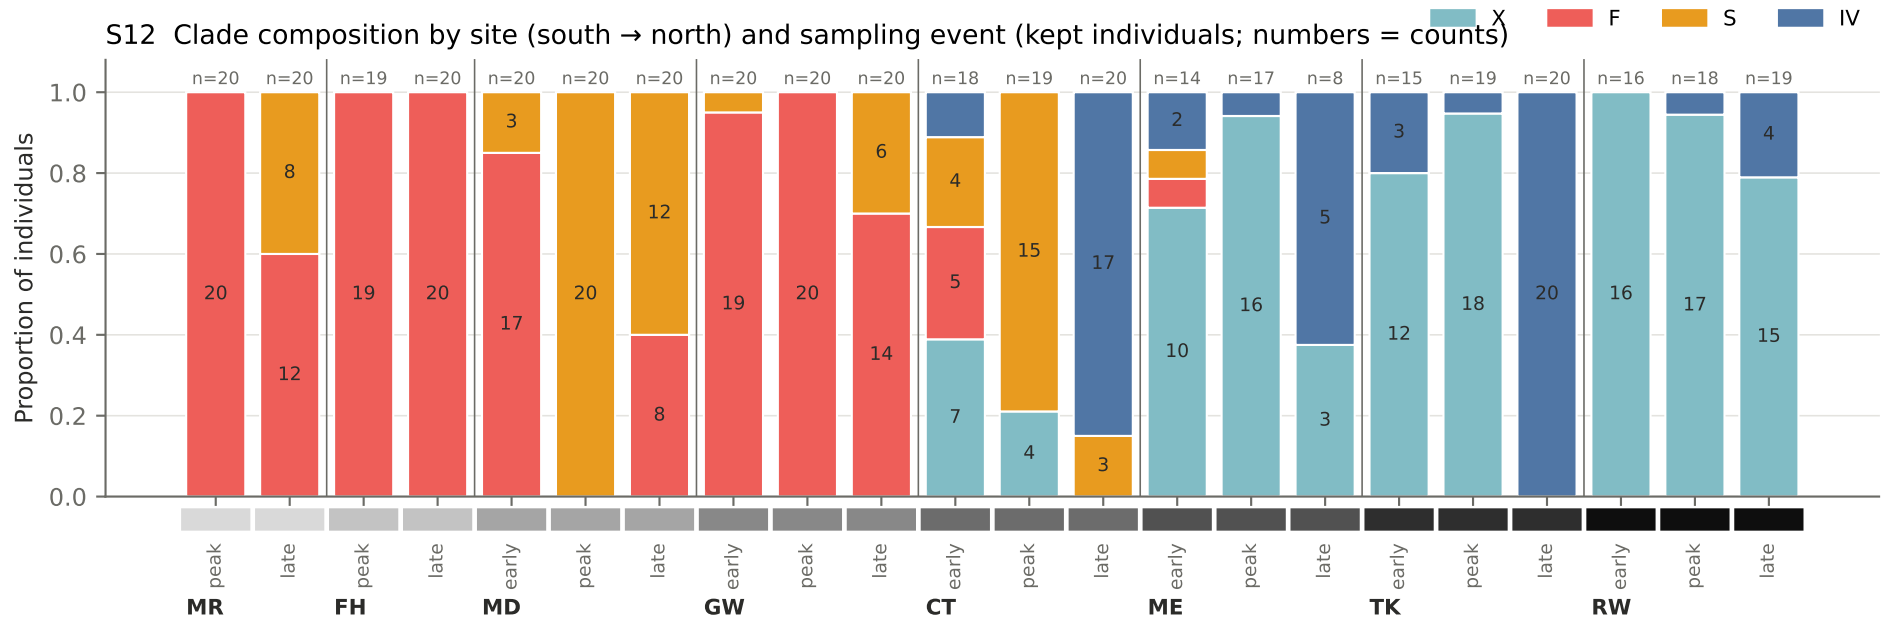

Clade = prior_clade (confirmed by mito reads for 402/402); switch to metadata/clade_assignments.tsv after Stage 1.