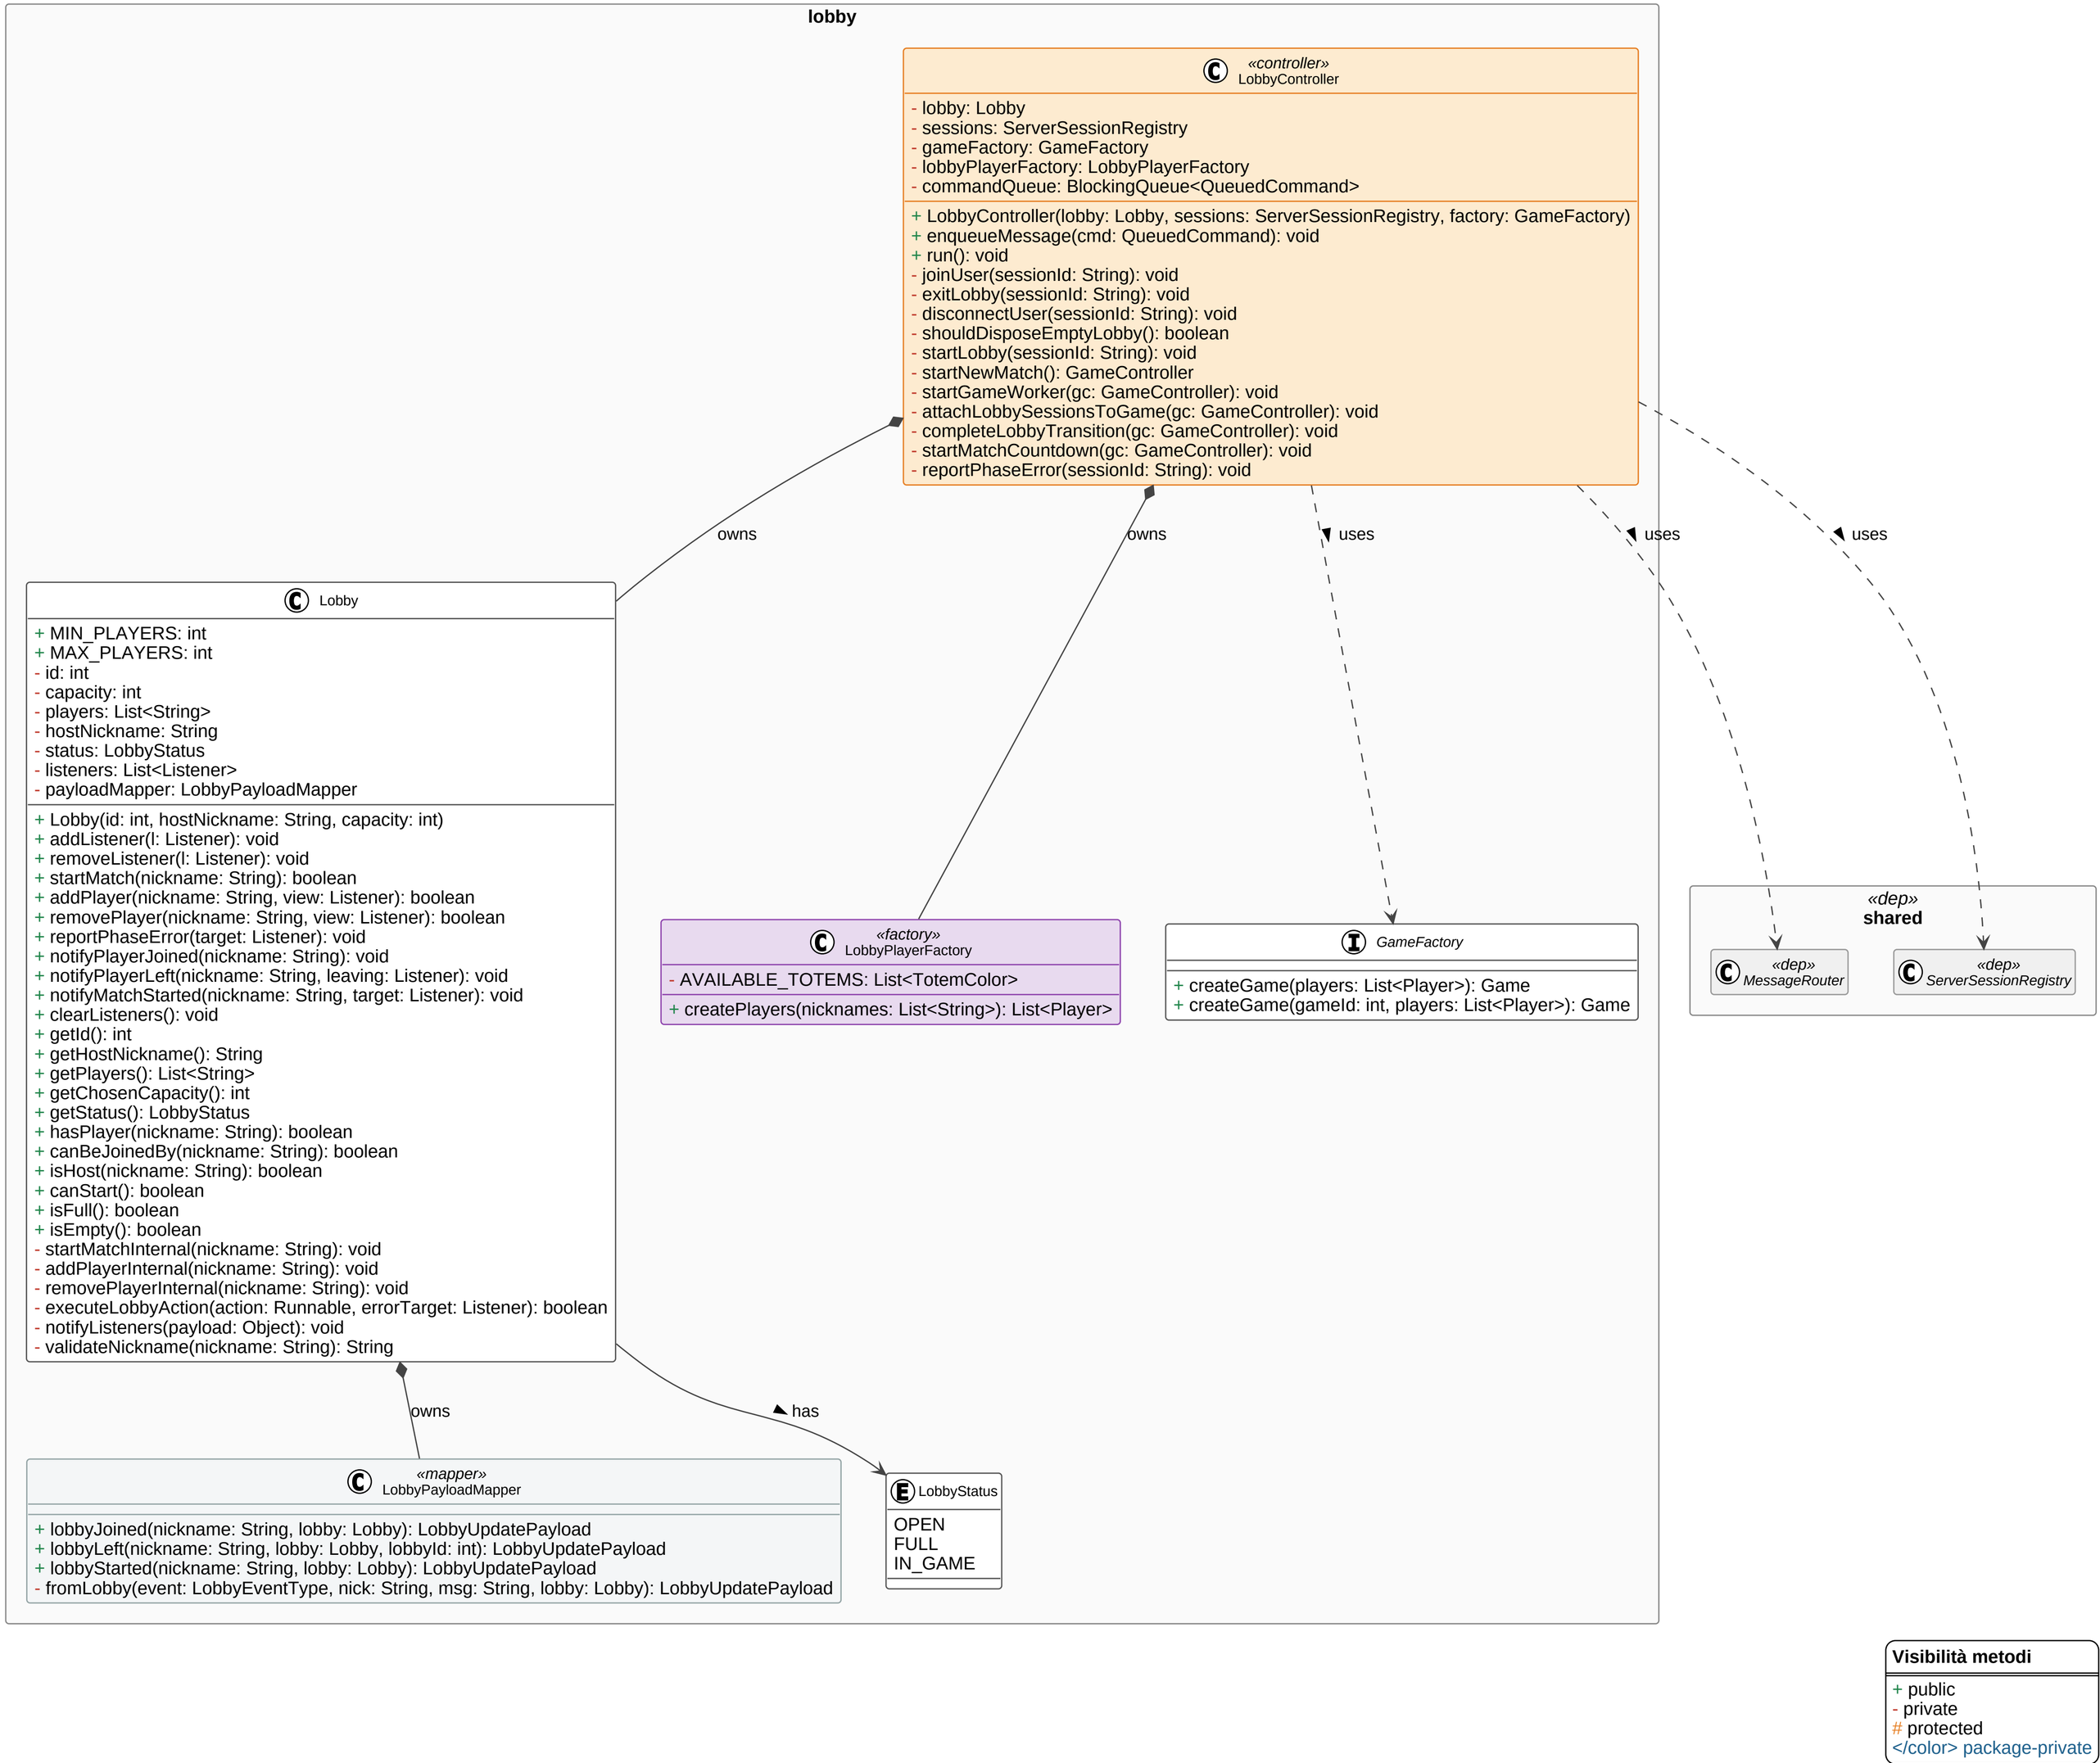
lobby
«controller»
LobbyController
- lobby: Lobby
- sessions: ServerSessionRegistry
- gameFactory: GameFactory
- lobbyPlayerFactory: LobbyPlayerFactory
- commandQueue: BlockingQueue<QueuedCommand>
+ LobbyController(lobby: Lobby, sessions: ServerSessionRegistry, factory: GameFactory)
+ enqueueMessage(cmd: QueuedCommand): void
+ run(): void
- joinUser(sessionId: String): void
- exitLobby(sessionId: String): void
- disconnectUser(sessionId: String): void
- shouldDisposeEmptyLobby(): boolean
- startLobby(sessionId: String): void
- startNewMatch(): GameController
- startGameWorker(gc: GameController): void
- attachLobbySessionsToGame(gc: GameController): void
- completeLobbyTransition(gc: GameController): void
- startMatchCountdown(gc: GameController): void
- reportPhaseError(sessionId: String): void
owns
owns
uses
uses
uses
Lobby
+ MIN_PLAYERS: int
+ MAX_PLAYERS: int
- id: int
- capacity: int
- players: List<String>
- hostNickname: String
- status: LobbyStatus
- listeners: List<Listener>
- payloadMapper: LobbyPayloadMapper
+ Lobby(id: int, hostNickname: String, capacity: int)
+ addListener(l: Listener): void
+ removeListener(l: Listener): void
+ startMatch(nickname: String): boolean
+ addPlayer(nickname: String, view: Listener): boolean
+ removePlayer(nickname: String, view: Listener): boolean
+ reportPhaseError(target: Listener): void
+ notifyPlayerJoined(nickname: String): void
+ notifyPlayerLeft(nickname: String, leaving: Listener): void
+ notifyMatchStarted(nickname: String, target: Listener): void
+ clearListeners(): void
+ getId(): int
+ getHostNickname(): String
+ getPlayers(): List<String>
+ getChosenCapacity(): int
+ getStatus(): LobbyStatus
+ hasPlayer(nickname: String): boolean
+ canBeJoinedBy(nickname: String): boolean
+ isHost(nickname: String): boolean
+ canStart(): boolean
+ isFull(): boolean
+ isEmpty(): boolean
- startMatchInternal(nickname: String): void
- addPlayerInternal(nickname: String): void
- removePlayerInternal(nickname: String): void
- executeLobbyAction(action: Runnable, errorTarget: Listener): boolean
- notifyListeners(payload: Object): void
- validateNickname(nickname: String): String
«factory»
LobbyPlayerFactory
- AVAILABLE_TOTEMS: List<TotemColor>
+ createPlayers(nicknames: List<String>): List<Player>
GameFactory
+ createGame(players: List<Player>): Game
+ createGame(gameId: int, players: List<Player>): Game
«dep»
shared
«dep»
MessageRouter
«dep»
ServerSessionRegistry
owns
has
«mapper»
LobbyPayloadMapper
+ lobbyJoined(nickname: String, lobby: Lobby): LobbyUpdatePayload
+ lobbyLeft(nickname: String, lobby: Lobby, lobbyId: int): LobbyUpdatePayload
+ lobbyStarted(nickname: String, lobby: Lobby): LobbyUpdatePayload
- fromLobby(event: LobbyEventType, nick: String, msg: String, lobby: Lobby): LobbyUpdatePayload
LobbyStatus
OPEN
FULL
IN_GAME
Visibilità metodi
+ public
- private
protected
</color> package-private