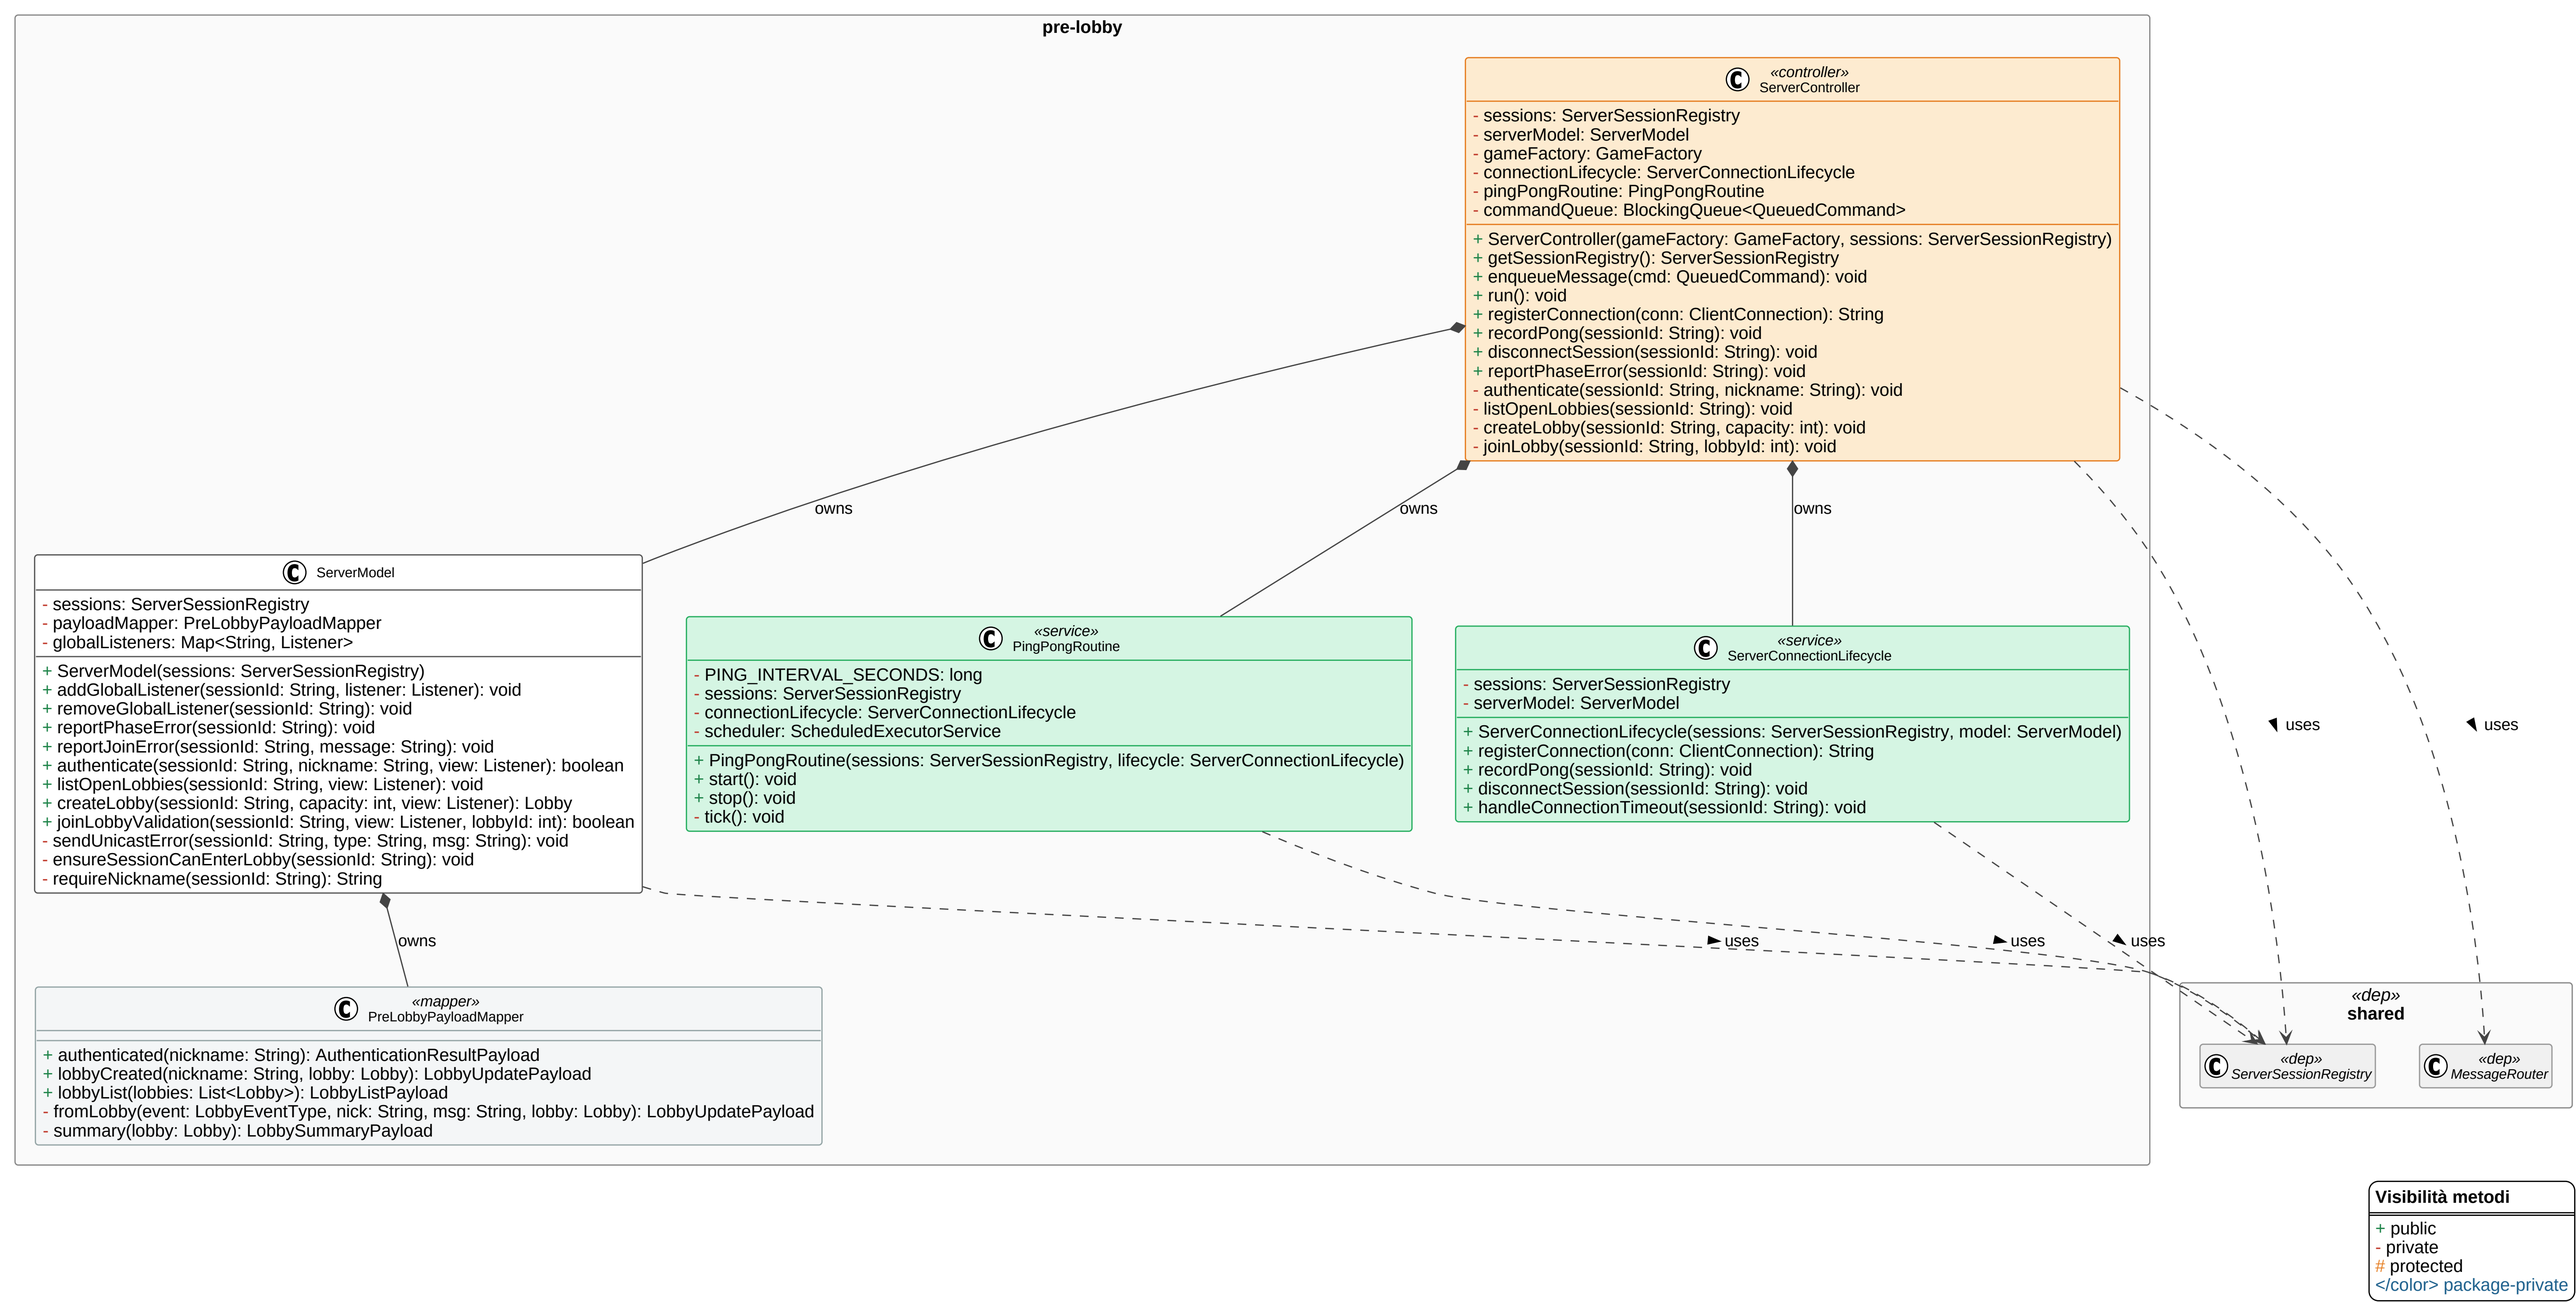
pre-lobby
«controller»
ServerController
- sessions: ServerSessionRegistry
- serverModel: ServerModel
- gameFactory: GameFactory
- connectionLifecycle: ServerConnectionLifecycle
- pingPongRoutine: PingPongRoutine
- commandQueue: BlockingQueue<QueuedCommand>
+ ServerController(gameFactory: GameFactory, sessions: ServerSessionRegistry)
+ getSessionRegistry(): ServerSessionRegistry
+ enqueueMessage(cmd: QueuedCommand): void
+ run(): void
+ registerConnection(conn: ClientConnection): String
+ recordPong(sessionId: String): void
+ disconnectSession(sessionId: String): void
+ reportPhaseError(sessionId: String): void
- authenticate(sessionId: String, nickname: String): void
- listOpenLobbies(sessionId: String): void
- createLobby(sessionId: String, capacity: int): void
- joinLobby(sessionId: String, lobbyId: int): void
owns
owns
owns
ServerModel
- sessions: ServerSessionRegistry
- payloadMapper: PreLobbyPayloadMapper
- globalListeners: Map<String, Listener>
+ ServerModel(sessions: ServerSessionRegistry)
+ addGlobalListener(sessionId: String, listener: Listener): void
+ removeGlobalListener(sessionId: String): void
+ reportPhaseError(sessionId: String): void
+ reportJoinError(sessionId: String, message: String): void
+ authenticate(sessionId: String, nickname: String, view: Listener): boolean
+ listOpenLobbies(sessionId: String, view: Listener): void
+ createLobby(sessionId: String, capacity: int, view: Listener): Lobby
+ joinLobbyValidation(sessionId: String, view: Listener, lobbyId: int): boolean
- sendUnicastError(sessionId: String, type: String, msg: String): void
- ensureSessionCanEnterLobby(sessionId: String): void
- requireNickname(sessionId: String): String
«service»
PingPongRoutine
- PING_INTERVAL_SECONDS: long
- sessions: ServerSessionRegistry
- connectionLifecycle: ServerConnectionLifecycle
- scheduler: ScheduledExecutorService
+ PingPongRoutine(sessions: ServerSessionRegistry, lifecycle: ServerConnectionLifecycle)
+ start(): void
+ stop(): void
- tick(): void
«service»
ServerConnectionLifecycle
- sessions: ServerSessionRegistry
- serverModel: ServerModel
+ ServerConnectionLifecycle(sessions: ServerSessionRegistry, model: ServerModel)
+ registerConnection(conn: ClientConnection): String
+ recordPong(sessionId: String): void
+ disconnectSession(sessionId: String): void
+ handleConnectionTimeout(sessionId: String): void
uses
uses
uses
uses
uses
owns
«mapper»
PreLobbyPayloadMapper
+ authenticated(nickname: String): AuthenticationResultPayload
+ lobbyCreated(nickname: String, lobby: Lobby): LobbyUpdatePayload
+ lobbyList(lobbies: List<Lobby>): LobbyListPayload
- fromLobby(event: LobbyEventType, nick: String, msg: String, lobby: Lobby): LobbyUpdatePayload
- summary(lobby: Lobby): LobbySummaryPayload
«dep»
shared
«dep»
ServerSessionRegistry
«dep»
MessageRouter
Visibilità metodi
+ public
- private
protected
</color> package-private