




Sleep.c

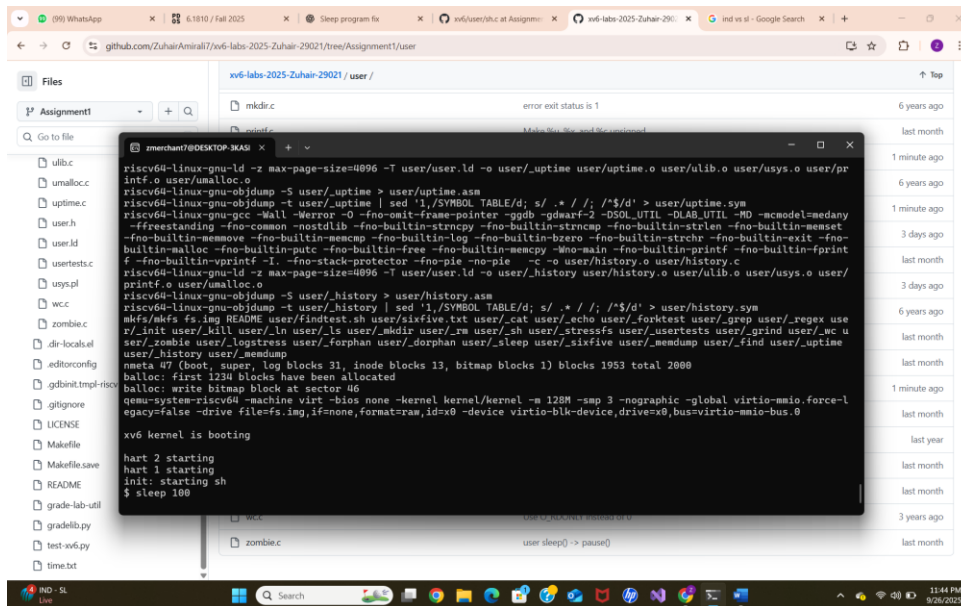

Sixfive.c

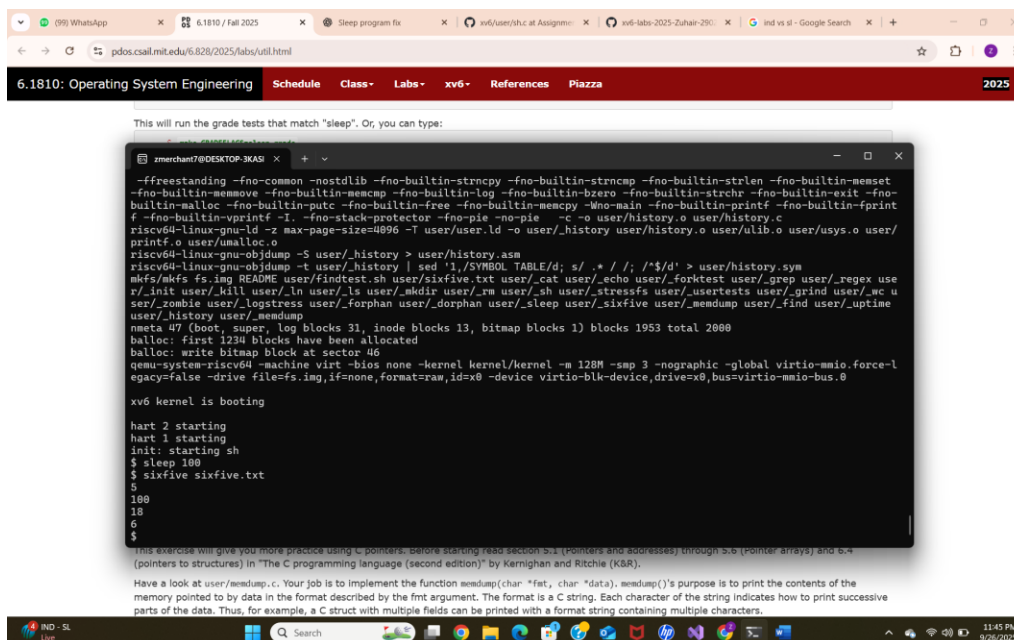


Memdump.c

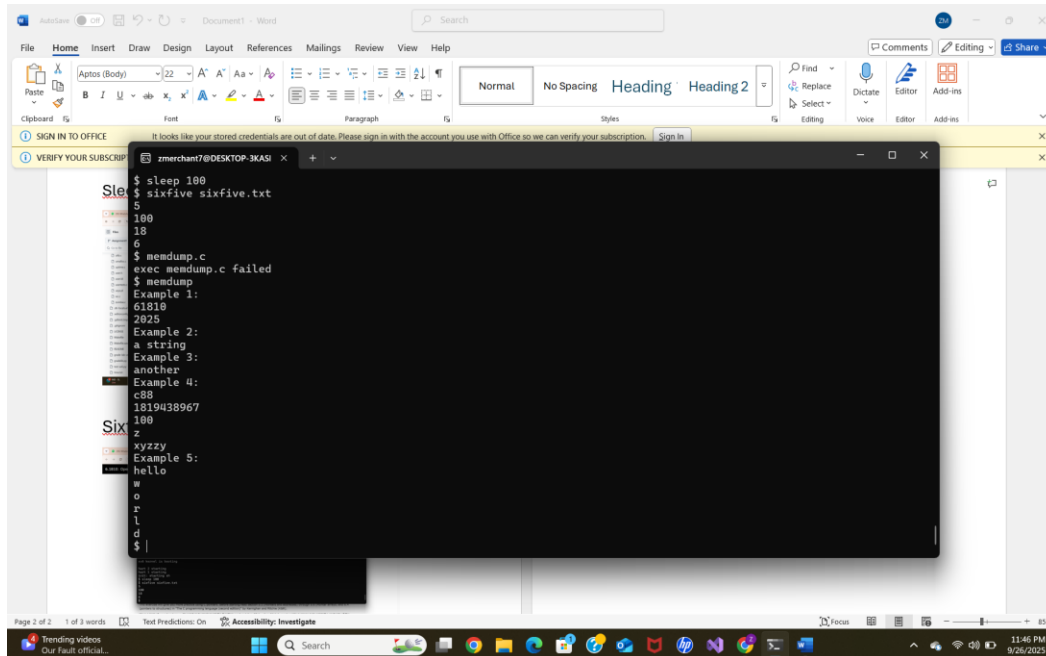

```
$ sleep 100
$ sixfive sixfive.txt
5
100
18
6
$ memdump.c
exec memdump.c failed
$ memdump
Example 1:
61810
2025
Example 2:
a string
Example 3:
another
Example 4:
c88
1819438967
100
z
xyzyz
Example 5:
hello
w
o
r
l
d
$ find .b
usage: find <start-path> <name|pattern> [-E | -F] [-exec <cmd> [args...]]
$ find . b
$ echo > b
mkdir a
echo > a/b
mkdir a/aa
echo > a/aa/b
find . b
$ $ $ $ $ ./b
./a/b
./a/aa/b
$
```

Find.c

\

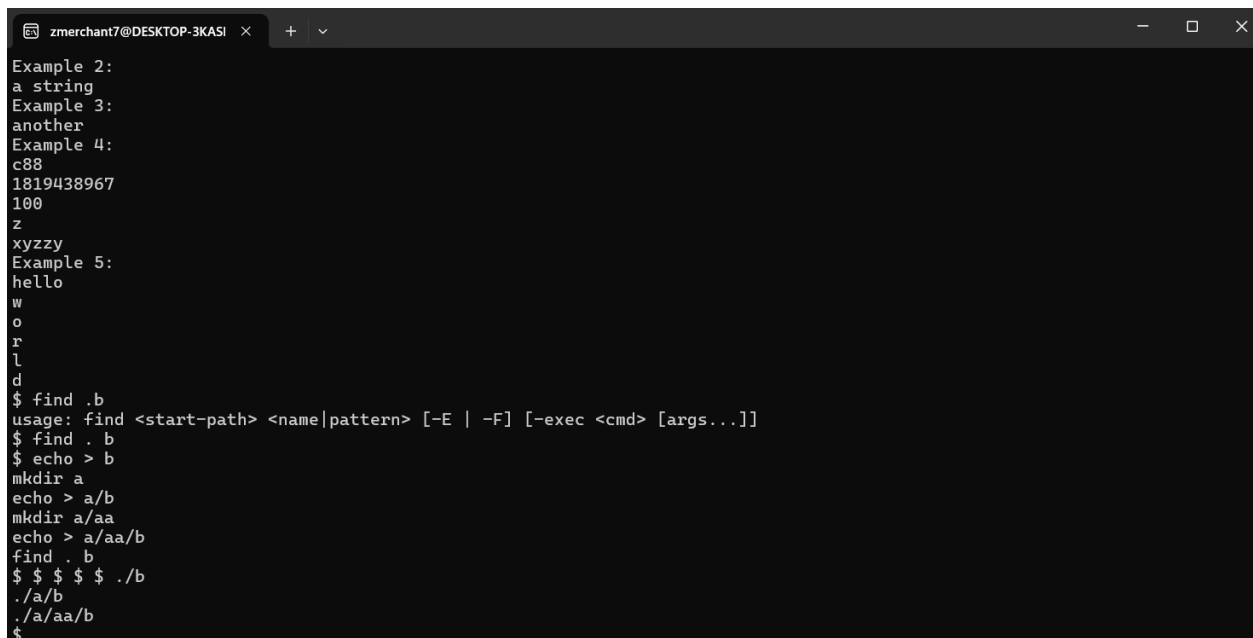

```
Example 2:
a string
Example 3:
another
Example 4:
c88
1819438967
100
z
xyzyz
Example 5:
hello
w
o
r
l
d
$ find .b
usage: find <start-path> <name|pattern> [-E | -F] [-exec <cmd> [args...]]
$ find . b
$ echo > b
mkdir a
echo > a/b
mkdir a/aa
echo > a/aa/b
find . b
$ $ $ $ $ ./b
./a/b
./a/aa/b
$
```