

**Nama : Winda Umi Fatimatus Sa'diyah**

**NIM : 2141762055**

**Absen : 19**

## **Lab - Gather System Information After an Incident**

### **Objectives**

- Collect system information after an incident has occurred.
- View logs for potential intrusions.

### **Background / Scenario**

When an incident occurs in an organization, people responsible must know how to respond. An organization needs to develop an incident response plan and put together a Computer Security Incident Response Team (CSIRT) to manage the response. In this lab, you will gather system information and review logs after an incident has occurred. Doing these tasks immediately after the incident is important because any data residing in RAM will be gone when the system is shut down.

### **Required Resources**

PC with the **CSE-LABVM** installed in VirtualBox

### **Instructions**

#### **Step 1: Open a terminal window in the CSE-LABVM.**

- a. Launch the **CSE-LABVM**.
- b. Double-click the **Terminal** icon to open a terminal.

#### **Step 2: Collect volatile information of the compromised system.**

In this step, you will create a file called **report.txt** that includes a variety of system information that can be used for incident analysis. This report can then be transferred to a USB drive, emailed, or uploaded to a cloud server to preserve the information. Then the system can be taken down.

- a. Switch to the root user with the **sudo su** command. Enter **password** as the root password.

```
cisco@labvm:~$ sudo su
[sudo] password for cisco: password
root@labvm:/home/cisco#
```

- b. Enter the **echo** command, and then specify a heading for a newly created file named **report.txt**. Enter the **cat** command to review the new file.

```
root@labvm:/home/cisco# echo Incident Investigator Report > report.txt
root@labvm:/home/cisco# cat report.txt
Incident                Investigator            Report
root@labvm:/home/cisco#
```

- c. Enter the **date** command and redirect the date and timestamp to the **report.txt** file. Be sure to use the double angle brackets (**>>**) to append to the **report.txt** file. Otherwise, you will replace the previous content.

**Note:** To better document the content stored in `report.txt`, use the `echo` command to add a subheading as shown here for **Start Date and Time**. Each substep will specify a subheading for you to append before you gather information.

```
root@labvm:/home/cisco# echo =====Start Date and Time===== >> report.txt
root@labvm:/home/cisco# date >> report.txt
```

- d. Enter the `uname` command to print system information. Use the `-a` option to append all system information to the `report.txt` file.

```
root@labvm:/home/cisco# echo =====System Information===== >> report.txt
root@labvm:/home/cisco# uname -a >> report.txt
```

- e. Enter the `ifconfig -a` command and append all network interface information to the `report.txt` file.

```
root@labvm:/home/cisco# echo =====Network Interfaces===== >> report.txt
root@labvm:/home/cisco# ifconfig -a >> report.txt
```

- f. The `netstat` command can collect all the network statistics. Enter the command with the options `-ano` to collect data on all sockets (`-a`), IP addresses instead of domain names (`-n`), and information related to networking times (`-o`). Append the output to the `report.txt` file.

```
root@labvm:/home/cisco# echo =====Network Statistics===== >> report.txt
root@labvm:/home/cisco# netstat -ano >> report.txt
```

- g. The `ps` command reports a snapshot of the current processes running on the system. Enter the command with the options `-axu` to list every process running on the system (`-a` and `-x`) and in a useroriented format (`-u`). Append the output to the `report.txt` file.

```
root@labvm:/home/cisco# echo =====Processes===== >> report.txt
root@labvm:/home/cisco# ps axu >> report.txt
```

- h. The `route` command lists the routing table currently used by the system. Enter the command with the option `-n` to list IP addresses instead of trying to determine host names. Append the output to the `report.txt` file.

```
root@labvm:/home/cisco# echo =====Routing Table===== >> report.txt
root@labvm:/home/cisco# route -n >> report.txt
```

- i. Enter the `date` command and append the date and timestamp to the end of the file to complete the report.

```
root@labvm:/home/cisco# echo =====End Date and Time===== >> report.txt
root@labvm:/home/cisco# date >> report.txt
```

- j. Use the `cat` command and pipe the output to the `less` command to view `report.txt` one page or line at a time. Press the **spacebar** to scroll down by page or press **Enter** to scroll down by a single line. Type **q** when finished.

```
root@labvm:/home/cisco# cat report.txt | less
Incident Investigator Report
=====Start Date and Time=====
Wed 24 Mar 2021 05:06:53 PM UTC
=====System Information=====
Linux labvm 5.4.0-67-generic #75-Ubuntu SMP Fri Feb 19 18:03:38 UTC 2021 x86_64
x86_64      x86_64      GNU/Linux      =====Network      Interfaces=====      enp0s3:
flags=4163<UP,BROADCAST,RUNNING,MULTICAST>      mtu 1500      inet 10.0.2.15
netmask 255.255.255.0 broadcast 10.0.2.255      inet6 fe80::a00:27ff:feb5:4bb0
prefixlen 64 scopeid 0x20<link>      ether 08:00:27:b5:4b:b0 txqueuelen
1000 (Ethernet)      RX packets 47719 bytes 36618515 (36.6 MB)
```

```

RX errors 0 dropped 0 overruns 0 frame 0
TX packets 31406 bytes 3590109 (3.5 MB)
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
inet 127.0.0.1 netmask 255.0.0.0 inet6 ::1
prefixlen 128 scopeid 0x10<host> loop
txqueuelen 1000 (Local Loopback) RX packets
2292 bytes 244651 (244.6 KB)
RX errors 0 dropped 0 overruns 0 frame 0
TX packets 2292 bytes 244651 (244.6 KB)
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

=====Network Statistics=====
Active Internet connections (servers and established) <output omitted> unix 3
[ ] STREAM CONNECTED 22100 unix 3 [ ] STREAM
CONNECTED 18249 =====Processes===== USER PID %CPU %MEM VSZ RSS
TTY STAT START TIME COMMAND root 1 0.0 0.5 101896 10768 ?
Ss Mar23 0:03 /sbin/init root 2 0.0 0.0 0 0 ? S
Mar23 0:00 [kthreadd] root 3 0.0 0.0 0 0 ? I<
Mar23 0:00 [rcu_gp] <output omitted> root 5319 0.0 0.0 0 0 ?
I 16:31 0:00 [kworker/0:2events] root 5490 0.0 0.1 11492 3332
pts/1 R+ 17:06 0:00 ps axu =====Routing Table=====
Kernel IP routing table
Destination Gateway Genmask Flags Metric Ref Use Iface
0.0.0.0 10.0.2.2 0.0.0.0 UG 100 0 0 enp0s3
10.0.2.0 0.0.0.0 255.255.255.0 U 0 0 0 enp0s3
10.0.2.2 0.0.0.0 255.255.255.255 UH 100 0 0 enp0s3

=====End Date and Time=====
Wed 24 Mar 2021 05:06:53 PM UTC
(END) q
root@labvm:/home/cisco#

```

- Hasil output

```
root@labvm:/home/cisco
File Edit View Search Terminal Help
cisco@labvm:~$ sudo su
[sudo] password for cisco:
root@labvm:/home/cisco# echo Incident Investigator Report > report.txt
root@labvm:/home/cisco# cat report.txt
Incident Investigator Report
root@labvm:/home/cisco# echo "====Start Date and Time====" >> report.txt
root@labvm:/home/cisco# date >> report.txt
root@labvm:/home/cisco# echo "====System Information====" >> report.txt
root@labvm:/home/cisco# uname -a >> report.txt
root@labvm:/home/cisco# echo "====Network Interface====" >> report.txt
root@labvm:/home/cisco# ifconfig -a >> report.txt
root@labvm:/home/cisco# echo "====Network Statistics====" >> report.txt
root@labvm:/home/cisco# netstat -ano >> report.txt
root@labvm:/home/cisco# echo "====Processes====" >> report.txt
root@labvm:/home/cisco# echo "====Processes====" >> report.txt
root@labvm:/home/cisco# ps aux >> report.txt
root@labvm:/home/cisco# echo "====Routing Table====" >> report.txt
root@labvm:/home/cisco# route -n >> report.txt
root@labvm:/home/cisco# echo "====End Date and Time====" >> report.txt
root@labvm:/home/cisco# date >> report.txt
root@labvm:/home/cisco# cat report.txt | less
root@labvm:/home/cisco#
```

```
root@labvm:/home/cisco
File Edit View Search Terminal Help
Incident Investigator Report
====Start Date and Time====
Sat Nov  2 10:27:23 PM UTC 2024
====System Information====
Linux labvm 5.15.0-60-generic #66-Ubuntu SMP Fri Jan 20 14:29:49 UTC 2023 x86_64
x86_64 x86_64 GNU/Linux
====Network Interface====
enp0s3: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
    inet 10.0.2.15 netmask 255.255.255.0 broadcast 10.0.2.255
    inet6 fe80::a00:27ff:fe55:4407 prefixlen 64 scopeid 0x20<link>
    inet6 fd00::a00:27ff:fe55:4407 prefixlen 64 scopeid 0x0<global>
    ether 08:00:27:55:44:07 txqueuelen 1000 (Ethernet)
    RX packets 677 bytes 65596 (65.5 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
    TX packets 707 bytes 63321 (63.3 KB)
    TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1 prefixlen 128 scopeid 0x10<host>
    loop txqueuelen 1000 (Local Loopback)
    RX packets 579 bytes 61343 (61.3 KB)
    RX errors 0 dropped 0 overruns 0 frame 0
:
```

```

root@labvm: /home/cisco
File Edit View Search Terminal Help
Active Internet connections (servers and established)
Proto Recv-Q Send-Q Local Address           Foreign Address         State
Timer
tcp        0      0 0.0.0.0:631             0.0.0.0:*               LISTEN
off (0.00/0/0)
tcp        0      0 0.0.0.0:22             0.0.0.0:*               LISTEN
off (0.00/0/0)
tcp        0      0 0.0.0.0:21             0.0.0.0:*               LISTEN
off (0.00/0/0)
tcp        0      0 127.0.0.53:53          0.0.0.0:*               LISTEN
off (0.00/0/0)
tcp6       0      0 :::22                  :::*                    LISTEN
off (0.00/0/0)
tcp6       0      0 :::23                  :::*                    LISTEN
off (0.00/0/0)
udp        0      0 0.0.0.0:631             0.0.0.0:*               *
off (0.00/0/0)
udp        0      0 127.0.0.53:53          0.0.0.0:*               *
off (0.00/0/0)
udp        0      0 10.0.2.15:68           0.0.0.0:*               *
off (0.00/0/0)
udp        0      0 10.0.2.15:123          0.0.0.0:*               *
off (0.00/0/0)
:

```

### Step 3: Analyze different log files and learn their importance.

In addition to capturing information stored in RAM, the system also maintains a variety of logs that you should review after an incident. These log files can also be appended to your **report.txt** file or stored separately off the system in the event the system needs to be wiped. Logs of particular interest include, but are not limited to, the following:

- auth.log - logs system authorization information
  - btmp.log - logs failed login attempts
  - wtmp.log - logs who is currently logged into the system
- a. Use the **cat** command to view the auth.log and pipe it to the **less** command. Press the **spacebar** to scroll down by page or press **Enter** to scroll down by a single line. Type **q** when finished. Your output will be different.

```

root@labvm: /home/cisco# cat /var/log/auth.log | less
Mar 18 21:43:57 labvm sshd[375]: Server listening on 0.0.0.0 port 22.
Mar 18 21:43:57 labvm sshd[375]: Server listening on :: port 22.
Mar 18 21:43:57 labvm systemd-logind[366]: New seat seat0.
Mar 18 21:43:57 labvm systemd-logind[366]: Watching system buttons on
/dev/input/event0 (Power Button)
Mar 18 21:43:57 labvm systemd-logind[366]: Watching system buttons on
/dev/input/event1 (Sleep Button)
Mar 18 21:43:57 labvm systemd-logind[366]: Watching system buttons on
/dev/input/event2 (AT Translated Set 2 keyboard)
Mar 18 21:43:59 labvm sshd[408]: error: kex_exchange_identification: Connection
closed by remote host
Mar 18 21:43:59 labvm sshd[407]: Accepted password for cisco from 10.0.2.2 port
57067 ssh2


```

```

Mar 18 21:43:59 labvm sshd[407]: pam_unix(sshd:session): session opened for user
cisco by (uid=0)
Mar 18 21:43:59 labvm systemd-logind[366]: New session 1 of user cisco.
<output omitted>
(END)
root@labvm:/home/cisco#

```

- Hasil output

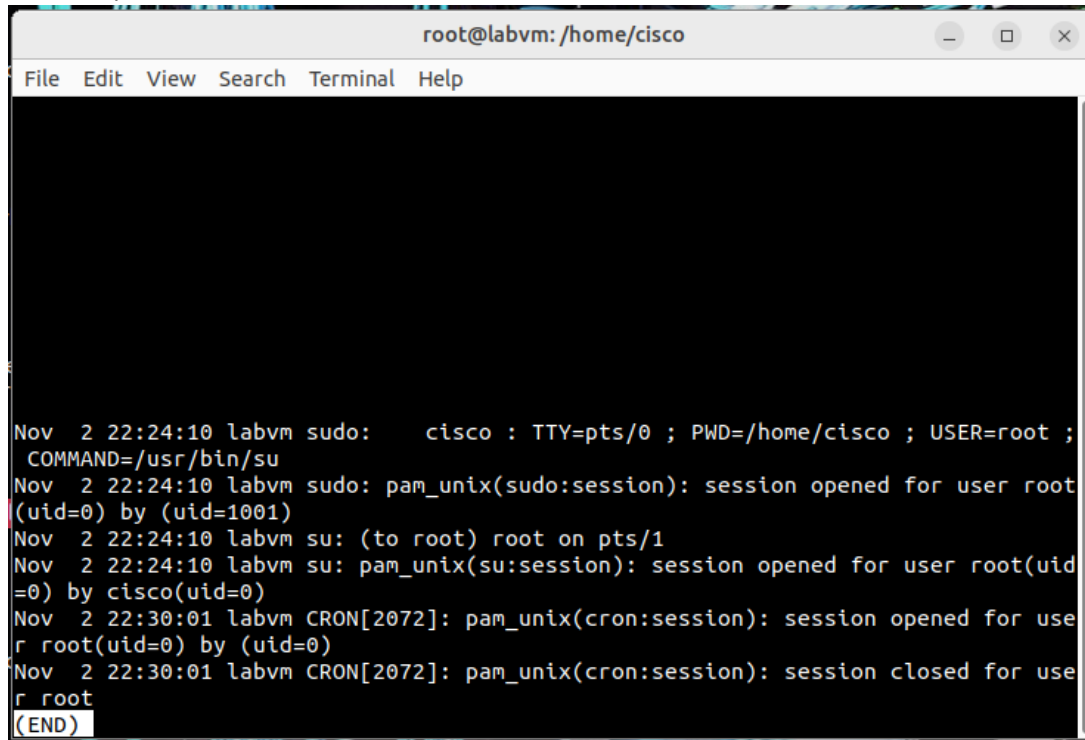

```

root@labvm: /home/cisco
File Edit View Search Terminal Help
Nov  2 22:24:10 labvm sudo:    cisco : TTY=pts/0 ; PWD=/home/cisco ; USER=root ;
COMMAND=/usr/bin/su
Nov  2 22:24:10 labvm sudo: pam_unix(sudo:session): session opened for user root
(uid=0) by (uid=1001)
Nov  2 22:24:10 labvm su: (to root) root on pts/1
Nov  2 22:24:10 labvm su: pam_unix(su:session): session opened for user root(uid
=0) by cisco(uid=0)
Nov  2 22:30:01 labvm CRON[2072]: pam_unix(cron:session): session opened for use
r root(uid=0) by (uid=0)
Nov  2 22:30:01 labvm CRON[2072]: pam_unix(cron:session): session closed for use
r root
(END)

```


- b. The **last** command shows a listing of last logged in users. Enter the command with the **-f** option to specify the log file. The **btmp** log file shows failed login attempts. Your output will be different.

```

root@labvm:/home/cisco# last -f /var/log/btmp
UNKNOWN  tty6                Thu Mar 18 21:47      gone - no logout
UNKNOWN  tty4                Thu Mar 18 21:47      gone - no logout
UNKNOWN  tty3                Thu Mar 18 21:47      gone - no logout
cisco    tty1                Thu Mar 18 21:47      gone - no logout
cisco    tty1                Thu Mar 18 21:47 - 21:47  (00:00)
btmp begins Thu Mar 18 21:47:05 2021 root@labvm:/home/cisco#

```

- Hasil output

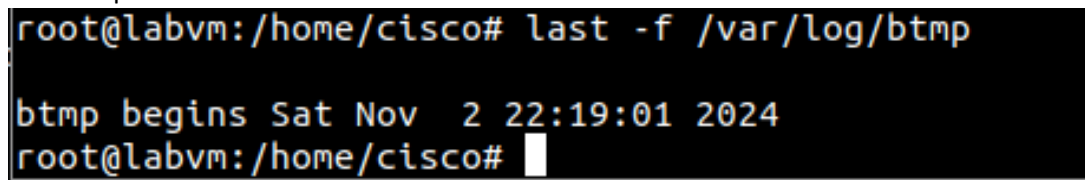

```

root@labvm:/home/cisco# last -f /var/log/btmp
btmp begins Sat Nov  2 22:19:01 2024
root@labvm:/home/cisco#

```

- c. Enter the **last** command again specifying the **wtmp** file to show who is currently connected to the system. Your output will be different.

```

root@labvm:/home/cisco# last -f /var/log/wtmp

```

```

cisco    tty7          :0                Tue Mar 23 19:38    gone - no logout
echoreboot system boot 5.4.0-67-generic Tue Mar 23 14:38    still running
cisco    tty2          :0                Thu Mar 18 21:47 - 21:47 (00:00)
reboot   system boot 5.4.0-67-generic Thu Mar 18 21:43 - 22:02 (00:18)
wtmp begins Thu Mar 18 21:43:54 2021

```

- Hasil Output

```

root@labvm: /home/cisco
File Edit View Search Terminal Help
root@labvm:/home/cisco# cat /var/log/auth.log | less
root@labvm:/home/cisco# last -f /var/log/btmp

btmp begins Sat Nov  2 22:19:01 2024
root@labvm:/home/cisco# last -f /var/log/wtmp
cisco    pts/1        127.0.0.1      Wed Sep 18 03:31 - 03:32 (00:01)
cisco    tty7          :0            Wed Sep 18 03:30    gone - no logout
reboot   system boot 5.15.0-60-generi Wed Sep 18 10:30    still running
cisco    pts/4        127.0.0.1      Wed Sep 18 02:00 - 02:01 (00:00)
cisco    pts/4        127.0.0.1      Wed Sep 18 01:54 - 01:56 (00:01)
cisco    pts/3        localhost      Wed Sep 18 01:42 - 01:44 (00:01)
cisco    tty7          :0            Wed Sep 18 01:33 - crash (08:57)
reboot   system boot 5.15.0-60-generi Wed Sep 18 08:32    still running
cisco    pts/1        localhost      Tue Sep 17 03:51 - 03:51 (00:00)
cisco    tty7          :0            Tue Sep 17 03:44 - crash (1+04:48)
reboot   system boot 5.15.0-60-generi Tue Sep 17 10:44    still running
cisco    pts/1        localhost      Fri Sep 13 01:38 - 01:40 (00:02)
cisco    pts/0        localhost      Fri Sep 13 01:27 - 01:32 (00:04)
cisco    tty7          :0            Fri Sep 13 01:15 - crash (4+09:28)
reboot   system boot 5.15.0-60-generi Thu Sep 12 09:29    still running
reboot   system boot 5.15.0-60-generi Fri Feb 10 21:10 - 21:31 (00:20)

wtmp begins Fri Feb 10 21:10:49 2023
root@labvm:/home/cisco#

```

d. Enter the **exit** command to switch back to the cisco user. root@labvm:/home/cisco# **exit**

```
cisco@labvm:~$
```

