

**NATIONAL UNIVERSITY OF MODERN
LANGUAGE ISLAMABAD**

Lab 11



Submitted to:

Sir Hassan Shah

Submitted by:


Zulqarnain Hassan

Roll No: SP21379

Subject: computer network

Department: BSSE-5-Afternoon

Date: 13-12-2024

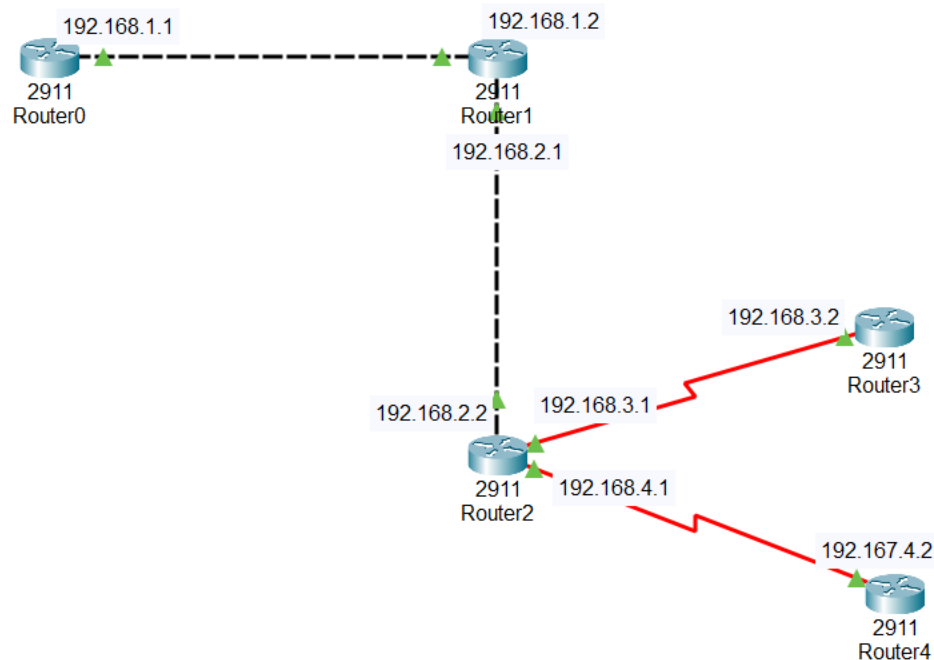

Lab Task of serial connections

Task 1

Router2:

```

zulqarnain-sp21379-r3(config)#inter
zulqarnain-sp21379-r3(config)#interface se0/1/0
zulqarnain-sp21379-r3(config-if)#ip address 192.168.3.1 255.255.255.0
zulqarnain-sp21379-r3(config-if)#no sh
zulqarnain-sp21379-r3(config-if)#exit
zulqarnain-sp21379-r3(config)#inter
zulqarnain-sp21379-r3(config)#interface se0/1/1
zulqarnain-sp21379-r3(config-if)#ip address 192.168.4.1 255.255.255.0
zulqarnain-sp21379-r3(config-if)#no sh
zulqarnain-sp21379-r3(config-if)#
zulqarnain-sp21379-r3(config-if)#
zulqarnain-sp21379-r3(config-if)#

```

Router3:

```
Router3(config)#hostname zulqarnain-sp21379-r4
zulqarnain-sp21379-r4(config)#inter
zulqarnain-sp21379-r4(config)#interface se0/1/0
zulqarnain-sp21379-r4(config-if)#ip address192.168.3.2 255.255.255.0
                                     ^
% Invalid input detected at '^' marker.

zulqarnain-sp21379-r4(config-if)#ip address 192.168.3.2 255.255.255.0
zulqarnain-sp21379-r4(config-if)#no sh
zulqarnain-sp21379-r4(config-if)#
zulqarnain-sp21379-r4(config-if)#
zulqarnain-sp21379-r4(config-if)#
zulqarnain-sp21379-r4(config-if)#
zulqarnain-sp21379-r4(config-if)#
```

Router4:

```
Router(config)#
Router(config)#int
Router(config)#interface se0/1/0
Router(config-if)#ip address 192.167.4.2 255.255.255.0
Router(config-if)#no sh
Router(config-if)#
Router(config-if)#
Router(config-if)#
Router(config-if)#exit
Router(config)#
Router(config)#
```

Task 2

Router2:

```
zulqarnain-sp21379-r3(config)#
zulqarnain-sp21379-r3(config)#inte
zulqarnain-sp21379-r3(config)#interface se0/1/0
zulqarnain-sp21379-r3(config-if)#cl
zulqarnain-sp21379-r3(config-if)#clock r
zulqarnain-sp21379-r3(config-if)#clock rate 56000
zulqarnain-sp21379-r3(config-if)#exit
zulqarnain-sp21379-r3(config)#interface se0/1/1
zulqarnain-sp21379-r3(config-if)#clock rate 56000
zulqarnain-sp21379-r3(config-if)#exit
zulqarnain-sp21379-r3(config)#
zulqarnain-sp21379-r3(config)#
```

Lab Task of Default Routes

Task 1:

Router0:

```
zulqarnain-sp21379-r1(config)#ip route 0.0.0.0 0.0.0.0 192.168.1.2
zulqarnain-sp21379-r1(config)#exit
zulqarnain-sp21379-r1#
%SYS-5-CONFIG_I: Configured from console by console
zulqarnain-sp21379-r1#
```

Router1:

```
-----
zulqarnain-sp21379-r1(config)#ip route 0.0.0.0 0.0.0.0 192.168.2.2
zulqarnain-sp21379-r1(config)#exit
zulqarnain-sp21379-r1#
%SYS-5-CONFIG_I: Configured from console by console

zulqarnain-sp21379-r1#
zulqarnain-sp21379-r1#
```

Router2:

```
zulqarnain-sp21379-r3(config)#
zulqarnain-sp21379-r3(config)#
zulqarnain-sp21379-r3(config)#ip route 0.0.0.0 0.0.0.0 192.168.2.1
zulqarnain-sp21379-r3(config)#
zulqarnain-sp21379-r3(config)#
zulqarnain-sp21379-r3(config)#
zulqarnain-sp21379-r3(config)#
```

Router3:

```
zulqarnain-sp21379-r4(config)#
zulqarnain-sp21379-r4(config)#ip route 0.0.0.0 0.0.0.0 192.168.3.1
zulqarnain-sp21379-r4(config)#exit
zulqarnain-sp21379-r4#
%SYS-5-CONFIG_I: Configured from console by console
```

Router4:

```
-----
zulqarnain-sp21379-r5(config)#
zulqarnain-sp21379-r5(config)#ip route 0.0.0.0 0.0.0.0 192.168.4.1
zulqarnain-sp21379-r5(config)#
zulqarnain-sp21379-r5(config)#
zulqarnain-sp21379-r5(config)#
```

Ping router4 from router0

```
zulqarnain-sp21379-r1>
zulqarnain-sp21379-r1>
zulqarnain-sp21379-r1>en
zulqarnain-sp21379-r1#
zulqarnain-sp21379-r1#ping 192.168.4.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.4.2, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/7/18 ms

zulqarnain-sp21379-r1#
zulqarnain-sp21379-r1#
zulqarnain-sp21379-r1#
```
