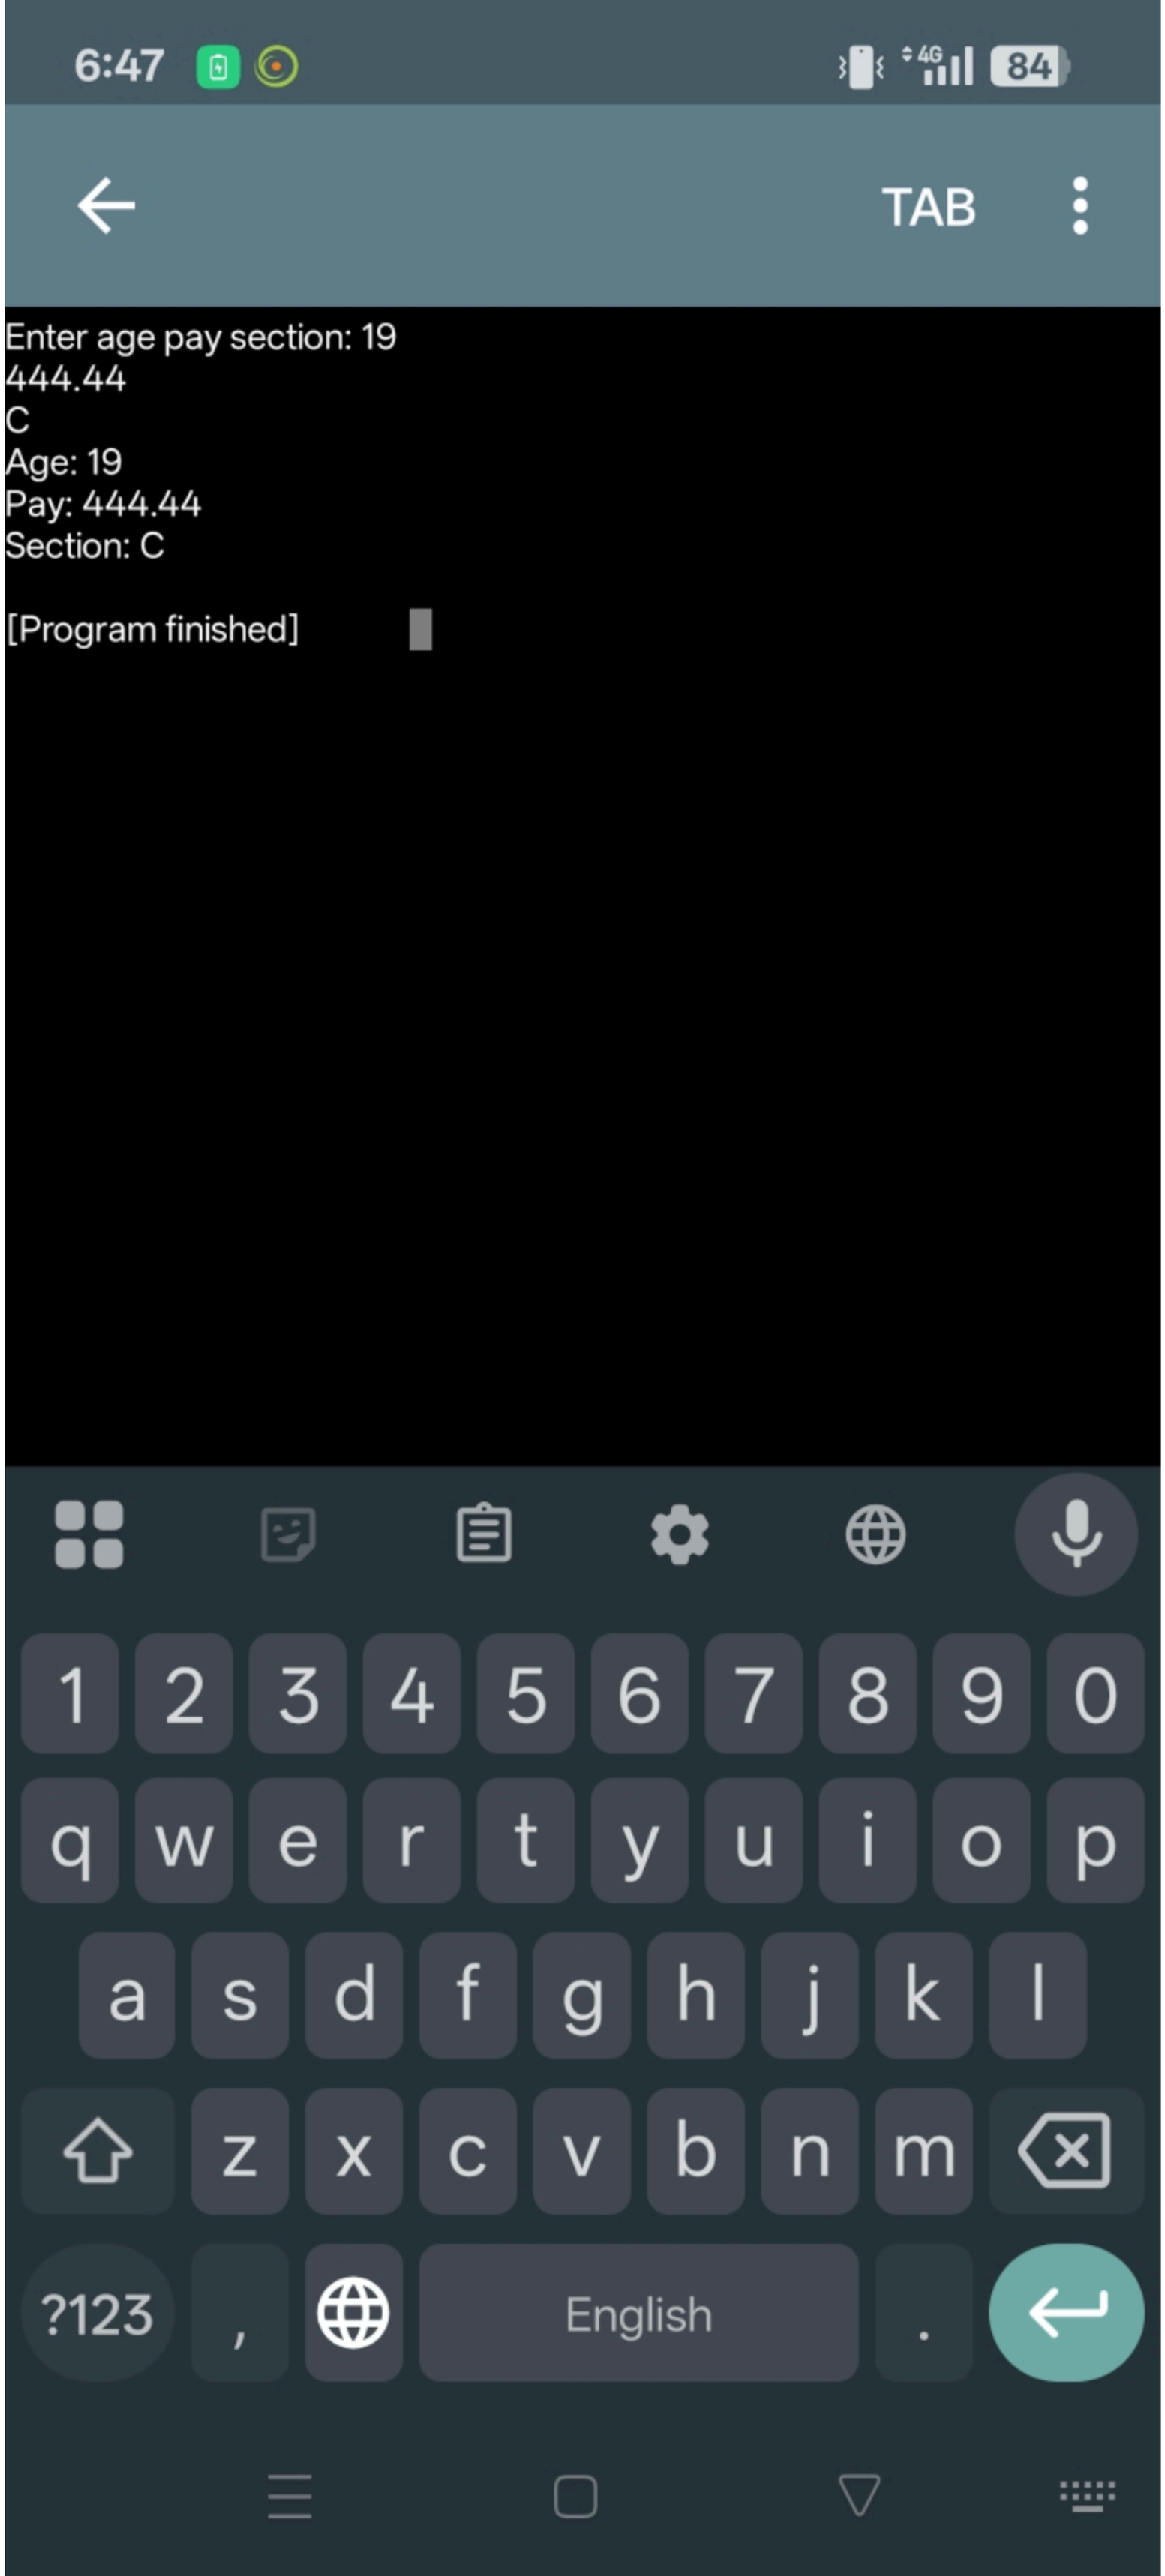



```
1  #include <iostream>
2  using namespace std;
3  int main() {
4      int age;
5      double pay;
6      char section;
7      cout << "Enter age pay section: ";
8      cin >> age >> pay >> section;
9      cout << "Age: " << age << endl;
10     cout << "Pay: " << pay << endl;
11     cout << "Section: " << section <<
   endl;
12     return 0;
13 }
```




6:47
84
TAB
Enter age pay section: 19
444.44
C
Age: 19
Pay: 444.44
Section: C
[Program finished]

Task 1:-

```
#include <iostream>
using namespace std;
int main() {
int age;
double pay;
char section;
cout << " Enter age pay section: ";
 cin >> age >> pay >> section;
 cout << "Age: " << age << endl;
 cout << "pay: " << pay << endl;
 cout << " section: " << section << endl;
 return 0;
 }
```

Output

Enter age pay section: 19

444.44 , C

Age = 19
pay: 444.44
Section: C

6:54 83

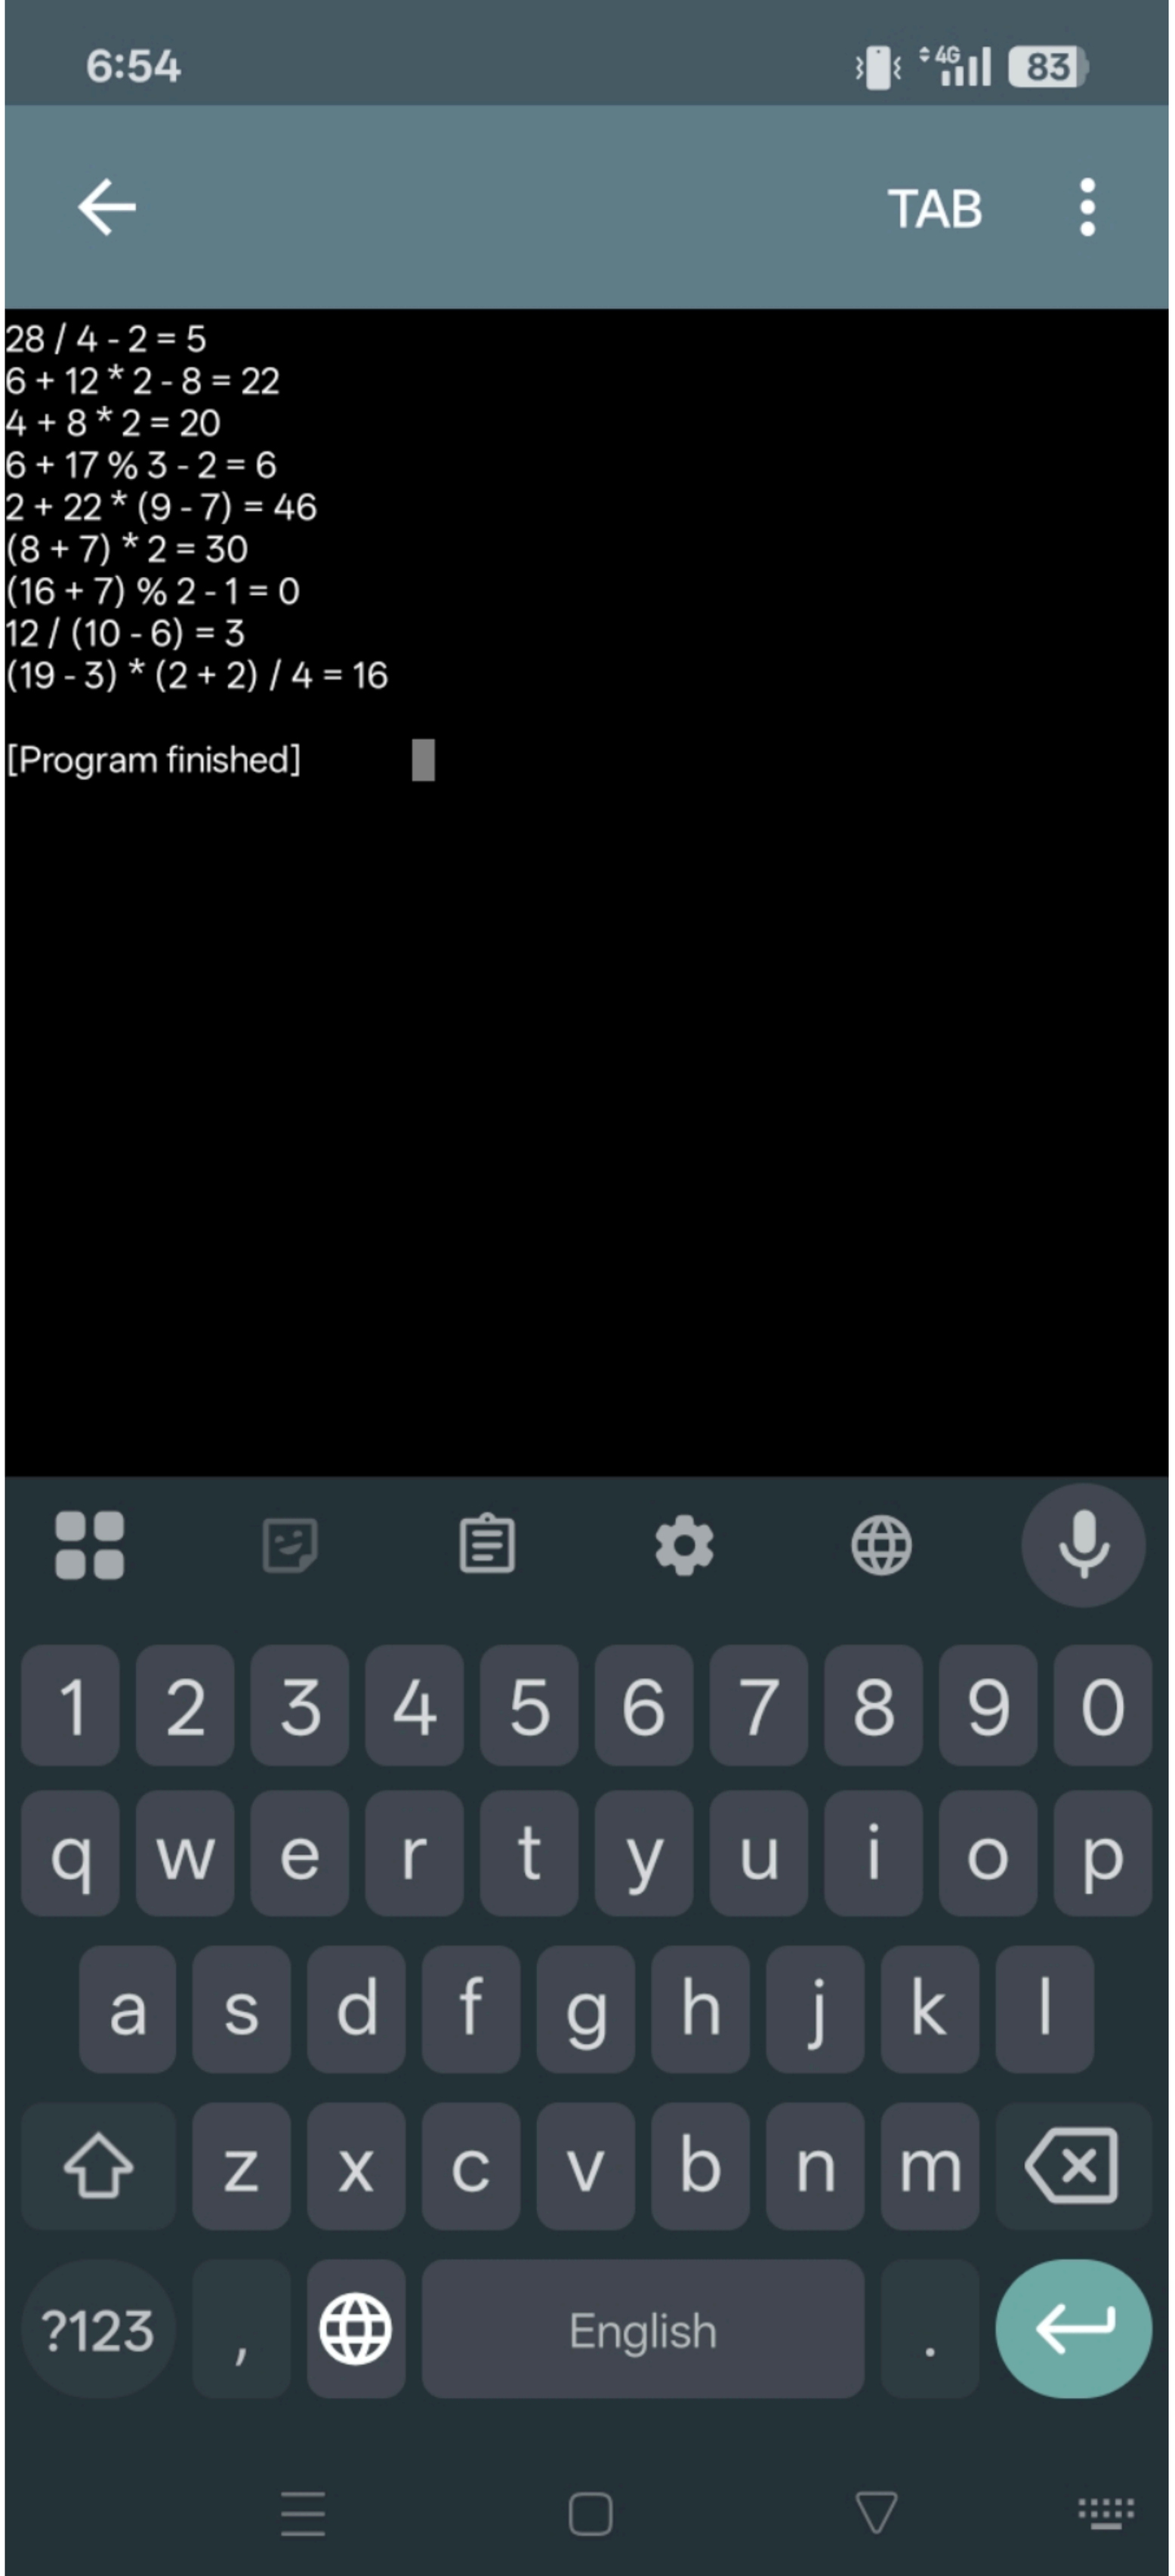
new*

```cpp
#include <iostream>
using namespace std;

int main() {
    cout << "28 / 4 - 2 = " << 28 / 4 - 2 << endl;
    cout << "6 + 12 * 2 - 8 = " << 6 + 12 * 2 - 8 << endl;
    cout << "4 + 8 * 2 = " << 4 + 8 * 2 << endl;
    cout << "6 + 17 % 3 - 2 = " << 6 + 17 % 3 - 2 << endl;
    cout << "2 + 22 * (9 - 7) = " << 2 + 22 * (9 - 7) << endl;
    cout << "(8 + 7) * 2 = " << (8 + 7) * 2 << endl;
    cout << "(16 + 7) % 2 - 1 = " << (16 + 7) % 2 - 1 << endl;
    cout << "12 / (10 - 6) = " << 12 / (10 - 6) << endl;
    cout << "(19 - 3) * (2 + 2) / 4 = " << (19 - 3) * (2 + 2) / 4 << endl;

    return 0;
}
```

Tab { } : ;


6:54
TAB
28 / 4 - 2 = 5
6 + 12 * 2 - 8 = 22
4 + 8 * 2 = 20
6 + 17 % 3 - 2 = 6
2 + 22 * (9 - 7) = 46
(8 + 7) * 2 = 30
(16 + 7) % 2 - 1 = 0
12 / (10 - 6) = 3
(19 - 3) * (2 + 2) / 4 = 16
[Program finished]
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

Task 2:-

```
#include<iostream>
using namespace std;
int main(){
cout<<"28/4-2="<<28/4-2<<endl;
cout<<"6+12*2-8="<<6+12*2-8<<endl;
cout<<"4+8*2="<<4+8*2<<endl;
cout<<"6+17%3-2="<<6+17%3-2<<endl;
cout<<"2+22*(9-7)="<<2+22*(9-7)<<en
cout<<"(8+7)*2="<<(8+7)*2<<endl;
cout<<"12/(10-6)="<<12/(10-6)<<endl;
cout<<"(19-3)*(2+2)/4="<<(19-3)*(2+2)/4
<<endl;
return0;
}
```

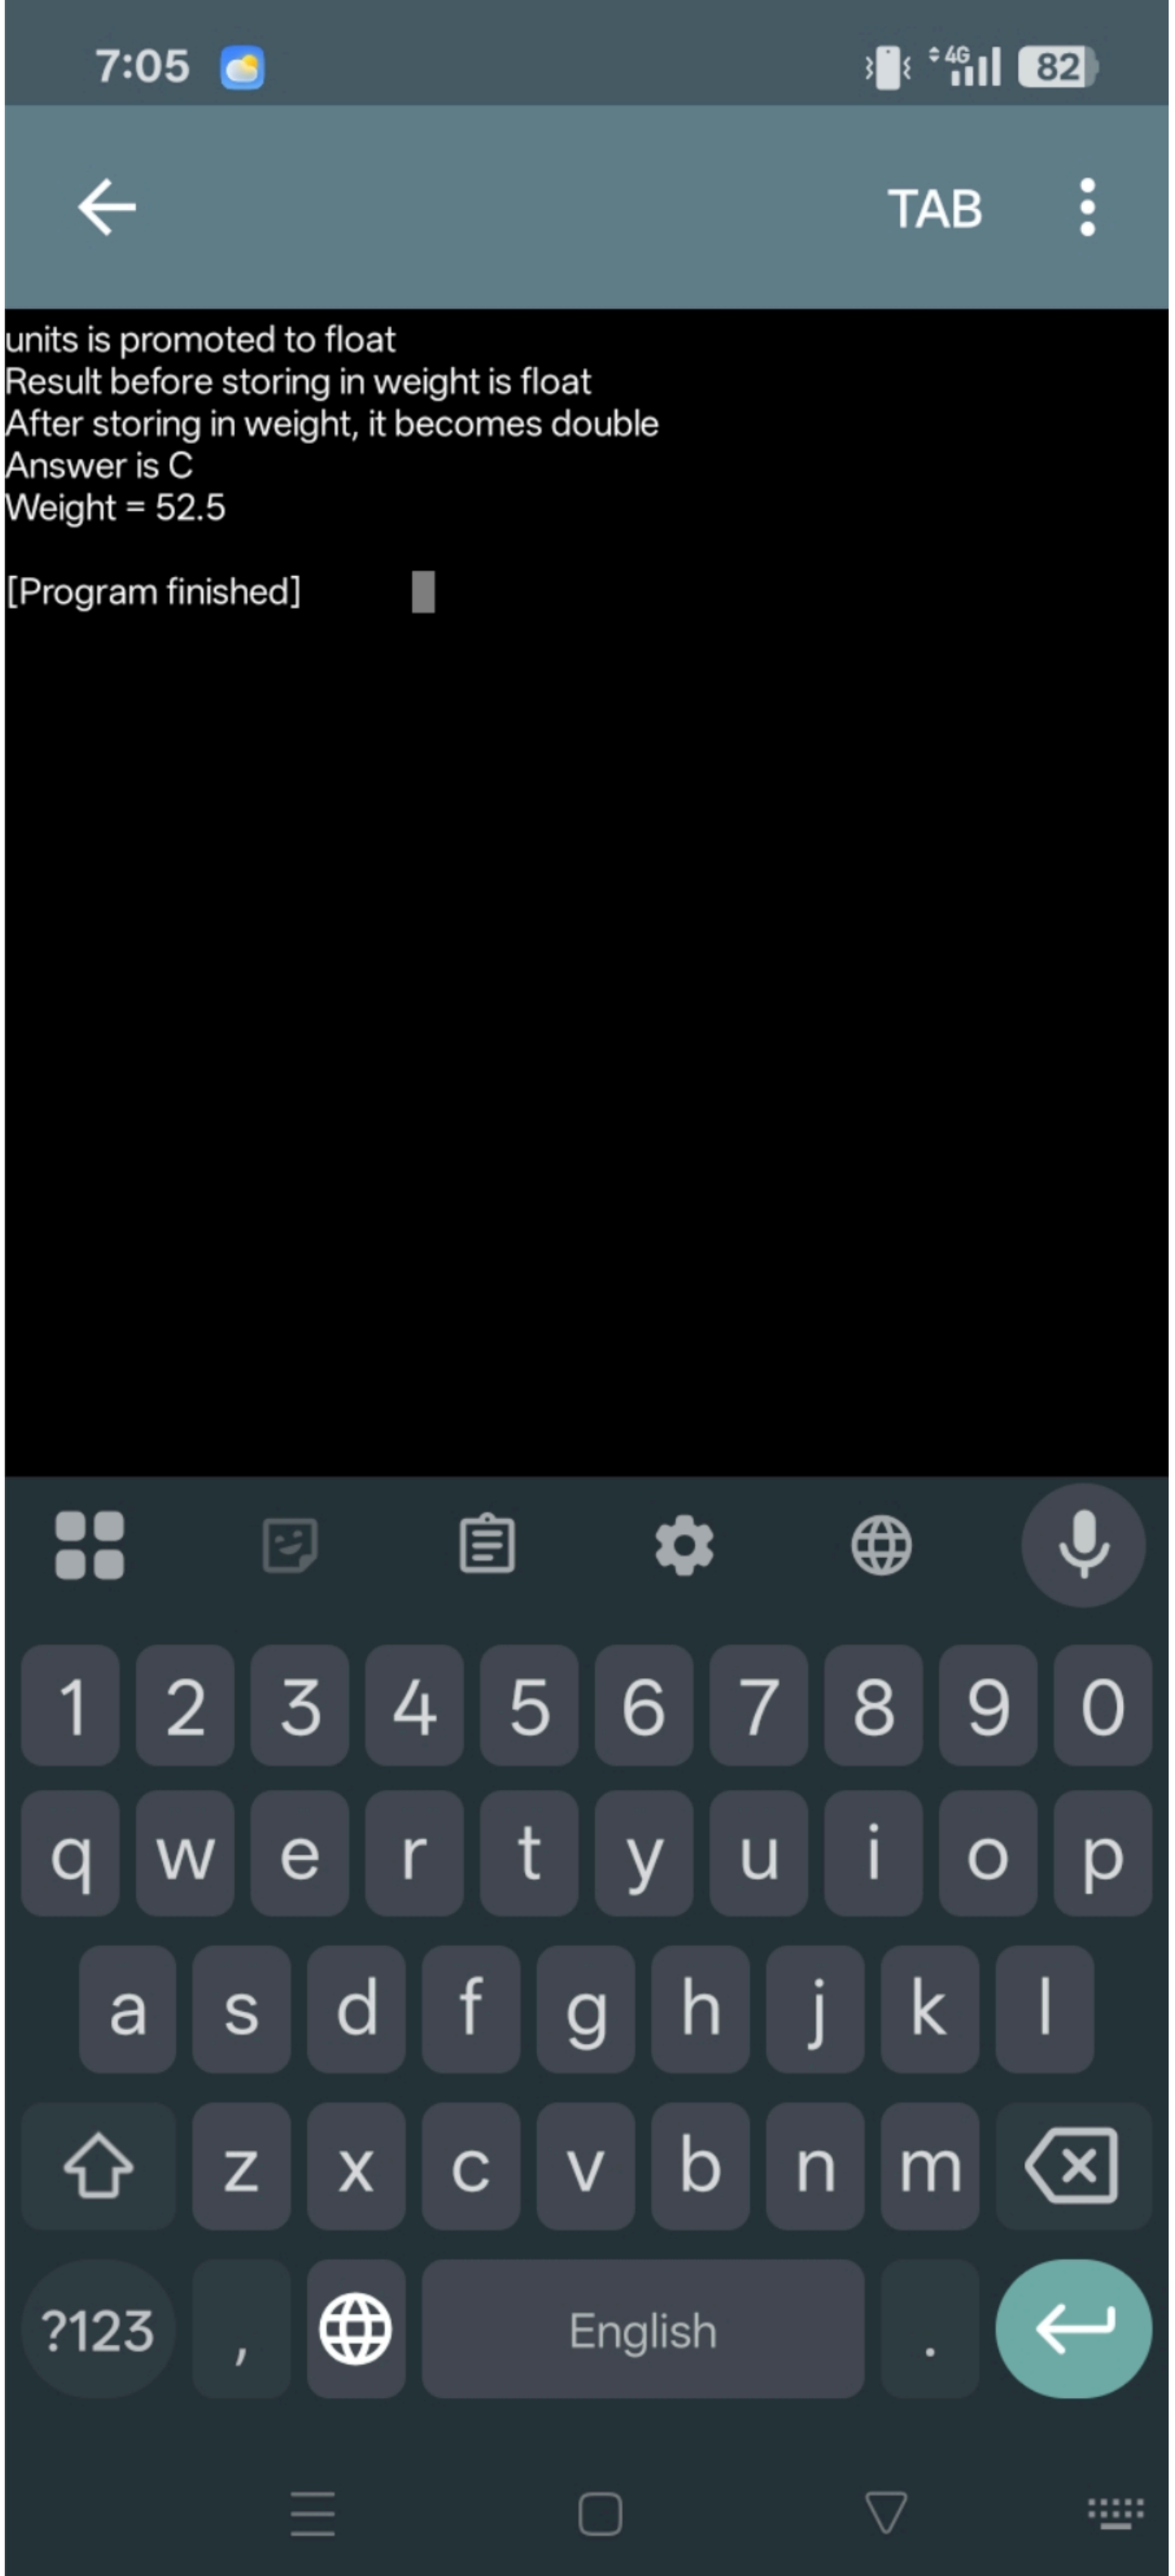
	Output
28/4-2	=5
6+12*2-8	=22
4+8*2	=20
6+17%3-2	=6
2+22*(9-7)	=46
(8+7)*2	=30
(16+7)%2-1	=0
12/(10-6)	=3
(19-3)*(2+2)/4	=16

7:04 82

new*

```cpp
#include <iostream>
using namespace std;
int main() {
    int units = 5;
    float mass = 10.5f;
    double weight;
    weight = mass * units;
    cout << "units is promoted to float" << endl;
    cout << "Result before storing in weight is float" << endl;
    cout << "After storing in weight, it becomes double" << endl;
    cout << "Answer is C" << endl;
    cout << "Weight = " << weight << endl;
    return 0;
}
```

Tab | { | } | : | ;


7:05
82
TAB
units is promoted to float
Result before storing in weight is float
After storing in weight, it becomes double
Answer is C
Weight = 52.5
[Program finished]
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

Task 2:-

Task 3

```
#include<iostream>
using namespace std;
int main(){
int units=5;
float mass=10.5f;
double weight;
weight = mass * units;
cout<<"units is promoted to float"<<endl;
cout<<"Result before storing in weight is
float"<<endl;
cout<<" After storing in weight is float";
cout<<"After storing in weight, it become
double"<<endl;
cout<<"Answer is :"<<endl;
cout<<"weight="<<endl;
return 0;
}
```

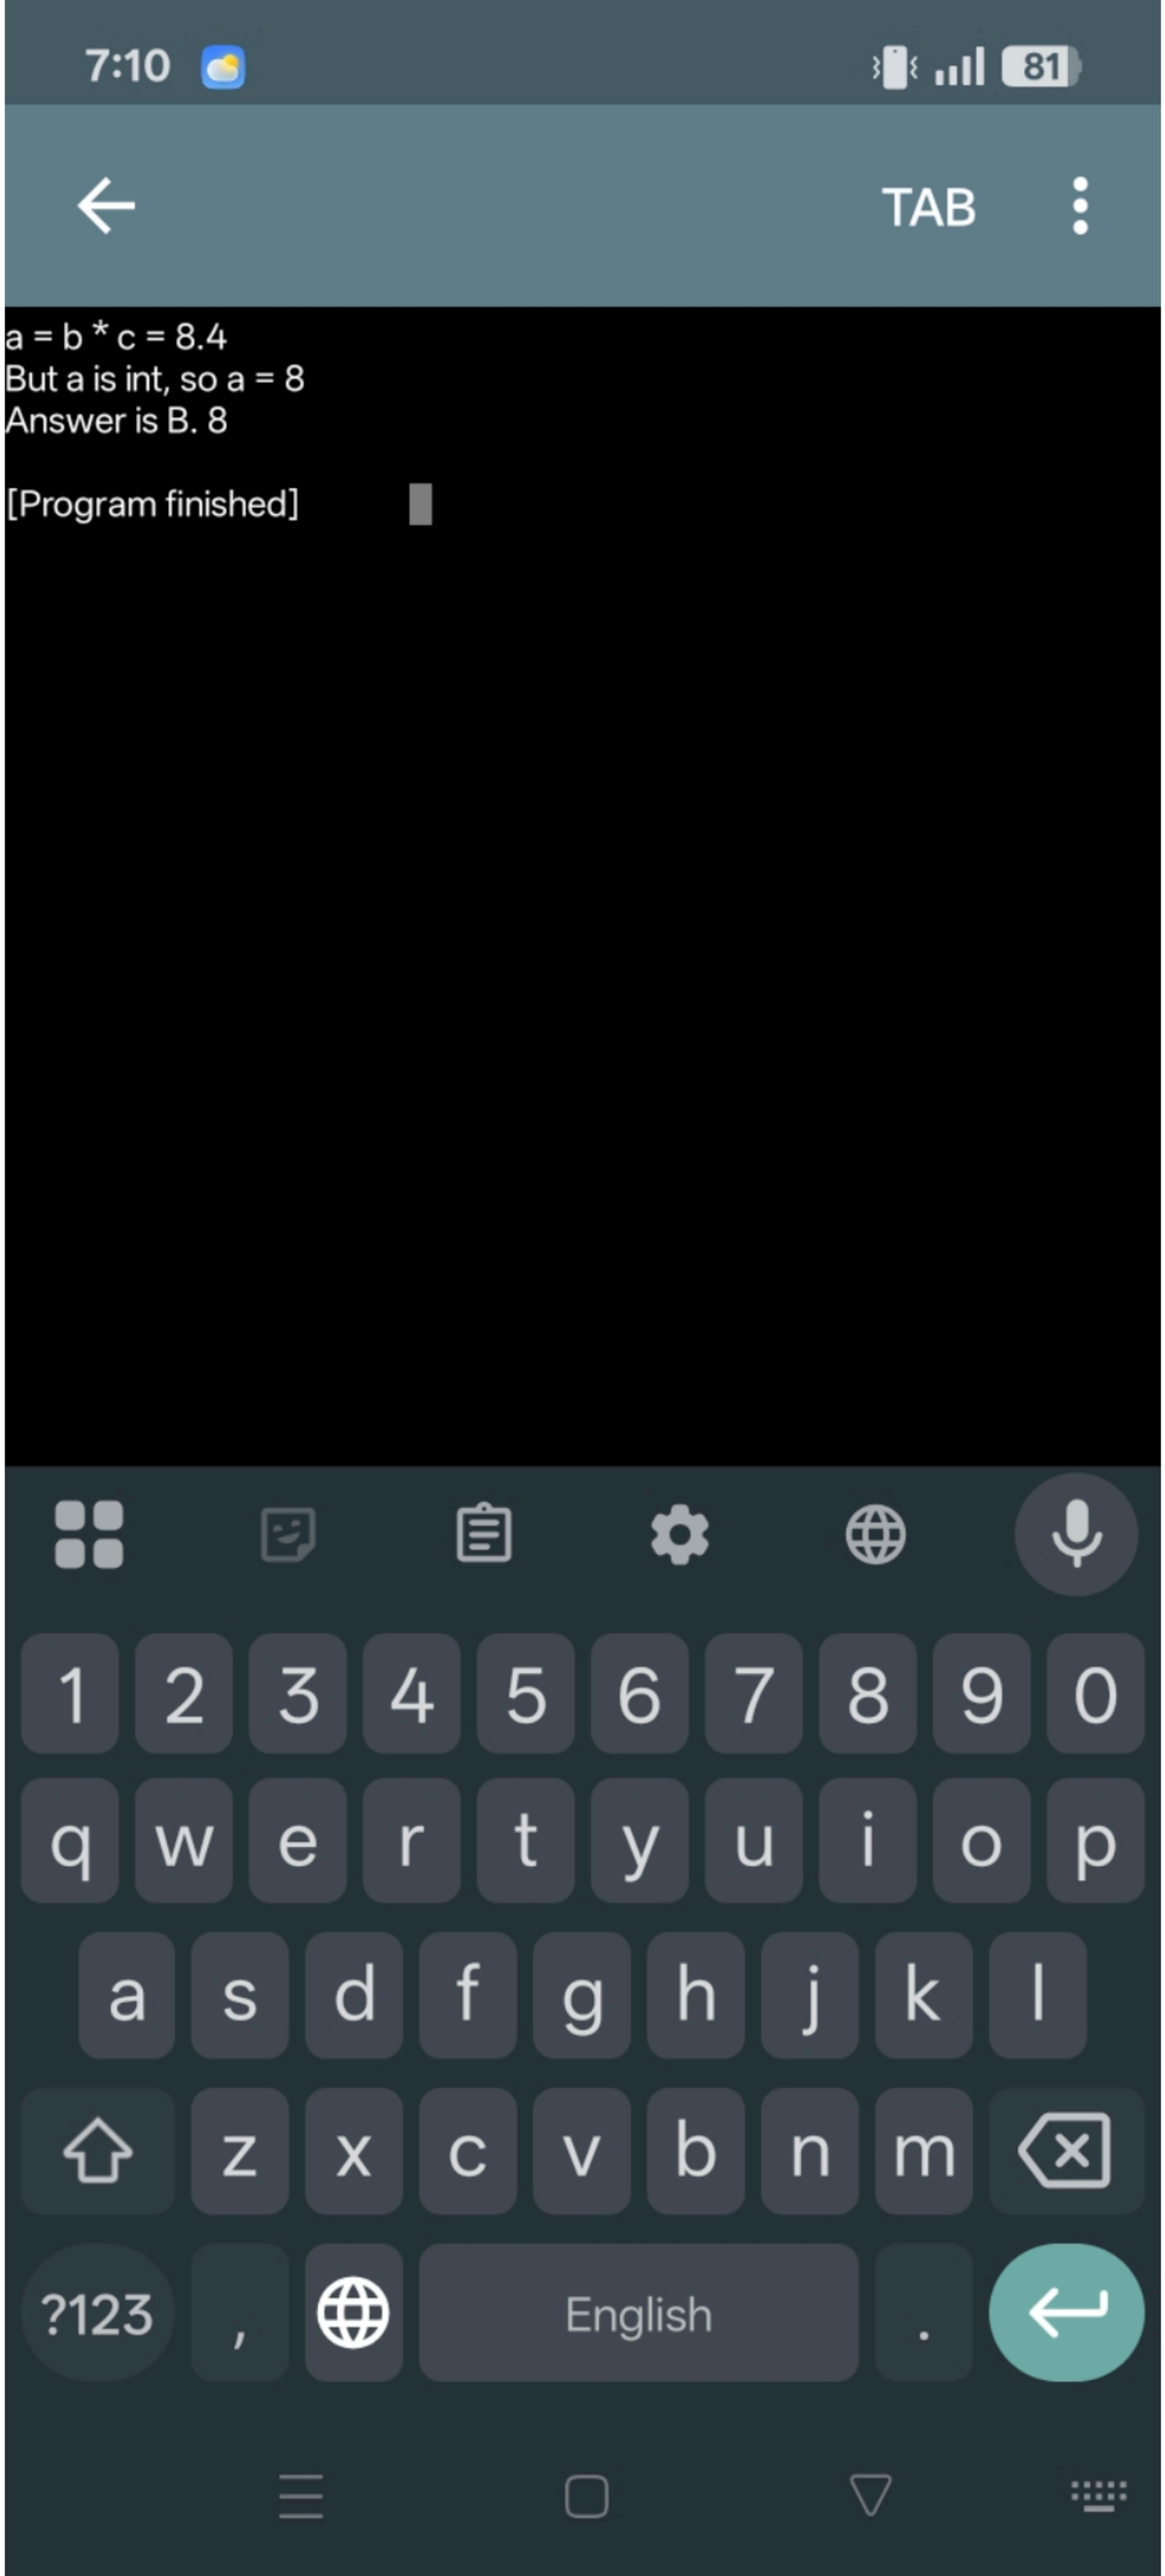
Output

Answer is :
weight=52.5

7:10 81


```
1  #include <iostream>
2  using namespace std;
3  int main() {
4      int a, b = 2;
5      float c = 4.2;
6      a = b * c;
7      cout << "a = b * c = " << b * c <<
   endl;
8      cout << "But a is int, so a = " << a
   << endl;
9      cout << "Answer is B. 8" << endl;
10     return 0;
11 }
```

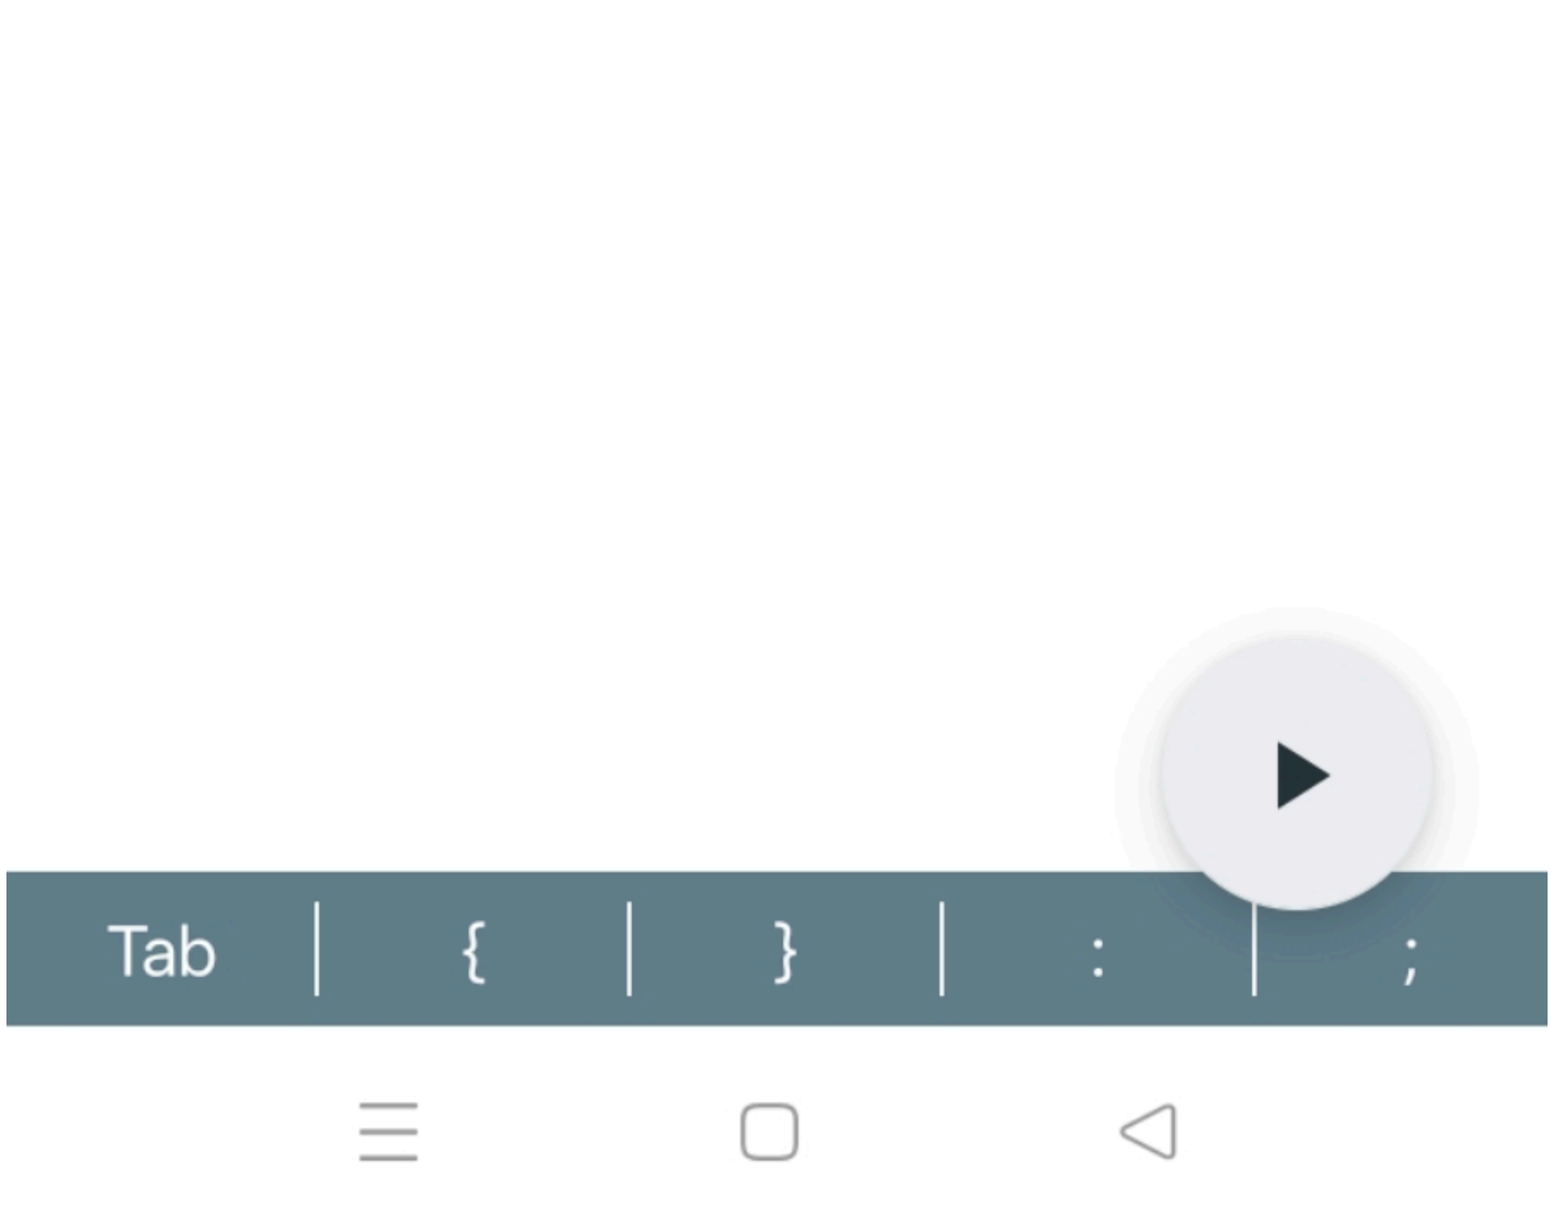
Tab { } : ;

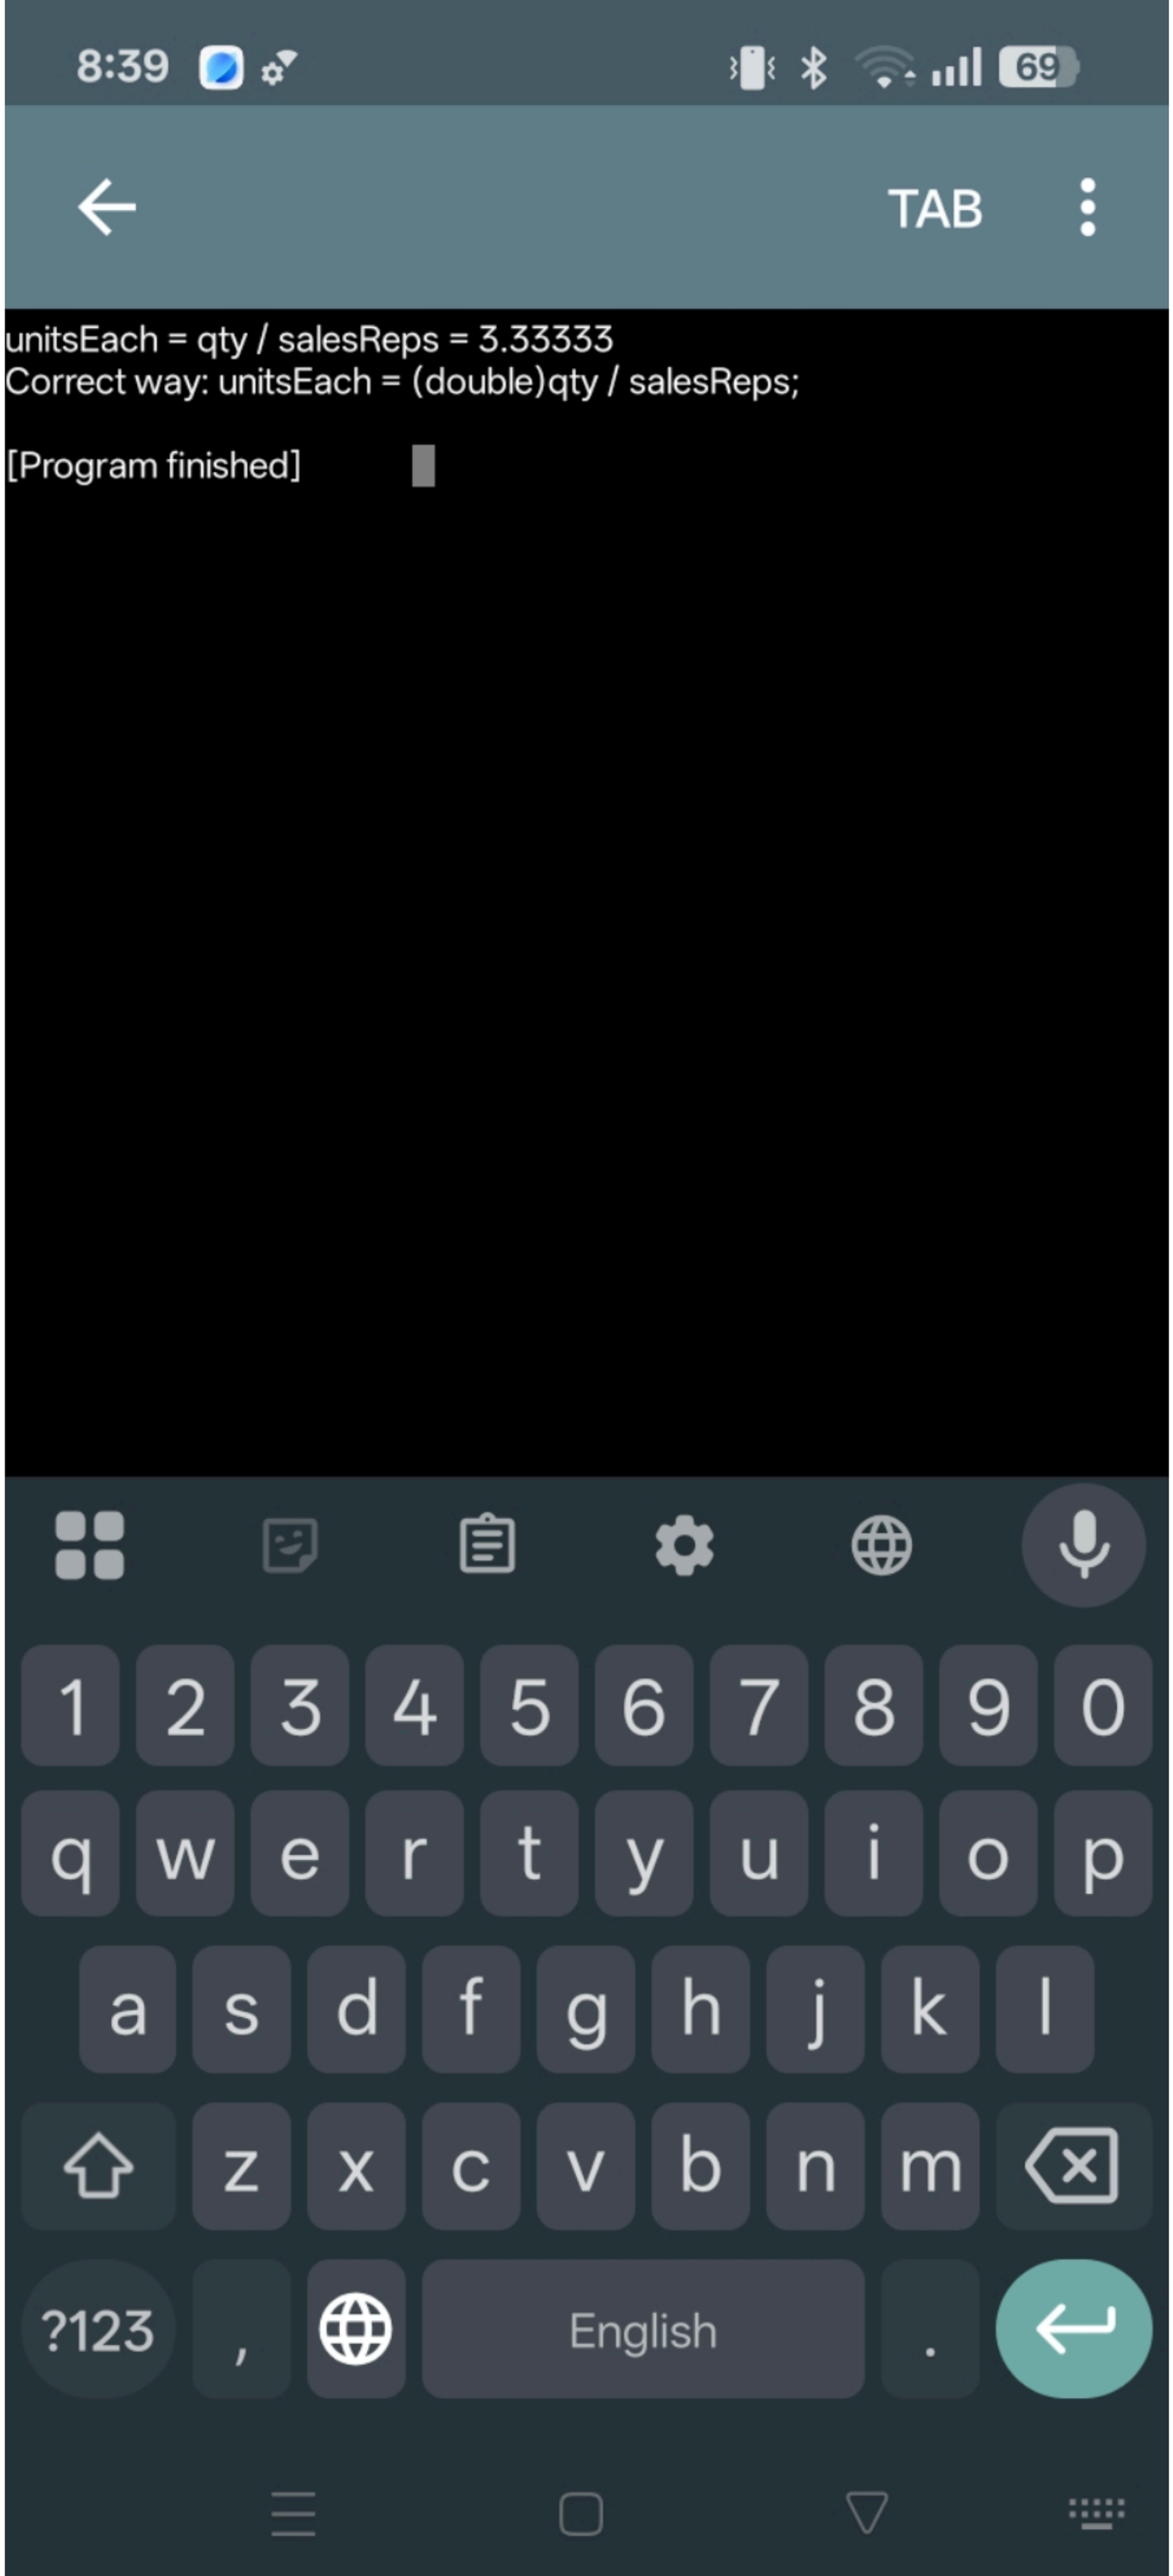

7:10
81
TAB
a = b * c = 8.4
But a is int, so a = 8
Answer is B. 8
[Program finished]
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English




```cpp
#include <iostream>
using namespace std;
int main() {
    int qty = 10, salesReps = 3;
    double unitsEach;
    // unitsEach = qty / salesReps; // ye galat hai, integer division

    unitsEach = static_cast<double>(qty) / salesReps;
    cout << "unitsEach = qty / salesReps = " << unitsEach << endl;
    cout << "Correct way: unitsEach = (double)qty / salesReps;" << endl;
    return 0;
}
```




8:39
69
TAB
unitsEach = qty / salesReps = 3.33333
Correct way: unitsEach = (double)qty / salesReps;
[Program finished]
1 2 3 4 5 6 7 8 9 0
q w e r t y u i o p
a s d f g h j k l
z x c v b n m
?123
English

Task 4:

```
#include<iostream>
using namespace std;
int main(){
int a,b=2;
float c=4.2;
a=b*c;
cout<<"a=b*c="<<b*c<<endl;
cout<<"But a is int, so a="<<a<<endl;
cout<<"Answer is 8.8"<<endl;
return 0;
}
```

Output

```
a=b*c=8.4
Answer is 8.8
```

Task 5

```
#include<iostream>
using namespace std;
int main(){
int qty=19, sales Reps=3;
double units Each=
static_cast<double>(qty)/sales Reps;
cout<<units Each<<endl;
cout<<"correct way: units Each=
(double)qty/sales Reps;"<<endl;
return 0;
}
```

a=19/sales Reps =3.3333