Process Flows (Swimlane): RAG-Diary

> The main processes of the TO-BE state: what each role does, where the decision points are, and how the system handles the failure path. The AS-IS story lives in AS-IS-TO-BE.

> Thai version: PROCESS-FLOWS.md

1. Document control

Item	Detail
Document	Process Flows (Swimlane)
Version	1.0
Prepared	15 October 2026
Author	Business Analyst / System Analyst (project owner)
Status	Reviewed, round 1 (25 October 2026)
Related documents	USE-CASES, AS-IS-TO-BE, SEQUENCE-DIAGRAMS

2. Purpose and scope


This document answers one question: in each main process, which role does what in turn, where are the decisions, and where does the system go when something fails?

Scope: three TO-BE processes: writing an entry, searching and asking questions, and managing data in settings. Out of scope: the AS-IS story (in AS-IS-TO-BE) and object-level message sequence (in SEQUENCE-DIAGRAMS).

3. Selected processes

ID	Process	Use case	Lanes
PF-01	Write an entry and build the index	UC-02	User, screen, API service, embedding provider
PF-02	Search and ask questions	UC-04	User, screen, API service, external providers
PF-03	Manage data in settings	UC-06	User, screen, API service


4. PF-01 Write an entry and build the index

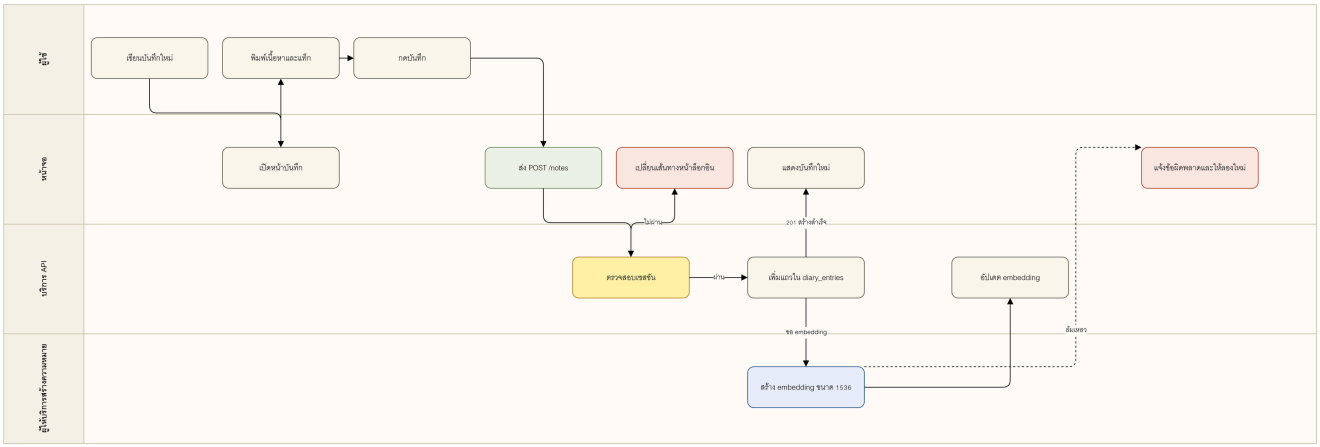

Decision points and failure paths

- If the session is invalid, the system refuses and redirects to the login page.
- If the embedding provider fails, the entry is still saved without an index and the user is notified; it can be retried, and the entry will not appear in search until it is saved again.
- If the entry is edited later, the system rebuilds the index from the new text.


5. PF-02 Search and ask questions

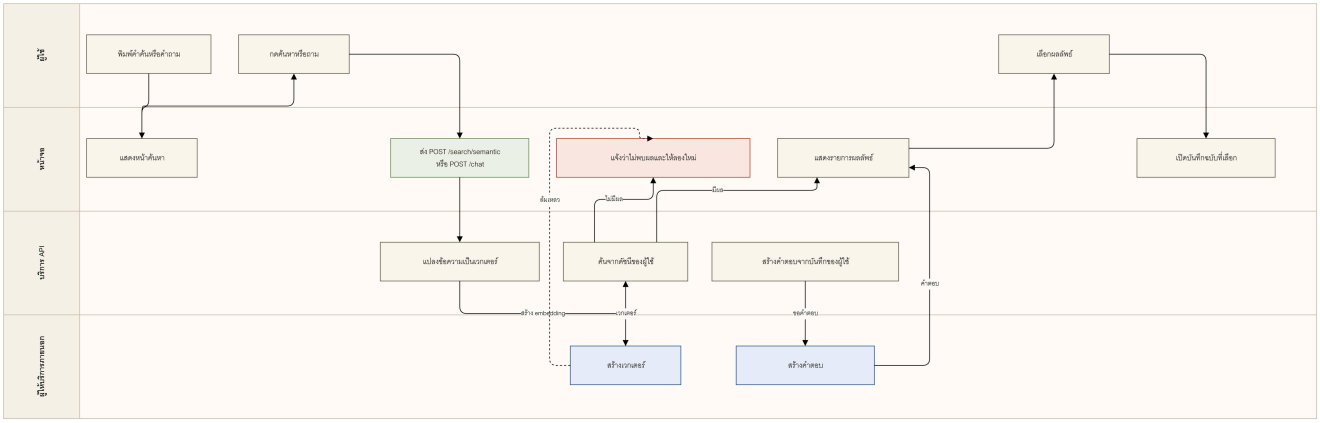

Decision points and failure paths

- Search runs only against the signed-in user's index, so there is no path to another user's data.
- If no related result is found, the system says so and suggests trying again.
- If a provider fails, the system shows an understandable message and allows a retry.

6. PF-03 Manage data in settings

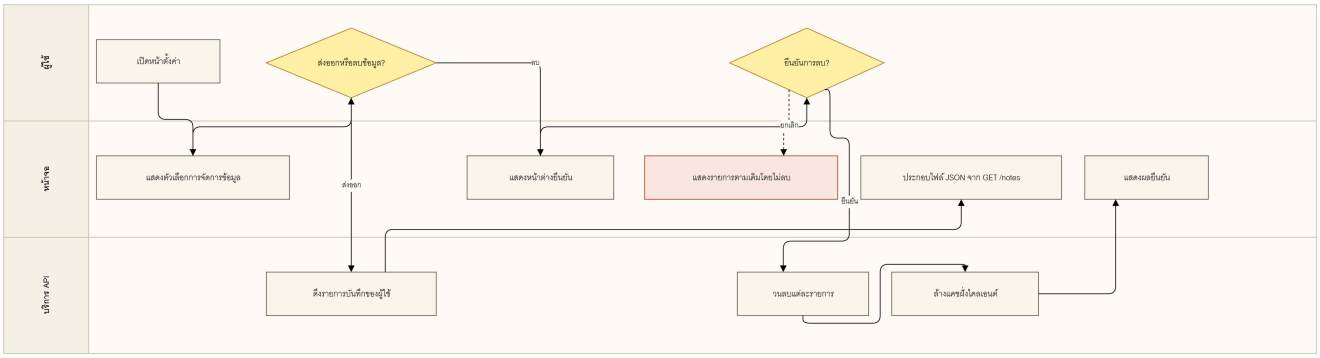

Decision points and failure paths

- Export uses GET /export, which returns only the signed-in user's data, and the file is assembled on the client.
- Delete-all uses DELETE /data in a single call; it replaced the earlier loop of DELETE /notes/:id.
- If the user cancels, nothing is deleted and all data remains.
- If the user is not signed in, the system redirects to the login page.

7. General notes

- All lanes show system roles rather than individuals, following the framing agreed for this document set.
- Every process requires authentication before touching data, per business rules BR-02 and BR-10.
- Drawing lanes with Mermaid is a tool limitation, because Mermaid has no native swimlane form.

8. References

Document	Relationship
USE-CASES	The use cases each PF comes from
AS-IS-TO-BE	The story of the current process
SEQUENCE-DIAGRAMS	Object-level message sequence
C4-ARCHITECTURE	Where each part that takes part in the process sits