

Trees & Structures

(`avm`, `forest`, `tikz`)

Antonio Machicao y Priemer
<http://www.linguistik.hu-berlin.de/staff/amyp>
mapriema@hu-berlin.de

November 17, 2020

Contents

1 Notes	2
2 AVM	3
2.1 Two examples with different commands	3
2.2 Lexical Rule	3
2.3 Forest-Tree with AVM	4
3 Forest-Trees (Basics)	5
3.1 Simple small tree with bar over X, no bottom alignment	5
3.2 Trinary branching, prime instead of bar, bottom alignment	5
3.3 Bottom alignment, roof, traces	6
3.4 Bottom alignment with <code>tier=word</code> and empty nodes	7
3.5 Big tree – resized, with phantom nodes	8
3.6 Two trees and arrow	8
3.7 Node with circle	9
3.8 Two nodes marked with ellipse	9
3.9 Coloured rectangle	9
4 Forest-Trees with arrows	10
4.1 Movement and advice, with phantom node	10
4.2 With different arrows	10
4.3 Tree with different arrows and coloured boxes	11
5 Forest-Trees with adjusted roofs for glosses and bottom alignment	12
5.1 The default behaviour	12
5.2 Hiding the wider text	12
5.3 Tree with arrows avoiding nodes (with corrections)	13

5.4	Hiding the wider text and correcting the separation	14
6	Some other trees for linguistics	14
6.1	Language architecture	14
6.2	Structures of complex words	15
6.3	Structures of syllables	15
6.4	Sonority Profiles with TikZ	16
6.5	Tikz-tree: Typology	16
6.6	Forest-tree: Typology	17
6.7	Forest Sets: rectangles	17
6.8	Tikz-qtree Sets	18
6.9	Type hierarchy, multiple inheritance, and scalebox	19
	References	19

1 Notes

For this file you will need the following packages:

- Fontenc package with T1 and T3 option:
`\usepackage[T3,T1]{fontenc}`
- Xcolor package for colored elements in trees:
`\usepackage{xcolor}`
- Tipa package with no encoding and safe option:
`\usepackage[noenc,safe]{tipa}`
- TikZ-qtree package with the positioning library:
`\usepackage{tikz-qtree}`
`\usetikzlibrary{positioning}`
- Forest package with linguistics option:
`\usepackage[linguistics]{forest}`
- AVM package (the one in this folder¹):
`\usepackage{avm}`

If the settings (e.g. `forestset` or `tikzset`) are used outside of the forest or tikz-picture environment (see the code in the tex-file of this document) then they apply

¹There are many different versions of the package avm on the internet. They have different settings but the same name. So if you are using a different avm package, it could be the case, that you get some errors.

globally, i.e. for all following trees. If they are only used inside of an environment (i.e. after `\begin{forest}` or `\begin{tikzpicture}`), their effect only lasts until the environment is closed again (see code below).

For further information on L^AT_EX, forest, TikZ, and tipa, see Freitag and Machicao y Priemer (2015); Vanden Wyngaerd (2016); Živanović (2017); Crémer (2011); Tantau (2013); Rei (2004).

This file has been compiled with PDF-L^AT_EX.

2 AVM

2.1 Two examples with different commands

First example (see code):

$$\left[\text{SUBCAT} \left\langle \begin{bmatrix} \text{NP} \\ \text{CASE } nom \\ \text{IND } \boxed{1} \end{bmatrix}, \begin{bmatrix} \text{NP} \\ \text{CASE } acc \\ \text{IND } \boxed{2} \end{bmatrix} \right\rangle \right] \Rightarrow \left[\text{SUBCAT} \left\langle \begin{bmatrix} \text{NP} \\ \text{CASE } nom \\ \text{IND } \boxed{3} \end{bmatrix}, \begin{bmatrix} \text{NP} \\ \text{CASE } dat \\ \text{IND } \boxed{1} \end{bmatrix}, \begin{bmatrix} \text{NP} \\ \text{CASE } acc \\ \text{IND } \boxed{2} \end{bmatrix} \right\rangle \right]$$

Second example (see code):

$$\left[\text{SUBCAT} \left\langle \begin{bmatrix} \text{NP} \\ \text{CASE } nom \\ \text{IND } \boxed{1} \end{bmatrix}, \begin{bmatrix} \text{NP} \\ \text{CASE } acc \\ \text{IND } \boxed{2} \end{bmatrix} \right\rangle \right] \Rightarrow \left[\text{SUBCAT} \left\langle \begin{bmatrix} \text{NP} \\ \text{CASE } nom \\ \text{IND } \boxed{3} \end{bmatrix}, \begin{bmatrix} \text{NP} \\ \text{CASE } dat \\ \text{IND } \boxed{1} \end{bmatrix}, \begin{bmatrix} \text{NP} \\ \text{CASE } acc \\ \text{IND } \boxed{2} \end{bmatrix} \right\rangle \right]$$

2.2 Lexical Rule

$$\left[\begin{array}{l} \text{CONT} \mid \text{RELS } \boxed{8} \oplus \text{nelist} \\ \textit{alt-psych-v-lxm} \end{array} \right] \mapsto \left[\begin{array}{l} \text{CAT} \mid \text{ARG-ST} \left\langle \text{NP}[\textit{str}]_{\boxed{5}}, \text{NP}[\textit{str}]_{\boxed{1}} \right\rangle \\ \text{IND } \boxed{4} \\ \text{CONT} \left[\begin{array}{l} \text{RELS } \boxed{8} \left\langle \begin{bmatrix} \text{ARG0 } \boxed{0} \\ \textit{pred} \end{bmatrix}, \begin{bmatrix} \text{ARG0 } \boxed{1} \\ \textit{exp} \end{bmatrix} \right\rangle \oplus \left\langle \begin{bmatrix} \text{ARG0 } \boxed{4} \textit{ hpng} \\ \text{ARG1 } \boxed{0} \textit{ begin-pred} \end{bmatrix}, \begin{bmatrix} \text{ARG0 } \boxed{5} \\ \text{ARG1 } \boxed{4} \textit{ csr} \end{bmatrix} \right\rangle \end{array} \right] \\ \textit{cause-psych-v-lxm} \end{array} \right]$$

Figure 1: LR for case alternation for *alt-psych-v-lxm* (Machicao y Priemer and Fritz-Huechante, 2018)

2.3 Forest-Tree with AVM


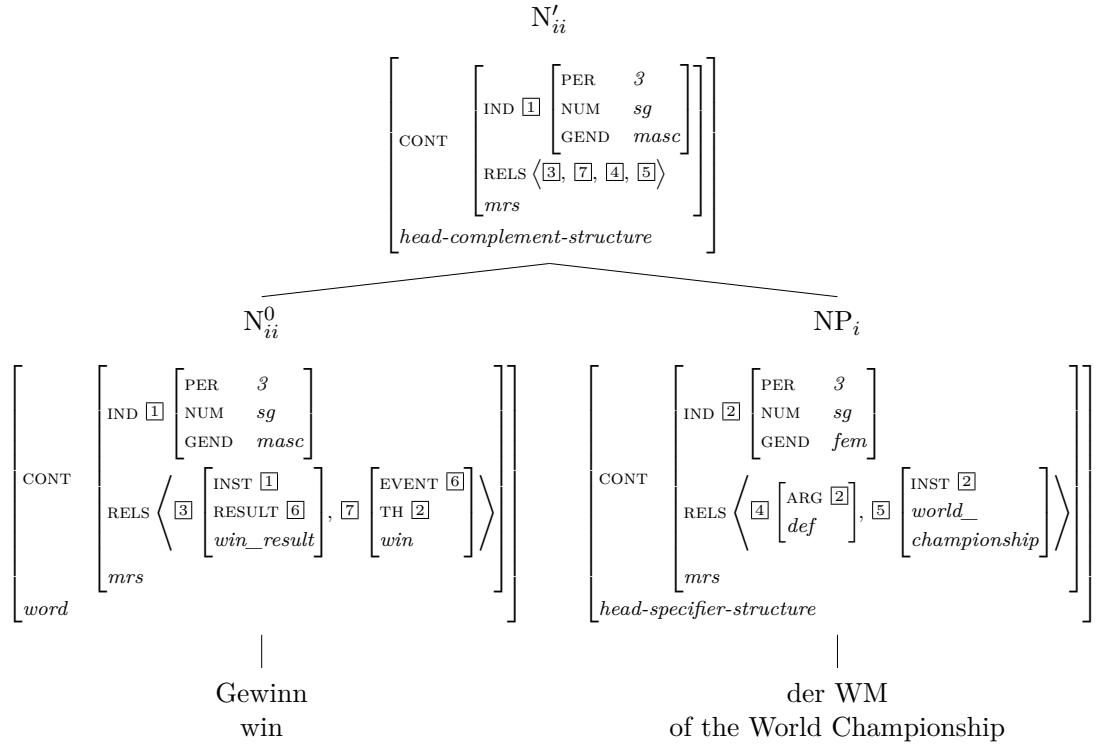



Figure 2: Illustration of the Semantics Principle (Machicao y Priemer, 2017)

3 Forest-Trees (Basics)

3.1 Simple small tree with bar over X, no bottom alignment

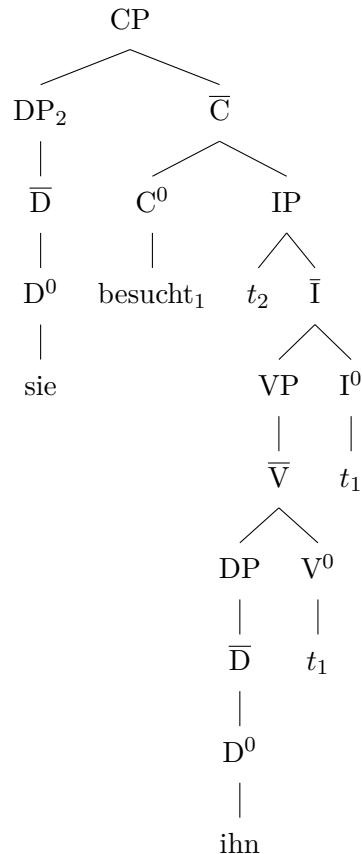

3.2 Trinary branching, prime instead of bar, bottom alignment

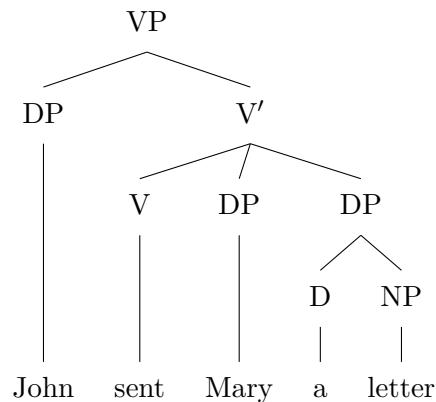

3.3 Bottom alignment, roof, traces


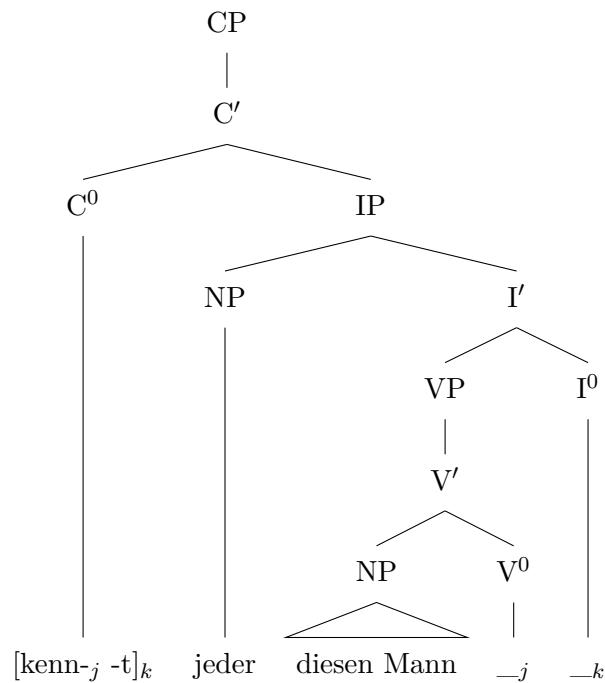



Figure 3: CP Structure in Müller (2019: 107)

3.4 Bottom alignment with tier=word and empty nodes

The command , tier=word aligns every node with this command to the lowest node that has the command.

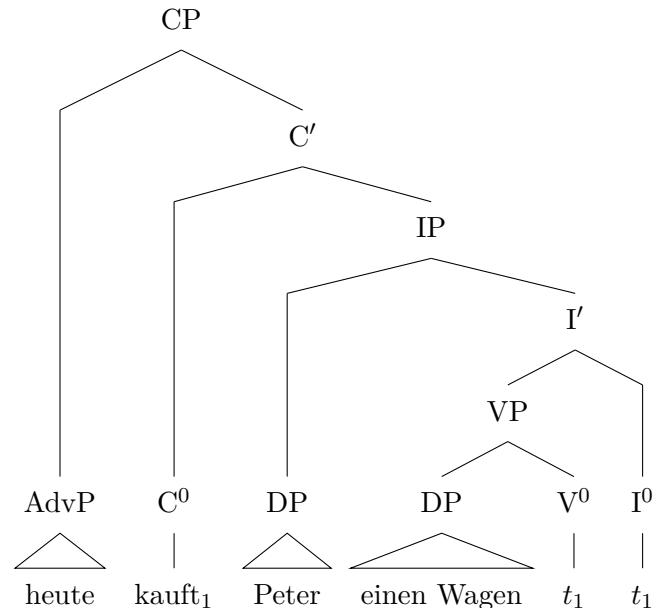

3.5 Big tree – resized, with phantom nodes

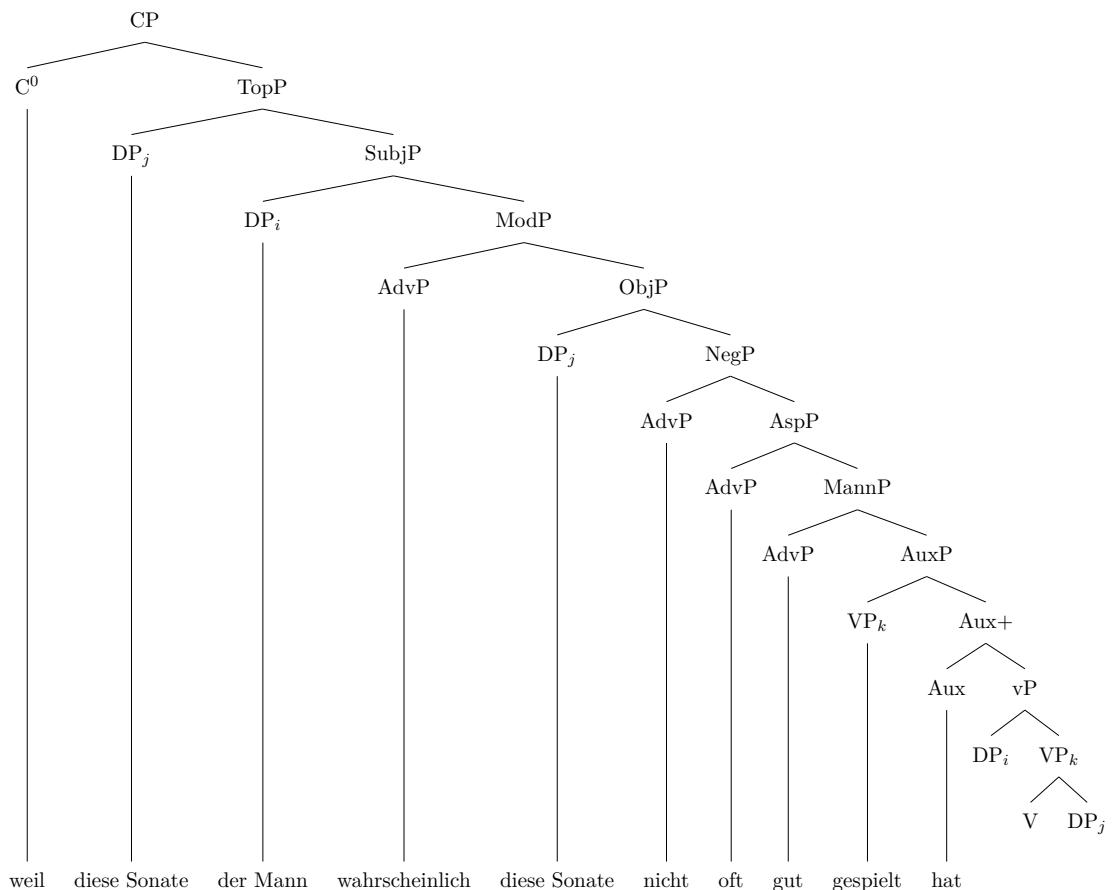

3.6 Two trees and arrow


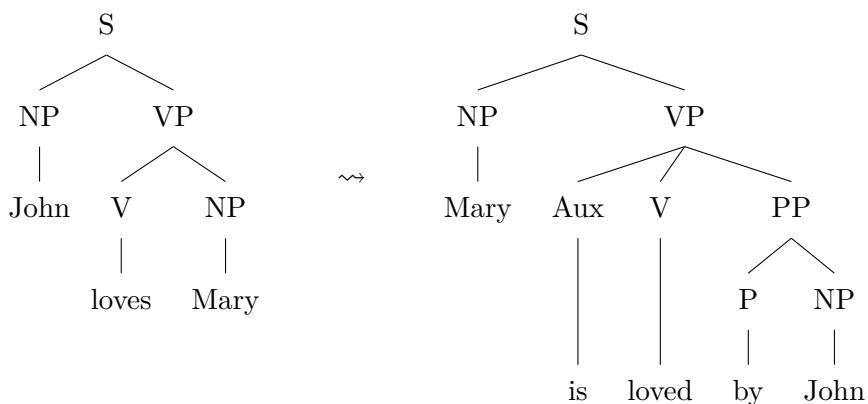



Figure 4: Transformation (Müller, 2019: 149, 85)

3.7 Node with circle




3.8 Two nodes marked with ellipse

Change the parameters in `node` to fit the nodes inside the ellipse.



Code taken from: <https://tex.stackexchange.com/questions/355365/drawing-an-ellipse-around-an-edge-in-forest>

3.9 Coloured rectangle

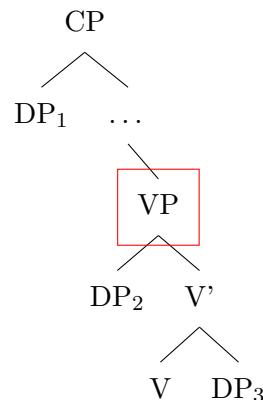

4 Forest-Trees with arrows

4.1 Movement and advice, with phantom node

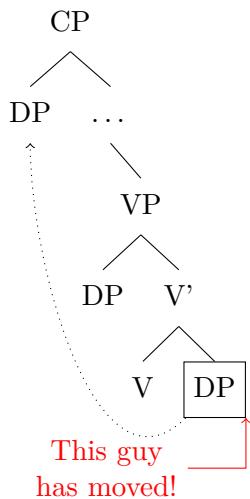


Figure 5: CP with arrows (Živanović, 2017: 6, 8)

4.2 With different arrows

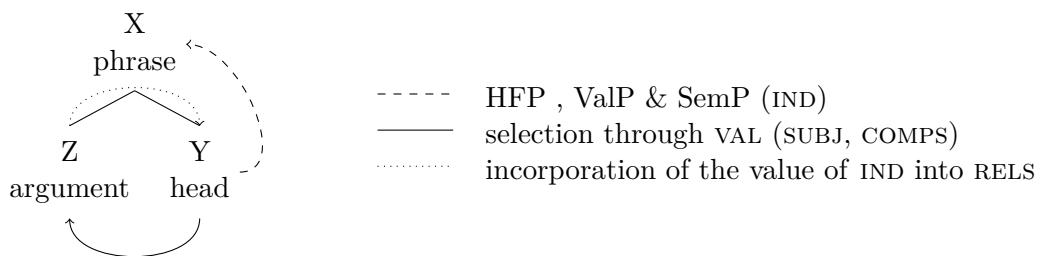


Figure 6: Head-argument relation (Machicao y Priemer, 2017)

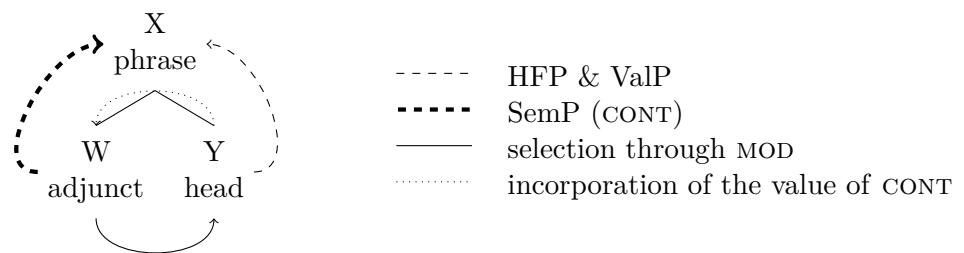


Figure 7: Head-adjunct relation (Machicao y Priemer, 2017)


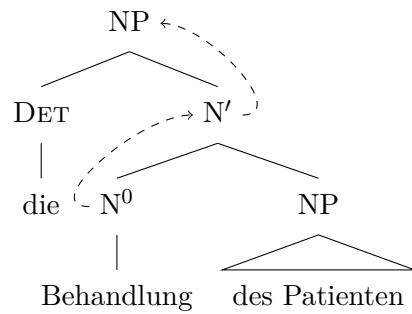


Figure 8: Projection of head features (Machicao y Priemer, 2018)


4.3 Tree with different arrows and coloured boxes

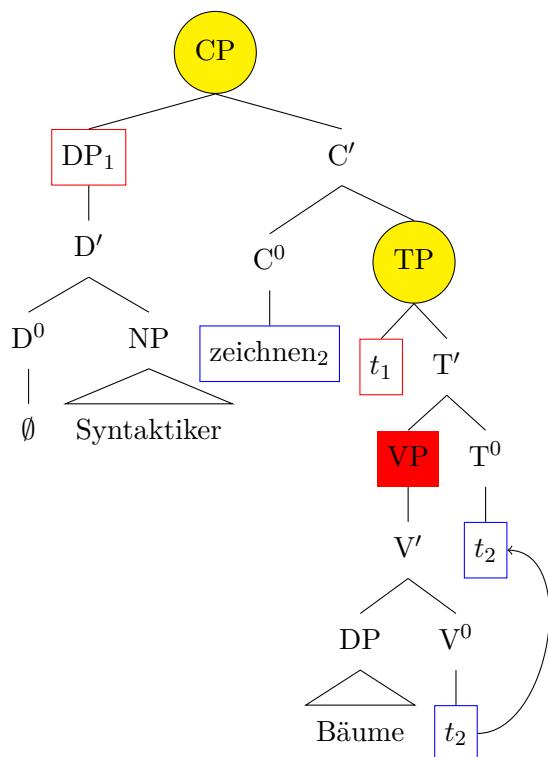


5 Forest-Trees with adjusted roofs for glosses and bottom alignment

Taken from: <http://tex.stackexchange.com/questions/167978/smaller-roofs-for-forest>


5.1 The default behaviour

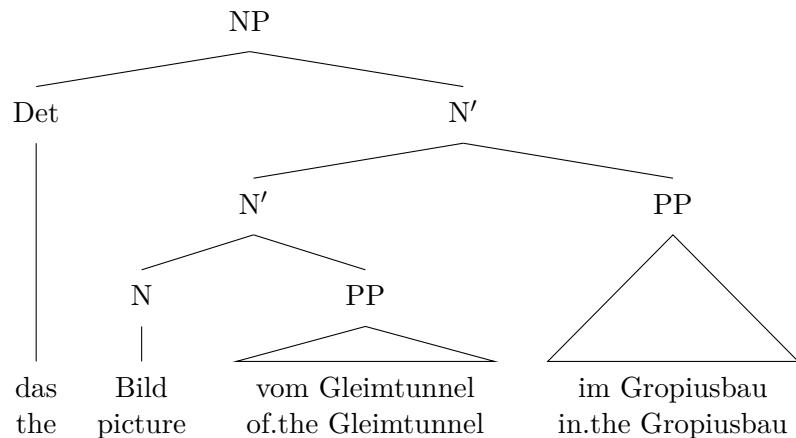

5.2 Hiding the wider text

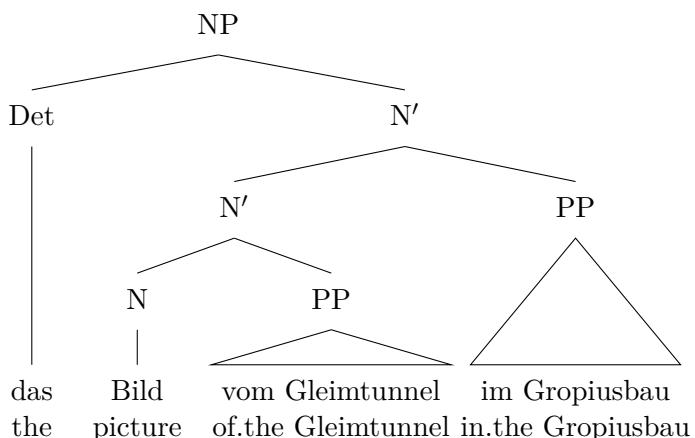


5.3 Tree with arrows avoiding nodes (with corrections)

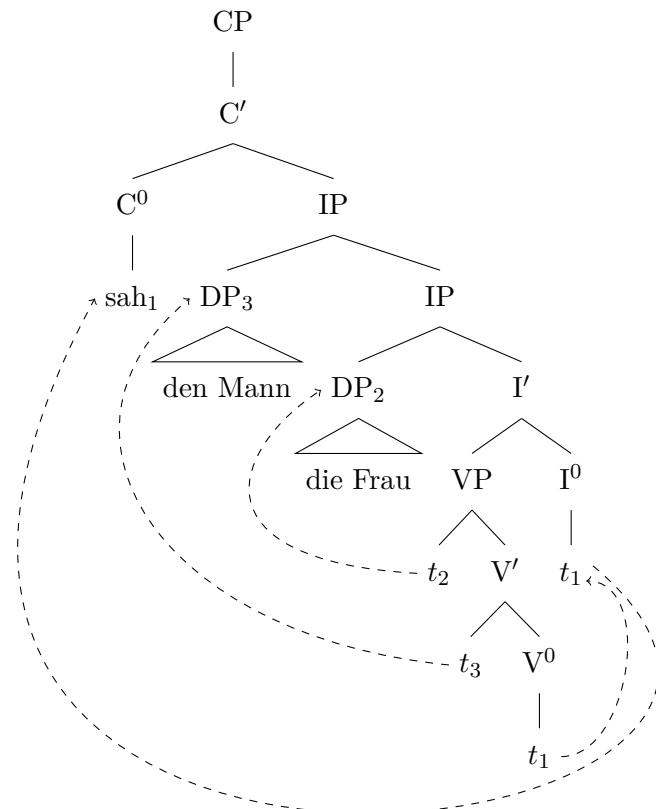

Check also:

<https://tex.stackexchange.com/questions/352873/drawing-lines-or-arrows-along-node-paths-with-forest/353341#353341>

5.4 Hiding the wider text and correcting the separation

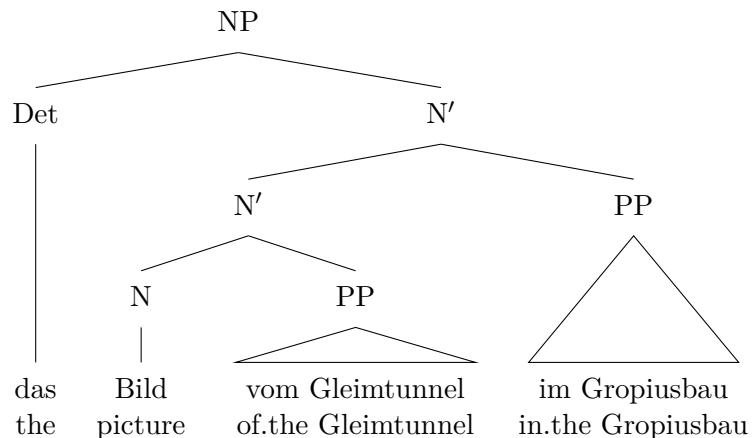

6 Some other trees for linguistics

6.1 Language architecture

This tree uses the forest styles `bottom word` and `edgy` defined in the preamble of this document.

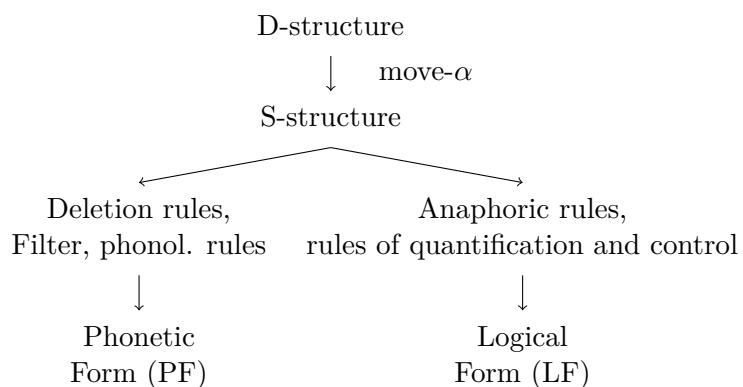


Figure 9: T-Modell (Müller, 2019: 88)

6.2 Structures of complex words

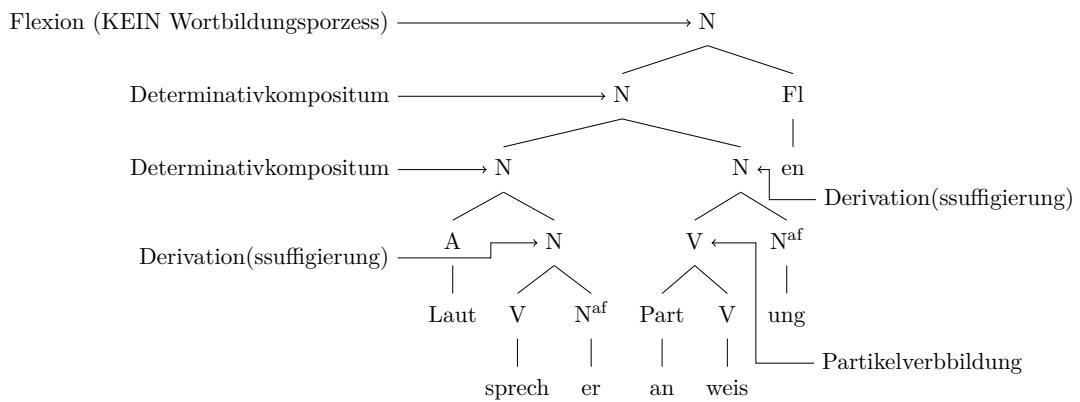


Figure 10: Word structure (Machicao y Priemer, 2019)

6.3 Structures of syllables

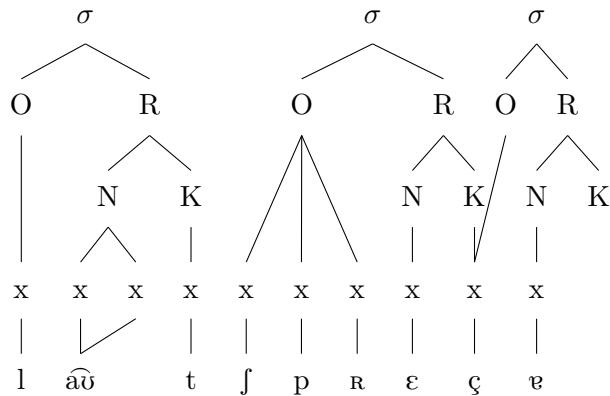


Figure 11: Phonetic structure (Machicao y Priemer, 2019)

The following style can be obtained using the forestset “GP1” which is already provided by the linguistics option of `forest`.

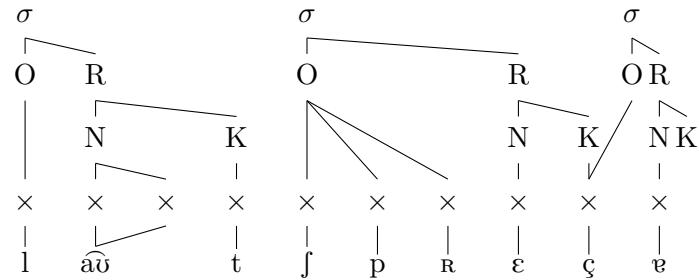


Figure 12: Phonetic structure (Machicao y Priemer, 2019)

6.4 Sonority Profiles with TikZ



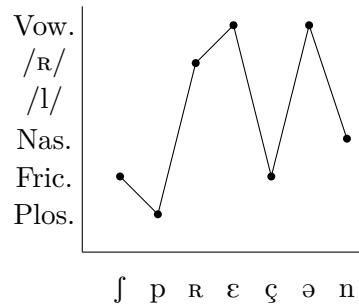


Figure 13: Sonority profile (Machicao y Priemer, 2019)


6.5 Tikz-tree: Typology

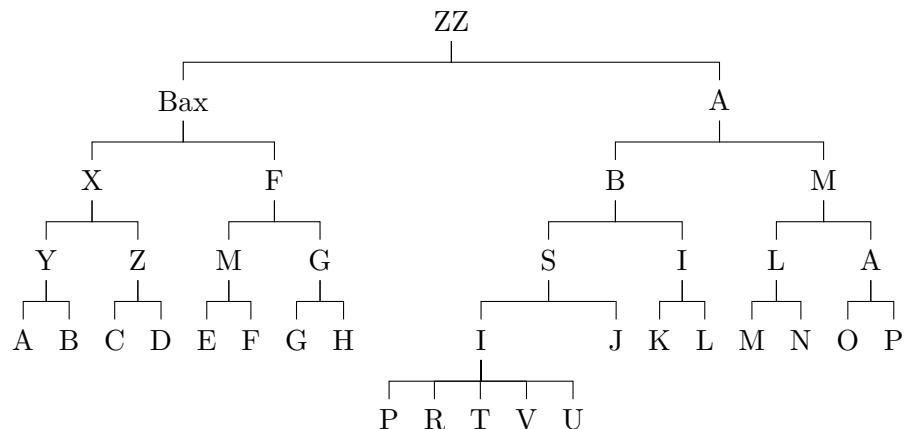


6.6 Forest-tree: Typology

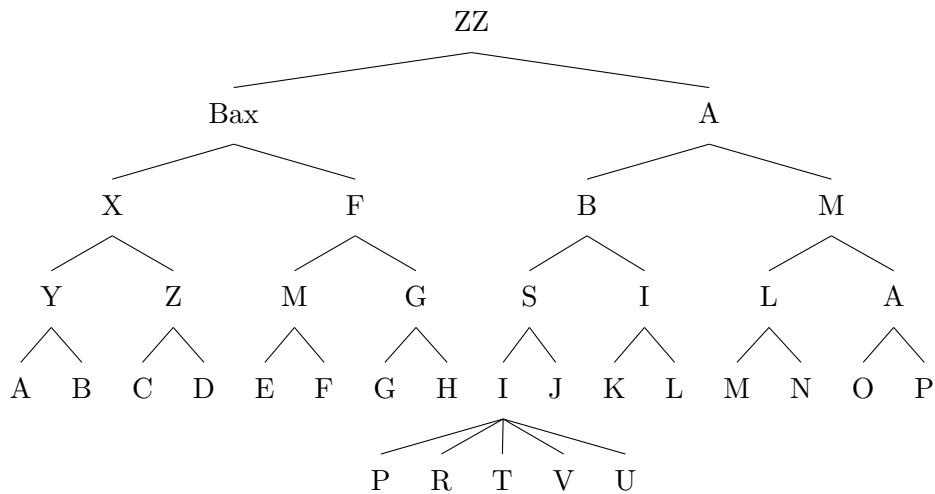

6.7 Forest Sets: rectangles

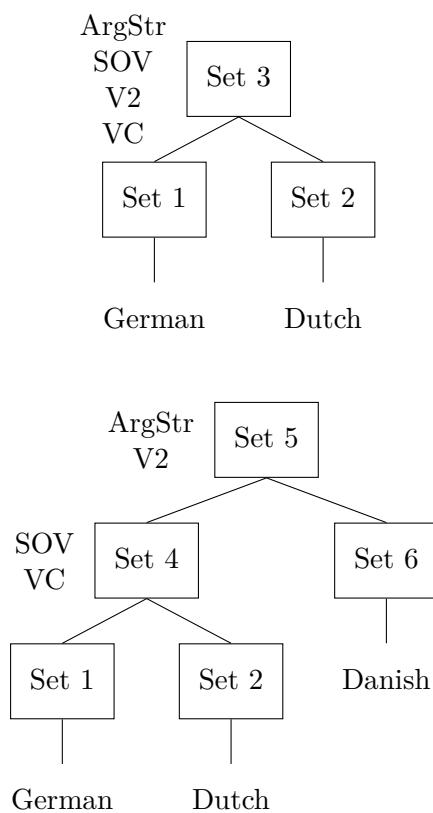

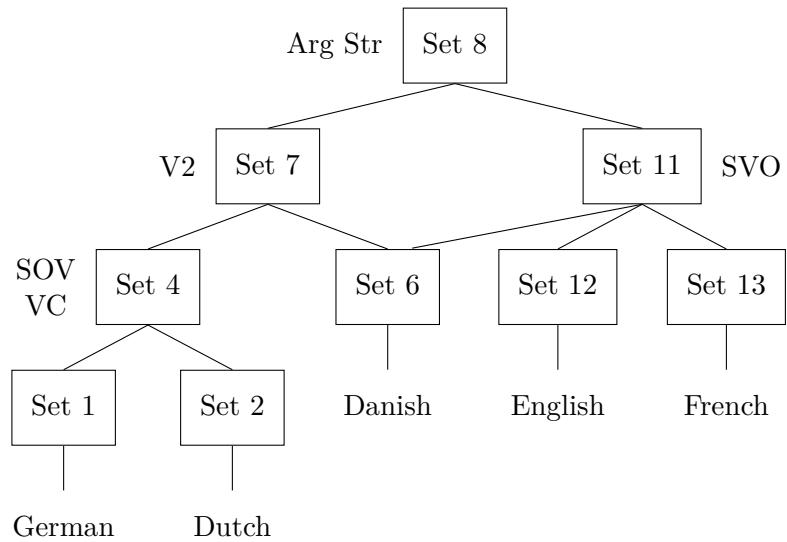

6.8 Tikz-qtree Sets




Figure 14: Common properties in German & Dutch (Müller, 2014)

6.9 Type hierarchy, multiple inheritance, and scalebox

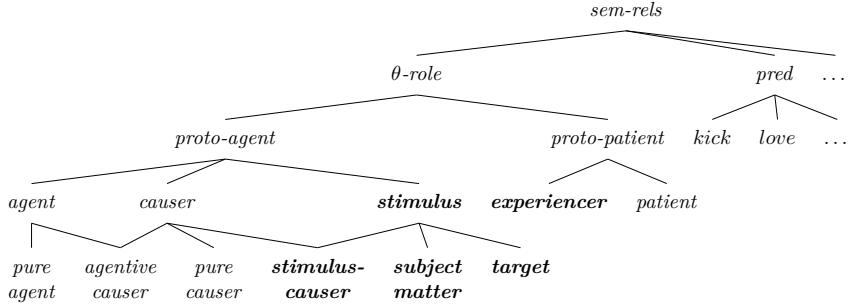


Figure 15: Type hierarchy for *semantic-relations* (Machicao y Priemer and Fritz-Huechante, 2018)

References

- Crémer, Jacques (2011). A very minimal introduction to TikZ. *CTAN: Comprehensive TeX Archive Network*. URL <http://www.ctan.org/pkg/pgf>, Access: 04/09/2019.
- Freitag, Constantin and Antonio Machicao y Priemer (2015). LaTeX-Einführung für Linguisten. Manuscript. URL https://www.researchgate.net/publication/279514740_LATEX-Einführung_für_Linguisten, Access: 12/04/2015.
- Machicao y Priemer, Antonio (2017). *NP-Arguments in NPs: An Analysis of German and Spanish Noun Phrases in Head-Driven Phrase Structure Grammar*. PhD thesis, Humboldt-Universität zu Berlin.
- Machicao y Priemer, Antonio (2018). Kopf. In Stefan Schierholz and Pál Uzonyi (Eds.), *Grammatik: Syntax*, Number 1.2 in Wörterbücher zur Sprach- und Kommunikationswissenschaft (Online). Berlin: De Gruyter. URL https://www.researchgate.net/publication/325046855_Kopf_Pre-Print, Access: 14/08/2018.
- Machicao y Priemer, Antonio (2019). Materialien zum GK Linguistik. Script.
- Machicao y Priemer, Antonio and Paola Fritz-Huechante (2018). Korean and Spanish psych-verbs: Interaction of case, theta-roles, linearization, and event structure in HPSG. In Stefan Müller and Frank Richter (Eds.), *The 25th International Conference on Head-Driven Phrase Structure Grammar (HPSG 2018)*, University of Tokyo, pp. 155–175. CSLI Publications. URL <http://web.stanford.edu/group/cslipublications/cslipublications/HPSG/2018/hpsg2018-machicayoypriemer-fritz-huechante.pdf>, Access: 30/10/2018.
- Müller, Stefan (2014). Kernigkeit: Anmerkungen zur Kern-Peripherie-Unterscheidung. In Antonio Machicao y Priemer, Andreas Nolda, and Athina Sioupi (Eds.), *Zwischen*

Kern und Peripherie: Untersuchungen zu Randbereichen in Sprache und Grammatik, pp. 25–39. Berlin: De Gruyter.

Müller, Stefan (2019). *Grammatical Theory: From Transformational Grammar to Constraint-Based Approaches*. Number 3 in Textbooks in Language Science. Berlin: Language Science Press. URL <http://langsci-press.org/catalog/book/255>, Access: 26/08/2019.

Nordhoff, Sebastian and Stefan Müller (2018). Language Science Press: Complete set of guidelines. Online. URL <http://langsci.github.io/guidelines/latexguidelines/LangSci-guidelines.pdf>, Access: 12/01/2019.

Rei, Fukui (2004). Tipa manual – version 1.3. *CTAN: Comprehensive TeX Archive Network*. URL <http://www.ctan.org/tex-archive/fonts/tipa/tipa>, Access: 06/06/2013.

Tantau, Till (2013). TikZ & PGF: Manual for version 3.0.0. *CTAN: Comprehensive TeX Archive Network*. URL <http://www.ctan.org/pkg/pgf>, Access: 24/02/2015.

Vanden Wyngaerd, Guido (2016). Forest quickstart guide for linguists. Manuscript. URL <https://ling.auf.net/lingbuzz/003391>, Access: 30/11/2017.

Živanović, Sašo (2017). Forest: a PGF/TikZ-based package for drawing linguistic trees v2.1.5. *CTAN: Comprehensive TeX Archive Network*. URL <https://ctan.org/pkg/forest>, Access: 30/11/2017.