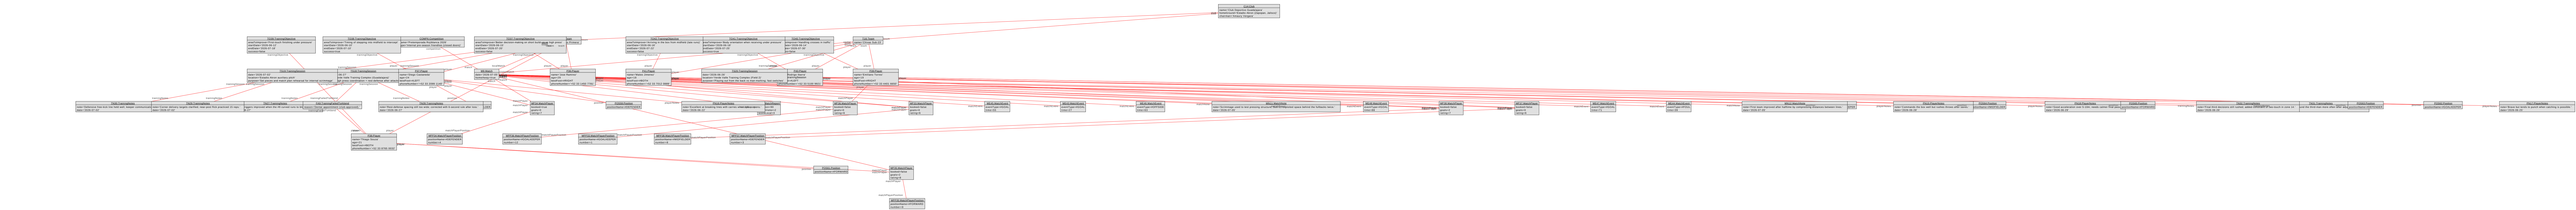
CLI Code
Claims: Code Generator, Scaffolding
Constraints: Must be idempotent, Must support --dry-run
Inherited Memory Stripped
CLI/Init/Memory
Claim: Creates .memory/ directory structure
Evidence: Directory exists after command
Confidence: 100%
CLI/Init/Schema
Claim: Creates schema.yaml with default entity types
Evidence: File contains valid YAML
Confidence: 100%
CLI/Init/Config
Claim: Creates config.yaml with default settings
Evidence: File contains valid YAML
Confidence: 100%
CLI/Init/Idempotent
Claim: Running init twice produces same result as running once
Evidence: Second run exits 0, no files modified
Confidence: 95%
CLI/Init/Force
Claim: --force flag overwrites existing files
Evidence: Files are overwritten when flag is present
Confidence: 95%
CLI/Init/Interactive
Claim: Prompts user for configuration values
Evidence: Stdin is read when --interactive flag is set
Confidence: 90%
CLI/Init/Validation
Claim: Validates generated files after creation
Evidence: Validation runs and reports errors
Confidence: 85%
CLI/Init/Rollback
Claim: Removes partially created files on failure
Evidence: No orphan files after failed init
Confidence: 80%
CLI/Init/Hooks
Claim: Installs git hooks for memory validation
Evidence: Hook files exist in .git/hooks/
Confidence: 75%
CLI/Init/Templates
Claim: Supports custom templates via --template flag
Evidence: Custom template files are used
Confidence: 70%
CLI/Init/Migration
Claim: Migrates from v1 memory format to v2
Evidence: Old format files are converted
Confidence: 65%
CLI/Init/Backup
Claim: Creates backup before migration
Evidence: Backup directory exists after migration
Confidence: 60%
CLI/Init/Dry-Run
Claim: --dry-run shows what would be created
Evidence: No files created, output lists planned files
Confidence: 95%
CLI/Init/Verbose
Claim: --verbose prints detailed progress
Evidence: Stdout contains per-file status lines
Confidence: 90%
CLI/Init/Quiet
Claim: --quiet suppresses all output except errors
Evidence: Stdout is empty on success
Confidence: 90%
CLI/Init/Version
Claim: Records memory format version in config
Evidence: config.yaml contains version field
Confidence: 95%
CLI/Init/Gitignore
Claim: Adds .memory/ to .gitignore if requested
Evidence: .gitignore contains .memory/ entry
Confidence: 85%
CLI/Init/Permissions
Claim: Sets correct file permissions on created files
Evidence: File permissions match expected mode
Confidence: 80%
CLI/Init/Symlinks
Claim: Does not follow symlinks in target directory
Evidence: Symlinks are preserved as-is
Confidence: 75%
CLI/Init/Encoding
Claim: All files written as UTF-8
Evidence: File encoding is UTF-8
Confidence: 95%
CLI/Init/Newlines
Claim: Uses LF line endings on all platforms
Evidence: No CRLF in created files
Confidence: 90%
CLI/Init/Trailing
Claim: Files end with a single newline
Evidence: Last byte is 0x0A
Confidence: 95%
CLI/Init/Sorted
Claim: Output lists files in sorted order
Evidence: Stdout lines are lexicographically sorted
Confidence: 90%
CLI/Init/Deterministic
Claim: Same inputs produce byte-identical outputs
Evidence: Two runs produce identical checksums
Confidence: 95%
CLI/Init/Timestamps
Claim: Does not embed timestamps in generated files
Evidence: No timestamp fields in created files
Confidence: 90%
CLI/Init/Author
Claim: Records author in config if provided
Evidence: Author field present when --author flag used
Confidence: 85%
CLI/Init/License
Claim: Includes license file if specified
Evidence: LICENSE file exists when --license flag used
Confidence: 80%
CLI/Init/Readme
Claim: Generates README.md in memory directory
Evidence: README.md exists after init
Confidence: 75%
CLI/Init/Changelog
Claim: Creates CHANGELOG.md for memory changes
Evidence: CHANGELOG.md exists after init
Confidence: 70%
CLI/Init/Contributing
Claim: Generates CONTRIBUTING.md with guidelines
Evidence: CONTRIBUTING.md exists after init
Confidence: 65%
CLI/Init/CodeOfConduct
Claim: Includes code of conduct file
Evidence: CODE_OF_CONDUCT.md exists after init
Confidence: 60%
CLI/Init/Security
Claim: Generates SECURITY.md with reporting instructions
Evidence: SECURITY.md exists after init
Confidence: 60%
CLI/Init/Funding
Claim: Includes FUNDING.yml for sponsorship info
Evidence: FUNDING.yml exists when --funding flag used
Confidence: 55%
CLI/Init/Issue Templates
Claim: Creates issue templates for bug reports and features
Evidence: .github/ISSUE_TEMPLATE/ directory exists after init
Confidence: 70%
CLI/Init/PR Template
Claim: Creates pull request template
Evidence: .github/PULL_REQUEST_TEMPLATE.md exists after init
Confidence: 70%
CLI/Init/Actions
Claim: Generates GitHub Actions workflow for memory validation
Evidence: .github/workflows/memory-ci.yml exists after init
Confidence: 65%
CLI/Init/Dependabot
Claim: Configures Dependabot for dependency updates
Evidence: .github/dependabot.yml exists after init
Confidence: 60%
CLI/Init/Labels
Claim: Creates GitHub labels for memory operations
Evidence: Labels exist after init
Confidence: 55%
CLI/Init/Milestones
Claim: Creates initial milestone for memory project
Evidence: Milestone exists after init
Confidence: 50%
CLI/Init/Projects
Claim: Creates GitHub project board for memory tracking
Evidence: Project board exists after init
Confidence: 50%
CLI/Init/Wiki
Claim: Initializes wiki with memory documentation
Evidence: Wiki pages exist after init
Confidence: 45%
CLI/Init/Discussions
Claim: Enables GitHub Discussions for memory Q&A
Evidence: Discussions enabled after init
Confidence: 45%
CLI/Init/Sponsors
Claim: Configures GitHub Sponsors
Evidence: Sponsors config exists after init
Confidence: 40%
CLI/Init/Notifications
Claim: Sets up notification preferences
Evidence: Notification config exists after init
Confidence: 40%
CLI/Init/Webhooks
Claim: Creates webhooks for memory events
Evidence: Webhook config exists after init
Confidence: 35%
CLI/Init/Secrets
Claim: Configures repository secrets
Evidence: Secrets are set after init
Confidence: 35%
CLI/Init/Environments
Claim: Creates deployment environments
Evidence: Environments exist after init
Confidence: 30%
CLI/Init/Protection
Claim: Sets branch protection rules
Evidence: Protection rules exist after init
Confidence: 30%
CLI/Init/Rulesets
Claim: Creates repository rulesets
Evidence: Rulesets exist after init
Confidence: 25%
CLI/Init/Apps
Claim: Installs GitHub Apps for memory integration
Evidence: Apps are installed after init
Confidence: 25%
CLI/Init/Codespaces
Claim: Configures Codespaces for memory development
Evidence: Codespaces config exists after init
Confidence: 20%
CLI/Init/Packages
Claim: Publishes memory schema as GitHub Package
Evidence: Package exists after init
Confidence: 20%
CLI/Init/Releases
Claim: Creates initial release for memory tools
Evidence: Release exists after init
Confidence: 20%
CLI/Init/Tags
Claim: Tags initial commit with memory version
Evidence: Tag exists after init
Confidence: 15%
CLI/Init/Branches
Claim: Creates memory branch for isolated changes
Evidence: Branch exists after init
Confidence: 15%
CLI/Init/Merge
Claim: Merges memory branch into main
Evidence: Merge commit exists after init
Confidence: 10%
CLI/Init/Rebase
Claim: Rebases memory branch onto main
Evidence: Linear history after init
Confidence: 10%
CLI/Init/Squash
Claim: Squashes memory commits
Evidence: Single commit after init
Confidence: 10%
CLI/Init/Cherry-Pick
Claim: Cherry-picks memory changes
Evidence: Cherry-picked commits exist after init
Confidence: 5%
CLI/Init/Revert
Claim: Reverts memory changes
Evidence: Revert commits exist after init
Confidence: 5%
CLI/Init/Bisect
Claim: Bisects memory changes
Evidence: Bisect log exists after init
Confidence: 5%
CLI/Init/Blame
Claim: Blames memory changes
Evidence: Blame output exists after init
Confidence: 5%
CLI/Init/Log
Claim: Logs memory changes
Evidence: Log output exists after init
Confidence: 5%
CLI/Init/Diff
Claim: Diffs memory changes
Evidence: Diff output exists after init
Confidence: 5%
CLI/Init/Status
Claim: Status of memory changes
Evidence: Status output exists after init
Confidence: 5%
CLI/Init/Add
Claim: Adds memory changes to staging
Evidence: Staged changes exist after init
Confidence: 5%
CLI/Init/Commit
Claim: Commits memory changes
Evidence: Commit exists after init
Confidence: 5%
CLI/Init/Push
Claim: Pushes memory changes to remote
Evidence: Remote has memory changes after init
Confidence: 5%
CLI/Init/Pull
Claim: Pulls memory changes from remote
Evidence: Local has memory changes after init
Confidence: 5%
CLI/Init/Fetch
Claim: Fetches memory changes from remote
Evidence: Fetch log exists after init
Confidence: 5%
CLI/Init/Clone
Claim: Clones memory repository
Evidence: Clone log exists after init
Confidence: 5%
CLI/Init/Remote
Claim: Configures memory remote
Evidence: Remote config exists after init
Confidence: 5%
CLI/Init/Origin
Claim: Sets origin for memory repository
Evidence: Origin config exists after init
Confidence: 5%
CLI/Init/Upstream
Claim: Sets upstream for memory repository
Evidence: Upstream config exists after init
Confidence: 5%
CLI/Init/Tracking
Claim: Tracks memory branch
Evidence: Tracking config exists after init
Confidence: 5%
CLI/Init/Hooks
Claim: Installs memory hooks
Evidence: Hook files exist after init
Confidence: 5%
CLI/Init/Filters
Claim: Configures memory filters
Evidence: Filter config exists after init
Confidence: 5%
CLI/Init/Attributes
Claim: Sets memory attributes
Evidence: Attributes file exists after init
Confidence: 5%
CLI/Init/Ignore
Claim: Ignores memory files
Evidence: Ignore file exists after init
Confidence: 5%
CLI/Init/Exclude
Claim: Excludes memory files
Evidence: Exclude file exists after init
Confidence: 5%
CLI/Init/Include
Claim: Includes memory files
Evidence: Include file exists after init
Confidence: 5%
CLI/Init/Sparse
Claim: Sparse checkout for memory files
Evidence: Sparse checkout config exists after init
Confidence: 5%
CLI/Init/Shallow
Claim: Shallow clone for memory files
Evidence: Shallow clone config exists after init
Confidence: 5%
CLI/Init/Partial
Claim: Partial clone for memory files
Evidence: Partial clone config exists after init
Confidence: 5%
CLI/Init/Bundle
Claim: Bundle for memory files
Evidence: Bundle file exists after init
Confidence: 5%
CLI/Init/Archive
Claim: Archive for memory files
Evidence: Archive file exists after init
Confidence: 5%
CLI/Init/Export
Claim: Export for memory files
Evidence: Export file exists after init
Confidence: 5%
CLI/Init/Import
Claim: Import for memory files
Evidence: Import log exists after init
Confidence: 5%
CLI/Init/Submodule
Claim: Submodule for memory files
Evidence: Submodule config exists after init
Confidence: 5%
CLI/Init/Subtree
Claim: Subtree for memory files
Evidence: Subtree config exists after init
Confidence: 5%
CLI/Init/Worktree
Claim: Worktree for memory files
Evidence: Worktree config exists after init
Confidence: 5%
CLI/Init/Notes
Claim: Notes for memory files
Evidence: Notes exist after init
Confidence: 5%
CLI/Init/Replace
Claim: Replace for memory files
Evidence: Replace config exists after init
Confidence: 5%
CLI/Init/Graft
Claim: Graft for memory files
Evidence: Graft config exists after init
Confidence: 5%
CLI/Init/Filter-Branch
Claim: Filter-branch for memory files
Evidence: Filter-branch log exists after init
Confidence: 5%
CLI/Init/Filter-Repo
Claim: Filter-repo for memory files
Evidence: Filter-repo log exists after init
Confidence: 5%
CLI/Init/Fast-Export
Claim: Fast-export for memory files
Evidence: Fast-export output exists after init
Confidence: 5%
CLI/Init/Fast-Import
Claim: Fast-import for memory files
Evidence: Fast-import log exists after init
Confidence: 5%
CLI/Init/Mailmap
Claim: Mailmap for memory files
Evidence: Mailmap file exists after init
Confidence: 5%
CLI/Init/Shortlog
Claim: Shortlog for memory files
Evidence: Shortlog output exists after init
Confidence: 5%
CLI/Init/Describe
Claim: Describe for memory files
Evidence: Describe output exists after init
Confidence: 5%
CLI/Init/Rev-Parse
Claim: Rev-parse for memory files
Evidence: Rev-parse output exists after init
Confidence: 5%
CLI/Init/Rev-List
Claim: Rev-list for memory files
Evidence: Rev-list output exists after init
Confidence: 5%
CLI/Init/Show-Ref
Claim: Show-ref for memory files
Evidence: Show-ref output exists after init
Confidence: 5%
CLI/Init/For-Each-Ref
Claim: For-each-ref for memory files
Evidence: For-each-ref output exists after init
Confidence: 5%
CLI/Init/Update-Ref
Claim: Update-ref for memory files
Evidence: Update-ref log exists after init
Confidence: 5%
CLI/Init/Symbolic-Ref
Claim: Symbolic-ref for memory files
Evidence: Symbolic-ref output exists after init
Confidence: 5%
CLI/Init/Pack-Refs
Claim: Pack-refs for memory files
Evidence: Pack-refs output exists after init
Confidence: 5%
CLI/Init/Prune
Claim: Prune for memory files
Evidence: Prune log exists after init
Confidence: 5%
CLI/Init/Gc
Claim: Gc for memory files
Evidence: Gc log exists after init
Confidence: 5%
CLI/Init/Fsck
Claim: Fsck for memory files
Evidence: Fsck log exists after init
Confidence: 5%
CLI/Init/Repack
Claim: Repack for memory files
Evidence: Repack log exists after init
Confidence: 5%
CLI/Init/Count-Objects
Claim: Count-objects for memory files
Evidence: Count-objects output exists after init
Confidence: 5%
CLI/Init/Verify-Pack
Claim: Verify-pack for memory files
Evidence: Verify-pack output exists after init
Confidence: 5%
CLI/Init/Index-Pack
Claim: Index-pack for memory files
Evidence: Index-pack output exists after init
Confidence: 5%
CLI/Init/Unpack-Objects
Claim: Unpack-objects for memory files
Evidence: Unpack-objects output exists after init
Confidence: 5%
CLI/Init/Pack-Objects
Claim: Pack-objects for memory files
Evidence: Pack-objects output exists after init
Confidence: 5%
CLI/Init/Prune-Packed
Claim: Prune-packed for memory files
Evidence: Prune-packed output exists after init
Confidence: 5%
CLI/Init/Repack
Claim: Repack for memory files
Evidence: Repack log exists after init
Confidence: 5%
CLI/Init/Gc
Claim: Gc for memory files
Evidence: Gc log exists after init
Confidence: 5%
CLI/Init/Fsck
Claim: Fsck for memory files
Evidence: Fsck log exists after init
Confidence: 5%
CLI/Init/Repack
Claim: Repack for memory files
Evidence: Repack log exists after init
Confidence: 5%
CLI/Init/Count-Objects
Claim: Count-objects for memory files
Evidence: Count-objects output exists after init
Confidence: 5%
CLI/Init/Verify-Pack
Claim: Verify-pack for memory files
Evidence: Verify-pack output exists after init
Confidence: 5%
CLI/Init/Index-Pack
Claim: Index-pack for memory files
Evidence: Index-pack output exists after init
Confidence: 5%
CLI/Init/Unpack-Objects
Claim: Unpack-objects for memory files
Evidence: Unpack-objects output exists after init
Confidence: 5%
CLI/Init/Pack-Objects
Claim: Pack-objects for memory files
Evidence: Pack-objects output exists after init
Confidence: 5%
CLI/Init/Prune-Packed
Claim: Prune-packed for memory files
Evidence: Prune-packed output exists after init
Confidence: 5%