Sprint 10 - Vactory Monolith Report

Prepared by: Aicha Nait Dayaa

Supervised by: Mr. Abdelmajid Bendrif
Mr. Hamza Bahlaouane

Date: April 3, 2026

Contents

1 Installation and Configuration . . . 2
1.1 Environment Setup . . . 2
1.2 Cloning the project . . . 2
2 Issue 0: Broken Patches . . . 2
2.0.1 Root Cause : (issue 0.1) . . . 3
2.0.2 Fix : (issue 0.1) . . . 3
2.0.3 Root Cause : (issue 0.2) . . . 4
2.0.4 Fix : (issue 0.2) . . . 4
2.0.5 Root Cause : (issue 0.3) . . . 4
2.0.6 Fix : (issue 0.3) . . . 4
3 Issue 1: Config Dependency . . . 7
3.0.1 Root Cause . . . 7
3.0.2 Fix . . . 9
3.0.3 Patch . . . 9
4 Issue 2: Memory Limit . . . 10
4.0.1 Step 1 . . . 10
4.0.2 Step 2 . . . 10
4.0.3 Fix . . . 10
5 Issue 3: Page Creation is Broken . . . 12
5.0.1 Fix . . . 12
6 Issue 4: Troubleshooting Views and Migration Configuration . . . 14
6.0.1 Initial Setup . . . 14
6.0.2 Migration Error . . . 14
6.0.3 Fix . . . 14
6.0.4 Running Migrations . . . 14
6.0.5 Views Issue (404 Error) . . . 15
6.0.6 Fix . . . 16
7 Issue 5: Broken Views . . . 17
7.0.1 Error Analysis . . . 17
7.0.2 Investigation . . . 17
7.0.3 Root Cause . . . 17
7.0.4 Fix . . . 18
7.0.5 Result . . . 18
7.1 Conclusion . . . 18

Introduction

The objective of this report is to document our hands-on discovery of the Vactory. As part of this sprint, we were asked to install a deliberately broken version of the project, and resolve the issues we encountered.

In this report, we will walk through each problem we encountered, explain what caused it, and document how we fixed it.

1 Installation and Configuration

1.1. Environment Setup

First we set up a local Apache environment with PHP 8.3 to run the project, and set up the corresponding mysql database, and then we add the correct credentials in the **settings.local.php**

```
$databases['default']['default'] = [
  'driver'   => 'mysql',
  'database' => 'vactory8',
  'username' => 'drupaluser',
  'password' => 'drupaluser',
  'host'     => '127.0.0.1',
  'port'     => '3306',
];
```

1.2. Cloning the project

```
git clone git@bitbucket.org:adminvoid/vactory8.git
cd vactory8
git checkout b394b05
composer install -vvv
```

This is where things started to break, the **composer install -vvv** did not complete cleanly. Several patches failed to apply, which brings us to the first issue we had to resolve.

2 Issue 0: Broken Patches

When running **composer install -vvv**, the installation stopped mid-way and handed control back to the user, waiting for input. This is the sign that a patch failed to apply. Cweagen couldn't find the file to patch and was asking the user to provide the path manually, which blocked the terminal and caused a timeout.

1. Root Cause : (issue 0.1)

The output to **composer install -vvv** showed that cweagen v1.7 applies patches using two flags by default:

```
patch '-p1' --no-backup-if-mismatch -d 'modules/contrib/colorapi' < '/var/folders/5q/stm9swyj0p9681rqd4vx244r0000gn/T/69c6943b7be09.patch'
```

- **-p1** : strips the first path component from the patch file paths
- **-d module_path** : sets the working directory to the module's folder

The problem is that these two flags conflict with each other for certain patches.
A patch file typically has paths like this (e.g. the colorapi patch)

```
--- a/modules/contrib/colorapi/config/install/colorapi.settings.yml
+++ b/modules/contrib/colorapi/config/install/colorapi.settings.yml
@@ -1,2 +1,2 @@
```

When cweagen applies **-p1**, it strips the **a/** prefix, leaving:

```
modules/contrib/colorapi/config/install/colorapi.settings.yml
```

But then **-d modules/contrib/colorapi** sets the working directory to the module folder, so the final path becomes:

```
modules/contrib/colorapi/modules/contrib/colorapi/config/install/colorapi.settings.yml
```

A double prefix, the path appears twice, so the file is never found and the patch fails.

2. Fix : (issue 0.1)

For each module affected by this double prefix problem, we added an explicit patchLevel in **composer.json** to override cweagen's default **-p1**, to correct each patche's directory level.

```
"patchLevel": {
  "drupal/core": "-p2",
  "drupal/colorapi": "-p4",
  .
  .
  }
```

> We could use another solution, which is upgrading **cweagen** to version 2.0. Unlike version 1.7 which only allows one global patch level per module, version 2.0 supports objects in the patch definition, allowing us to specify a patch level for each patch individually.

After resolving this issue, some patches passed, and some others failed.

3. Root Cause : (issue 0.2)

The reason is that some modules had multiple patches defined, each generated with a different path level. Since cweagen v1.7 only allows one global patch level per module via the patchLevel declaration, we couldn't satisfy all patches of the same module with a single value. Fixing one would break the other.

4. Fix : (issue 0.2)

Since we couldn't declare multiple patch levels for the same module, the solution was to normalize the patches themselves. We fetched the problematic patches locally and manually corrected their internal paths so that they all work with the same patch level. The corrected patches were saved in **modules/patches/** and referenced locally in **composer.json**

Even after all these fixes, the only patch that still fails is the **colorapi** patch.

> Using version 2.0 of **cweagen** would also solve this issue, since it allows defining the patch level per patch rather than per module, meaning each patch of the same module can have its own level, eliminating the need to normalize patch paths manually.

5. Root Cause : (issue 0.3)

The colorapi module had a different issue. The patch was being rejected entirely, and a **.rej** file was created indicating that there should be no additional line in the **colorapi.settings.yml** file.

When we inspected the patch file, we found that it contained a reference to an empty line that existed in an older version of the colorapi.settings YAML file but had since been removed. The module was updated, but the patch was never updated to reflect this.

In other words, the patch was written against an older version of the file. When **cweagen** tried to match the context lines to find where to apply the change, it couldn't find the expected empty line, so it rejected the patch entirely.

6. Fix : (issue 0.3)

The fix was in the same way as the previous one; fetching the patch locally, removing the reference to the non-existent empty line, and then updating the **composer.patches.json**

```
    "drupal/colorapi": {
        "Enable colorapi field type by default": "modules/patches/colorapi
            .patch"
    },
```

After these modifications, we should apply a **composer install** after clearing the composer cache, deleting the module and the vendor folder, for the installation to proceed with no errors.

Web Installer

After resolving the patch issues, we accessed the web installer at **http://vactory8**. The installer immediately flagged several **permission errors**. Drupal could not create the required directories automatically because Apache did not have write access to them.

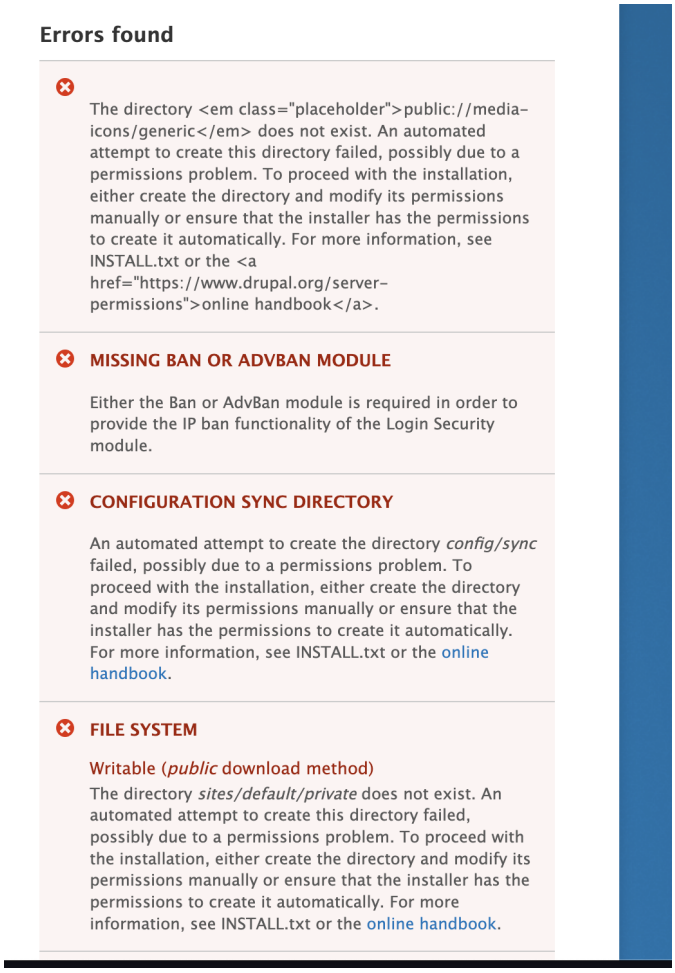

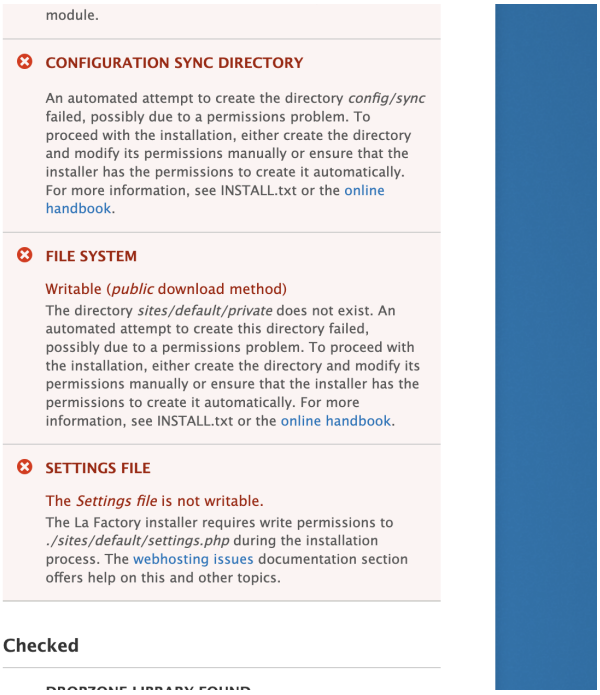

After fixing the permissions, the installer flagged another requirement. The **Ban** or **AdvBan** module was required by the **Login Security** module to provide IP ban functionality. We attempted to resolve this by enabling the **Ban** module via Drush. However we couldn't solve the issue.

Given the state of the project we decided to start fresh, create a new project and reapply the previously made patches. This time the web installer ran cleanly.

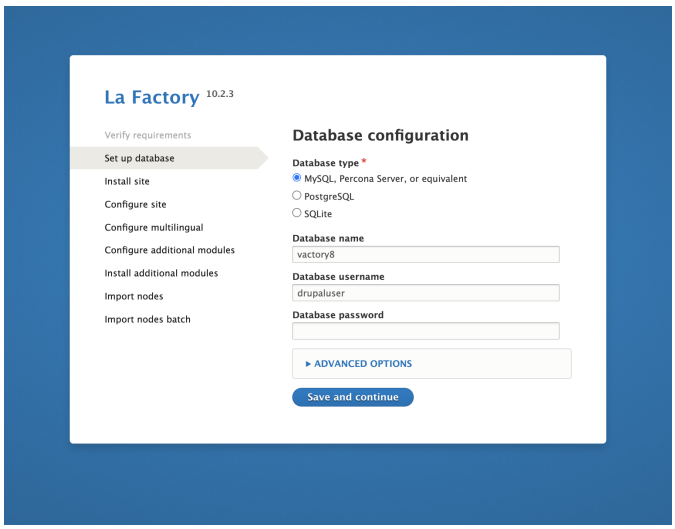
La Factory 10.2.3
Verify requirements
Set up database
Install site
Configure site
Configure multilingual
Configure additional modules
Install additional modules
Import nodes
Import nodes batch
Database configuration
Database type *
MySQL, Percona Server, or equivalent
PostgreSQL
SQLite
Database name
vactory8
Database username
drupaluser
Database password
ADVANCED OPTIONS
Save and continue

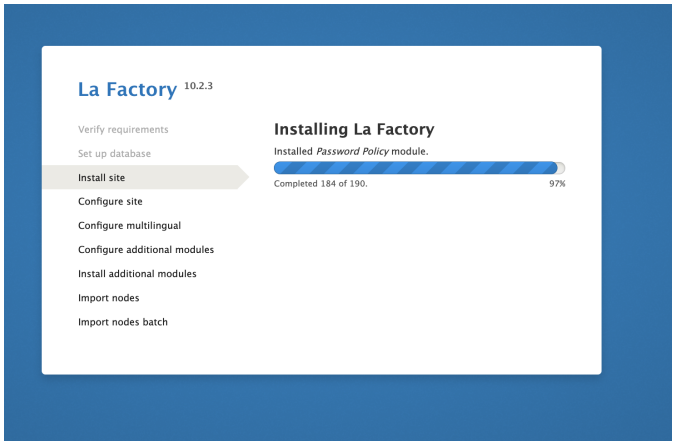
La Factory 10.2.3
Verify requirements
Set up database
Install site
Configure site
Configure multilingual
Configure additional modules
Install additional modules
Import nodes
Import nodes batch
Installing La Factory
Installed Password Policy module.
Completed 184 of 190.
97%

3 Issue 1: Config Dependency

During the installation, this error occured :

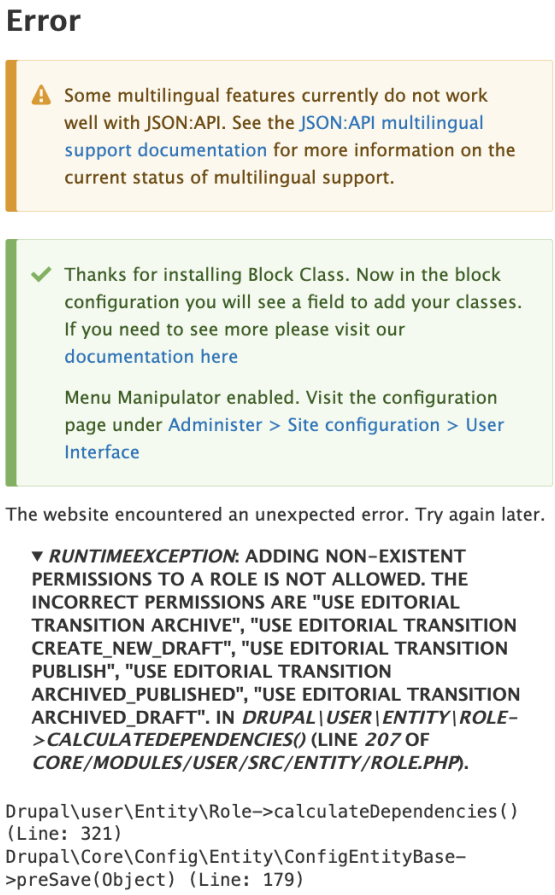

Error

Some multilingual features currently do not work well with JSON:API. See the JSON:API multilingual support documentation for more information on the current status of multilingual support.

Thanks for installing Block Class. Now in the block configuration you will see a field to add your classes. If you need to see more please visit our documentation here

Menu Manipulator enabled. Visit the configuration page under Administer > Site configuration > User Interface

The website encountered an unexpected error. Try again later.

▼ *RUNTIMEEXCEPTION*: ADDING NON-EXISTENT PERMISSIONS TO A ROLE IS NOT ALLOWED. THE INCORRECT PERMISSIONS ARE "USE EDITORIAL TRANSITION ARCHIVE", "USE EDITORIAL TRANSITION CREATE_NEW_DRAFT", "USE EDITORIAL TRANSITION PUBLISH", "USE EDITORIAL TRANSITION ARCHIVED_PUBLISHED", "USE EDITORIAL TRANSITION ARCHIVED_DRAFT". IN *DRUPAL|USER|ENTITY|ROLE->CALCULATEDEPENDENCIES()* (LINE *207* OF *CORE/MODULES/USER/SRC/ENTITY/ROLE.PHP*).

```
Drupal\user\Entity\Role->calculateDependencies()
(Line: 321)
Drupal\Core\Config\Entity\ConfigEntityBase-
>preSave(Object) (Line: 179)
```

The error indicates that a Role is trying to assign a non-existant permission, so this signifies that it is a dependency issue, because the permissions are not available at runtime.

In order to resolve this issue, we need to know which module is responsible for creating these permissions and which role is trying to assign these permissions.

The error specifies the problematic permissions - **use editorial transition archive, etc.** - these permissions are clearly **editorial permissions**, exposed by the **content_moderation** module as permissions through the editorial workflow, which is defined under **profiles/contrib/vactory_starter_kit/config/install/workflows.workflow.editorial.yml**.

> The **editorial workflow** is a content moderation workflow that defines the lifecycle of a piece of content. It provides three states: **Draft**, **Published**, and **Archived**, and defines the transitions between them, for example, a content editor can *publish* a draft, *archive* a published article. Each transition then becomes a permission that can be assigned to a role.

1. Root Cause

Step 1

We first check that the permissions exist in the **content_moderation.permissions.yml** :

```yaml
view any unpublished content:
  title: 'View any unpublished content'

view latest version:
  title: 'View the latest version'
  description: 'Requires the "View any unpublished content" or "View own unpublished content" permission'

permission_callbacks:
  - \Drupal\content_moderation\Permissions::transitionPermissions
```

Figure 1: content_moderation.permissions.yml

This tells us that the permissions are **not static**, they are **dynamically generated** by a PHP callback (**Permissions::transitionPermissions**) that reads the configured workflows from the database and generates a permission for each transition.

This means the permissions only exist if:

- The **content_moderation** module is installed
- The **workflow configuration** has already been imported into the database

Step 2

Second we need to check which role is trying to assign these permissions :

```
grep -r "use editorial transitions archive" profiles/
```

Result :

```
profiles/contrib/vactory_starter_kit/config/install/user.role.
    webmaster.yml:  - 'use editorial transition archive'
```

So it is the **webmaster role** that is trying to assign these permissions.

```yaml
langcode: en
status: true
dependencies:
  config:
    - filter.format.basic_html
    - filter.format.full_html
id: webmaster
label: Webmaster
weight: 5
is_admin: null
permissions:
  - 'access administration pages'
  - 'access content overview'
  - 'access files overview'
```

Figure 2: user.role.webmaster.yml

Looking at the **user.role.webmaster.yml** file, we can see its dependencies section:

```
dependencies:
  config:
    - filter.format.basic_html
    - filter.format.full_html
```

The **workflows.workflow.editorial** configuration is **not declared as a dependency**. This means Drupal has no way of knowing that it needs to import the workflow **before** importing this role. As a result, when Drupal tries to assign the editorial transition permissions to the webmaster role, the workflow hasn't been imported yet, so the permissions don't exist yet, and the installation crashes.

2. Fix

The fix is to declare **workflows.workflow.editorial** as a config dependency in **user.role.webmaster.yml**, so the workflow is imported **before** the role:

```
dependencies:
  config:
    - filter.format.basic_html
    - filter.format.full_html
+   - workflows.workflow.editorial
```

3. Patch

Since **vactory_starter_kit** is a contrib profile, modifying it directly would mean losing the fix every time **composer install** is run. That is why we created a **patch** for this change and referenced it in **composer.json** so it is reapplied automatically on every install:

```
--- a/profiles/contrib/vactory_starter_kit/config/install/user.role.
   webmaster.yml
+++ b/profiles/contrib/vactory_starter_kit/config/install/user.role.
   webmaster.yml
@@ -3,6 +3,7 @@
 dependencies:
   config:
     - filter.format.basic_html
     - filter.format.full_html
+    - workflows.workflow.editorial
 id: webmaster
```

4 Issue 2: Memory Limit

In this section, we uninstall the **vactory_decoupled** module along with its submodules using Drush under the memory_limit=128M.

1. Step 1

First we need to decrease the memory_limit from 512M to 128M in the php.ini file.

```
; Maximum amount of memory a script may consume
; https://php.net/memory-limit
memory_limit = 512M
```

```
; Maximum amount of memory a script may consume
; https://php.net/memory-limit
memory_limit = 128M
```

2. Step 2

We try to uninstall the module **vactory_decoupled** using drush

```
Fatal error: Allowed memory size of 134217728 bytes exhausted (tried to allocate 397312
bytes) in /Users/mac/projects/vactory8/core/lib/Drupal/Core/Cache/DatabaseBackend.php on
 line 255
PHP Fatal error:  Allowed memory size of 134217728 bytes exhausted (tried to allocate 52
42880 bytes) in /Users/mac/projects/vactory8/core/modules/page_cache/src/StackMiddleware
/PageCache.php on line 136

Fatal error: Allowed memory size of 134217728 bytes exhausted (tried to allocate 5242880
 bytes) in /Users/mac/projects/vactory8/core/modules/page_cache/src/StackMiddleware/Page
Cache.php on line 136
```

And we get a **memory allocation error**. This is because uninstalling **vactory_decoupled** triggers a many operations - resolving the dependency tree of all its submodules, running their uninstall hooks, and rebuilding the cache - all within a single PHP process. With only **128MB** available, the process runs out of memory before it finishes.

3. Fix

The fix is to override the memory limit only for this specific command using the **PHP CLI flag -d**:

```
php -d memory_limit=512M ./vendor/bin/drush pmu vactory_decoupled
```

The **-d** flag passes a PHP configuration directive at runtime without touching any configuration file.

```
~/p/vactory8  @b394b05d +5 !11 ?2  php -d memory_limit=512M ./vendor/bin/drush pmu va
ctory_decoupled
The following extensions will be uninstalled: vactory_decoupled, vactory_decoupled_theme
_switcher, vactory_private_files_decoupled, vactory_decoupled_webform, vactory_decoupled
_espace_prive, vactory_decoupled_router

 Do you want to continue? (yes/no) [yes]:
 >

[INFO] [system] [2026-03-30T11:22:33] vactory_decoupled_router module uninstalled. | uid
: 0 | request-uri: http://default/ | refer:  | ip:  127.0.0.1 | link:
[INFO] [system] [2026-03-30T11:22:34] vactory_decoupled_espace_prive module uninstalled.
 | uid: 0 | request-uri: http://default/ | refer:  | ip:  127.0.0.1 | link:
[INFO] [system] [2026-03-30T11:22:35] vactory_decoupled_webform module uninstalled. | ui
d: 0 | request-uri: http://default/ | refer:  | ip:  127.0.0.1 | link:
[INFO] [system] [2026-03-30T11:22:36] vactory_private_files_decoupled module uninstalled
. | uid: 0 | request-uri: http://default/ | refer:  | ip:  127.0.0.1 | link:
[INFO] [system] [2026-03-30T11:22:38] vactory_decoupled module uninstalled. | uid: 0 | r
equest-uri: http://default/ | refer:  | ip:  127.0.0.1 | link:
[INFO] [system] [2026-03-30T11:22:39] vactory_decoupled_theme_switcher module uninstalle
d. | uid: 0 | request-uri: http://default/ | refer:  | ip:  127.0.0.1 | link:
 [success] Successfully uninstalled: vactory_decoupled, vactory_decoupled_theme_switcher
, vactory_private_files_decoupled, vactory_decoupled_webform, vactory_decoupled_espace_p
rive, vactory_decoupled_router

~/p/vactory8  @b394b05d +5 !11 ?2                                  ✔  25s  system
```

5 Issue 3: Page Creation is Broken

In this section, we resolve a **403 Forbidden** error on the **colorpicker** JavaScript and CSS files, which are being blocked, when trying to choose a new template on page creation.

When inspecting the browser's network tab, the requests for:

```
vendor/jaypan/jquery-colorpicker/js/colorpicker.js
vendor/jaypan/jquery-colorpicker/css/colorpicker.css
```

were returning **403 Forbidden**.

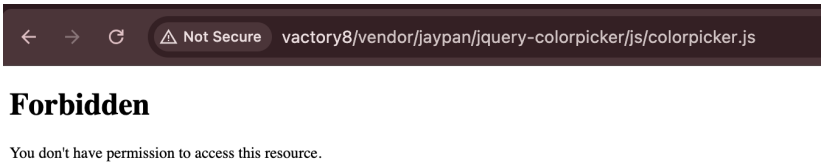

The reason is that the **vendor/** directory contains a **.htaccess** file that blocks all public access. However, the **jquery_colorpicker** module was referencing these files directly from **vendor/** in its **jquery_colorpicker.libraries.yml**:

```
library:
  css:
    theme:
      ../../../vendor/jaypan/jquery-colorpicker/css/colorpicker.css: {}
  js:
    ../../../vendor/jaypan/jquery-colorpicker/js/colorpicker.js: {}
```

1. Fix

The fix was to copy the colorpicker assets into the **libraries/** folder, which is web accessible:

```
cp -r vendor/jaypan/jquery-colorpicker libraries/jquery-colorpicker
```

Then update the paths in **jquery_colorpicker.libraries.yml** to point to the new location:

```
library:
  css:
    theme:
      ../../../libraries/jquery-colorpicker/css/colorpicker.css: {}
  js:
    ../../../libraries/jquery-colorpicker/js/colorpicker.js: {}
```

Since **jquery_colorpicker** is a contrib module managed by Composer, we created a patch for this change:

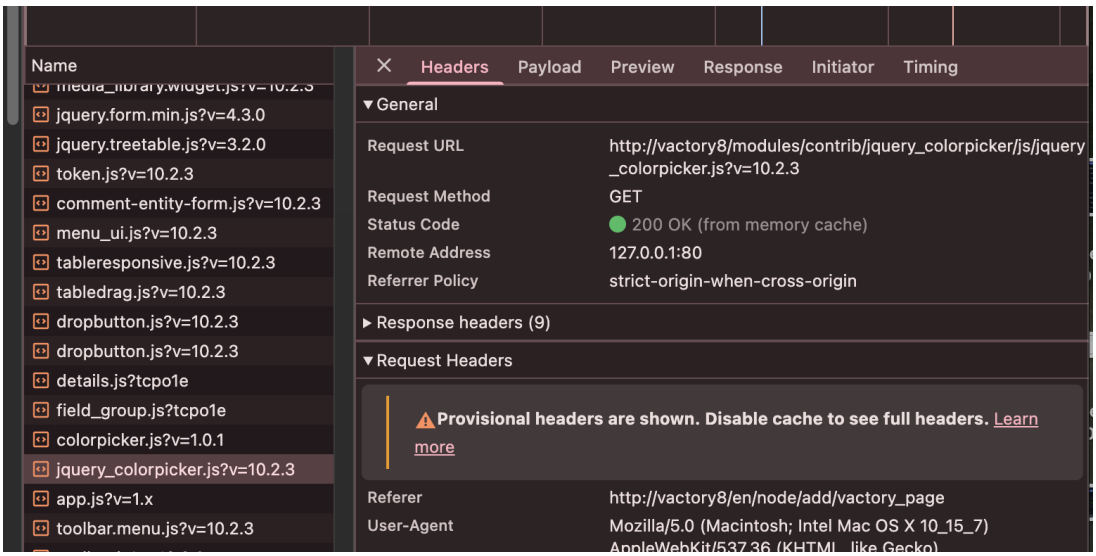


```
"drupal/jquery_colorpicker": {
    "Fix vendor assets not web accessible":
        "modules/patches/jquery_colorpicker_fix_vendor_path.patch"
}
```

Another solution to this problem, would be using the module **vendor stream wrapper** module, which provides a stream wrapper, **vendor://**, that allows for referencing of files in the vendor directory, without exposing it to the webroot.

6 Issue 4: Troubleshooting Views and Migration Configuration

In this section, we troubleshoot issues related to **Views** access and **migration conflicts** after installing the **vactory_news** module.

1. Initial Setup

The PHP **memory_limit** was initially set to **128MB**, which is insufficient for running migrations. It was updated to **512MB** by editing the **php.ini** file, followed by restarting Apache to apply the changes.

We then installed the modules **vactory_news & vactory_news_migrate** using Drush:

```
drush en vactory_news vactory_news_migrate
drush cr
```

No errors occurred during installation.

2. Migration Error

After uninstalling and re-enabling **vactory_news_migrate**, an error occurred indicating that migrations already exist in active configuration.

This happens because Drupal stores migration configurations in the database as independent configuration entites. Re-enabling the module attempts to recreate them, leading to conflicts.

3. Fix

The conflicting migration configurations were manually removed using Drush:

```
drush config:delete migrate_plus.migration.news_ar
drush config:delete migrate_plus.migration.news_fr
```

This clears previously registered migrations, allowing a clean re-import.

4. Running Migrations

Available migrations can be listed using:

```
drush migrate:status
```

```
~/p/vactory8  @b394b05d +5 !11 ?4  ./vendor/bin/drush migrate:status                                  ✓ 26s system
 ------------------ ----------------------------------- -------- ------- ---------- ------------- --------------- ----------
-----
  Group              Migration ID                        Status   Total   Imported   Unprocessed   Message Count   Last Impo
rted
 ------------------ ----------------------------------- -------- ------- ---------- ------------- --------------- ----------
-----
  vactory (vactory)   news_ar                            Idle     7       0          7             0
  vactory (vactory)   news_fr                            Idle     7       0          7             0
  vactory (vactory)   news_theme                         Idle     4       0          4             0
  vactory (vactory)   news_theme_ar                      Idle     4       0          4             0


  Default (default)   node_vactory_news_migration_default   Idle     12      0          12            0
 ------------------ ----------------------------------- -------- ------- ---------- ------------- --------------- ----------
-----
```

We then import all migrations with:

```
drush migrate:import --all
```

```
~/p/vactory8  @b394b05d +5 !11 ?4  ./vendor/bin/drush migrate:import --all                            ✓ 4s system
[notice] Processed 7 items (0 created, 0 updated, 0 failed, 7 ignored) - done with 'news_ar'
[notice] Processed 7 items (7 created, 0 updated, 0 failed, 0 ignored) - done with 'news_fr'
[notice] Processed 4 items (4 created, 0 updated, 0 failed, 0 ignored) - done with 'news_theme'
[notice] Processed 4 items (4 created, 0 updated, 0 failed, 0 ignored) - done with 'news_theme_ar'
[notice] Processed 12 items (12 created, 0 updated, 0 failed, 0 ignored) - done with 'node_vactory_news_migration_default'
```

5. Views Issue (404 Error)

Accessing the view at:

```
/admin/structure/views/view/vactory_news
```

resulted in a **404 Not Found** error.

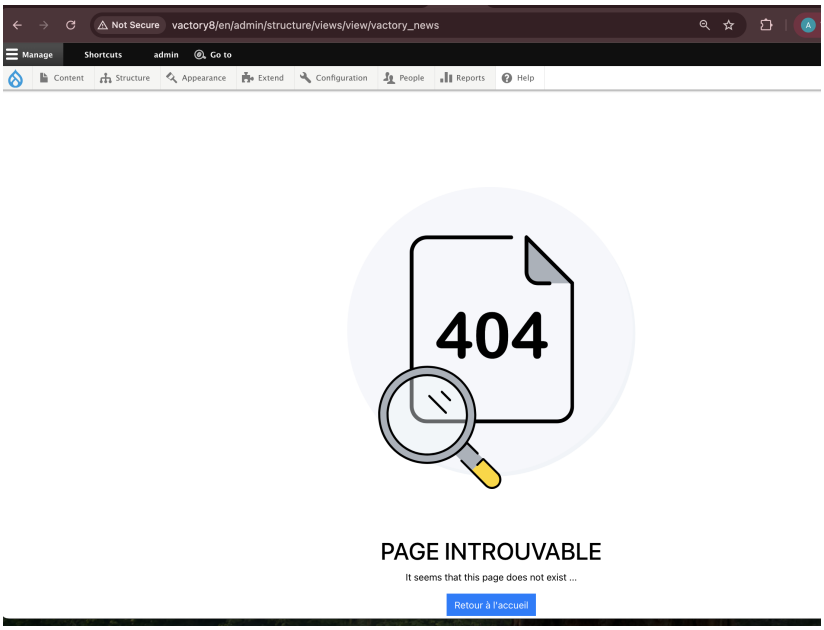

The issue was caused by a missing dependency: the **views_ui** module. While the core **Views** module provides functionality, the UI routes are only available when **views_ui** is enabled.

6. Fix

```
drush en views_ui
drush cr
```

After enabling the module and clearing cache, the view became accessible.

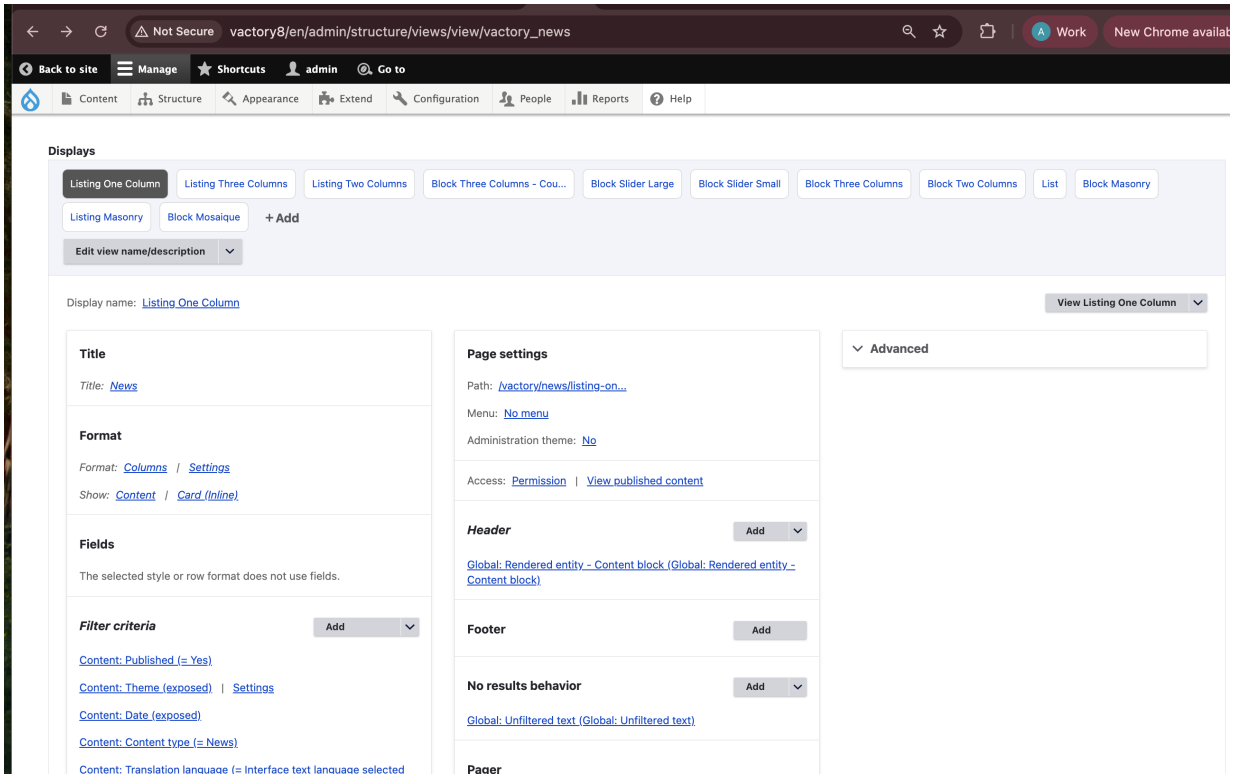

7 Issue 5: Broken Views

In this section, we troubleshoot a rendering failure when accessing the **vactory_news** View from the administration interface.

Accessing:

```
/admin/structure/views/view/vactory_news
```

resulted in the error:

```
Oops, something went wrong. Check your browser's developer console.
```

1. Error Analysis

By inspecting the logs using **dblog**, the following error was identified:

User	admin
Location	http://vactory8/en/admin/structure/views/view/vactory_news/preview/listing_one_column?_wrapper_format=drupal_ajax
Referrer	http://vactory8/en/admin/structure/views/view/vactory_news
Message	*Twig|Error|LoaderError*: Template "@twigComponents/article/article-inline.twig" is not defined in "profiles/contrib/vactory_starter_kit/modules/vactory_news/templates/card-inline.html.twig" at line 66. in *Twig|Loader|ChainLoader->getCacheKey()* (line *111* of */Users/mac/projects/vactory8/vendor/twig/twig/src/Loader/ChainLoader.php*).
Severity	Error

This indicates that Twig failed to resolve a template referenced via the **@twig_components** namespace.

2. Investigation

Searching for **twigComponents** in the codebase revealed that the namespace is defined in the active theme configuration:

```
components:
  namespaces:
    twigComponents:
      - src/twig/components
```

This confirms that the template should exist within the theme's components directory.

3. Root Cause

The issue is caused by how the **components** module resolves templates.

When accessing the View from the admin interface, Drupal uses the **admin theme** as the active theme. However, the Twig components are defined in the **default theme**.

By default, the components module only searches for templates within the active theme. As a result, it fails to locate templates defined in the default theme, leading to the Twig loader error.

4. Fix

A patch addressing this issue was found in component issue:

```
https://www.drupal.org/files/issues/2025-01-20/3107993-reroll-3.1.0.patch
```

The patch modifies the template resolution logic in the **ComponentsRegistry** class to introduce a fallback mechanism:

- First, attempt to load the template from the active theme
- If not found, attempt to load it from the default theme

This ensures that components defined in the frontend theme are still available when rendering content in the admin interface.

The patch was added to **composer.patches.json**:

```
"drupal/components": {
  "Fix template lookup across themes":
  "https://git.drupalcode.org/project/components/-/merge_requests/44.patch
    "
}
```

Then applied using:

```
composer install
drush cr
```

5. Result

After applying the patch and clearing the cache, the Twig templates were correctly resolved and the View loaded without errors.

7.1. Conclusion

This issue was caused by a limitation in the **components** module, which did not account for differences between the active (admin) theme and the default (frontend) theme. The patch resolves this by adding a fallback mechanism, ensuring consistent template resolution across different rendering contexts.