


DERIVATION OF THE NODE DELAY VALUES FROM THE COUPLING GRAPH

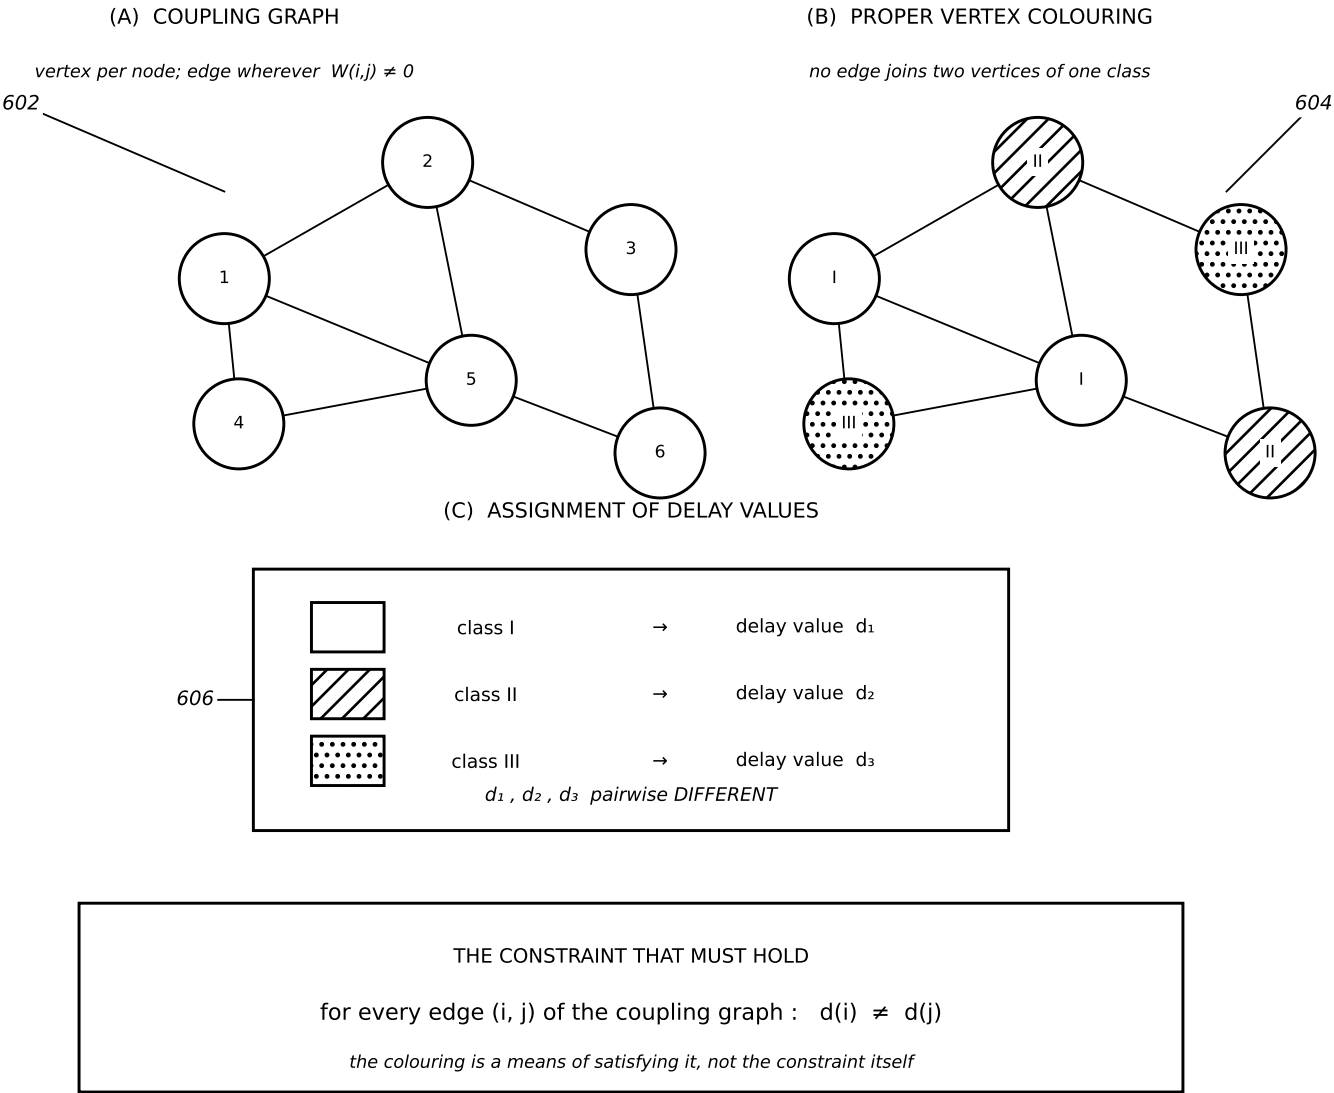

The constraint is on the DELAY VALUES, not on the class labels. A proper colouring whose classes are all assigned the same delay value satisfies every graph-theoretic requirement and does not work — see FIG. 7. The particular values are otherwise immaterial; only their distinctness on each edge is required.

Because the coupling graph is sparse, the number of distinct values needed is small and does not grow appreciably with the number of nodes.

FIG. 6