


SYNTHESIS OF THE NODE LOGIC USING OPERATING-REGION DON'T-CARES

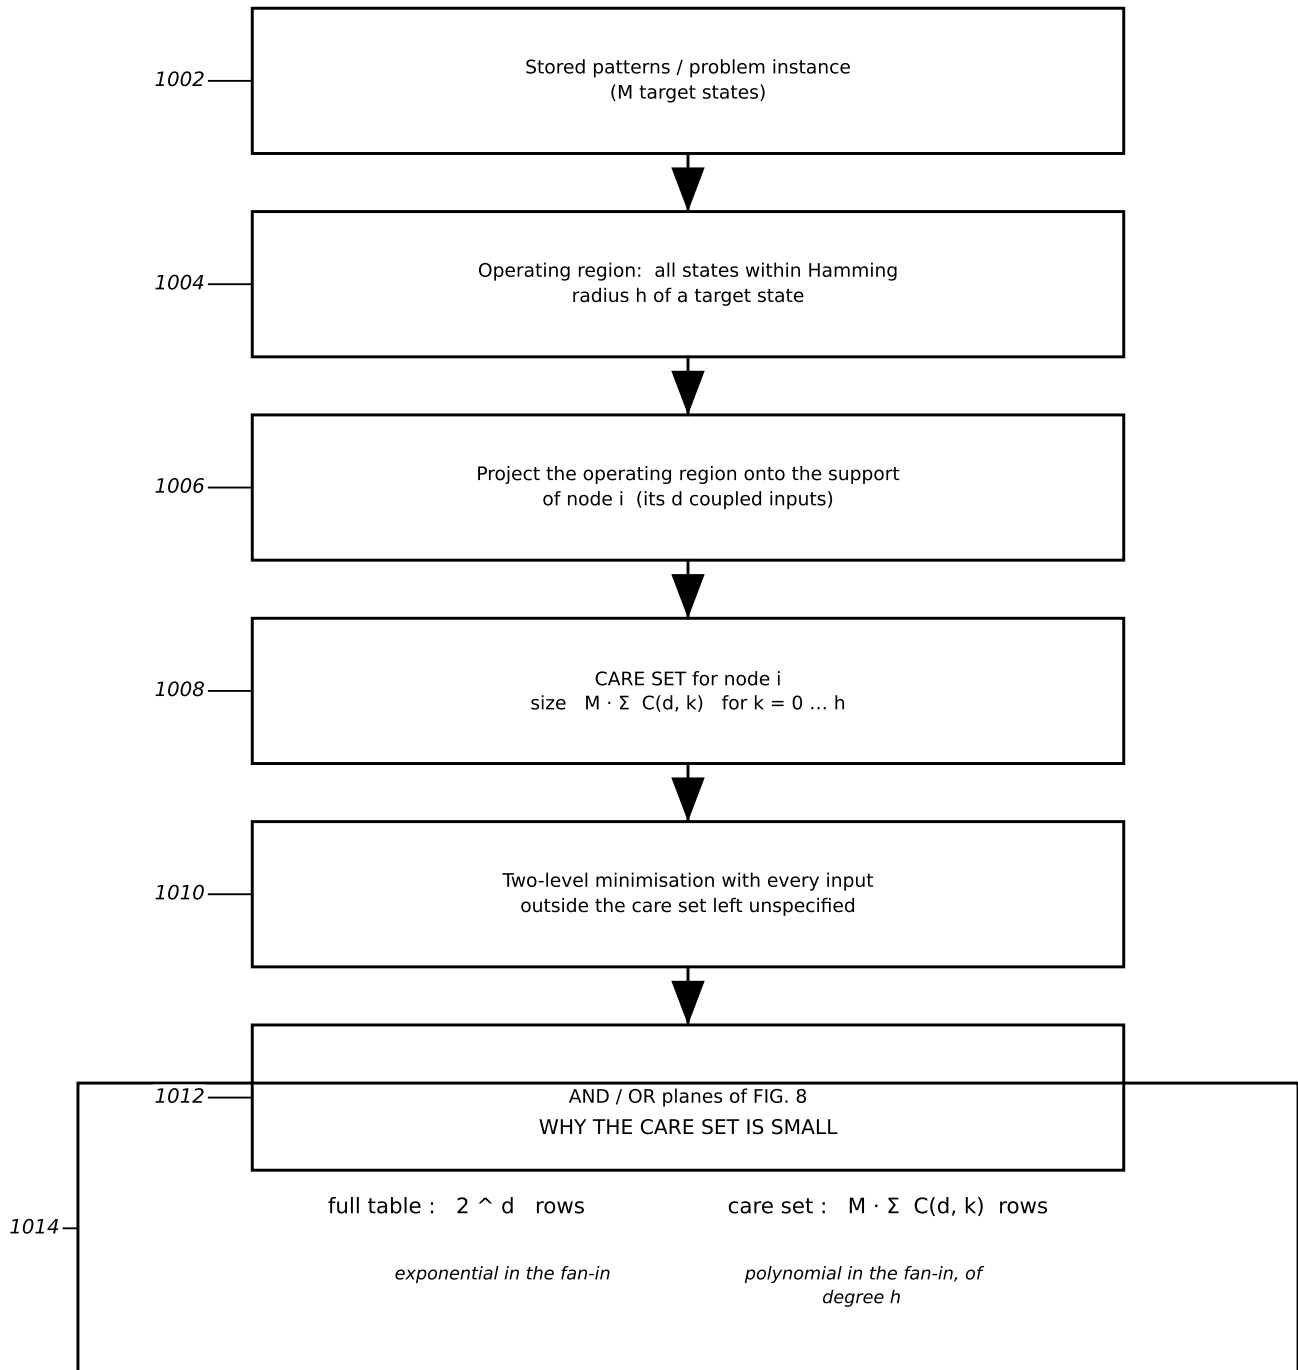

The care set is derived in closed form from the operating region. It is not obtained by sampling which inputs a trained network happens to visit, and it carries a guarantee over a stated radius rather than an observed frequency. Because the network is recurrent, an unspecified input that is later realised may create a fixed point that the target function does not have — a failure mode with no counterpart in a feed-forward network.

FIG. 10