


接入 OpenCode


OpenCode 是一个开源 AI 编程助手，提供终端、网页等运行形式。

从现有安装中迁移到 DeepSeek

1. 执行 `opencode upgrade` 命令，将 opencode 升级至最新版本 ($\geq v1.14.24$)
2. 执行 `opencode` 命令，启动 OpenCode
3. 输入框中输入 `/connect`，然后输入 `deepseek` 并选择供应商

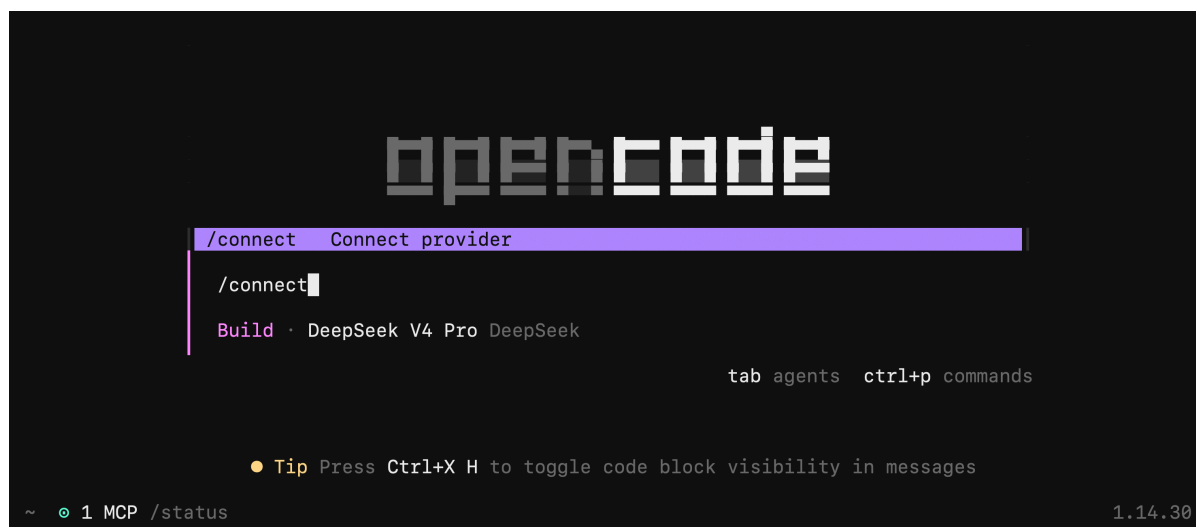


The screenshot shows the OpenCode terminal interface. At the top, the 'opencode' logo is displayed in a stylized, blocky font. Below the logo, a command prompt shows the user entering `/connect` and pressing Enter. The terminal then displays `Build · DeepSeek V4 Pro DeepSeek`. Below this, there are keyboard shortcuts: `tab agents` and `ctrl+p commands`. A tip message reads: `● Tip Press Ctrl+X H to toggle code block visibility in messages`. At the bottom left, it shows `~ 1 MCP /status` and at the bottom right, the version `1.14.30`.

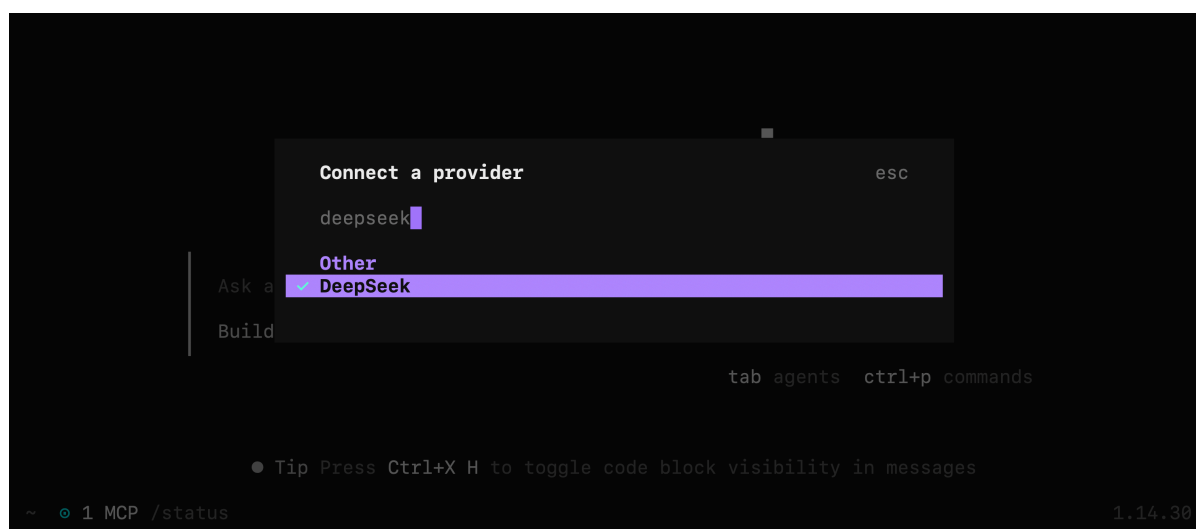


The screenshot shows the OpenCode terminal interface with a modal dialog box open. The dialog box has a title bar that says 'Connect a provider' and a close button labeled 'esc'. Inside the dialog, there is a text input field containing 'deepseek'. Below the input field, there are two options: 'Other' and 'DeepSeek'. The 'DeepSeek' option is highlighted with a blue bar. To the left of the dialog, the text 'Ask a' and 'Build' is visible. Below the dialog, there are keyboard shortcuts: `tab agents` and `ctrl+p commands`. A tip message reads: `● Tip Press Ctrl+X H to toggle code block visibility in messages`. At the bottom left, it shows `~ 1 MCP /status` and at the bottom right, the version `1.14.30`.

3. 填入 [DeepSeek API Key](#)

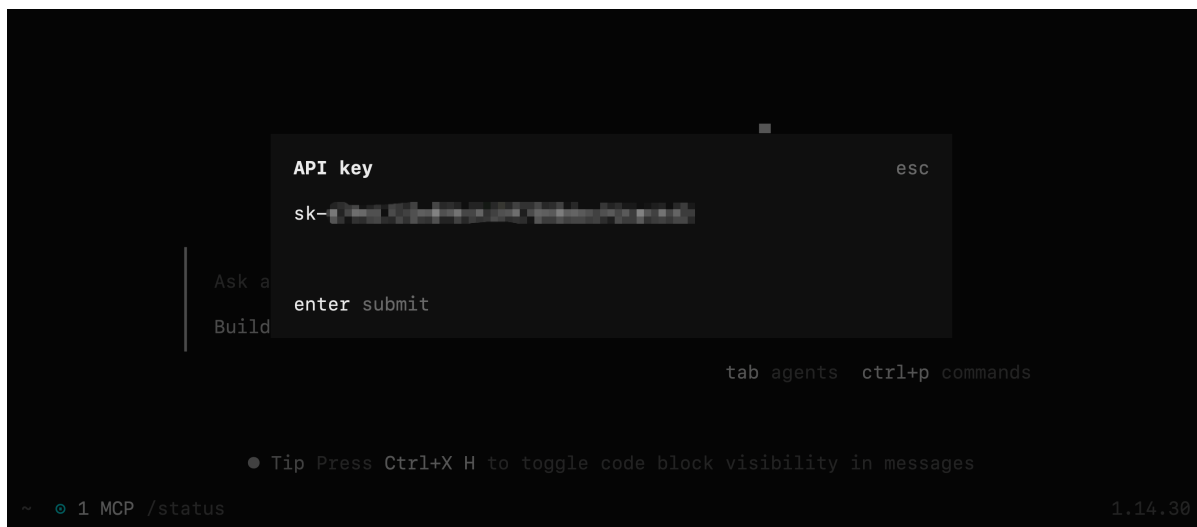

4. 选择 DeepSeek-V4-Pro 模型

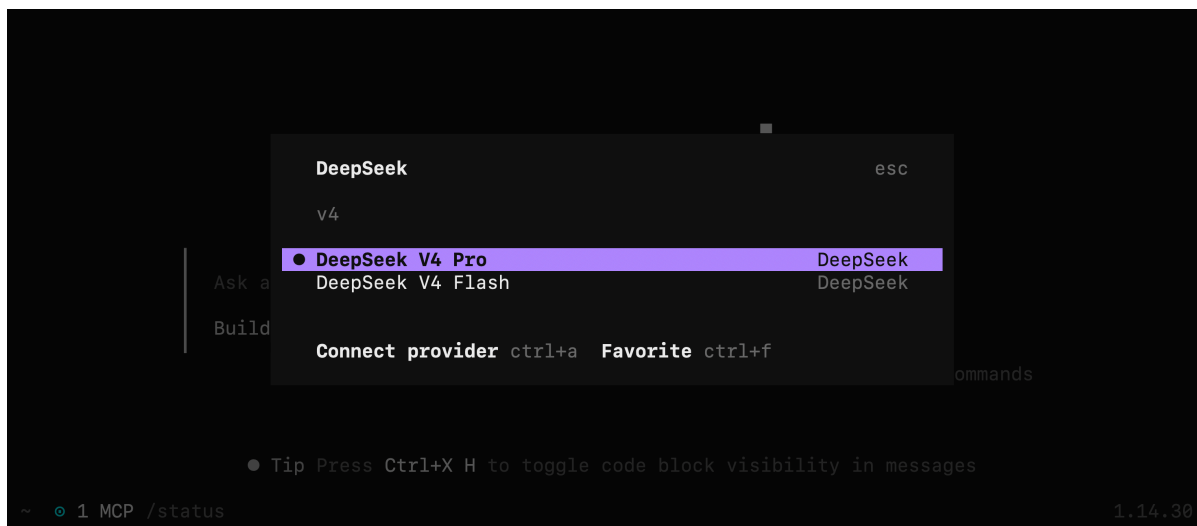

从零安装 OpenCode

1. 安装 OpenCode

前往官方下载页面安装或升级：[OpenCode 下载](#)

为避免兼容性问题，强烈建议您将 OpenCode 升级到最新版本，确保版本号 $\geq$ v1.14.24。

2. 运行与配置

- 执行 `opencode` 命令
- 输入框中输入 `/connect`，然后输入 `deepseek` 并选择供应商
- 填入 [DeepSeek API Key](#)

- 选择 DeepSeek-V4-Pro 模型